

DENTURE ADHESIVE COMPOSITIONS

5

BACKGROUND OF THE INVENTION

Ordinary removable dentures, dental plates and the like, comprise teeth mounted
10 in a suitable plate or base. Denture stabilizers are used to fill the interstices between the
dentures and the gums or tissues. Prior to placement of the denture in the oral cavity, a
denture stabilizer is applied to the denture-plate surface which, for a perfect fit, should
uniformly contact the gums and mucous tissues. The denture stabilizer is formulated not
only for its adherent properties, but also to provide a cushion or gasket between the
15 denture and the gums or tissues, thereby positioning the denture securely in the oral
cavity.

Considerable effort has been made over the years to develop improved denture
adhesive compositions. Both synthetic and natural polymers and gums have been used
singly, in combination, and in combination with various adhesives and other materials in
20 an attempt to lessen certain deficiencies. These deficiencies include inadequate holding
power, oozing of the adhesive from under the dental plate during insertion and throughout
the wearing period, and messiness and difficulty of removing the residual adhesive from
the mouth and dentures. Additionally, food may become trapped between the denture and
the oral cavity of the wearer.

25 Alkyl vinyl ether-maleic copolymers and salts thereof are known in the art for use
in denture adhesive compositions. Such disclosures include: U.S. Patent 3,003,988 to
Germann et al., issued October 10, 1961; U.S. Patent 4,980,391 to Kumar et al., issued
December 25, 1990; U.S. Patent 5,073,604 to Holeva et al., issued December 17, 1991;
U.S. Patent 5,900,470, Prosise et al., issued May 4, 1999; U.S. Patent 5,037,924, Tazi et
30 al, issued August 6, 1991; U.S. Patent 5,082,913, Tazi et al., issued January 21, 1992; and
U.S. Patent 5,525,652 to Clarke, issued June 11, 1996. In addition strip or insert

WO 00/61071

PCT/US00/10185

2

denture adhesives are also known. For example, U.S. Patent 4,880,702 to Homan et al., issued 11/14/89 discloses a denture stabilizer in the form of a strip consisting of three layers. The two outside layers consist of a polymer selected from the group consisting of polyethylene oxide having an average molecular weight of about 200,000 to 10,000,000, sodium carboxymethylcellulose, polyvinyl alcohol, and mixtures thereof. The inside layer consists of microcrystalline wax and a polymer sufficient to adhere the inside layer to gums and a denture base, after contact with water, when the outside layers have been dissolved. European Patent Application 0,353,375 to Altwirth published 2/7/90, discloses an adhesive insert for dentures consisting of an adhesive permeated fibrous fleece and an adhesive consisting of a pasty mixture of alginate and/or carboxymethylcellulose, polyvinyl acetate and an alcoholic solvent. Despite the above-noted technologies as well as many others, a need still exists for denture stabilizing compositions providing improved hold.

In accordance with the present invention, it has been discovered that denture adhesive compositions comprising alkyl vinyl ether-maleic acid copolymers and/or terpolymers with isobutylene comprising magnesium and zinc mixed salts together with specific levels of free acid provide superior denture hold. The present denture adhesive compositions may also be effectively used as a wound dressing, underwater adhesive, a bioadhesive, a delivery vehicle for other actives, and/or any other application that requires adhesion to skin or tissue, including cosmetic pore cleansing strips.

An object of the present invention is to provide alkyl vinyl ether-maleic copolymers and/or terpolymers comprising magnesium and zinc mixed salts, together with specific levels of free acid for adhesive compositions for firm hold, which may be used with dentures. These composition effectively hold dentures in place for a prolonged period of time.

SUMMARY OF THE INVENTION

The present invention relates to a denture adhesive composition comprising mixed salts of an alkyl vinyl ether-maleic acid copolymer and/or terpolymers with isobutylene wherein the mixed salt contains a cationic salt function comprising, or in the alternative consists essentially of, from about 5% to about 50% zinc cations; from 0% to about 2.5% of a cation selected from the group consisting of iron, boron, aluminum, vanadium,

chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof; from about 30% to about 60% free acid component; an effective adhesive amount of magnesium cations; and an effective adhesive amount of a cation selected from the group consisting of calcium, strontium, and mixtures thereof; wherein the total level of magnesium, calcium and strontium is from about 5% to about 65%, of the total initial carboxyl groups reacted. In addition the present invention relates to denture adhesive compositions comprising the above composition and at least one non-adhesive self-supporting layer. The present denture adhesive compositions can optionally comprise one or more additional adhesive components. The present invention further relates to the use of the composition for the manufacture of a medicament to increase the adhesion of dentures to the oral cavity by applying the above compositions to dentures, directly to the oral cavity, palate or ridge of the oral cavity, or applying it to both, and thereafter securing the denture to the ridge or palate of the oral cavity.

DETAILED DESCRIPTION OF THE INVENTION

The denture adhesive compositions of the present invention comprise magnesium and zinc mixed salt of an alkyl vinyl ether-maleic copolymer and/or terpolymer with isobutylene (preferably copolymers) with specific free acid levels, and comprising a cation selected from the group consisting of calcium, strontium, and mixtures thereof. The adhesive compositions may be in the form of a powder, cream, paste, liquid, aerosol, and/or wafer. Powder forms are sprinkled on a dental prosthesis, moistened and then inserted into the oral cavity. The compositions may also be combined with various conventional delivery vehicles to form liquids or pastes which are applied to a dental prosthesis and inserted into the oral cavity. These compositions can optionally comprise at least one non-adhesive self-supporting layer. Denture adhesive compositions with a self-supporting layer are thoroughly moistened and applied to dentures. A detailed description of essential and optional components of the present invention is given below.

Definitions

The term "safe and effective adhesive amounts" or "effective adhesive amount", as used herein, means an amount sufficient to provide adherence to the oral cavity and/or adherence of a dental prosthesis to the palate and ridge of the oral cavity, without toxicity to the user, damage to oral tissue, and alteration of the denture material.

WO 00/61071

PCT/US00/10185

4

The term "AVE/MA" as used herein refers to alkyl vinyl ether-maleic acid copolymer. The term "AVE/MA/IB" refers to terpolymers with alkyl vinyl ether, maleic acid or anhydride, and isobutylene. The term "mixed polymer salts" or "mixed salts", as used herein, refers to salts of AVE/MA and/or AVE/MA/IB where at least 2 different cations are mixed on the same polymer with each other or with other ester functions. The present invention comprises mixed polymer (copolymer or terpolymer) salts containing as essential salts: zinc and magnesium cations. The term "free acid" "FA" component, as used herein, refers either to the unreacted carboxyl groups (-COOH) of AVE/MA copolymer and/or AVE/MA/IB plus any other monovalent cations of carboxyl groups; e.g., -COONa, of the polymer. Monovalent cations include Group IA cations, such as sodium, potassium, hydrogen, etc. Preferably, the term "free acid" refers to the unreacted carboxyl groups (-COOH) of AVE/MA and/or AVE/MA/IB plus sodium and potassium cations. More preferably, the term "free acid" refers only to the unreacted carboxyl groups (-COOH) of the AVE/MA and/or AVE/MA/IB. The term "additional adhesive component", as used herein, refers to adhesives other than those described as essential AVE/MA and/or AVE/MA/IB mixed salts of the present invention.

The percentages used herein to describe the mixed salt function of the copolymers or terpolymer are defined as the stoichiometric percent of the total initial carboxyl groups reacted on the polymer. All other percentages used herein are by weight unless otherwise indicated.


Polymer

The alkyl vinyl ether-maleic acid copolymer comprises the repeated structural unit:

WO 00/61071

PCT/US00/10185

5

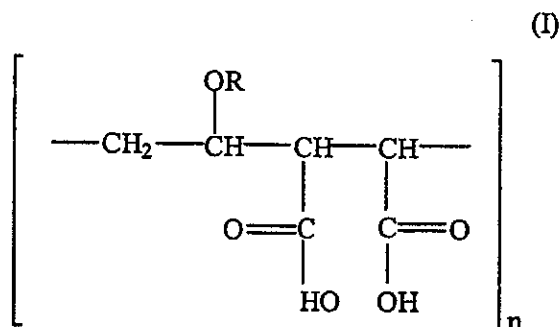

wherein R represents an alkyl radical, preferably a C₁ to C₅ alkyl radical, n is an integer greater than one representing the number of repeated occurrences of the structural unit in a molecule of the polymer.

The "terpolymer" or "terpolymer with isobutylene" means a terpolymer of maleic anhydride or acid, an alkyl vinyl ether (preferably with a C₁-C₅ alkyl radical), and isobutylene, having a structure of (A-B)_n where A is maleic anhydride or acid and B is alkyl vinyl ether (preferably with a C₁-C₅ alkyl radical), and/or isobutylene. The specific viscosity of the starting anhydride or acid of the terpolymer is preferably at least about 5.5, preferably at least about 6, preferably measured as a 1% weight/volume solution of methyl ethyl ketone at 25°C. The terpolymer must contain at least some isobutylene.

The present denture adhesive compositions comprise mixed salts of an AVE/MA copolymer and/or terpolymer wherein the mixed salt contains a cationic salt function comprising (or in the alternative consists essentially of) an effective adhesive amount of magnesium cations, from about 5% to about 50% zinc cations, from 0% to about 2.5% of a cation selected from the group consisting of iron, boron, aluminum, vanadium, chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof, and an effective adhesive amount of a cation selected from the group consisting of calcium, strontium, and mixtures thereof, of the total initial carboxyl groups reacted, the mixed salt containing from about 30% to about 60% free acid component. The AVE/MA copolymers have a range of specific viscosities. For example, the specific viscosity is preferably from 1.2 to 14, as preferably measured as a 1% weight/volume solution of the starting anhydride or acid of the copolymer, in methyl ethyl ketone at 25°C. Other methods and solvents can be used to measure the specific viscosity such as a 1%

WO 00/61071

PCT/US00/10185

6

weight/volume solution in DMF (dimethyl formamide) at 25°C and a 1% weight/volume solution in 2-butanone at 25°C.

Preferably, the total level of magnesium, calcium and strontium is from about 10% to about 60%, more preferably from about 15% to about 55%, of the initial carboxyl groups reacted. In addition, preferably the cationic salt function contains from about 10% to about 45% zinc, more preferably from about 15% to about 40% zinc cations, of the initial carboxyl groups reacted; preferably from about 0.001% to about 2.5 %, more preferably from about 0.01% to about 2% of a cation selected from the group consisting of iron, boron, aluminum, vanadium, chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof, more preferably from about 0.01% to about 2% iron-cations, of the initial carboxyl groups reacted. Preferably the cationic salt function contains from about 37.5% to about 55%, more preferably from about 37.5% to about 50%, free acid component, of the total initial carboxyl groups.

The alkyl vinyl ether maleic anhydride copolymers are obtained by copolymerizing an alkyl vinyl ether monomer, such as methyl vinyl ether, ethyl vinyl ether, divinyl ether, propyl vinyl ether and isobutyl vinyl ether, with maleic anhydride to yield the corresponding alkyl vinyl ether-maleic anhydride copolymer which is readily hydrolyzable to the acid copolymer. Suitable copolymers may be prepared by well-known methods of the prior art, for example US 2,782,182, and US 2,047,398, both of which are incorporated herein by reference in their entirety. Both anhydride and acid forms are also available from commercial suppliers. For example, the ISP Corporation, Wayne, N.J. provides both the polymeric free acid form (I) and the corresponding anhydride form under its "GANTREZ" trademark as the "GANTREZ S Series" and "GANTREZ AN Series", respectively. When the anhydride copolymer dissolves in water, the anhydride linkage is cleaved so that the highly polar, polymeric free acid (I) is formed. Accordingly, the anhydride form, which is relatively less expensive than the acid form, may be used as a convenient and cheaper precursor for the acid. Elevated temperatures may be advantageously employed to enhance the rate of anhydride-to-acid hydrolysis. The terpolymers can be made by the methods discussed in U.S. Patent 5,900,470, Prosise et al., issued May 4, 1999; U.S. Patent 5,037,924, Tazi et al., issued Aug. 6, 1991; and U.S.

WO 00/61071

PCT/US00/10185

7

Patent 5,082,913, Tazi et al., issued Jan. 21, 1992, herein incorporated by reference in their entirety.

The salt form of the subject polymers may be prepared by the interaction of the AVE/M anhydride or acid copolymer or terpolymer with at least one cationic salt function, such as magnesium, zinc, calcium, sodium, potassium, iron, or ammonium compounds having a functional group typical of reactants of a carboxylic acid, such as, for example, the hydroxide, oxide, acetate, halide, lactate, etc. in an aqueous medium. In a preferred embodiment, the zinc oxide, magnesium oxide, combined with strontium carbonate and/or calcium hydroxide are utilized. Mixed polymer salts comprising iron cations can be prepared by the interaction of the AVE/M anhydride/acid polymers with iron compounds, in the form of a salt, such as iron sulfate n-hydrate.

Ions that form toxic, irritating or contaminating by-products should be avoided, or special precautions and treatment provided to assure the removal and absence of such by-products from the polymeric salt end-product. The particular compound used should be substantially pure to assure obtaining a substantially pure, polymeric salt end-product.

If the salt form of the polymer is desired, then an aqueous dispersion of particulate zinc oxide is combined with magnesium oxide (combined with strontium carbonate and/or calcium hydroxide) and, optionally, ferric sulfate n-hydrate. This is combined with the powder polymer, in the form of a slurry, in an amount sufficient to provide the desired cationic content desired in the end-product. This is done at ambient temperature and then slowly heated to 70°-95°C with continuous vigorous mixing so as to prevent localized precipitation of the cationic polymeric salt; mixing is continued to ensure that all the salt forming compound is reacted with the copolymer.

Alternatively, the polymer is hydrolyzed and neutralized in an aqueous mixture or slurry of one or more divalent and/or monovalent metal bases by heating the copolymer/base mixture to a temperature ranging from about 45°C to about 100°C. Reaction of the mixed polymer salt with iron cations is obtained through addition of iron salts to the hydrolyzed and neutralized mixed salt of the polymer. Completion of the reaction with iron cations is indicated by an increase in viscosity to stabilization. Alternatively, iron salts may be blended with the polymer/metal base mixture prior to the hydrolysis and neutralization reactions.

WO 00/61071

PCT/US00/10185

8

In either of the above processes, the resulting slurry or solution is transferred to shallow stainless steel drying trays and placed in a forced air mechanical convection oven at 60-70°C for a time sufficient to evaporate the reaction medium (water) and remove water from the polymer (about 18-24 hours). Alternatively, the resulting slurry or solution can be drum-dried at 100° to 200°C with hot steam to evaporate the water content and recover the polymer in the flake form. After drying, the polymer forms brittle flakes which can easily be peeled off from the trays or drum surface and ground to a fine powder as desired to provide satisfactory denture stabilizing properties. Methods of making these mixed salts of AVE/MA polymers are further disclosed in U.S. Patent Nos. 5,073,604, Holeva et al., issued Dec. 17, 1991; 5,872,161, Liang et al., issued Feb. 16, 1999; 5,830,933, Synodis et al., issued Nov. 3, 1998, all of which are herein incorporated by reference in their entirety.

The mixed salt polymers have exceptional adhesive qualities when contacted with water or saliva such that they are extremely useful as denture adhesive materials in denture compositions. The compositions of the present invention comprise a safe and effective adhesive amounts of the mixed salt polymers, preferably at least 20 percent by weight, and more preferably at least 30 percent by weight of the composition, as the sole adhesive component or as a co-adhesive in joint usage with other adhesive components.

Optional Non-Adhesive Self-Supporting Layer

The present denture adhesive compositions optionally comprise at least one non-adhesive self-supporting layer. The non-adhesive self-supporting layer is characterized by its ability to maintain strength and provide integrity for the adhesive composition in the presence of water and/or saliva. The non-adhesive self-supporting layer may include materials such as polyester, polypropylene, nylon, rayon, cellulose acetate, non-adhesive cellulose derivatives, cloth, fibrous fleece, paper, plastic, leather, microcrystalline wax, synthetic fibers, natural fibers, and mixtures thereof. Preferred are non-adhesive cellulose derivatives, polyester, polypropylene, nylon, rayon, cloth, paper, microcrystalline wax, and mixtures thereof. More preferred are polyester, polypropylene, rayon, nylon, cloth and paper.

The non-adhesive self-supporting layer may be in any physical form suitable for providing strength and/or integrity to the present adhesive compositions. Such physical

WO 00/61071

PCT/US00/10185

9

forms include non-woven, woven, continuous, chopped, and combinations thereof. In addition, the non-adhesive self-supporting layer may be formed by any process commonly known in the art. Such processes include un-bonded, spraybonded, spun-bonded, needle-punched, carded, thermal bonded hydroentangled, meltblown, aperture print bonded, 5 needed, wet-laid, dry-laid, and combinations thereof.

Other Adhesive Components

The present invention compositions may also include other adhesive components. These adhesive components, if present, are used in a safe and effective adhesive amounts. In general, the other adhesive components may be present at a level of from about 0% to 10 about 90%, preferably from about 10% to about 70%, and most preferably from about 20% to about 50%, by weight of the composition.

Suitable adhesive components include a water-soluble hydrophilic colloid or polymer having the property of swelling upon exposure to moisture to form a mucilaginous mass. Such adhesive materials include natural gums, synthetic polymeric 15 gums, AVE/MA copolymer acid, AVE/MA copolymer anhydride, AVE/MA/IB, synthetic polymers, mucoadhesive polymers, hydrophilic polymers, saccharide derivatives, adhesive materials commonly employed in denture stabilizing compositions and compatible with the polymers of the present invention, cellulose derivatives, and mixtures thereof. Examples of such materials include karaya gum, guar gum, gelatin, algin, sodium 20 alginate, tragacanth, chitosan, polyethylene glycol, acrylamide polymers, carbopol, polyvinyl alcohol, polyamines, polyquarternary compounds, polybutenes, silicones, ethylene oxide polymers, polyvinylpyrrolidone, cationic polyacrylamide polymers.

Preferred are cellulose derivatives, polyethylene glycol, polyethylene oxide, karaya gum, sodium alginate, chitosan, polyvinyl alcohol, and mixtures thereof. Most preferred 25 are cellulose derivatives such as methylcellulose, carboxymethylcellulose, hydroxyethylcellulose, hydroxypropylcellulose, hydroxy-propylmethylcellulose, and mixtures thereof.

Other Ingredients

The present invention may also comprise a reducing agent. The reducing agent 30 aids in removal of the denture from the oral cavity after application of the mixed polymer salt of the present invention to the denture. The preferred reducing agent for use herein is

WO 00/61071

PCT/US00/10185

10

ascorbic acid and its water soluble salts. The reducing agent may also be used in combination with a chelating agent. Preferred chelating agents include citrate, tartrate, lactate, and the like. The reducing agent and/or chelating agent may also be delivered in a composition by carriers known in the art which are safe for oral administration (i.e., non-toxic and approved for use in humans). Such carriers include surfactants, solvents, etc.

The reducing agent and/or chelating agents are used in safe and effect amounts. The term "safe and effective amount", as used herein, means an amount sufficient to aid in releasing the denture hold in the oral cavity without toxicity to the user, damage to oral tissue, and alteration of the denture material. Thus, a denture wearer applies the mixed polymer salt adhesive composition to dentures or oral tissue and inserts the denture into the oral cavity. When removal is desired, the wearer swishes in the mouth, a denture releasing composition comprising a reducing agent and/or chelating agents and suitable solvent(s) which aids in releasing the denture hold.

In addition one or more toxicologically-acceptable plasticizers may also be included in the present compositions. The term "toxicologically-acceptable", as used herein, is used to describe materials that are suitable in their toxicity profile for administration to humans and/or lower animals. Plasticizers that may be used in the present compositions include dimethyl phthalate, diethyl phthalate, dioctyl phthalate, glycerin, diethylene glycol, triethylene glycol, Igepal®, Gafac®, sorbitol, tricresyl phosphate, dimethyl sebacate, ethyl glycolate, ethylphthalyl ethyl glycolate, o- and p-toluene ethyl sulfonamide, and mixtures thereof. Plasticizers may be present at a level of from about 0% to about 70%, preferably from about 1% to about 30%, by weight of the compositions.

The present denture adhesive compositions which also comprise a non-adhesive self-supporting layer may also comprise a coating which is sticky to dry dentures and, if present, will be placed on one side of the denture adhesive composition. Compositions suitable for use as this type of adhesive layer include polybutenes, silicones, rubbers, petrolatum, natural polymers, synthetic polymers, and mixtures thereof. The adhesive layer may be present at a level of from about 0% to about 70%, and preferably from about 0.5% to about 20%, by weight of the composition.

WO 00/61071

PCT/US00/10185

11

Other suitable ingredients include colorants, preservatives such as methyl and propyl parabens; thickeners such as silicon dioxide, and polyethylene glycol; and vehicles such as liquid petrolatum, petrolatum, mineral oil and glycerin. Preferred are polyethylene glycol, silicon dioxide, and petrolatum. Colorants, preservatives, thickeners and vehicles may be present at levels of from about 0% to about 20%, by weight of the composition.

The compositions of the present invention may also include one or more components which provide flavor, fragrance, and/or sensate benefit (warming or cooling agents). Suitable components include natural or artificial sweetening agents, menthol, menthyl lactate, wintergreen oil, peppermint oil, spearmint oil, leaf alcohol, clove bud oil, anethole, methyl salicylate, eucalyptol, cassia, 1-menthyl acetate, sage, eugenol, parsley oil, oxanone, alpha-irisonone, marjoram, lemon, orange, propenyl guaethol, cinnamon, vanillin, thymol, linalool, cinnamaldehyde glycerol acetal known as CGA, and mixtures thereof, as well as coolants. The coolant can be any of a wide variety of materials. Included among such materials are carboxamides, menthol, ketals, diols, and mixtures thereof. Preferred coolants in the present compositions are the paramenthan carboxamide agents such as N-ethyl-p-menthan-3-carboxamide, known commercially as "WS-3", N,2,3-trimethyl-2-isopropylbutanamide, known as "WS-23," and mixtures thereof. Additional preferred coolants are selected from the group consisting of menthol, 3-1-menthoxypropane-1,2-diol known as TK-10 manufactured by Takasago, menthone glycerol acetal known as MGA manufactured by Haarmann and Reimer, and menthyl lactate known as Frescolat® manufactured by Haarmann and Reimer. The terms menthol and menthyl as used herein include dextro- and levorotatory isomers of these compounds and racemic mixtures thereof. TK-10 is described in U.S. Pat. No. 4,459,425, Amano et al., issued 7/10/84. WS-3 and other agents are described in U.S. Pat. No. 4,136,163, Watson, et al., issued Jan. 23, 1979; the disclosure of both are herein incorporated by reference in their entirety. These agents may be present at a level of from about 0% to about 50%, by weight of the composition.

The present compositions may be used as a denture adhesive and/or used as a bioadhesive on wet tissue such as mucosal tissues, wounds, oral mucosa, etc. The present adhesive compositions can be used to deliver one or more

WO 00/61071

PCT/US00/10185

12

therapeutic actives suitable for topical administration to mucosal or wet tissues. The phrase "therapeutic actives", as used herein, describes agents which are pharmacologically active when absorbed through wet tissue or mucosal surfaces of the body such as the oral cavity, wounds, or applied to the surfaces of the skin. Therapeutic actives may be present
5 at a level of from about 0% to about 70%, by weight of the composition.

Therapeutic actives that are useful in the present compositions include antimicrobial agents such as iodine, sulfonamides, bisbiguanides, or phenolics; antibiotics such as tetracycline, neomycin, kanamycin, metronidazole, or clindamycin; anti-inflammatory agents such as aspirin, acetaminophen, naproxen and its salts, ibuprofen,
10 ketorolac, flurbiprofen, indomethacin, eugenol, or hydrocortisone; dentinal desensitizing agents such as potassium nitrate, strontium chloride or sodium fluoride; anesthetic agents such as lidocaine or benzocaine; anti-fungals; aromatics such as camphor, eucalyptus oil, flavors, fragrances, or sensates (warming or cooling agents), and aldehyde derivatives such as benzaldehyde; insulin; steroids; and anti-neoplastics. It is recognized that in
15 certain forms of therapy, combinations of these agents in the same delivery system may be useful in order to obtain an optimal effect. Thus, for example, an antimicrobial and an anti-inflammatory agent may be combined in a single delivery system to provide combined effectiveness.

Process for Preparation of the Composition

20 A process for preparing denture adhesive compositions of the present invention (creams, powders, wafers, liquids, aerosols, pastes) comprises conventional methods disclosed in the art. Conventional methods are taught in US 5,525,652, issued June 11, 1996, Clarke et al.; US 3,003,988, issued Oct. 10, 1961, Germann et al.; US 5,073,604, Holeva et al., issued Dec. 17, 1991; and US 5,872,161, Liang et al., issued Feb. 16, 1999,
25 all of which are herein incorporated by reference in their entirety.

A process for the preparation of the present denture adhesive compositions optionally comprising a non-adhesive self-supporting layer, comprises coating a weighed amount of the adhesive components onto the non-adhesive self-supporting layer. This process is disclosed in US 5,877,233, Liang et al, issued March 2, 1999; US 5,872,160,
30 issued 2/16/99, Liang et al.; US 5,880,172, Rajaiah et al., filed Oct. 25, 1996, all of which are incorporated herein by reference in their entirety.

WO 00/61071

PCT/US00/10185

13

The term "mixture", as used in this "Process for Preparation the Composition" section, refers to a solution, slurry, or suspension.

The adhesive components may be coated on the non-adhesive self-supporting layer using various methods. These include: (a) wetting the non-adhesive self-supporting layer with water, uniformly sifting the adhesive component powder(s) onto the wet layer and then rewetting the layer with water; (b) dissolving the adhesive component(s) in water and/or other solvent(s) and coating the resulting mixture on the layer; (c) coating the layer with the mixture produced during AVE/MA polymer processing; (d) incorporating the adhesive component(s) into the layer as the layer is being formed; and (e) dissolving the adhesive component(s) in water and/or other solvent(s), wetting/coating the resulting mixture onto the layer, and uniformly sifting one or more adhesives in powder form onto the wet/coated layer and optionally re-coating/re-wetting the layer with the mixture and/or water; (f) the method of step (e) repeated multiple times; and (g) any combination of the methods in (a) through (f) above.

As disclosed above, the adhesive components may be dissolved in water and/or other solvents and the resulting mixture coated onto the layer. Solvents for the polymers include water and/or alcohols such as methanol, propanol, isopropanol, ethanol, butanol, 1,4-butanediol, cyclohexanol, and diethylene glycol; ethers or ether alcohols such as tetrahydrofuran, ethylene glycol monomethyl ether, diethylene glycol monomethyl ether, dioxane, and ethyl ether; esters such as methyl acetate, ethyl acetate and sec-butyl acetate; aldehydes, ketones or ketone-alcohols such as benzaldehyde, formaldehyde solution, methyl ethyl ketone, diacetone alcohol, acetone, cyclohexanone, mesityl oxide, and methyl isobutyl ketone; lactams or lactones such as N-methyl-2-pyrrolidone, N-vinyl-2-pyrrolidone, 2-pyrrolidone, and butyrolactone; hydrocarbons such as benzene, toluene, xylene, hexane, mineral spirits, mineral oil, and gasoline; chlorinated hydrocarbons such as carbon tetrachloride, chlorobenzene, chloroform, ethylene dichloride, methylene chloride; nitroparaffins such as nitroethane, and nitromethane; mercaptans such as thiophenol and 2-mercapto-1-ethanol; and others such as acetic acid, pyridine and dimethyl formamide.

Preferred solvents for the polymers are water, methanol, propanol, isopropanol, tetrahydrofuran, methyl acetate, benzaldehyde, formaldehyde solution, methyl ethyl

WO 00/61071

PCT/US00/10185

14

ketone, diacetone alcohol, N-methyl-2-pyrrolidone, N-vinyl-2-pyrrolidone, dimethyl formamide and mixtures thereof. Compounds commonly used as plasticizers can also be used as solvents for the polymers. Such plasticizers include dimethyl phthalate, diethyl phthalate, dioctyl phthalate, glycerin, diethylene glycol, triethylene glycol, Igepal® CO-
5 630, Gafac ® RE-610, sorbitol, tricresyl phosphate, dimethyl sebacate, ethyl glycolate, ethylphthalyl ethyl glycolate, and p-toluene ethyl sulfonamide.

Solvents for other adhesives such as CMC, which may be optionally included in the adhesive compositions include mixtures of water and water-miscible solvents such as ethanol and acetone. Solutions of low concentration can be made with up to 40% acetone
10 and/or 50% alcohol. Other solvents which may be used include ethanolamines; ethylene glycol; glycerol; 1,2,6-hexanetriol; mono-, di-, and triacetin; 1,5-pentanediol; polyethylene glycol (molecular weight 600 or less); propylene glycol; and trimethylolpropane.

When the adhesive compositions are prepared by dissolving the adhesive
15 component(s) in water and/or other solvents, various embodiments of the process includes: dissolving the polymers in one or more of the solvents for polymers; dissolving an optional adhesive in a suitable solvent and coating the resulting mixture onto the non-adhesive self-supporting layer and then optionally sifting one or more adhesives onto the coated layer. Coating the layer can be achieved by techniques commonly known in the art
20 including extrusion, doctor blading, spraying, dipping, etc.

After the polymer has been deposited on the layer by one of the means described above, the layer is then dried. Next, the denture adhesive composition is mechanically softened by running it through a ring-roller or micro-cracker or any other suitable means. The composition is then pressed smooth in a hydraulic press or flat-roller or other suitable
25 means. The composition is then die-cut into denture shapes. These shapes may facilitate application of the composition to the dentures.

The following examples further describe and demonstrate embodiments within the scope of the present invention. The examples are given solely for the purpose of illustration and are not to be construed as limitations of the present invention. Many
30 variations of these are possible without departing from the spirit and scope of the invention.

WO 00/61071

PCT/US00/10185

15

EXAMPLE I (A-J)

The following examples A to J describe various mixed salts and the process for making these mixed salts of AVE/MA polymers:

5

	A	B	C	D
Component	(In Grams)	(In Grams)	(In Grams)	(In Grams)
Water	2850	2850	2850	2850
Calcium Hydroxide	5.69	2.85	2.85	14.24
Zinc Oxide	18.76	18.76	18.76	3.13
Magnesium Oxide	4.65	7.74	1.55	7.74
AVE/MA Anhydride Polymer ¹	120	120	120	120
Resulting Mixed Salt	Ca(10%)/Zn(30%)/FA(45%)/Mg(15%)	Ca(5%)/Zn(30%)/FA(40%)/Mg(25%)	Ca(5%)/Zn(30%)/FA(60%)/Mg(5%)	Ca(25%)/Zn(5%)/FA(45%)/Mg(25%)

	E	F	G	H
Component	(In Grams)	(In Grams)	(In Grams)	(In Grams)
Water	2850	2850	2850	2850
Calcium Hydroxide	2.85			5.55
Strontium Carbonate		17.02	11.35	5.67
Zinc Oxide	28.14	28.14	18.76	18.76
Ferric				0.34

¹ Gantrez AN 169 available from ISP Corporation, and/or AVE/MA copolymer with specific viscosity of 6.3 and/or 7.3.

WO 00/61071

PCT/US00/10185

16

Sulfate, N-Hydrate				
Sodium Hydroxide				6.15
Magnesium Oxide	3.1	3.1	4.65	1.55
AVE/MA Anhydride Polymer ¹	120	120	120	120
Resulting Mixed Salt	Ca(5%)/Zn(45%)/FA(40%)/Mg(10%)	Sr (15%)/Zn (45%)/FA(30%)/Mg(10%)	Sr(10%)/Zn (45%)/FA(30 %)/Mg(15%)	Ca(9.75%)/Sr (5%)/Zn(30%)/Fe(0.25%)/FA (50%)/Mg(5%)

	I	J
Component	(In Grams)	(In Grams)
Water	2847	2847
Calcium Hydroxide	17.08	15.66
Zinc Oxide	12.51	12.51
Magnesium Oxide	3.10	4.65
AVE/MA Anhydride Polymer ²	120	120
Resulting Mixed Salt	Ca(30%)/Zn(20%)/Mg(10%)/FA(40%)	Ca(27.5%)/Zn(20%)/Mg(15%)/FA(37.5%)

² Gantrez AN 169 available from ISP Corporation, and/or AVE/MA copolymer with specific viscosity of 6.3 and/or 7.3.

WO 00/61071

PCT/US00/10185

17

Weigh the above components and add to a 4 liter reaction vessel while mixing. Use 15% of water to pre-slurry all powders except the AVE/MA. Wash down the residual powders from the wall of the vessel. Then react the mixture at 80 to 95°C. Dry the solution in trays in an oven at 60 to 70°C. Mill all dried flakes to a fine powder. Equivalent mixed salts of AVE/MA/IB can be obtained by the same method as above, substituting the AVE/MA/IB for AVE/MA, at various levels.

EXAMPLE II

Denture stabilizing compositions in cream form can be made by blending together the following ingredients:

	weight (grams)
White Mineral Oil	89.74
Petrolatum, White	82.01
Carboxymethylcellulose Sodium	75.00
Silicon Dioxide, Colloidal	4.28
Colorant (Opatint Red Dye)	0.23
Any AVE/MA mixed salt of A-J or any AVE/MA/IB mixed salt of A-J	123.75

Weigh, heat and mix the red dye, petrolatum, and mineral oil in a glass jar at 50 to 60°C until visually uniform. Then weigh and shake-blend the powders (colloidal silicon dioxide, CMC, AVE/MA copolymer mixed salt or AVE/MA/IB mixed salt) together in a container. Thereafter, mix the powders into the liquid with a spatula until visually a uniform pink cream. The above cream can be modified by increasing or decreasing the level of AVE/MA mixed salt or AVE/MA/IB mixed salt by 0 to 18.75 grams, petrolatum by 0 to 18.75 grams, and/or the CMC by 0 to 18.75 grams. The above cream composition can also be modified by using mixtures of the various AVE/MA mixed polymer salts and/or AVE/MA/IB mixed

WO 00/61071

PCT/US00/10185

18

salts. The subject places from 0.1 to 2 grams of the cream composition on the denture. Then the subject inserts the denture into his/her mouth and presses it into place.

EXAMPLE III

- 5 Denture stabilizing compositions in powder form can be made by blending together the following ingredients:

	weight (grams)
Carboxymethylcellulose Sodium	40.00
Any AVE/MA mixed salt of A-J or any AVE/MA/IB mixed salt of A-J	60.00

- Blend all components together. The above compositions can be modified by increasing or
10 decreasing the AVE/MA mixed salt or AVE/MA/IB mixed polymer salt by 0 to 50 grams
and/or the CMC by 0 to 40 grams. The above powder compositions can also be modified
by using mixtures of the various AVE/MA mixed salts and/or AVE/MA/IB mixed salts.
The subject places from 0.1 to 2 grams of the composition on a pre-moistened denture,
allowing it to hydrate briefly. Then the subject inserts the denture into his/her mouth and
15 presses it into place.

EXAMPLE IV

- Denture stabilizing compositions in wafer form can be made by wetting a 58" by
20" non-woven polyester (non-adhesive self-supporting layer) with water. Uniformly coat
20 this wet sheet with the compositions listed below. Thereafter, rewet the layer with water.
Dry the layer. Mechanically soften the composition by ring-roller, and then smooth the
composition on a hydraulic press. Die-cut the composition into desired shapes. Moisten
and apply these wafer compositions to the dentures. Then insert the denture into the
mouth and press it into place.

25

WO 00/61071

PCT/US00/10185

19

	weight (grams)
Carboxymethylcellulose Sodium	60.00
Any AVE/MA mixed salt of A-J or any AVE/MA/IB mixed salt of A-J.	90.00

These wafer compositions can be modified by increasing or decreasing the AVE/MA mixed polymer salt or AVE/MA/IB mixed polymer salt by 0 to 60 grams and/or CMC by 0 to 60 grams. The above wafer compositions can also be modified by using mixtures of

5 the various AVE/MA mixed salts and/or AVE/MA/IB mixed polymer salt.

CLAIMS:

1. A denture adhesive composition comprising a mixed salt of a copolymer of alkyl vinyl ether and maleic acid or anhydride, the mixed salt containing a cationic salt function consisting essentially of:
 - a) from 5% to 50% zinc cations, preferably from 15% to 40%;
 - b) an effective adhesive amount of magnesium cations;
 - c) an effective adhesive amount of a cation selected from the group consisting of calcium, strontium, and mixtures thereof;
 - d) from 0% to 2.5%, preferably from 0.01% to 2%, of a cation selected from the group consisting of iron, boron, aluminum, vanadium, chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof; and
 - e) from 30% to 60% free acid component;wherein the total level of magnesium, calcium and strontium cations is from 5% to 65%, preferably from 15% to 55%.
2. The denture adhesive composition according to Claim 1 wherein the specific viscosity of the copolymer is greater than 5.5.
3. A denture adhesive composition comprising a mixed salt of a terpolymer of alkyl vinyl ether, maleic acid or anhydride, and isobutylene, the mixed salt containing a cationic salt function consisting essentially of:
 - a) from 5% to 50% zinc cations, preferably from 15% to 40%;
 - b) an effective adhesive amount of magnesium cations;
 - c) an effective adhesive amount of a cation selected from the group consisting of calcium, strontium, and mixtures thereof;
 - d) from 0% to 2.5%, preferably from 0.01% to 2%, of a cation selected from the group consisting of iron, boron, aluminum, vanadium, chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof; and
 - e) from 30% to 60% free acid component;wherein the total level of magnesium, calcium and strontium cations is from 5% to 65%, preferably from 15% to 55%.
4. The denture adhesive composition according to Claim 1 or 3 further comprising one or more ingredients selected from the group consisting of additional adhesive components, plasticizers, colorants, preservatives, thickeners, vehicles, flavors, fragrances, sensates, and mixtures thereof.

5. The denture adhesive composition according to Claim 4 wherein the additional adhesive component is selected from the group consisting of natural gums, synthetic polymers, mucoadhesive polymers, hydrophilic polymers, natural polymers, saccharide derivatives, cellulose derivatives, preferably selected from the group consisting of hydroxyethylcellulose, hydroxypropylcellulose, hydroxypropylmethyl-cellulose, sodium carboxymethylcellulose, and mixtures thereof, mixed salts of AVE/MA copolymers, AVE/MA copolymer acid, alkyl vinyl ether-maleic anhydride copolymer, and mixtures thereof.
6. The denture adhesive composition according to Claim 4 wherein the vehicle is selected from the group consisting of petrolatum, liquid petrolatum, mineral oil, glycerin, and mixtures thereof.
7. The denture adhesive composition according to Claim 1 or 3 wherein the composition further comprises at least one non-adhesive self-supporting layer.
8. The denture adhesive composition according to Claim 7 wherein the non-adhesive self-supporting layer is selected from the group consisting of polyester, polypropylene, nylon, rayon, cellulose acetate, non-adhesive cellulose derivatives, cloth, fibrous fleece, paper, plastic, leather, microcrystalline wax, synthetic fibers, natural fibers, and mixtures thereof.
9. The denture adhesive composition according to Claim 8 wherein the non-adhesive self-supporting layer is in a physical form selected from the group consisting of non-woven, woven, continuous, chopped, and combinations thereof.
10. The use of the composition of claim 1 or 3 for the manufacture of a medicament to increase the adhesion of dentures to the oral cavity by applying the composition of Claim 1 or 3 to the dentures, or the oral cavity, and thereafter securing the denture to the oral cavity.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61K 6/00	A1	(11) International Publication Number: WO 00/61071 (43) International Publication Date: 19 October 2000 (19.10.00)
(21) International Application Number: PCT/US00/10185 (22) International Filing Date: 13 April 2000 (13.04.00) (30) Priority Data: 60/129,164 14 April 1999 (14.04.99) US 60/152,158 2 September 1999 (02.09.99) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors: RAJAIAH, Jayanth; 9398 Kentonsrun Court, Loveland, OH 45140 (US). SCHUMACHER, Carole, Ann; 9826 Dargate Court, Cincinnati, OH 45231 (US). WHITNEY, John, Roy; 4558 Peakview Court, Hamilton, OH 45011 (US). GILDAY-WEBER, Kimberly, Ann; 3682 River Road, Cincinnati, OH 45204 (US). ERNST, Lisa, Catron; 7351 Keller Road, Cincinnati, OH 45243 (US). (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: DENTURE ADHESIVE COMPOSITIONS		
(57) Abstract		
The present invention relates to a denture adhesive composition comprising mixed salts of an alkyl vinyl ether-maleic acid copolymer wherein the mixed salt contains a cationic salt function comprising from about 5 % to about 50 % zinc cations; from 0 % to about 2.5 % of a cation selected from the group consisting of iron, boron, aluminum, vanadium, chromium, manganese, nickel, copper, yttrium, titanium, and mixtures thereof; from about 30 % to about 60 % free acid component; an effective adhesive amount of magnesium cations; and an effective adhesive amount of a cation selected from the group consisting of calcium, strontium, and mixtures thereof; wherein the total level of magnesium, calcium and strontium is from about 5 % to about 65 %. In addition the present invention relates to denture adhesive compositions comprising the above composition and at least one non-adhesive self-supporting layer. The present invention further relates to a method of increasing the adhesion of dentures to the oral cavity by applying the above compositions to dentures, directly to the oral cavity, palate or ridge of the oral cavity, or applying it to both, and thereafter securing the dentures to the ridge or palate of the oral cavity.		