



[Drawings]


[FIG. 1]

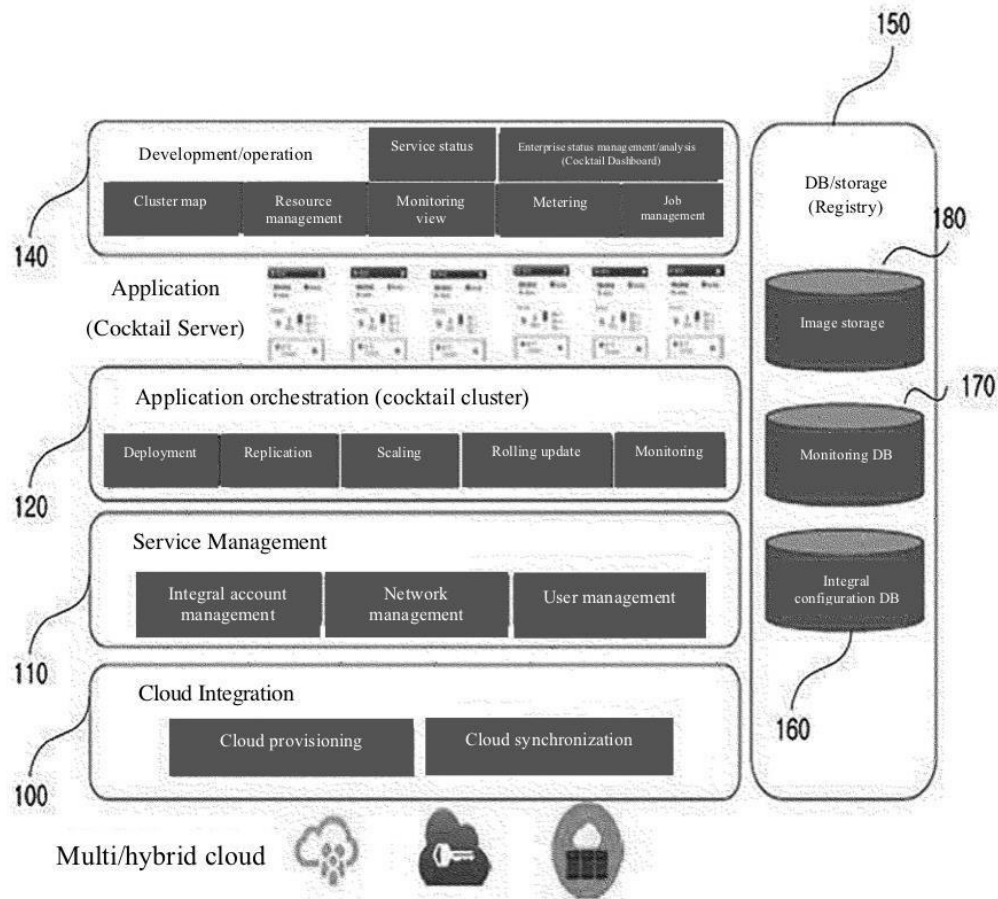


[FIG. 2]

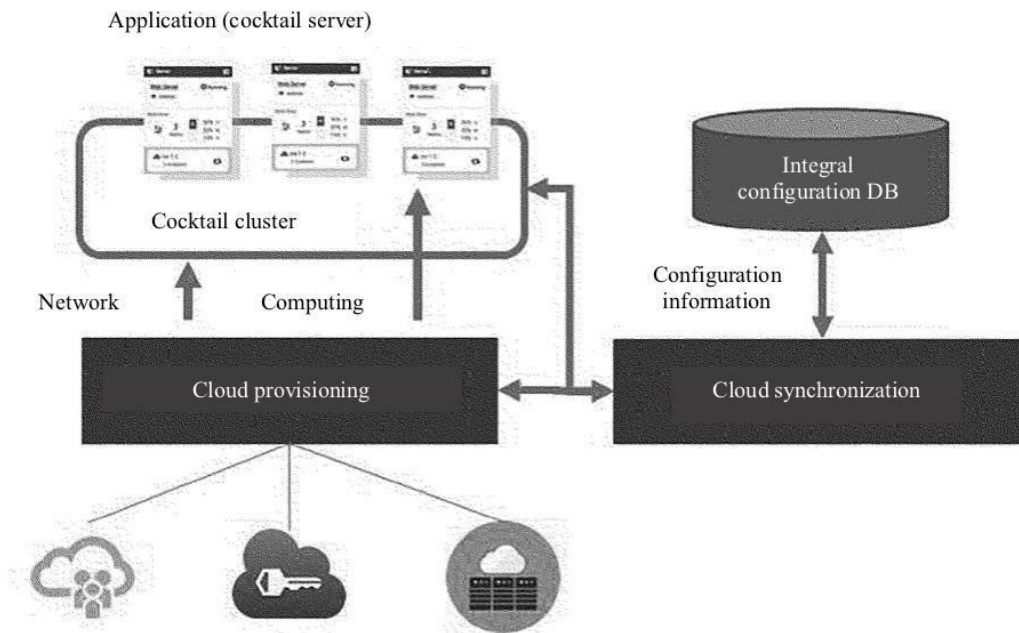


[FIG. 3]

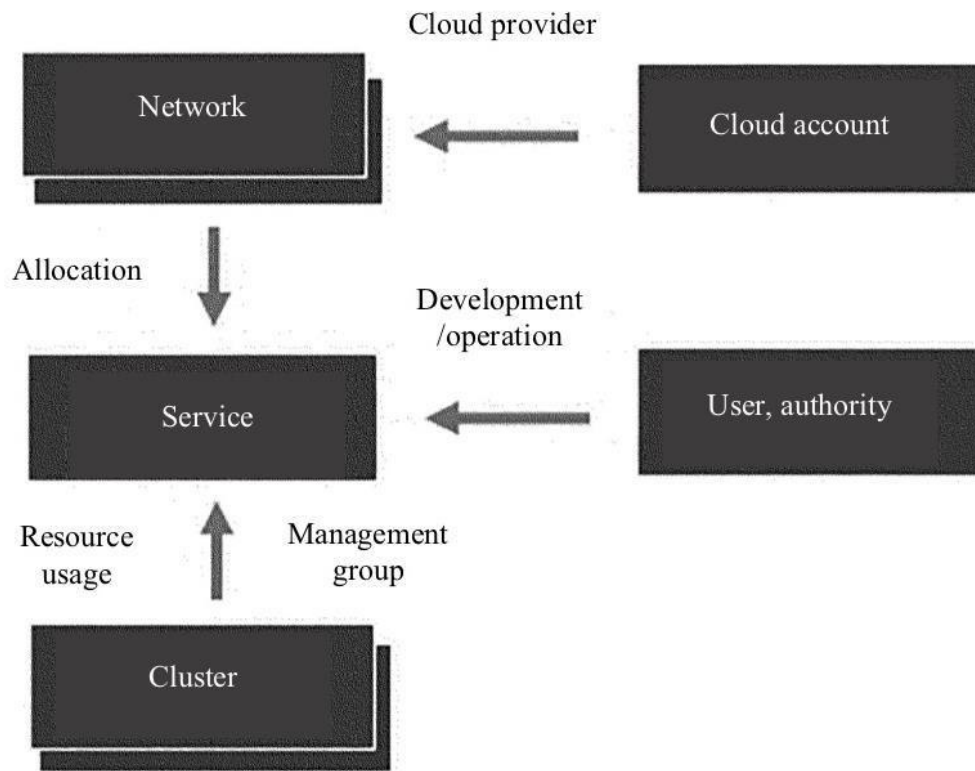

[FIG. 4]

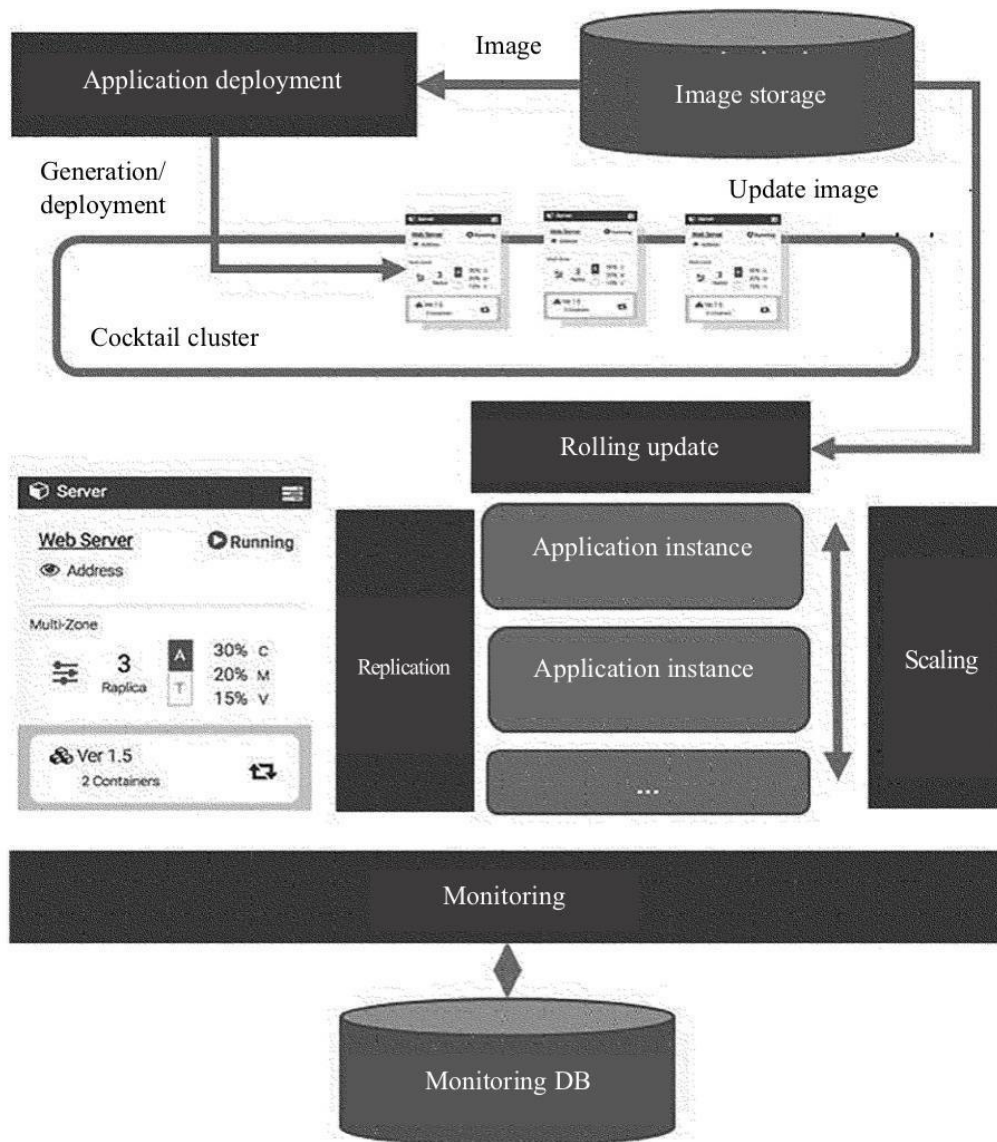


[FIG. 5]

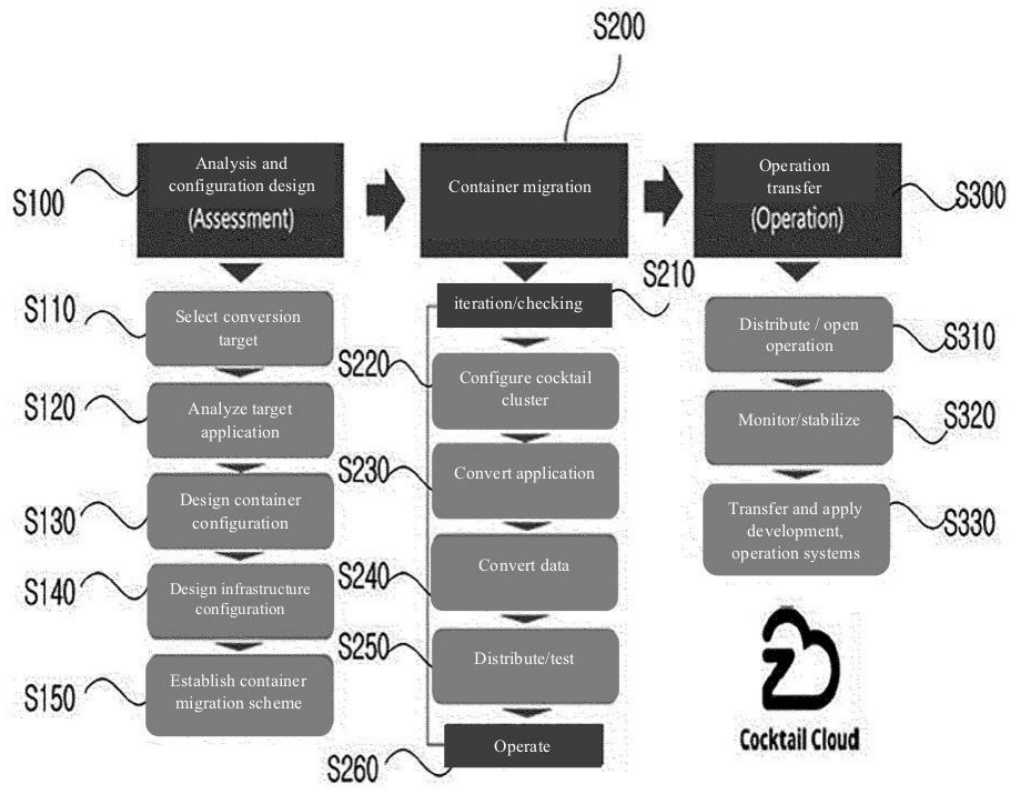

[FIG. 6]



[FIG. 7]

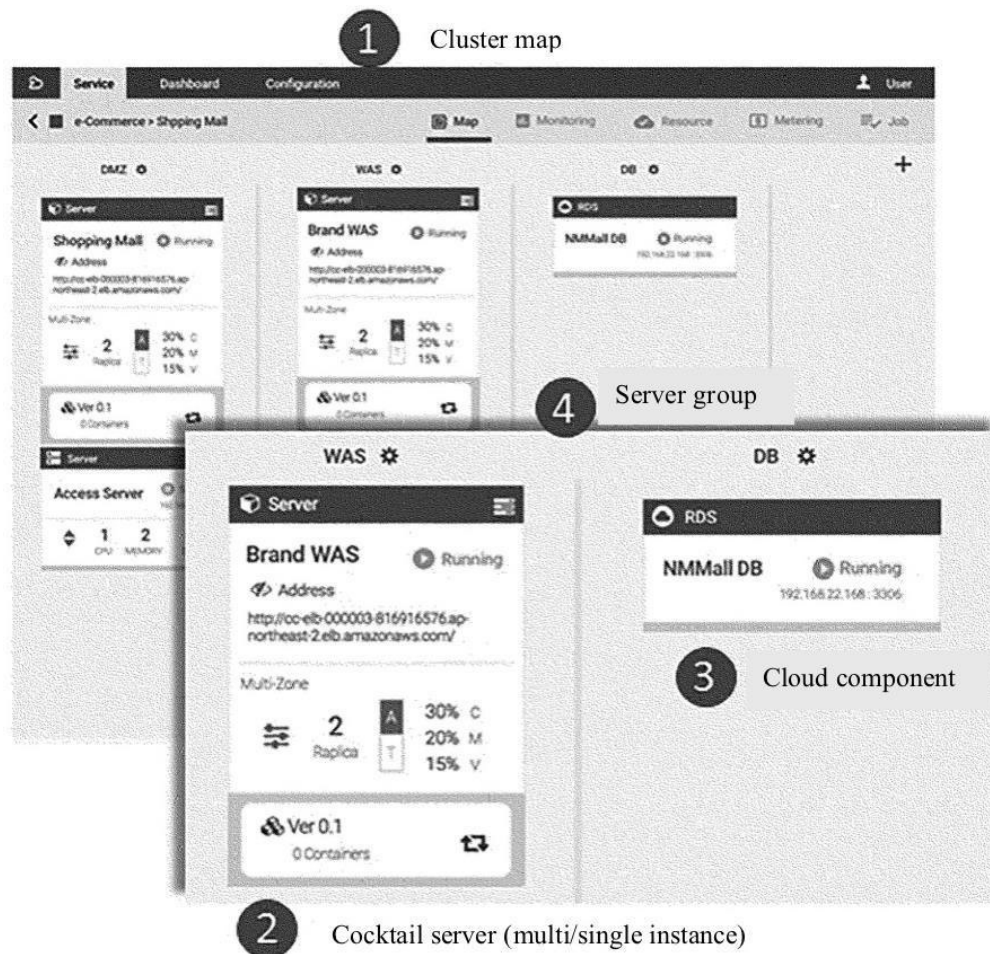

[FIG. 8]



[FIG. 9]

1 Resource management

Web Server

Search...

Web Server
GMAZ

Access Server
GMAZ

WAS Server
WAS

Redis Server
WAS

NMMALL DB
DB

Server

Server Type: Multi instance [Change Type >](#)

Application: Brand Web, Ver 1.5
2 containers
Last InstanceId: 2016-10-12 12:53:56

[Deploy >](#) [Configure >](#) [Status >](#)

Instance

Instance Image: Amazon Linux AMI 2016.09.0 (HVM), SSD Volume Type

Instance Type: t2.medium [Scale Up/Down >](#)

2 core 4 Gb

Instances: 3 Totals 2 Running 1 Stop [Status >](#) [Scale In/Out >](#)

1 Scheduled [Scheduling >](#)

Volume:

ROOT dev/sda1 150 Gb [Edit >](#)

Data dev/sda2 500 Gb [Edit >](#)

[Add Volume >](#)


Security

Load Balancer: Inbound(1), Outbound(2) [Configure >](#)

Instances: Inbound(1), Outbound(2) [Configure >](#)


2 Resource information/action

[FIG. 10]

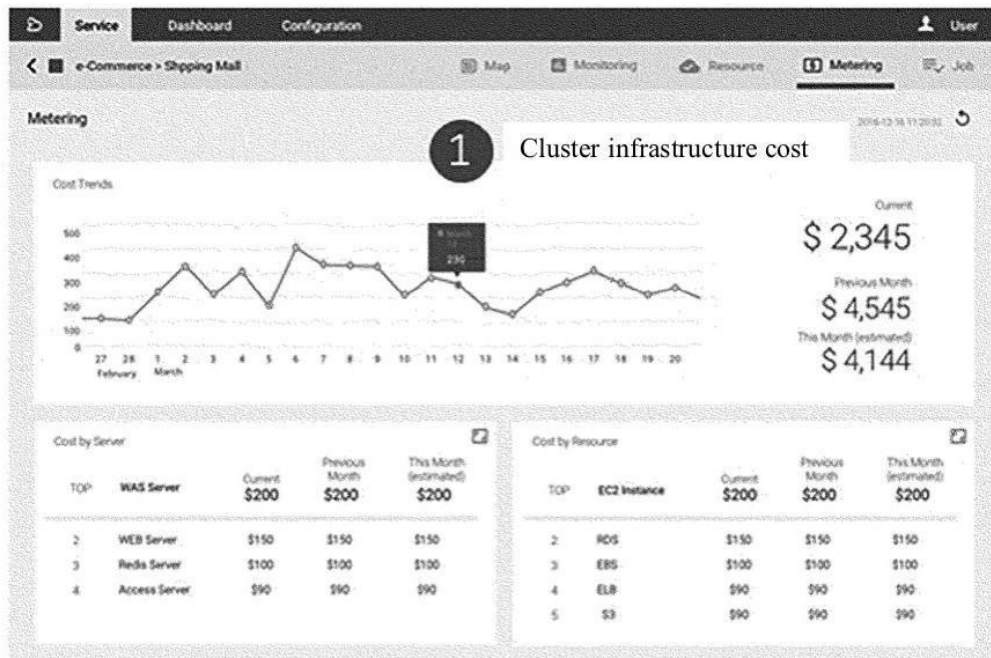


2 Cost for each server, resource


[FIG. 11]

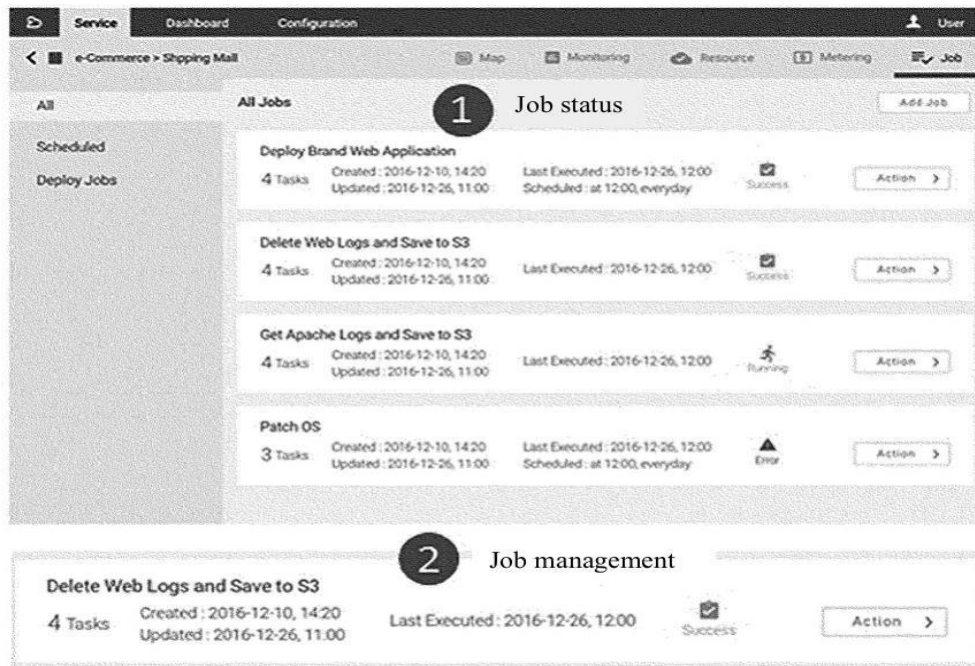


[FIG. 12]

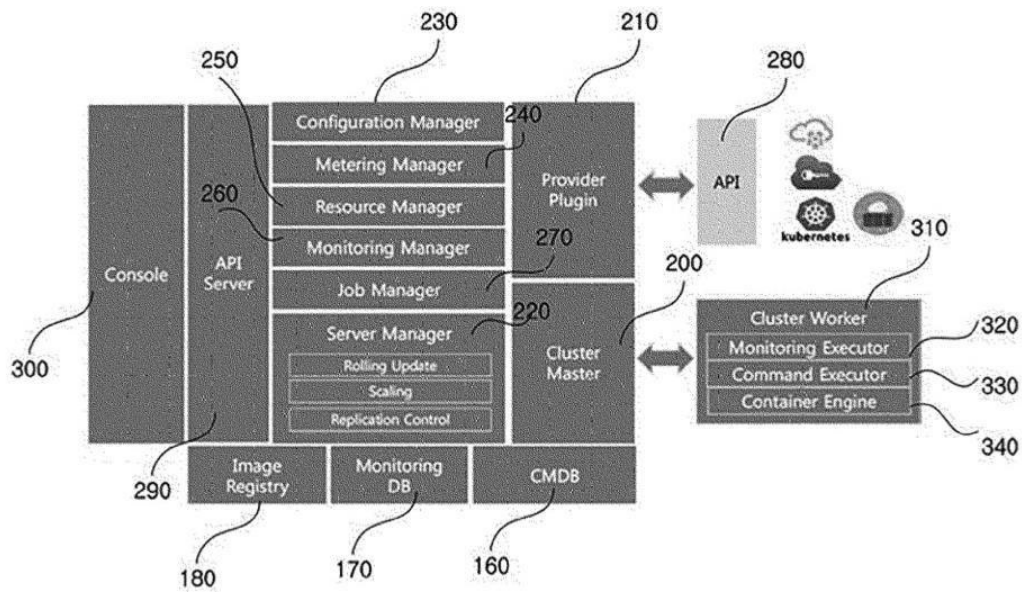


[FIG. 13]

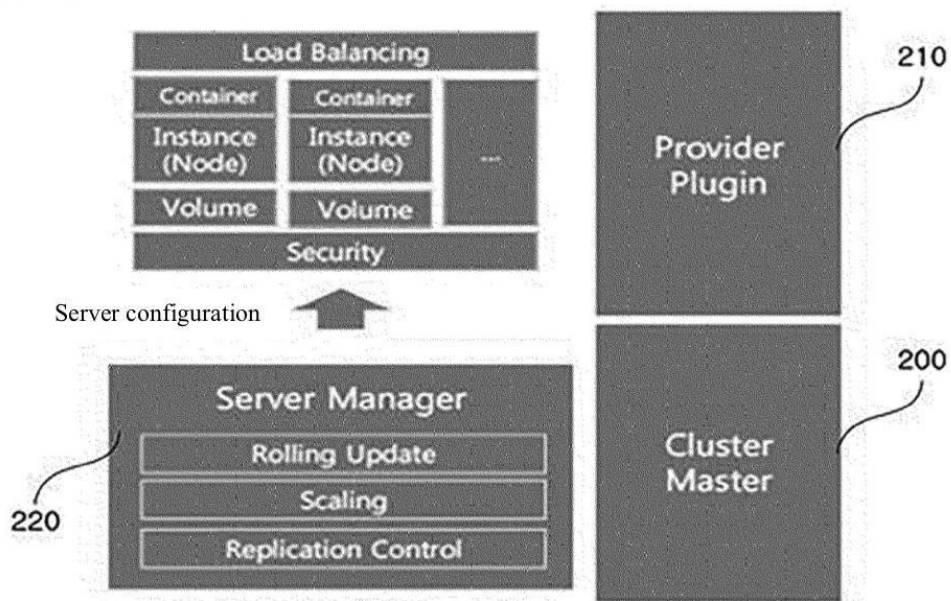


[FIG. 14]

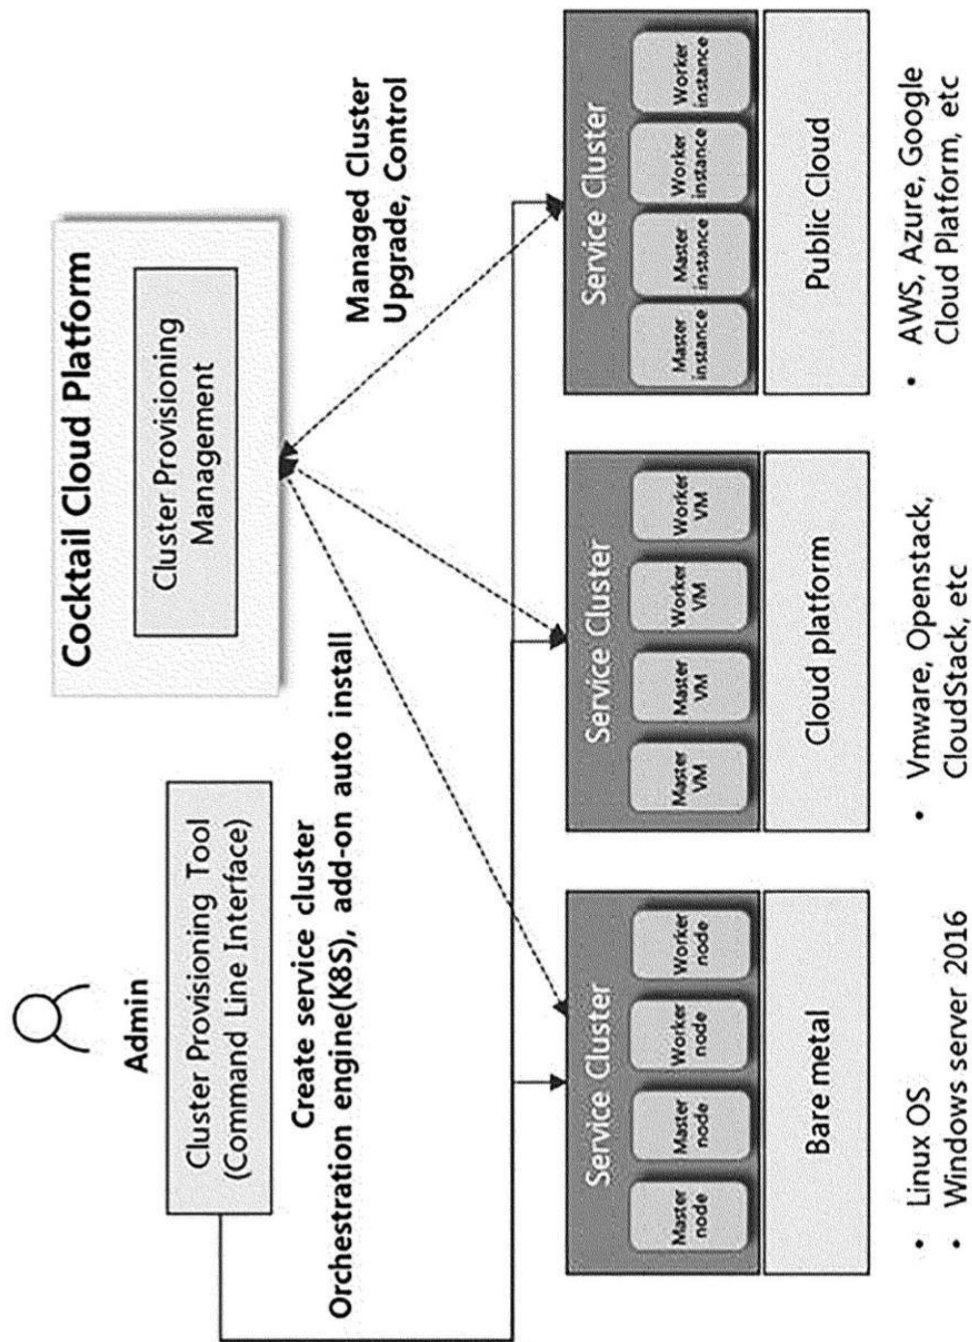


[FIG. 15]

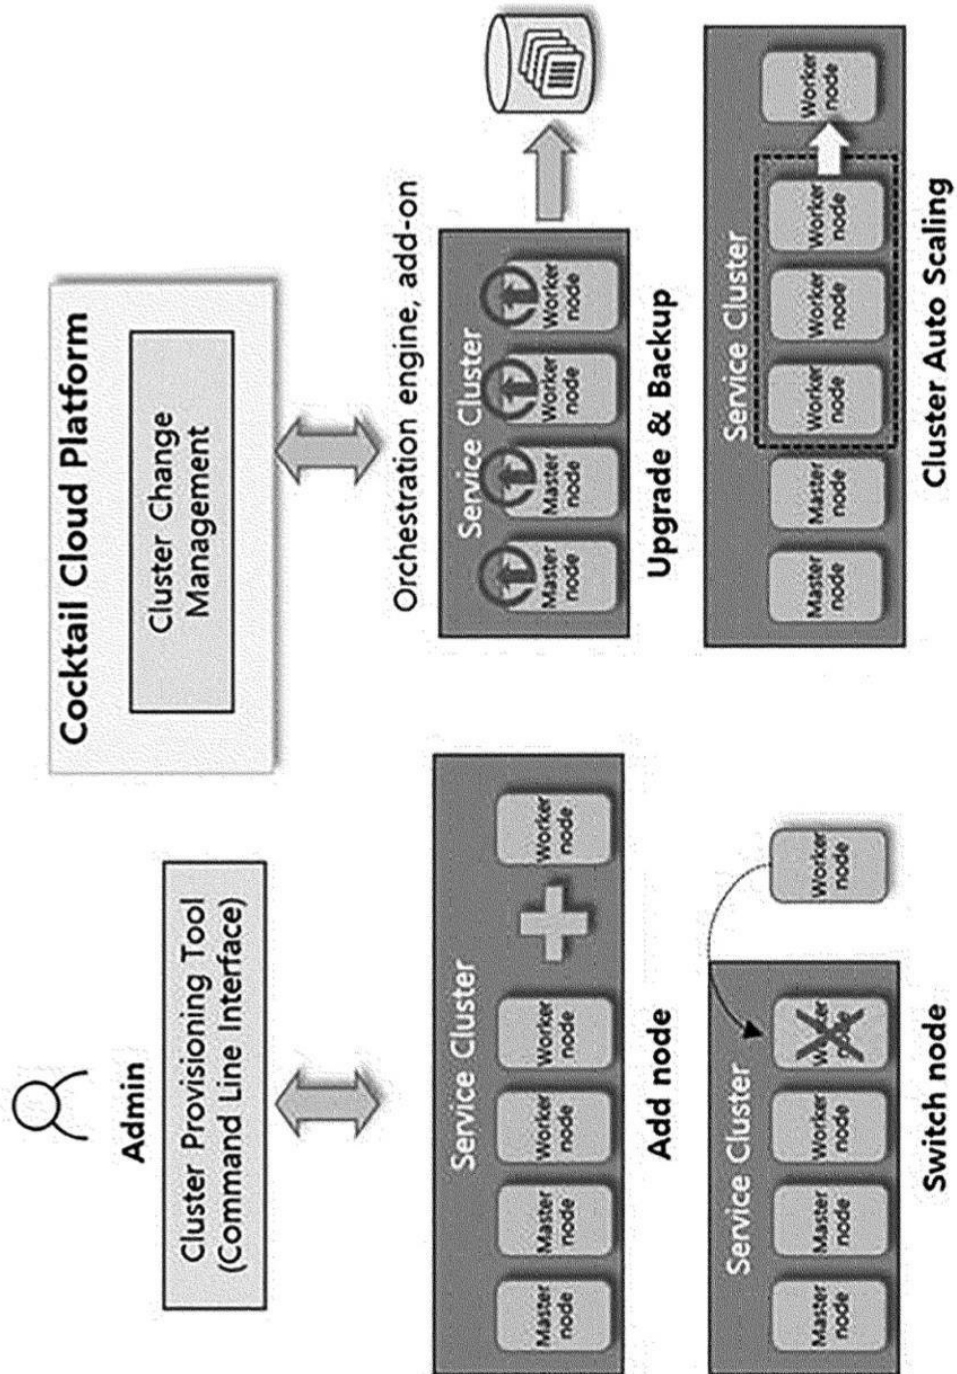


[FIG. 16]

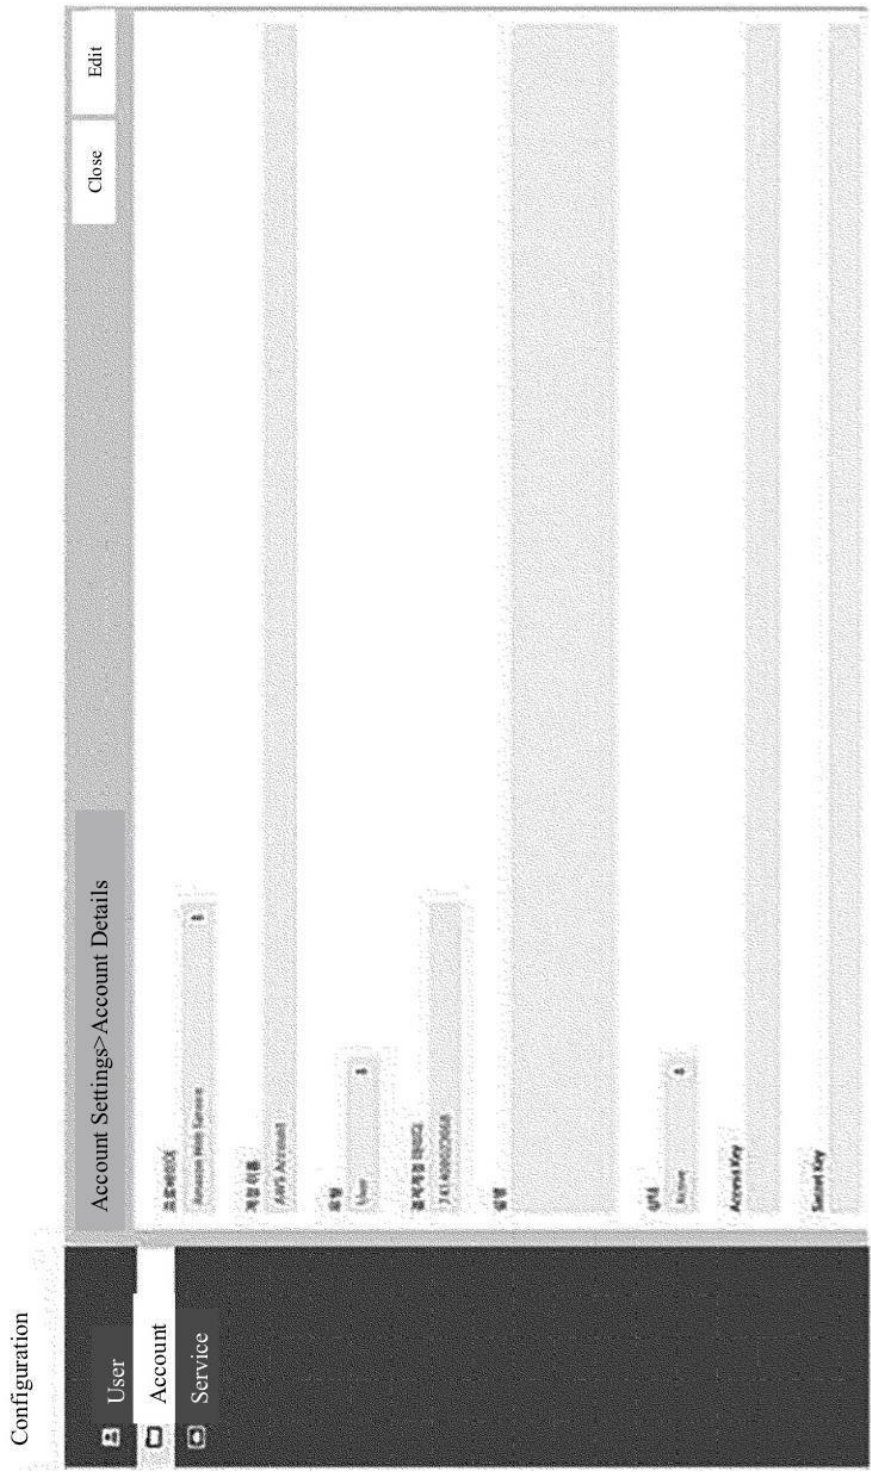


[FIG. 17]

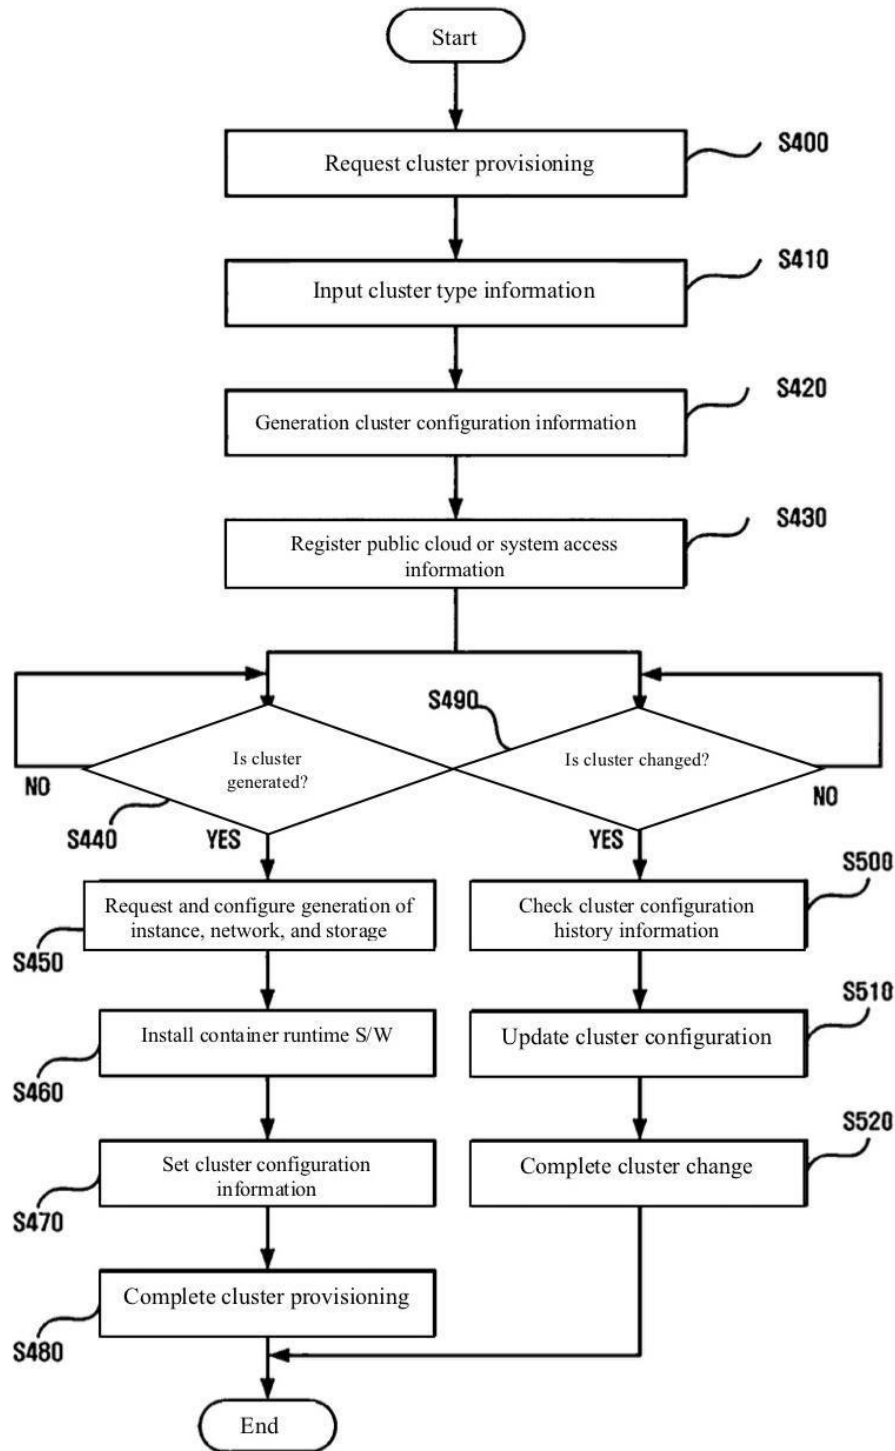


[FIG. 18]

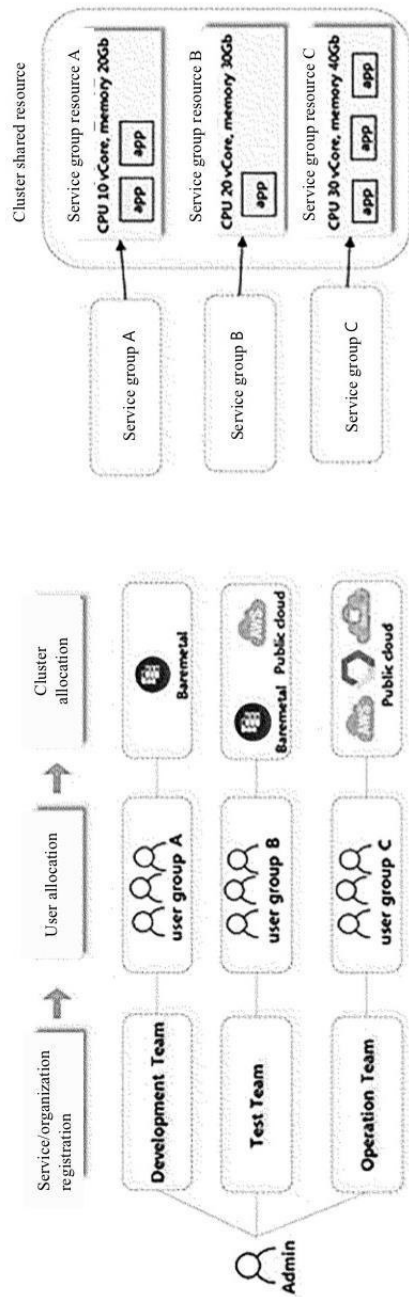

[FIG. 19]

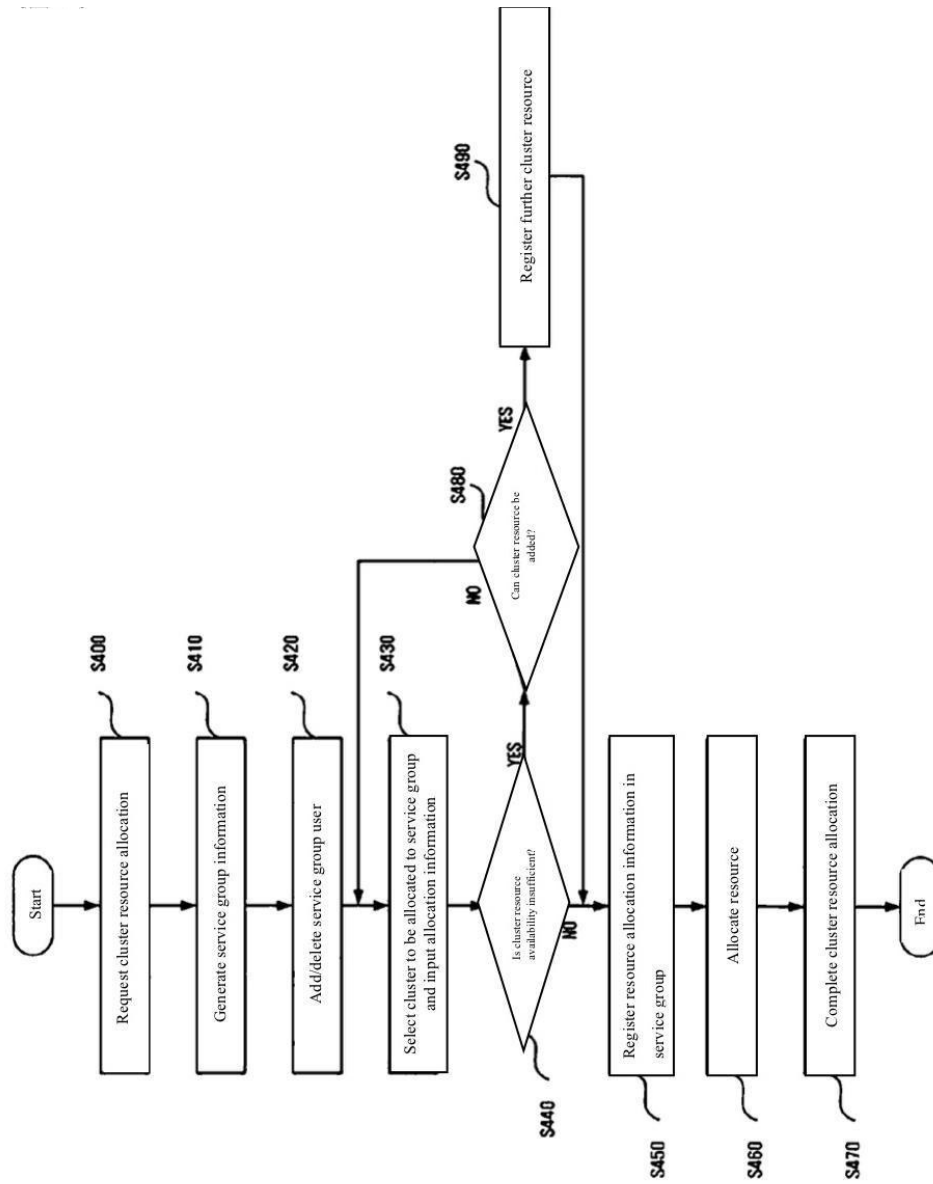

[FIG. 20]

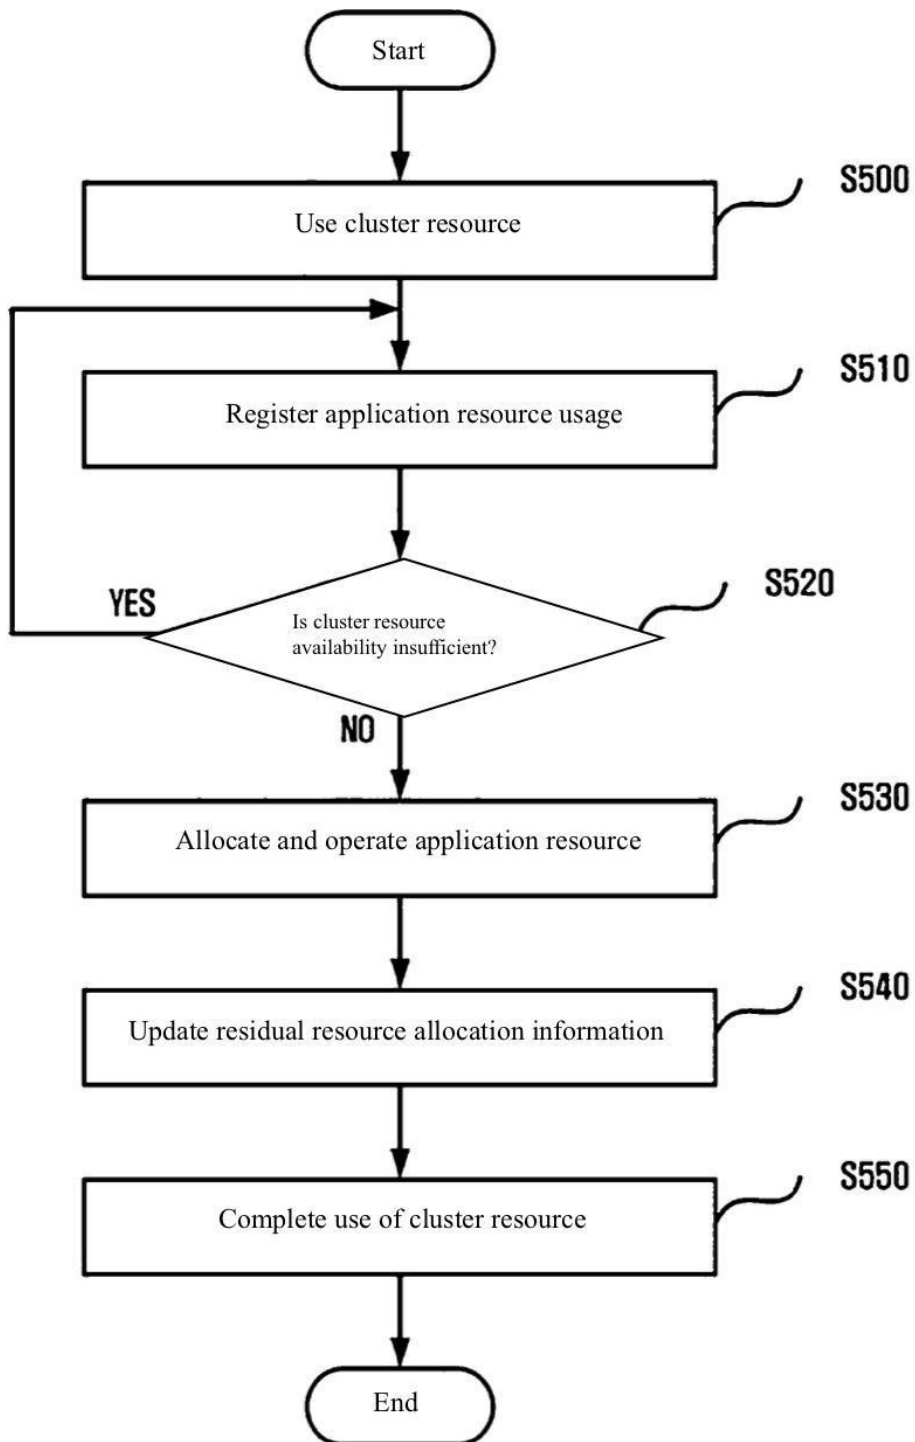

[FIG. 21]

