

DUAL BUS MICROCOMPUTER SYSTEM WITH
PROGRAMMABLE CONTROL OF LOCK FUNCTION

The present invention relates to a microcomputer system and more particularly to a microcomputer system employing a cache subsystem, and provides for programmable control over a LOCK function.

The use of cache subsystems in microcomputer systems leads to a number of attractive operating advantages. Microcomputer systems employing cache subsystems are in effect dual bus microcomputers. The CPU and cache subsystem are connected together via a CPU local bus. Separate from the CPU local bus is a system bus to which other devices (I/O devices, additional memory, etc.) can be connected. The presence of the cache subsystem relieves the system bus from any read memory access to the extent that the information sought is also found in the cache subsystem. Because not all desired information will be found in the cache subsystem, and write operations are usually directed to both the cache subsystem and to memory, there must of course be some connection between the system bus and the CPU local bus.

Under some circumstances, however, the CPU and/or the cache controller is arranged to inhibit cache operations for some commands. For example, the 80386 CPU includes a LOCK signal for multiprocessor and multimaster designs. The signal tells other bus masters that the processor is performing a multiple bus cycle operation that must not be interrupted. The 80386 for example automatically asserts LOCK when it updates the segment descriptor and page tables, during interrupt acknowledge bus cycles, and when it executes the Exchange instruction. The manufacturer of the 80386 recommends that the LOCK output of the 80386 be tied to a LOCK input of a cache controller. The cache controller, since it has visibility of not only the CPU local bus (on which the cache memory resides) but also the system bus (on which main and other memory resides) has the capability of allowing a cache operation or inhibiting the cache operation. Typically, the cache

controller (such as an 82385) will prevent a cache operation for any cycle on which the LOCK input is asserted.

The characteristics of the 80386 and 82385 devices are described in "Microprocessor and Peripheral Handbook", "82385 High Performance 32-Bit Cache Controller" and "Introduction to the 80386" and the 80386 Hardware Reference Manual, all published by Intel. The "82385 High Performance 32-Bit Cache Controller" indicates (Section 3.4.2) that when the LOCK output (of the 80386) is asserted, a sequence is run on the system bus regardless of whether any locations referenced in the sequence reside in cache. In other words, a read hit will be run as if it were a read miss.

Notwithstanding the foregoing, however, in most Personal Computer (PC) environments, descriptors are not shared between system processors. As a result, the effect of assertion of the LOCK signal causes a significant performance degradation, especially when operating in an 80386 protect mode. This performance degradation comes about because the 82385 cache controller treats all locked operations as non-cacheable.

An aim of the present invention is to overcome the the aforementioned problem of performance degradation by selectively disabling any relationship between an 80386 LOCK output and an 82385 LOCK input.

In accordance with the present invention, there is now provided a multi-bus microcomputer system including: a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising a cache controller and a cache memory, system bus means connecting said cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said cache controller having a LOCK input, said cache controller including means for treating any cycle associated with an active LOCK input as a non-cacheable cycle, and logic means coupled between said LOCK output of said CPU and said LOCK input of said cache controller, said logic

This Sheet Has Been Replaced



means including a control input for disabling any relationship between said LOCK output and said LOCK input. Preferably the cache controller is an 82385 cache controller and the CPU is an 80386 CPU. However, It will be appreciated that the present invention can be applied to microcomputer systems which do not employ the 80386 CPU, the 82385 cache controller, or either of them. More particularly, the invention is applicable to any multi-bus microcomputer system including a cache subsystem wherein the CPU includes a LOCK signal which is responded to by the cache controller to inhibit cache operations.

In a preferred embodiment of the present invention to be described later, there is provided additional logic coupled between a LOCK output (of the 80386 for example) and the LOCK input (of the 82385 for example). This additional logic includes a control input terminal which can be in either of two binary states. The control input terminal of the additional logic is driven by a particular bit of a selected I/O port. When the particular bit of the I/O port is asserted, its effect on the logic is to disable any relationship between the LOCK output (of the 80386) and the LOCK input (of the 82385). More particularly, when the selected bit of the I/O port is active, the LOCK input (of the 82385) is inactive, regardless of the LOCK output of the 80386. On the other hand, with the selected bit of the I/O port in an inactive state, the logic allows the LOCK input of the 82385 to follow the states of the LOCK output of the 80386. Accordingly, the state of the selected bit of the I/O port either enables the LOCK function of the microcomputer system or disables the LOCK function.

Preferably, the LOCK inputs and outputs are active low, the additional logic comprises a single OR gate. In this embodiment, the LOCK function is disabled by a high control input to the OR gate from the particular bit of the I/O port. On the other hand, when the particular bit of the I/O port is in a low state, the LOCK functions operate as in the prior art.



THIS SHEET HAS BEEN
REPLACED

By providing programmability of the control input to the additional logic, the microcomputer system can be allowed to operate as if the additional logic were not present when the particular bit of the I/O port (the control bit) is low. On the other hand, when the particular bit or control input is high, then the LOCK functions are disabled. It will be appreciated that control over the LOCK function is thereby placed in the software which controls the status of the particular bit of the selected I/O port.

In an embodiment of the invention, which is implemented in a PS/2[™] microcomputer system produced by the assignee of this application, which is a single processor or single bus master system, disabling the LOCK function produces significant performance increases (up to 6%) when operating under OS/2[™] operating system. The performance increases are attributed to achieving improvements in performance by use of the cache subsystem. In the absence of the present invention, the CPU and cache controller inhibit use of the cache subsystem (and its performance advantages) under the prescribed operating conditions.

An example of the present invention will now be described with reference to the accompanying drawings in which:

Fig. 1 is an overall three-dimensional view of a typical microcomputer system employing the present invention;

Fig. 2 is a detail block diagram of a majority of the components of a typical microcomputer system employing the present invention; and

Fig. 3 shows the relationship between a CPU, a cache controller and the added logic according to the present invention.

Fig. 1 shows a typical microcomputer system in which the present invention can be employed. As shown, the microcomputer system 10 comprises a number of components which are interconnected together. More particularly, a system unit 30 is coupled to and drives a monitor

This Sheet Has Been Replaced



20 (such as a conventional video display). The system unit 30 is also coupled to input devices such as a keyboard 40 and a mouse 50. An output device such as a printer 60 can also be connected to the system unit 30. Finally, the system unit 30 may include one or more disk drives, such as the disk drive 70. As will be described below, the system unit 30 responds to input devices such as the keyboard 40 and the mouse 50, and input/output devices such as the disk drive 70 for providing signals to drive output devices such as the monitor 20 and the printer 60. Of course, those skilled in the art are aware that other conventional components can also be connected to the system unit 30 for interaction therewith. In accordance with the present invention, the microcomputer system 10 includes (as will be more particularly described below) a cache memory subsystem such that there is a CPU local bus interconnecting a processor, a cache control and a cache memory which CPU local bus is coupled via a buffer to a system bus. The system bus is interconnected to and interacts with the I/O devices such as the keyboard 40, mouse 50, disk drive 70, monitor 20 and printer 60. Furthermore, in accordance with the present invention, the system unit 30 may also include a third bus comprising a Micro Channel (TM) bus for interconnection between the system bus and other (optional) input/output devices, memory, etc.

Fig. 2 is a high level block diagram illustrating the various components of a typical microcomputer system in accordance with the present invention. A CPU local bus 230 (comprising data, address and control components) provides for the connection of a microprocessor 225 (such as an 80386), a cache control 260 (which may include an 82385 cache controller) and a random access cache memory 255. Also coupled on the CPU local bus 230 is a buffer 240. The buffer 240 is itself connected to the system bus 250, also comprising address, data and control components. The system bus 250 extends between the buffer 240 and a further buffer 253.

The system bus 250 is also connected to a bus control and timing element 265 and a DMA controller 325. An arbitration control bus 340

couples the bus control and timing element 265 and a central arbitration element 335. Memory 350 is also connected to the system bus 250. The memory 350 includes a memory control element 351, an address multiplexer 352 and a data buffer 353. These elements are interconnected with memory elements 360 through 364, as shown in Fig. 2.

A further buffer 254 is coupled between the system bus 250 and a planar bus 270. The planar bus 270 includes address data and control components, respectively. Coupled along the planar bus 270 are a variety of I/O adaptors and other components such as the display adaptor 275 (which is used to drive the monitor 20), a clock 280, additional random access memory 285, an RS 232 adaptor 290 (used for serial I/O operations), a printer adaptor 295 (which can be used to drive the printer 60), a timer 300, a diskette adaptor 305 (which cooperates with the disk drive 70), an interrupt controller 310 and read only memory 315. The buffer 253 provides an interface between system bus 250 and an optional feature bus such as the Micro Channel (TM) bus 320 represented by the Micro Channel (TM) sockets. Devices such as memory 331 may be coupled to the bus 320.

While data for cache writes may be derived from memory 350, such data may also be derived from other memory such as memory installed on the Micro Channel (TM) bus.

Figs. 3 and 4 show application of the present invention to the relationship between the LOCK output of the CPU 225 and the LOCK input of the cache controller 260. The table in Fig. 4 is a state diagram showing the relationship between LOCK output, the control input to the OR gate 01 and the output of the OR gate 01, connected to the LOCK input of the cache controller 260. The legend below Fig. 4 indicates that the LOCK signals are active low, the LOCK function is disabled for high signals. The control signal in the low state enables the LOCK input to follow the LOCK output, whereas in the high state, the LOCK input is disabled (high) regardless of the state of the LOCK output.

In a preferred embodiment, the CPU 225 comprises an 80386, the cache controller 260 comprises an 82385. The control input terminal to the OR gate 01 can be connected to any particular bit from any selected I/O port. When so connected, the state of that I/O port bit will determine whether the LOCK input of the cache controller 260 does or does not follow the state of the LOCK output of the CPU 225. In the case where the LOCK input of the cache controller 260 does not follow the state of the LOCK output of the CPU 225, it is in a disabled or high state. In this state, as is apparent to those skilled in the art, the cache controller 260 will determine whether or not any cycle is cacheable based on other parameters. On the other hand, in the event the control bit is low (enabling the LOCK) function, then the cache controller 260 will treat any cycle associated with a low state of the CPU 225's LOCK output low, as non-cacheable regardless of these other parameters.

Accordingly, the invention provides the ability for enabling or disabling the LOCK function under control of software and in a manner which is entirely transparent to the CPU 225.

It should be apparent that while in a preferred embodiment the CPU 225 comprises an 80386 and the cache controller 260 comprises an 82385, application of the invention is not limited to use in microcomputer systems including these devices. Rather, any microcomputer system including a cache subsystem which replicates the LOCK function characteristics of the 80386/82385 is a candidate for application of the present invention. It should also be apparent that the invention can also be applied in microcomputer systems wherein the LOCK signal is active high rather than active low. For example, the active high condition can be treated by replacing the OR gate 01 with an AND gate along with appropriate changes to the status of the control bit. With active high signals, and using an AND gate as the additional logic, a high control signal allows the LOCK input to follow the LOCK output, whereas a low control bit disables the LOCK input.

While a preferred embodiment of the invention has been described herein, it should be apparent from the foregoing that many changes can be made within the spirit and scope of the invention. Accordingly the invention should be construed by the claims attached hereto rather than by the specific example described herein.



THIS SHEET HAS BEEN
REPLACED

CLAIMS

1. A multi-bus microcomputer system comprising;
a CPU (225) having a LOCK output;
a cache subsystem (255,260) having a cache memory (255) and a cache controller (260) having a LOCK input and means for treating any cycle associated with an active LOCK input as a non-cacheable cycle;
a CPU local bus (230) for connecting the cache subsystem (255,260) to the CPU (225);
a system bus (250) connecting the cache controller (260) to a random access memory (350) and a plurality of addressable functional units;
characterised in that the system further comprises logic means (01) coupled between the LOCK output and the LOCK input for disabling any relationship between the LOCK output and the LOCK input in response to a control input.
2. A multi-bus microcomputer system as claimed in claim 1 wherein the logic means sets the LOCK input to an inactive state in response to a first state in the control input regardless of the LOCK output and wherein the logic means permits the LOCK input to follow the LOCK output when the control input is in a second state.
3. A multi-bus microcomputer system as claimed in claim 2 wherein the logic means comprises an OR gate and wherein the LOCK output is active low.
4. A multi-bus microcomputer system as claimed in claim 2 wherein the logic means comprises an OR gate and wherein the LOCK output is active high.
5. A multi-bus microcomputer system as claimed in any preceding claim wherein the cache controller is an 82385 cache controller.
6. A multi-bus microcomputer system as claimed in any preceding claim wherein the CPU is an 80386 CPU.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

7. A multi-bus microcomputer system comprising:

a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising an 82385 cache controller and a cache memory, system bus means connecting said 82385 to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said 82385 having a LOCK input, and

logic means coupled between said LOCK output of said CPU and said LOCK input of said 82385, said logic means including a control input for disabling any relationship between said LOCK output and said LOCK input.

8. A multi-bus microcomputer system as claimed in claim 7 wherein said logic means comprises an OR gate.

9. A multi-bus microcomputer system as claimed in claim 7 wherein said logic means, in response to said control input in one condition disables said LOCK input and in another condition allows said LOCK input to follow said LOCK output.

10. A multi-bus microcomputer system comprising:

a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising a cache controller and a cache memory, system bus means connecting said cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output

and said cache controller having a LOCK input, said cache controller including means for treating any cycle associated with an active LOCK input as a non-cacheable cycle, and

This Sheet Has Been Replaced





BC9-89-016

11

THIS SHEET HAS BEEN
REPLACED

logic means coupled between said LOCK output of said CPU and said LOCK input of said cache controller, said logic means including a control input for disabling any relationship between said LOCK output and said LOCK input.

11. A multi-bus microcomputer system as recited in claim 10 wherein said active LOCK output is low and said logic means comprises an OR gate.

12. A multi-bus microcomputer system as recited in claim 10 wherein said logic means responds to said control input in a high state to control said LOCK input to an inactive state regardless of said LOCK output and in a low state allows said LOCK input to follow said LOCK output.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

DUAL BUS MICROCOMPUTER SYSTEM
WITH PROGRAMMABLE CONTROL OF LOCK FUNCTION

ABSTRACT

A dual bus microcomputer system including a cache subsystem improves performance under certain circumstances by allowing programmable control over the LOCK function. More particularly, additional logic is coupled between the LOCK output of the CPU and the LOCK input of the cache controller. A control bit from an I/O port is a second input to the additional logic. With the control bit in one state, the logic allows the LOCK input to follow the LOCK output.* In the other state of the control bit, the LOCK input is disabled regardless of the state of the LOCK output.

This Sheet Has Been Replaced



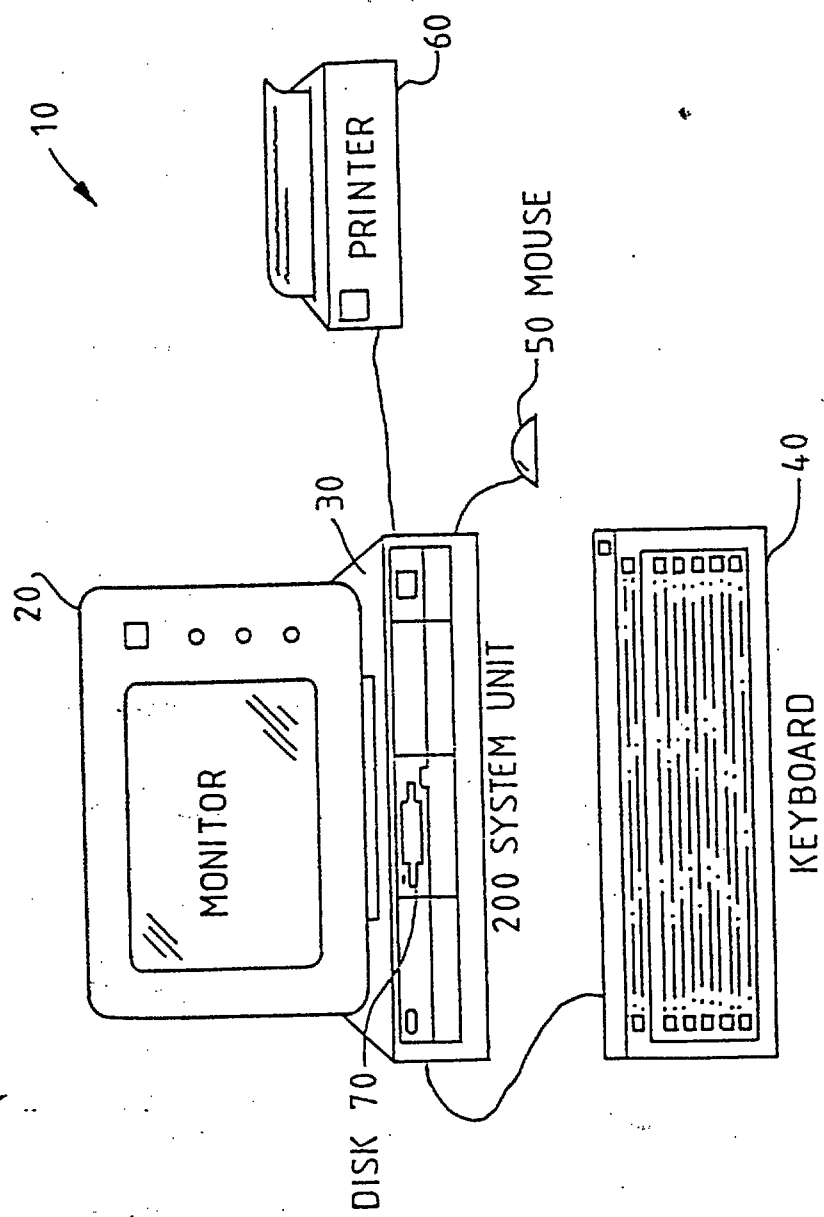


FIG. 1

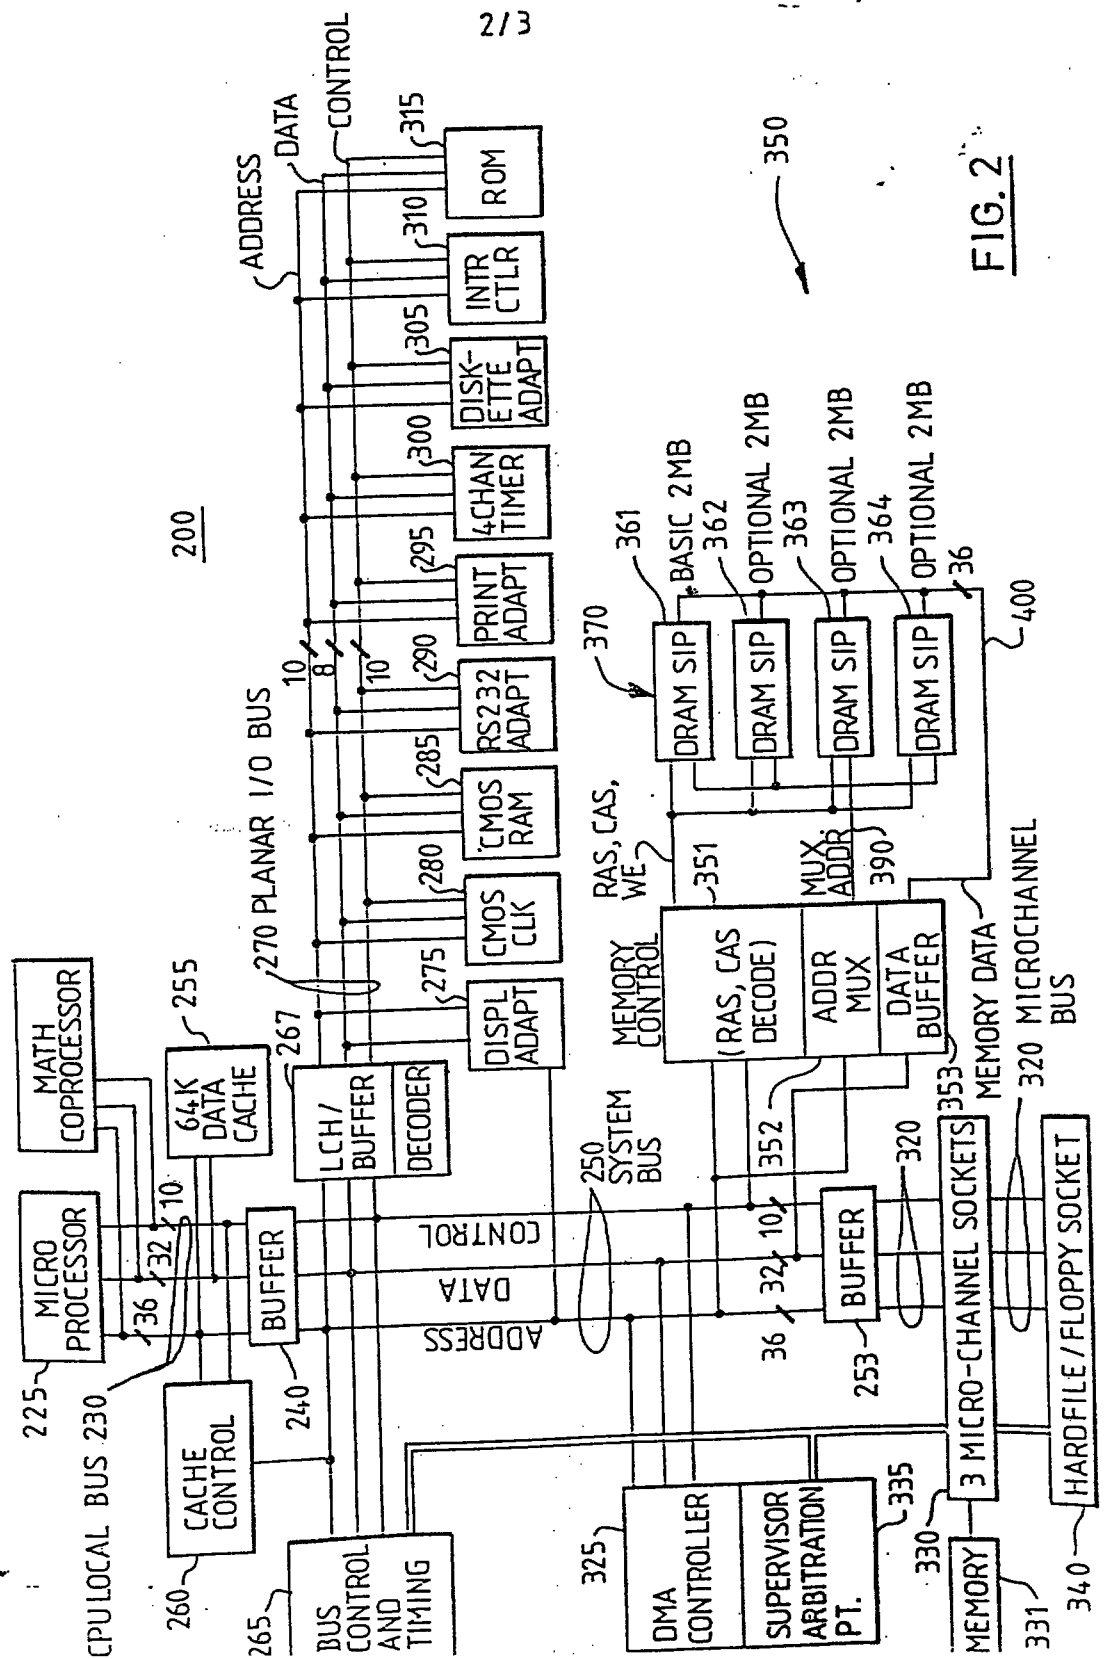
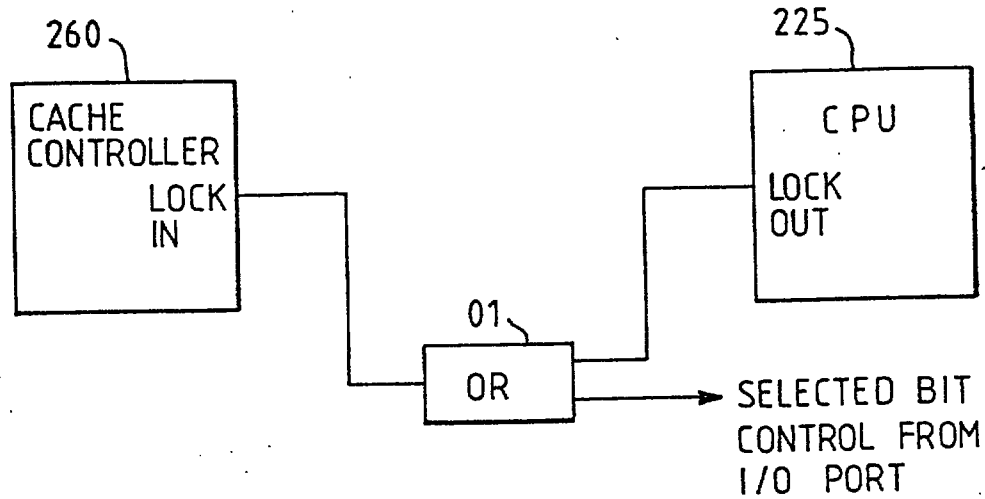


FIG. 2

FIG. 3

<u>LOCK OUT</u>	<u>CONTROL</u>	<u>LOCK IN</u>
0	0	0
1	0	1
0	1	1
1	1	1


LOCK OUT, LOCK IN, ACTIVE LOW, DISABLED HIGH CONTROL -
 DISABLE LOCK - HIGH
 ENABLE LOCK - LOW

FIG. 4

8-20500-8

THIS SHEET HAS BEEN
REPLACED

12

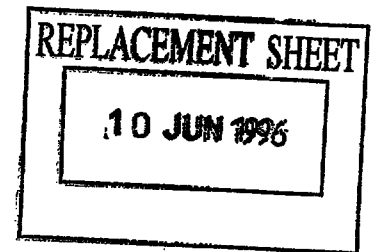

DUAL BUS MICROCOMPUTER SYSTEM
WITH PROGRAMMABLE CONTROL OF LOCK FUNCTION

ABSTRACT

A dual bus microcomputer system including a cache subsystem (255, 260) improves performance under certain circumstances by allowing programmable control over the LOCK function. More particularly, additional logic is coupled between the LOCK output of the CPU and the LOCK input of the cache controller (260). A control bit from an I/O port is a second input to the additional logic. With the control bit in one state, the logic allows the LOCK input to follow the LOCK output. In the other state of the control bit, the LOCK input is disabled regardless of the state of the LOCK output.

Fig.2

This Sheet Has Been Replaced



edit: all

ment: all

3 NOV 1997

controller (such as an 82385) will prevent a cache operation for any cycle on which the LOCK input is asserted.

The characteristics of the 80386 and 82385 devices are described in "Microprocessor and Peripheral Handbook", "82385 High Performance 32-Bit Cache Controller" and "Introduction to the 80386" and the 80386 Hardware Reference Manual, all published by Intel. The "82385 High Performance 32-Bit Cache Controller" indicates (Section 3.4.2) that when the LOCK output (of the 80386) is asserted, a sequence is run on the system bus regardless of whether any locations referenced in the sequence reside in cache. In other words, a read hit will be run as if it were a read miss.

Notwithstanding the foregoing, however, in most Personal Computer (PC) environments, descriptors are not shared between system processors. As a result, the effect of assertion of the LOCK signal causes a significant performance degradation, especially when operating in an 80386 protect mode. This performance degradation comes about because the 82385 cache controller treats all locked operations as non-cacheable.

SUMMARY OF THE INVENTION

It is an object of the present invention to ameliorate one or more disadvantages of the prior art.

According to one aspect of the present invention there is provided a multi-bus microcomputer system comprising: a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising an 82385 cache controller and a cache memory, system bus means connecting said 82385 cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said 82385 cache controller having a LOCK input; and logic means with a control input, said logic means coupled between said LOCK output of said CPU and said LOCK input of said 82385 cache controller, said logic means producing, in response to a predetermined signal on said control input, an inactive signal to said LOCK input of said 82385 cache controller to disable said LOCK input of said 82385 cache controller and, in

ment 2 all

3 NOV 1997

absence of said predetermined signal, allowing said LOCK inputs of said 82385 cache controller to follow said LOCK output of said CPU.

According to another aspect of the present invention there is provided a multi-bus microcomputer system comprising: a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising a cache controller and a cache memory, system bus means connecting said cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said cache controller having a LOCK input, said cache controller including means for treating any cycle associated with an active LOCK input as a non-cacheable cycle; and logic means coupled between said LOCK output of said CPU and said LOCK input of said cache controller, said logic means including a control input, said logic means generating a LOCK input signal in response to a signal on said control input, said LOCK input signal comprising either a signal equivalent to said LOCK output signal or comprising an inactive LOCK input signal for disabling said LOCK input, and logic means responding to said control input in a high state to thereby disable said LOCK input to control said LOCK input to an inactive state regardless of said LOCK output, and responding to said control input in a low state to require said LOCK input to follow said LOCK output.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

An example of the present invention will now be described with reference to the accompanying drawings in which:


Fig. 1 is an overall three-dimensional view of a typical microcomputer system employing the present invention;

Fig. 2 is a detail block diagram of a majority of the components of a typical microcomputer system employing the present invention; and

Fig. 3 shows the relationship between a CPU, a cache controller and the added logic according to the present invention.

Fig. 1 shows a typical microcomputer system in which the present invention can be employed. As shown, the microcomputer system 10 comprises a number of components

which are interconnected together. More particularly, a system unit 30 is coupled to and drives a monitor

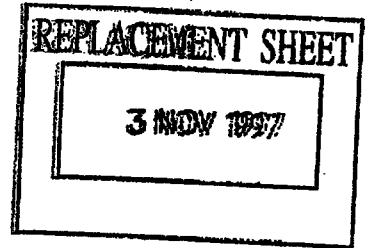

CLAIMS

1. A multi-bus microcomputer system comprising:

a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising an 82385 cache controller and a cache memory, system bus means connecting said 82385 cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said 82385 cache controller having a LOCK input; and

logic means with a control input, said logic means coupled between said LOCK output of said CPU and said LOCK input of said 82385 cache controller, said logic means producing, in response to a predetermined signal on said control input, an inactive signal to said LOCK input of said 82385 cache controller to disable said LOCK input of said 82385 cache controller and, in absence of said predetermined signal, allowing said LOCK inputs of said 82385 cache controller to follow said LOCK output of said CPU.

2. A multi-bus microcomputer system as recited in claim 1 wherein said logic means comprises an OR gate.

3. A multi-bus microcomputer system comprising:


a CPU and a cache subsystem connected together by a CPU local bus, said cache subsystem comprising a cache controller and a cache memory, system bus means connecting said cache controller to a random access memory and a plurality of addressable functional units, said CPU having a LOCK output and said cache controller having a LOCK input, said cache controller including means for treating any cycle associated with an active LOCK input as a non-cacheable cycle; and



3 NOV 1997

logic means coupled between said LOCK output of said CPU and said LOCK input of said cache controller, said logic means including a control input, said logic means generating a LOCK input signal in response to a signal on said control input, said LOCK input signal comprising either a signal equivalent to said LOCK output signal or comprising an inactive LOCK input signal for disabling said LOCK input, and logic means responding to said control input in a high state to thereby disable said LOCK input to control said LOCK input to an inactive state regardless of said LOCK output, and responding to said control input in a low state to require said LOCK input to follow said LOCK output.

4. A multi-bus microcomputer system as recited in claim 3 wherein said logic means comprises an OR gate.

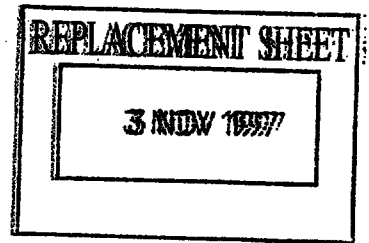

**DUAL BUS MICROCOMPUTER SYSTEM
WITH PROGRAMMABLE CONTROL OF LOCK FUNCTION**

ABSTRACT

A dual bus microcomputer system including a cache subsystem (255, 260) improves performance under certain circumstances by allowing programmable control over the LOCK function. More particularly, additional logic is coupled between the LOCK output of the CPU and the LOCK input of the cache controller (260). A control bit from an I/O port is a second input to the additional logic. With the control bit in one state, the logic allows the LOCK input to follow the LOCK output. In the other state of the control bit, the LOCK input is disabled regardless of the state of the LOCK output.

Fig.2