

REPLACED SHEETS SG

☒ Description : paged ...1... to paged 10....
☒ Claim(s) : paged ...11... to paged 14....
☒ Drawing(s) : paged ...15... to paged 5/a....
☒ Abstract : paged ...15... to paged

~~REPLACEMENT SHEETS SG~~

☐ Description : paged ...7... to paged
☐ Claim(s) : paged to paged
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

DATE OF RECEIPT

BIOCOMPATIBLE PERFORATED MEMBRANES, PROCESSES FOR THEIR
 PREPARATION, THEIR USE AS A SUPPORT IN THE IN VITRO GROWTH OF
 EPITHELIAL CELLS, THE ARTIFICIAL SKIN OBTAINED IN THIS MANNER, AND
 ITS USE IN SKIN GRAFTS

5 Field of the invention

This invention relates to new biocompatible perforated membranes,
 processes for their preparation, their use as a support in the in
 vitro growth of epithelial cells, the artificial skin obtained in
 this manner, and its use in skin grafts.

10 Prior art

The loss of cutaneous material for reasons of traumatic or
 pathological origin is commonly resolved by the autotransplant-
 ation technique, using skin explants from donor areas. To cover
 larger areas these explants can be expanded by surgical methods
 15 such as the mesh grafting described by J. Mauchahal, J. Plast.
 Surgery, 42, 88-91 (1989). These methods give positive results
 only with small-dimension lesions and patients with a satisfactory
 general health profile. If elderly patients or those in a state of
 serious decline are treated, unsatisfactory results are obtained
 20 and numerous problems arise, to the extent that such procedures
 cannot be used. In addition they do not allow a donor tissue
 expansion of more than 10 times.

An important turning point in the treatment of these lesions by
 reconstructive surgery was the development of the technique
 25 involving the in vitro culture of keratinocytes (J. Rheinwald and
 H. Green, Cell, 6, 331-344, 1975), which allowed the in vitro
 expansion of these cultures, to obtain epidermic cell membranes

This Sheet Has Been Replaced





potentially suitable for covering lesion areas.

This technique has been widely used in clinical practice, mostly in the case of patients suffering from burns (G.G. Gallico et al., M. Engl. J. Med., 311, 448-451, 1984), but numerous problems arose
5 from its conception, such as the failure to take of some grafts, the fragility of the epithelial film and the consequent difficulty in its handling by the surgeon, the length of time required for obtaining sufficient quantities of epidermic cultures and the difficulty of obtaining donor areas of sufficient size from
10 patients with large areas of damaged body surface. The in vitro epidermic cultures also require precise orientation to enable the graft to take, this being a particularly risky operation in view of the fragility of in vitro cultivated epidermic film.

A different approach to these problems is described by Yannas et
15 al., Science, 215, 174-176 (1982), who use dermic substitutes in the form of reabsorbable porous materials consisting of coprecipitates of collagen and glycosaminoglycans (GAG), in particular chondroitin-6-sulphate, covered by a thin silicone membrane film. The characteristic of these materials is that they
20 comprise non-standardized pores intercommunicating in a manner similar to a sponge.

Zang et al., in Burns, 12, 540-543 (1986) propose a method, known as microskin grafting, consisting of auto-grafting very small skin portions, which then develop to merge into a single epithelium.
25 With this method the maximum donor surface/coverable surface expansion ratio obtainable is 1:15.

S. Boyce and J. Hansborough in Surgery, 103, 421-431 (1988).



describe the use of membranes formed from collagen and GAG to promote on their surface the growth of keratinocytes, so reducing the surface porosity of the material. A continuous non-porous layer is also interposed to limit the epidermic culture development to the membrane surface. The possible antigenicity of these dermic substituents, which can result in rejection of the graft, has not yet been properly ascertained.

Object of the invention

The object of the present invention is to provide biocompatible membranes which enable in vitro culture of keratinocytes, with culture development in a much shorter time than that previously possible. An important result of the membranes according to this invention is the ability to obtain colonization by homologous or heterologous epithelial cells in a time which is surprisingly short (6-10 days) compared with the time normally required (20-40 days) by traditional methods for preparing comparable areas of in vitro epidermis cultures.

This advantage results in the preparation in a short time of an artificial skin which allows very rapid coverage of an area on which an epithelial transplantation is required, so reducing the risks relating to excessive organic liquid loss or infection.

A further object of the present invention is to provide biocompatible membranes which allow rapid development of keratinocyte cultures with an excellent donor surface/coverable surface ratio, of between 1:20 and 1:200, this being considerably higher than previously obtainable with traditional methods.

A further object of the present invention is to provide a



biocompatible and preferably bioreabsorbable artificial skin which can be produced in a short time, is strong, and is easily handled at the moment of transplantation, and which moreover can be applied to the site of the lesion independently of its original orientation
5 in the culture vessel, and can be easily stored. In this respect, an advantage of the artificial skin according to the present invention is that it can be easily cryopreserved to allow the creation of a bank of epithelial tissue, including heterologous. The possibility of cryopreservation also considerably reduces or
10 eliminates, after at least two cycles, the antigenic potential of the surface antigens expressed by the epithelial cells.

Description

These and further objects are attained by the biocompatible membranes according to the present invention, consisting of
15 material of natural, synthetic or semisynthetic origin and having a thickness of between 10 and 500 μ , and preferably between 20 and 40 μ , characterised by comprising an ordered series of holes of a defined and constant size between 10 and 1000 μ , and preferably between 40 and 70 μ , separated from each other by a constant
20 distance of between 50 and 1000 μ , and preferably 80 μ .

These membranes can consist of biocompatible and preferably also bioreabsorbable materials of natural origin such as collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic
25 acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches, or natural rubbers, either alone or in mixture with each other or with



polymers of synthetic or semisynthetic origin, in the presence of suitable precipitating or gelling agents such as metal salts, polycations or polyanions.

The membranes can also consist of biocompatible and preferably also
5 bioreabsorbable materials of synthetic origin such as polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones or polyurethanes, or semisynthetic derivatives of natural polymers such as collagen crosslinked with crosslinking agents such as dialdehydes or their
10 precursors, bicarboxylic acids or halides thereof, diamines, or derivatives of cellulose, of alginic acid, of starch, of chitin or chitosan, of gellan, of xanthan, of pectins or pectic acids, of polyglucans, of polymannans, of agar, of agarose, of natural rubbers or of glycosaminoglycans.

15 The membranes can also consist of synthetic polymers, even without the biodegradability characteristic, such as silicone, silane or siloxane rubbers, fluoropolymers such as polyfluoroethylene, polyfluoropropylene, polyfluoroethers, polystyrene, vinyl polychloride, polyacrylate or derivatives thereof, polyhydroxy-
20 acrylate, polyhydroxymethacrylate, carboxyvinyl polymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives, polyethylene and polypropylene.

The membranes preferably consist of semisynthetic derivatives of
25 hyaluronic acid, in particular ester derivatives thereof such as those described in Examples 6, 7 and 24 of EPA 0216453 filed on 7.7.86, these being biocompatible and biodegradable materials able



to release hyaluronic acid on the site of their application. this acid being well known to favour tissue reparative processes. A further characteristic which makes these materials particularly suitable for use according to the present invention is that they do
5 not produce intolerance phenomena, not being immunogenic.

The biocompatible membranes, consisting of one or more of the aforesaid materials have a thickness of between 10 and 500 μ and preferably between 20 and 40 μ , and are characterised by the presence of an ordered series of holes of defined and constant size
10 between 10 and 1000 μ , and preferably between 40 and 70 μ , separated from each other by a constant distance of between 50 and 1000 μ , and preferably 80 μ .

Continuous biocompatible membranes, consisting of one or more of the aforesaid materials, can be prepared by the conventional
15 methods described in the literature.

The perforated biocompatible membranes according to the present invention are obtained using mechanical perforation devices such as suitably arranged punching machines, or methods involving the use of thermal or ultraviolet lasers operating in a frequency band such
20 as to produce holes of the required size and distance apart in the membrane.

The following example of the preparation of a perforated biocompatible membrane according to the present invention is given by way of illustration only.

25 EXAMPLE 1

A membrane of hyaluronic acid benzyl ester with 100% esterification (as described in EPA 0216453 filed on 7.7.86) in the form of



a square of 12 x 12 cm and 25 μ thickness was perforated using a computerized UV Laser device operating at a frequency of 273 μ m under the following operating conditions: working frequency 200 Hz, output energy 250 mJ. Using a suitable screening system, holes
5 having a diameter of 40 μ were obtained at a distance apart of 80 μ , as shown in Figures 1a and 1b.

The perforated biocompatible membranes according to the present invention can be used advantageously for the in vitro culture of epithelial cells, especially keratinocytes.

10 For this purpose the membranes can be fixed to the base of cell culture vessels, to metal grids or to any other structure suitable for cell cultures at the air/culture medium interface, using sterile vaselin, sterile silicone or other cementing systems which allow easy removal of the membrane, or by systems involving the use
15 of biological material such as collagen, fibrin or fibrin glue. These membranes can be incubated in culture media suitable for the growth of epithelial cells either alone or in the presence of other cells, such as irradiated fibroblasts, as described in the cited literature, without within the time scheduled for growth and hole
20 colonization causing alteration in mechanical properties which would compromise their handleability and strength within the particular application.

Some of the tests carried out are described below to illustrate the use of the membranes of the present invention.

25 EXAMPLE 2

The following test was conducted to demonstrate the absence of any inhibition by hyaluronic acid derivative membranes on the in vitro



growth of human keratinocyte cell cultures.

Membranes denominated HYAFF 11 cut steriloly into 2 x 2 cm squares and consisting of hyaluronic acid benzyl ester with 100% esterification (as described in EP 0216453 filed on 7.7.86) were applied to
5 the base of the culture vessels by means of sterile silicone.

2×10^5 human keratinocytes were seeded onto these in a volume of 0.5 ml. in the presence of 4×10^5 lethally irradiated 3T3 fibroblasts at the second passage.

The capsules were incubated at 37°C for 2 hours in a 5% CO₂
10 atmosphere to allow the cells to attach to the matrix. After this period 5 ml of CEC culture medium (Green H. et al., J. Proc. Nation. Acad. Sci., 76, 5665-5668, 1979) were added and the capsules again incubated. The culture medium was changed every 2 days. The cells were treated with trypsin 9 days after seeding and
15 counted. All experiments were conducted in duplicate.

RESULTS

	No. of human keratinocytes per plate ($\times 10^{-5}$)	% inhibition
Control	27	0%
20 HYAFF 11 membrane	27	0%

These results show that the biomaterial used has no inhibiting effect on keratinocyte cultures.

EXAMPLE 3

Growth of human keratinocytes using the perforated biocompatible
25 membranes of the invention, obtained by the method described in
Example 1

HYAFF 11 membranes consisting of hyaluronic acid benzyl ester with

This Sheet Has Been Replaced



100% esterification (as described in EPA 0216453 filed on 7-7-86) in the form of 3 x 3 cm squares were cemented to the base of 6 cm diameter Petri capsules using sterile vaselin. Lethally irradiated 3T3 fibroblasts were seeded on the membranes to a concentration of 700,000 cells per plate, under the conditions described in Example 2. After adhesion of the 3T3 cells, ie after about 24 hours, a cell suspension of human keratinocytes originating from secondary cultures was added at a concentration of 38,000 cells per cm². The culture conditions were analogous to those described in Example 2.

10 The development of the keratinocyte culture was followed daily using a phase contrast microscope. The development of inoculated epithelial cells was observed on the membrane, these having reached confluence 8-10 days after seeding.

Of particular importance is the fact that even on the second day 15 after seeding, numerous holes contain keratinocytes, their growth being more active within the holes than on the surface, to totally fill them around the 6th day (Figures 2, 3 and 4).

A further fact of great importance is that when analyzed by histological techniques the cells within the holes demonstrate a 20 basaloid appearance documented by the findings of figures showing frequent mitosis (Figures 5 and 6), denoting high reproductive vitality. These findings were confirmed by immunohistochemical methods using specific antibodies (Mab).

The epithelial cells grown within the holes can therefore be 25 considered overall to be in the active proliferation stage and thus effectively usable on transplantation areas.

The artificial skin according to the present invention, obtained by



the aforesaid procedures, therefore consists of a biocompatible and preferably bioreabsorbable support membrane consisting of materials of natural, synthetic or semisynthetic origin, and having a thickness of between 10 and 500 μ , and preferably between 20 and 40 μ , characterised by comprising an ordered series of holes of a defined and constant size between 10 and 1000 μ , separated from each other by a constant distance of between 50 and 1000 μ , together with autologous or heterologous keratinocyte microcolonies in the active proliferation stage present within the holes.

10 This artificial skin can be easily shaped by the operator on the basis of the areas to be treated, and has a mechanical strength which enables it to be handled without difficulty and be sutured. Once implanted on the lesion area, the keratinocyte microcolonies create growth nuclei of rapid-growing epithelial tissue, which in a

15 short time completely re-epithelialize the area on which the transplantation has been carried out.

It is used by withdrawing it from the culture vessel, removing all traces of culture medium by a sterile physiological solution and applying it to the area to be treated without needing to pay

20 particular attention to the direction of application, as it is equally effective if applied on either of its two sides, in contrast to traditional keratinocyte cultures.

The artificial skin according to the present invention can be used to cover even extensive lesions of the body surface of traumatic

25 origin such as burns, of surgical origin such as withdrawal areas in plastic surgery, or pathological origin such as stasis ulcers or bedsores.



CLAIMS

- 1 1. Biocompatible membranes consisting of materials of natural,
2 synthetic or semisynthetic origin, and having a thickness of
3 between 10 and 500 μ . and preferably between 20 and 40 μ ,
4 characterised by comprising an ordered series of holes of a defined
5 and constant size between 10 and 1000 μ . separated from each other
6 by a constant distance of between 50 and 1000 μ .
- 1 2. Biocompatible membranes as claimed in claim 1, characterised in
2 that the hole size is between 40 and 70 μ .
- 1 3. Biocompatible membranes as claimed in claim 1, characterised in
2 that the distance between holes is 80 μ .
- 1 4. Biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible material of natural origin is chosen from
3 the group consisting of collagen or coprecipitates of collagen and
4 glycosaminoglycans, cellulose, gelled polysaccharides such as
5 chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan
6 gum, gellan, alginic acid or alginates, polymannans or polyglucans,
7 starches and natural rubbers, either alone or in mixture with each
8 other or with polymers of synthetic or semisynthetic origin, in the
9 presence of suitable precipitating or gelling agents such as metal
10 salts, polycations or polyanions.
- 1 5. Biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible material of synthetic origin is chosen from
3 the group consisting of polylactic acid, polyglycolic acid or
4 copolymers thereof or their derivatives, polydioxanones,
5 polyphosphazenes, polysulphones and polyurethanes.
- 1 6. Biocompatible membranes as claimed in claim 1, characterised in



2 that the biocompatible material of semisynthetic origin is chosen
3 from the group consisting of semisynthetic derivatives of natural
4 polymers such as collagen crosslinked with crosslinking agents such
5 as dialdehydes or their precursors, bicarboxylic acids or halides
6 thereof, diamines, and derivatives of cellulose, of alginic acid,
7 of starch, of hyaluronic acid, of chitin or chitinosan, of gellan,
8 of xanthan, of pectins or pectic acids, of polyglucans, of
9 polymannans, of agar, of agarose, of natural rubbers or of
10 glycosaminoglycans.

1 7. Biocompatible membranes as claimed in claim 6, characterised in
2 that the biocompatible membrane consists of hyaluronic acid benzyl
3 ester with 100% esterification.

1 8. A process for preparing biocompatible membranes consisting of
2 materials of natural, synthetic or semisynthetic origin and having
3 a thickness of between 10 and 500 μ , which comprise an ordered
4 series of holes of a defined and constant size between 10 and 1000
5 μ , separated from each other by a constant distance of between 50
6 and 1000 μ , characterised by perforating a continuous membrane via
7 a suitable screening system, using mechanical or laser perforation
8 devices.

1 9. A process for preparing biocompatible membranes as claimed in
2 claim 8, characterised in that the mechanical perforation device is
3 a punch.

1 10. A process for preparing biocompatible membranes as claimed in
2 claim 8, characterised in that the laser perforation device is a UV
3 radiation laser.

1 11. The use of biocompatible membranes consisting of materials of



This Sheet Has Been Replaced



13

FID.9

2 natural, synthetic or semisynthetic origin, and having a thickness
3 of between 10 and 500 μ , and preferably between 20 and 40 μ , for
4 the in vitro culture of epithelial cells, characterised in that the
5 epithelial cells are seeded on membranes comprising an ordered
6 series of holes of a defined and constant size between 10 and 1000
7 μ , separated from each other by a constant distance of between 50
8 and 1000 μ .

1 12. The use of biocompatible membranes as claimed in claim 11,
2 characterised in that the epithelial cells are keratinocytes.

1 13. Artificial skin composed of a biocompatible support membrane
2 consisting of materials of natural, synthetic or semisynthetic
3 origin, and having a thickness of between 10 and 500 μ , and
4 preferably between 20 and 40 μ , which contains an ordered series of
5 holes of a defined and constant size between 10 and 1000 μ ,
6 separated from each other by a constant distance of between 50 and
7 1000 μ , together with autologous or heterologous keratinocyte
8 microcolonies in the active proliferation stage present within said
9 holes.

1 14. Artificial skin as claimed in claim 13, characterised in that
2 the hole size is between 40 and 70 μ .

1 15. Artificial skin as claimed in claim 13, characterised in that
2 the distance between holes is 80 μ .

1 16. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of natural origin is chosen from the
3 group consisting of collagen or coprecipitates of collagen and
4 glycosaminoglycans, cellulose, gelled polysaccharides such as
5 chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan



FID.9

6 gum, gellano, alginic acid or alginates, polymannans or
7 polyglucans, starches and natural rubbers, either alone or in
8 mixture with each other or with polymers of synthetic or
9 semisynthetic origin, in the presence of suitable precipitating or
10 gelling agents such as metal salts, polycations or polyanions.

1 17. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of synthetic origin is chosen from the
3 group consisting of polylactic acid, polyglycolic acid or
4 copolymers thereof or their derivatives, polydioxanones,
5 polyphosphazenes, polysulphones and polyurethanes.

1 18. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of semisynthetic origin is chosen from
3 the group consisting of semisynthetic derivatives of natural
4 polymers such as collagen crosslinked with crosslinking agents such
5 as dialdehydes or their precursors, bicarboxylic acids or halides
6 thereof, diamines, and derivatives of cellulose, of alginic acid,
7 of starch, of hyaluronic acid, of chitin or chitosan, of gellano,
8 of xanthan, of pectins or pectic acids, of polyglucans, of
9 polymannans, of agar, of agarose, of natural rubbers or of
10 glycosaminoglycans.

1 19. Artificial skin as claimed in claim 18, characterised in that
2 the biocompatible material consists of hyaluronic acid benzyl ester
3 with 100% esterification.

1 20. The use of the artificial skin claimed in claim 13, for
2 transplantation in the case of loss of cutaneous areas.




BIOCOMPATIBLE PERFORATED MEMBRANES, PROCESSES FOR THEIR PREPARATION. THEIR USE AS A SUPPORT IN THE IN VITRO GROWTH OF EPITHELIAL CELLS, THE ARTIFICIAL SEIN OBTAINED IN THIS MANNER, AND ITS USE IN SKIN GRAFTS

5 ABSTRACT

The invention relates to biocompatible membranes constructed of materials of natural, synthetic or semisynthetic origin, and having a thickness of between 10 and 500 μ , characterised by containing an ordered series of holes of a constant size between 10 and 1000 μ ,
10 separated from each other by a constant distance of between 50 and 1000 μ , and obtained by perforation by mechanical, thermal laser or ultraviolet radiation means, they being suitable for use as a support for the in vitro growth of epithelial cells, the invention also relating to the artificial skin obtained thereby and its use
15 in grafts.

(Fig. 1 a)

This Sheet Has Been Replaced



F1D.9

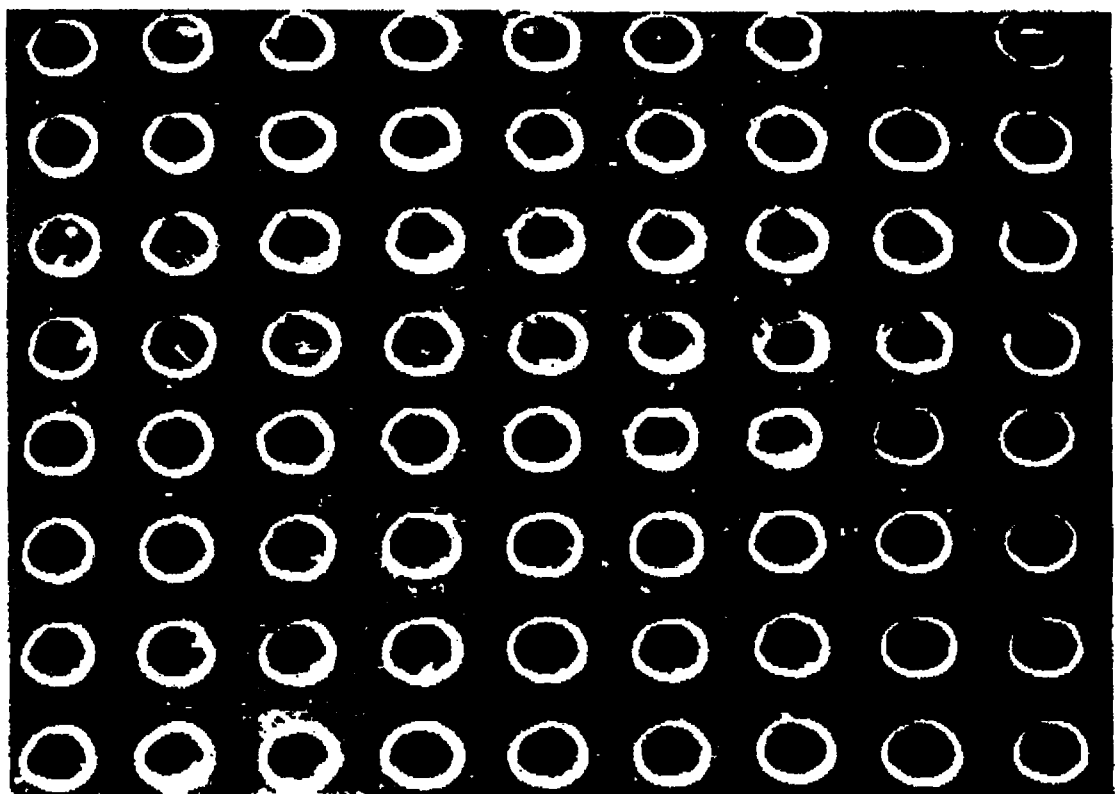


Fig. 1 a

This Sheet Has Been Replaced



F1D.9

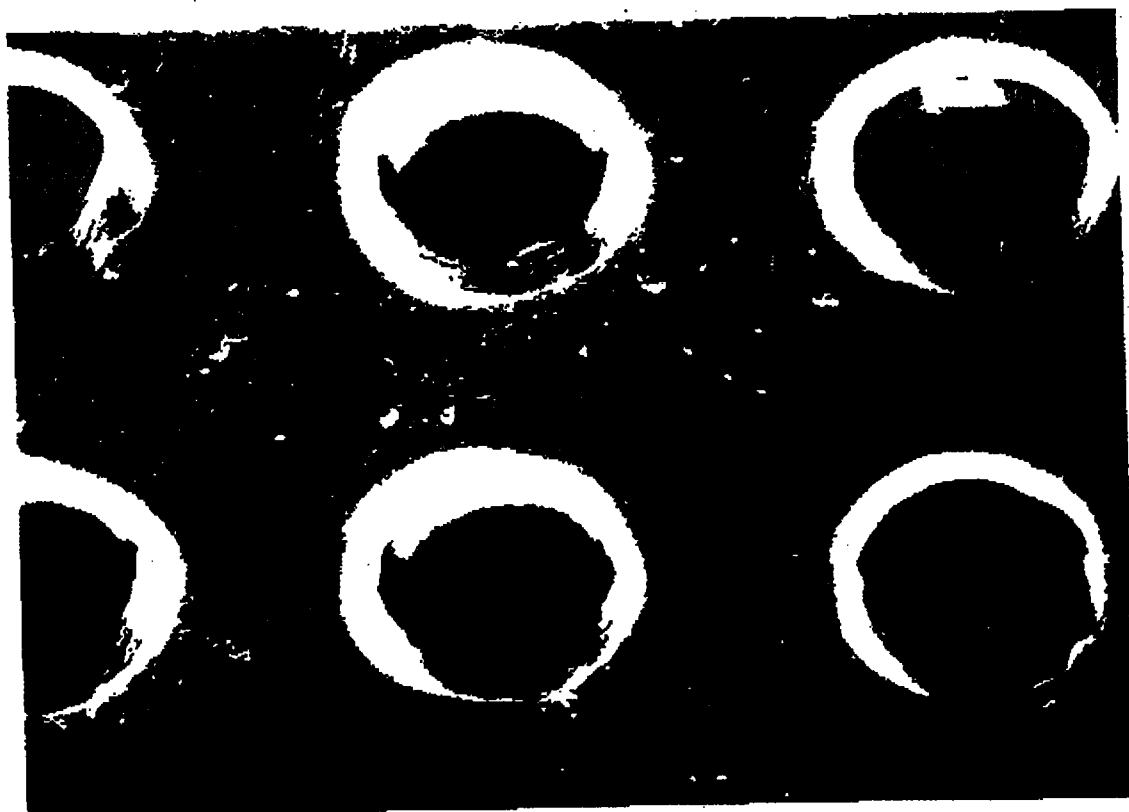


Fig. 1 b

This Sheet Has Been Replaced



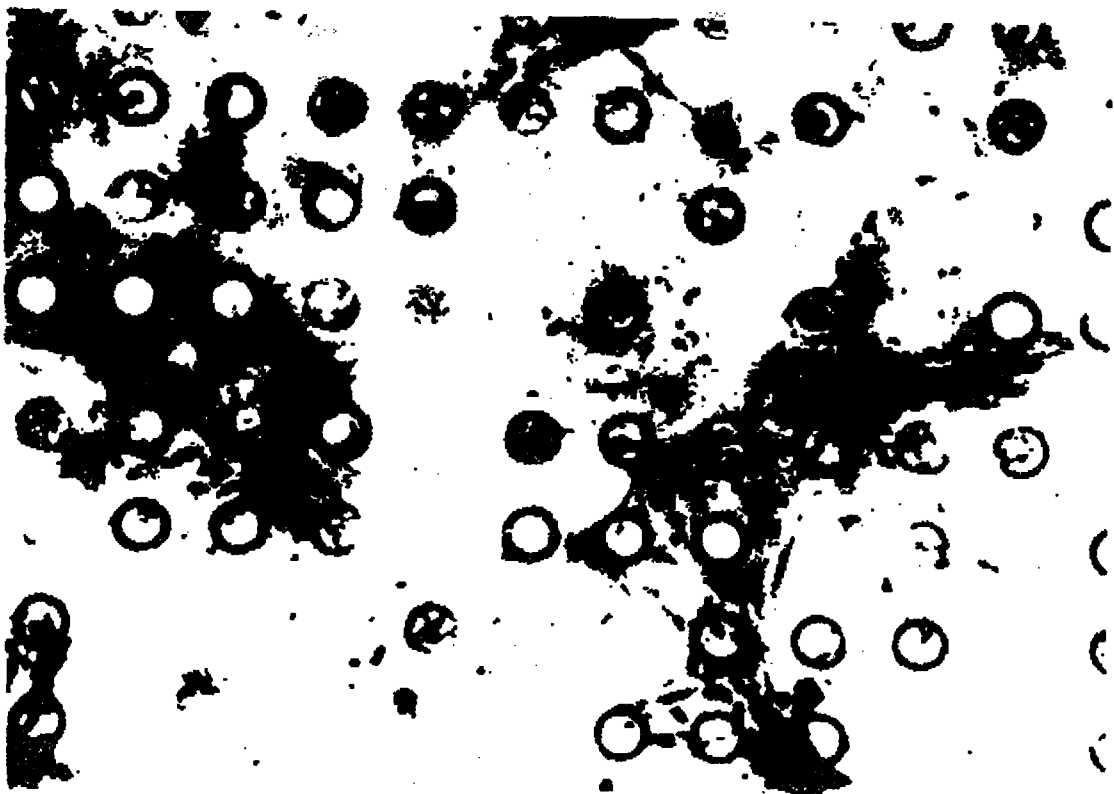


Fig. 2



Fig. 3

This Sheet Has Been Replaced



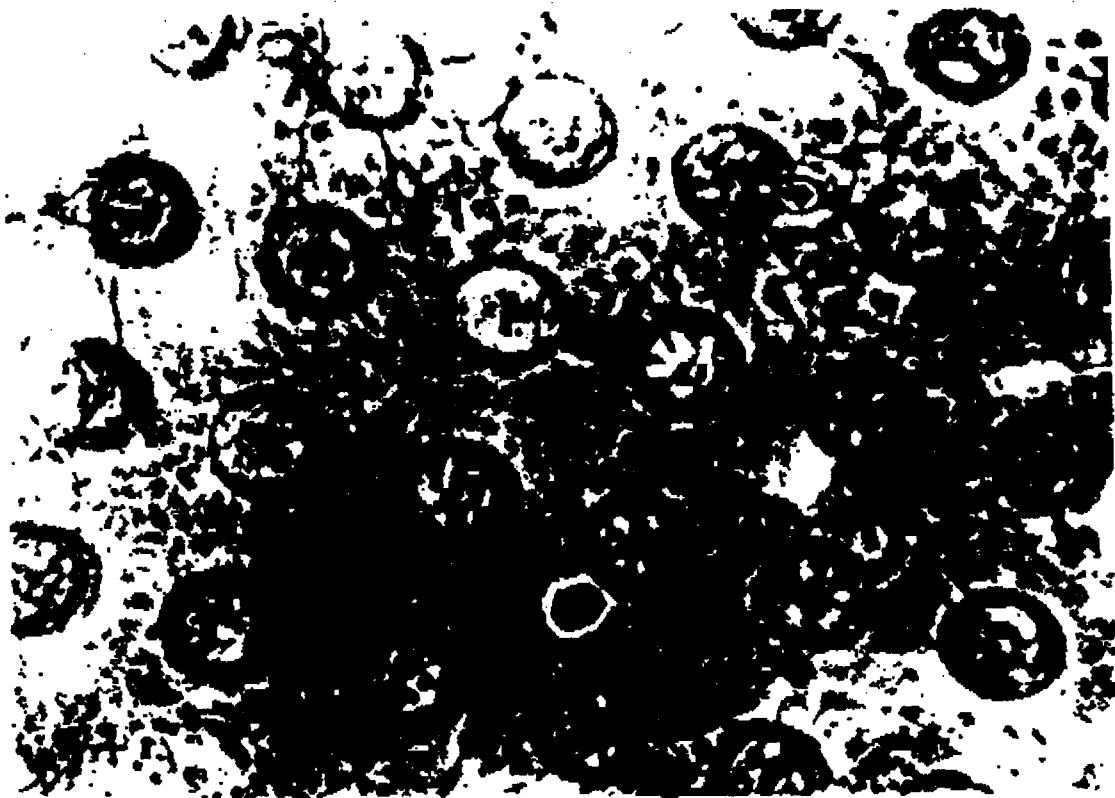


Fig. 4

This Sheet Has Been Replaced



F10.9

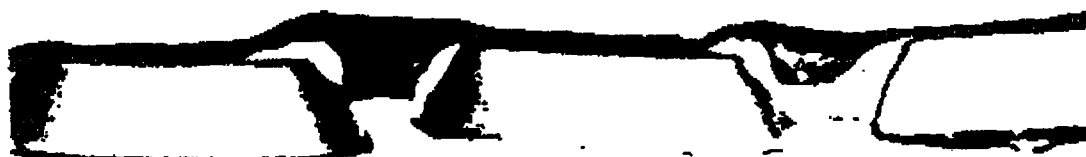


Fig. 5

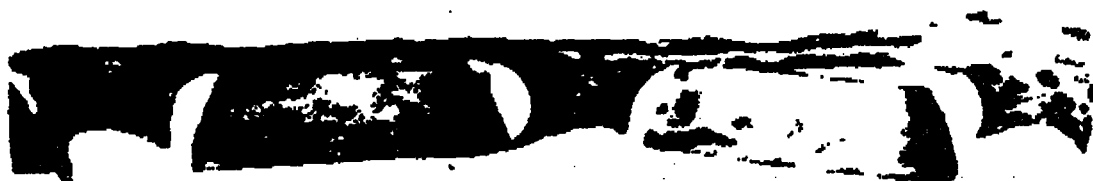


Fig. 6

This Sheet Has Been Replaced



REPLACED SHEETS	SG
☒ Description : paged ...3... to paged ...5.....	
☒ Claim(s) : paged ...h... to paged ...14.....	
☐ Drawing(s) : paged to paged	
☐ Abstract : paged to paged	
DATE OF RECEIPT	

1

REPLACEMENT SHEETS	SG
☒ Description : paged ...1... to paged ...10.....	
☒ Claim(s) : paged ...11... to paged ...14.....	
☒ Drawing(s) : paged ...15... to paged ...515.....	
☒ Abstract : paged ...15... to paged	
DATE OF RECEIPT 25/10/96	

BIOCOMPATIBLE PERFORATED MEMBRANES, PROCESSES FOR THEIR PREPARATION, THEIR USE AS A SUPPORT IN THE IN VITRO GROWTH OF EPITHELIAL CELLS, THE ARTIFICIAL SKIN OBTAINED IN THIS MANNER, AND ITS USE IN SKIN GRAFTS

5 Field of the invention

This invention relates to new biocompatible perforated membranes, processes for their preparation, their use as a support in the in vitro growth of epithelial cells, the artificial skin obtained in this manner, and its use in skin grafts.

10 Prior art

The loss of cutaneous material for reasons of traumatic or pathological origin is commonly resolved by the autotransplantation technique, using skin explants from donor areas. To cover larger areas these explants can be expanded by surgical methods such as the mesh grafting described by J. Mauchahal, J. Plast. Surgery, 42, 88-91 (1989). These methods give positive results only with small-dimension lesions and patients with a satisfactory general health profile. If elderly patients or those in a state of serious decline are treated, unsatisfactory results are obtained and numerous problems arise, to the extent that such procedures cannot be used. In addition they do not allow a donor tissue expansion of more than 10 times.

An important turning point in the treatment of these lesions by reconstructive surgery was the development of the technique involving the in vitro culture of keratinocytes (J. Rheinwald and H. Green, Cell. 6, 331-344, 1975), which allowed the in vitro expansion of these cultures, to obtain epidermic cell membranes

This is the replacement sheet

Date: 25 OCT 1996

1-3182000

25 OCT 1996


potentially suitable for covering lesion areas.

This technique has been widely used in clinical practice, mostly in the case of patients suffering from burns (G.G. Gallico et al., M. Engl. J. Med., 311, 448-451, 1984), but numerous problems arose from its conception, such as the failure to take of some grafts, the fragility of the epithelial film and the consequent difficulty in its handling by the surgeon, the length of time required for obtaining sufficient quantities of epidermic cultures and the difficulty of obtaining donor areas of sufficient size from patients with large areas of damaged body surface. The in vitro epidermic cultures also require precise orientation to enable the graft to take, this being a particularly risky operation in view of the fragility of in vitro cultivated epidermic film.

A different approach to these problems is described by Yannas et al., Science, 215, 174-176 (1982), who use dermic substitutes in the form of reabsorbable porous materials consisting of coprecipitates of collagen and glycosaminoglycans (GAG), in particular chondroitin-6-sulphate, covered by a thin silicone membrane film. The characteristic of these materials is that they comprise non-standardized pores intercommunicating in a manner similar to a sponge.

Zang et al., in Burns, 12, 540-543 (1986) propose a method, known as microskin grafting, consisting of auto-grafting very small skin portions, which then develop to merge into a single epithelium. With this method the maximum donor surface/coverable surface expansion ratio obtainable is 1:15.

S. Boyce and J. Hansborough in Surgery, 103, 421-431 (1988)

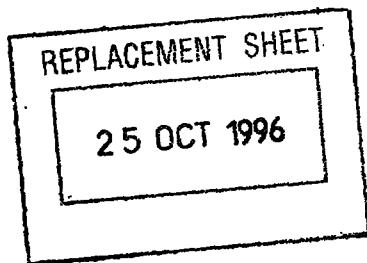

describe the use of membranes formed from collagen and GAG to promote on their surface the growth of keratinocytes, so reducing the surface porosity of the material. A continuous non-porous layer is also interposed to limit the epidermic culture development
5 to the membrane surface. The possible antigenicity of these dermic substituents, which can result in rejection of the graft, has not yet been properly ascertained.


Object of the invention

The object of the present invention is to provide biocompatible
10 membranes which enable in vitro culture of keratinocytes, with culture development in a much shorter time than that previously possible. An important result of the membranes according to this invention is the ability to obtain colonization by homologous or heterologous epithelial cells in a time which is surprisingly short
15 (6-10 days) compared with the time normally required (20-40 days) by traditional methods for preparing comparable areas of in vitro epidermis cultures.

This advantage results in the preparation in a short time of an artificial skin which allows very rapid coverage of an area on
20 which an epithelial transplantation is required, so reducing the risks relating to excessive organic liquid loss or infection.

A further object of the present invention is to provide biocompatible membranes which allow rapid development of keratinocyte cultures with an excellent donor surface/coverable
25 surface ratio, of between 1:20 and 1:200, this being considerably higher than previously obtainable with traditional methods.

A further object of the present invention is to provide a

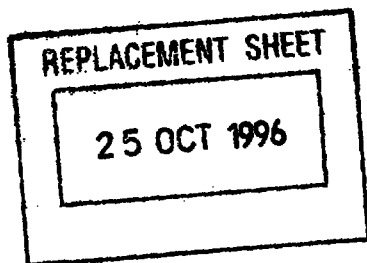


biocompatible and preferably bioreabsorbable artificial skin which can be produced in a short time, is strong, and is easily handled at the moment of transplantation, and which moreover can be applied to the site of the lesion independently of its original orientation
5 in the culture vessel, and can be easily stored. In this respect, an advantage of the artificial skin according to the present invention is that it can be easily cryopreserved to allow the creation of a bank of epithelial tissue, including heterologous. The possibility of cryopreservation also considerably reduces or
10 eliminates, after at least two cycles, the antigenic potential of the surface antigens expressed by the epithelial cells.

Description

These and further objects are attained by the biocompatible membranes according to the present invention, consisting of
15 material of natural, synthetic or semisynthetic origin and having a thickness of between 10 and 500 μ , and preferably between 20 and 40 μ , characterised by comprising an ordered series of holes of a defined and constant size between 10 and 1000 μ , and preferably between 40 and 70 μ , separated from each other by a constant
20 distance of between 50 and 1000 μ , and preferably 80 μ .

These membranes can consist of biocompatible and preferably also bioreabsorbable materials of natural origin such as collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic
25 acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches, or natural rubbers, either alone or in mixture with each other or with




polymers of synthetic or semisynthetic origin, in the presence of suitable precipitating or gelling agents such as metal salts, polycations or polyanions.

The membranes can also consist of biocompatible and preferably also
5 bioreabsorbable materials of synthetic origin such as polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones or polyurethanes, or semisynthetic derivatives of natural polymers such as collagen crosslinked with crosslinking agents such as dialdehydes or their
10 precursors, bicarboxylic acids or halides thereof, diamines, or derivatives of cellulose, of alginic acid, of starch, of chitin or chitosan, of gellan, of xanthan, of pectins or pectic acids, of polyglucans, of polymannans, of agar, of agarose, of natural rubbers or of glycosaminoglycans.

15 The membranes can also consist of synthetic polymers, even without the biodegradability characteristic, such as silicone, silane or siloxane rubbers, fluoropolymers such as polyfluoroethylene, polyfluoropropylene, polyfluoroethers, polystyrene, vinyl polychloride, polyacrylate or derivatives thereof, polyhydroxy-
20 acrylate, polyhydroxymethacrylate, carboxyvinyl polymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives, polyethylene and polypropylene.

The membranes preferably consist of semisynthetic derivatives of
25 hyaluronic acid, in particular ester derivatives thereof such as those described in Examples 6, 7 and 24 of EPA 0216453 filed on 7.7.86, these being biocompatible and biodegradable materials able

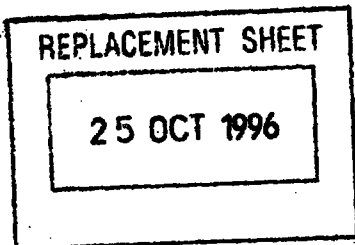

to release hyaluronic acid on the site of their application, this acid being well known to favour tissue reparative processes. A further characteristic which makes these materials particularly suitable for use according to the present invention is that they do
5 not produce intolerance phenomena, not being immunogenic.

The biocompatible membranes, consisting of one or more of the aforesaid materials have a thickness of between 10 and 500 μ and preferably between 20 and 40 μ , and are characterised by the presence of an ordered series of holes of defined and constant size
10 between 10 and 1000 μ , and preferably between 40 and 70 μ , separated from each other by a constant distance of between 50 and 1000 μ , and preferably 80 μ .

Continuous biocompatible membranes, consisting of one or more of the aforesaid materials, can be prepared by the conventional
15 methods described in the literature.

The perforated biocompatible membranes according to the present invention are obtained using mechanical perforation devices such as suitably arranged punching machines, or methods involving the use of thermal or ultraviolet lasers operating in a frequency band such
20 as to produce holes of the required size and distance apart in the membrane.

The following example of the preparation of a perforated biocompatible membrane according to the present invention is given by way of illustration only.

25 EXAMPLE 1

A membrane of hyaluronic acid benzyl ester with 100% esterification (as described in EPA 0216453 filed on 7.7.86) in the form of

25 OCT 1996

a square of 12 x 12 cm and 25 μ thickness was perforated using a computerized UV Laser device operating at a frequency of 273 μ m under the following operating conditions: working frequency 200 Hz, output energy 250 mJ. Using a suitable screening system, holes
5 having a diameter of 40 μ were obtained at a distance apart of 80 μ , as shown in Figures 1a and 1b.


The perforated biocompatible membranes according to the present invention can be used advantageously for the in vitro culture of epithelial cells, especially keratinocytes.

10 For this purpose the membranes can be fixed to the base of cell culture vessels, to metal grids or to any other structure suitable for cell cultures at the air/culture medium interface, using sterile vaselin, sterile silicone or other cementing systems which allow easy removal of the membrane, or by systems involving the use
15 of biological material such as collagen, fibrin or fibrin glue. These membranes can be incubated in culture media suitable for the growth of epithelial cells either alone or in the presence of other cells, such as irradiated fibroblasts, as described in the cited literature, without within the time scheduled for growth and hole
20 colonization causing alteration in mechanical properties which would compromise their handleability and strength within the particular application.

Some of the tests carried out are described below to illustrate the use of the membranes of the present invention.

25 EXAMPLE 2

The following test was conducted to demonstrate the absence of any inhibition by hyaluronic acid derivative membranes on the in vitro

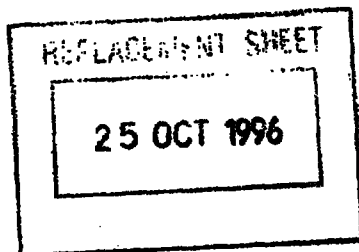

growth of human keratinocyte cell cultures.

Membranes denominated HYAFF 11 cut sterilely into 2 x 2 cm squares and consisting of hyaluronic acid benzyl ester with 100% esterification (as described in EP 0216453 filed on 7.7.86) were applied to
5 the base of the culture vessels by means of sterile silicone.

2×10^5 human keratinocytes were seeded onto these in a volume of 0.5 ml, in the presence of 4×10^5 lethally irradiated 3T3 fibroblasts at the second passage.

The capsules were incubated at 37°C for 2 hours in a 5% CO₂
10 atmosphere to allow the cells to attach to the matrix. After this period 5 ml of CEC culture medium (Green H. et al., J. Proc. Nation. Acad. Sci., 76, 5665-5668, 1979) were added and the capsules again incubated. The culture medium was changed every 2 days. The cells were treated with trypsin 9 days after seeding and
15 counted. All experiments were conducted in duplicate.

RESULTS


	No. of human keratinocytes per plate ($\times 10^{-5}$)	% inhibition
Control	27	0%
20 HYAFF 11 membrane	27	0%

These results show that the biomaterial used has no inhibiting effect on keratinocyte cultures.

EXAMPLE 3

Growth of human keratinocytes using the perforated biocompatible
25 membranes of the invention, obtained by the method described in
Example 1

HYAFF 11 membranes consisting of hyaluronic acid benzyl ester with

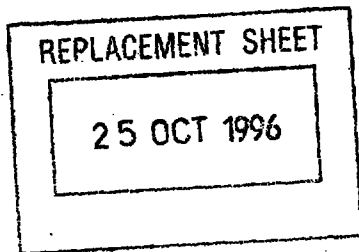

100% esterification (as described in EPA 0216453 filed on 7.7.86) in the form of 3 x 3 cm squares were cemented to the base of 6 cm diameter Petri capsules using sterile vaselin. Lethally irradiated 3T3 fibroblasts were seeded on the membranes to a concentration of 5 700,000 cells per plate, under the conditions described in Example 2. After adhesion of the 3T3 cells, ie after about 24 hours, a cell suspension of human keratinocytes originating from secondary cultures was added at a concentration of 38,000 cells per cm². The culture conditions were analogous to those described in Example 2.


10 The development of the keratinocyte culture was followed daily using a phase contrast microscope. The development of inoculated epithelial cells was observed on the membrane, these having reached confluence 8-10 days after seeding.

Of particular importance is the fact that even on the second day 15 after seeding, numerous holes contain keratinocytes, their growth being more active within the holes than on the surface, to totally fill them around the 6th day (Figures 2, 3 and 4).

A further fact of great importance is that when analyzed by histological techniques the cells within the holes demonstrate a 20 basaloid appearance documented by the findings of figures showing frequent mitosis (Figures 5 and 6), denoting high reproductive vitality. These findings were confirmed by immunohistochemical methods using specific antibodies (Mab).

The epithelial cells grown within the holes can therefore be 25 considered overall to be in the active proliferation stage and thus effectively usable on transplantation areas.

The artificial skin according to the present invention, obtained by



the aforesaid procedures, therefore consists of a biocompatible and preferably bioreabsorbable support membrane consisting of materials of natural, synthetic or semisynthetic origin, and having a thickness of between 10 and 500 μ , and preferably between 20 and 40 μ , characterised by comprising an ordered series of holes of a defined and constant size between 10 and 1000 μ , separated from each other by a constant distance of between 50 and 1000 μ , together with autologous or heterologous keratinocyte microcolonies in the active proliferation stage present within the holes.

10 This artificial skin can be easily shaped by the operator on the basis of the areas to be treated, and has a mechanical strength which enables it to be handled without difficulty and be sutured. Once implanted on the lesion area, the keratinocyte microcolonies create growth nuclei of rapid-growing epithelial tissue, which in a


15 short time completely re-epithelialize the area on which the transplantation has been carried out.

It is used by withdrawing it from the culture vessel, removing all traces of culture medium by a sterile physiological solution and applying it to the area to be treated without needing to pay

20 particular attention to the direction of application, as it is equally effective if applied on either of its two sides, in contrast to traditional keratinocyte cultures.

The artificial skin according to the present invention can be used to cover even extensive lesions of the body surface of traumatic


25 origin such as burns, of surgical origin such as withdrawal areas in plastic surgery, or pathological origin such as stasis ulcers or bedsores.

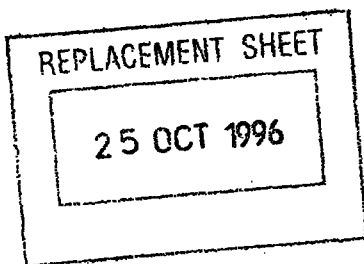

CLAIMS

- 1 1. Biocompatible membranes consisting of materials of natural,
2 synthetic or semisynthetic origin, and having a thickness of
3 between 10 and 500 μ , and preferably between 20 and 40 μ ,
4 characterised by comprising an ordered series of holes of a defined
5 and constant size between 10 and 1000 μ , separated from each other
6 by a constant distance of between 50 and 1000 μ .
- 1 2. Biocompatible membranes as claimed in claim 1, characterised in
2 that the hole size is between 40 and 70 μ .
- 1 3. Biocompatible membranes as claimed in claim 1, characterised in
2 that the distance between holes is 80 μ .
- 1 4. Biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible material of natural origin is chosen from
3 the group consisting of collagen or coprecipitates of collagen and
4 glycosaminoglycans, cellulose, gelled polysaccharides such as
5 chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan
6 gum, gellan, alginic acid or alginates, polymannans or polyglucans,
7 starches and natural rubbers, either alone or in mixture with each
8 other or with polymers of synthetic or semisynthetic origin, in the
9 presence of suitable precipitating or gelling agents such as metal
10 salts, polycations or polyanions.
- 1 5. Biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible material of synthetic origin is chosen from
3 the group consisting of polylactic acid, polyglycolic acid or
4 copolymers thereof or their derivatives, polydioxanones,
5 polyphosphazenes, polysulphones and polyurethanes.
- 1 6. Biocompatible membranes as claimed in claim 1, characterised in



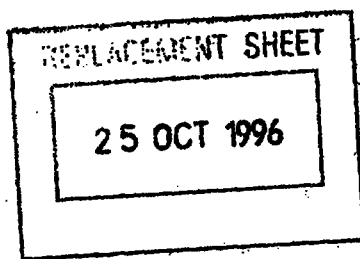

2 that the biocompatible material of semisynthetic origin is chosen
3 from the group consisting of semisynthetic derivatives of natural
4 polymers such as collagen crosslinked with crosslinking agents such
5 as dialdehydes or their precursors, bicarboxylic acids or halides
6 thereof, diamines, and derivatives of cellulose, of alginic acid,
7 of starch, of hyaluronic acid, of chitin or chitinosan, of gellan,
8 of xanthan, of pectins or pectic acids, of polyglucans, of
9 polymannans, of agar, of agarose, of natural rubbers or of
10 glycosaminoglycans.

1 7. Biocompatible membranes as claimed in claim 6, characterised in
2 that the biocompatible membrane consists of hyaluronic acid benzyl
3 ester with 100% esterification.

1 8. A process for preparing biocompatible membranes consisting of
2 materials of natural, synthetic or semisynthetic origin and having
3 a thickness of between 10 and 500 μ , which comprise an ordered
4 series of holes of a defined and constant size between 10 and 1000
5 μ , separated from each other by a constant distance of between 50
6 and 1000 μ , characterised by perforating a continuous membrane via
7 a suitable screening system, using mechanical or laser perforation
8 devices.

1 9. A process for preparing biocompatible membranes as claimed in
2 claim 8, characterised in that the mechanical perforation device is
3 a punch.

1 10. A process for preparing biocompatible membranes as claimed in
2 claim 8, characterised in that the laser perforation device is a UV
3 radiation laser.

1 11. The use of biocompatible membranes consisting of materials of



25 OCT 1996



2 natural, synthetic or semisynthetic origin, and having a thickness
3 of between 10 and 500 μ , and preferably between 20 and 40 μ , for
4 the in vitro culture of epithelial cells, characterised in that the
5 epithelial cells are seeded on membranes comprising an ordered
6 series of holes of a defined and constant size between 10 and 1000
7 μ , separated from each other by a constant distance of between 50
8 and 1000 μ .

1 12. The use of biocompatible membranes as claimed in claim 11,
2 characterised in that the epithelial cells are keratinocytes.


1 13. Artificial skin composed of a biocompatible support membrane
2 consisting of materials of natural, synthetic or semisynthetic
3 origin, and having a thickness of between 10 and 500 μ , and
4 preferably between 20 and 40 μ , which contains an ordered series of
5 holes of a defined and constant size between 10 and 1000 μ ,
6 separated from each other by a constant distance of between 50 and
7 1000 μ , together with autologous or heterologous keratinocyte
8 microcolonies in the active proliferation stage present within said
9 holes.

1 14. Artificial skin as claimed in claim 13, characterised in that
2 the hole size is between 40 and 70 μ .

1 15. Artificial skin as claimed in claim 13, characterised in that
2 the distance between holes is 80 μ .

1 16. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of natural origin is chosen from the
3 group consisting of collagen or coprecipitates of collagen and
4 glycosaminoglycans, cellulose, gelled polysaccharides such as
5 chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan



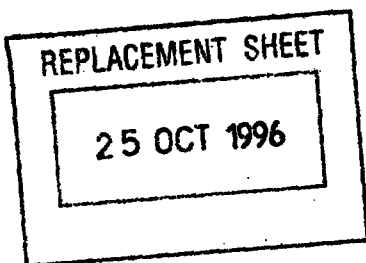

6 gum, gellano, alginic acid or alginates, polymannans or
7 polyglucans, starches and natural rubbers, either alone or in
8 mixture with each other or with polymers of synthetic or
9 semisynthetic origin, in the presence of suitable precipitating or
10 gelling agents such as metal salts, polycations or polyanions.

1 17. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of synthetic origin is chosen from the
3 group consisting of polylactic acid, polyglycolic acid or
4 copolymers thereof or their derivatives, polydioxanones,
5 polyphosphazenes, polysulphones and polyurethanes.

1 18. Artificial skin as claimed in claim 13, characterised in that
2 the biocompatible material of semisynthetic origin is chosen from
3 the group consisting of semisynthetic derivatives of natural
4 polymers such as collagen crosslinked with crosslinking agents such
5 as dialdehydes or their precursors, bicarboxylic acids or halides
6 thereof, diamines, and derivatives of cellulose, of alginic acid,
7 of starch, of hyaluronic acid, of chitin or chitosan, of gellano,
8 of xanthan, of pectins or pectic acids, of polyglucans, of
9 polymannans, of agar, of agarose, of natural rubbers or of
10 glycosaminoglycans.

1 19. Artificial skin as claimed in claim 18, characterised in that
2 the biocompatible material consists of hyaluronic acid benzyl ester
3 with 100% esterification.

1 20. The use of the artificial skin claimed in claim 13, for
2 transplantation in the case of loss of cutaneous areas.

REPLACEMENT SHEET

25 OCT 1996

15

BIOCOMPATIBLE PERFORATED MEMBRANES, PROCESSES FOR THEIR PREPARATION, THEIR USE AS A SUPPORT IN THE IN VITRO GROWTH OF EPITHELIAL CELLS, THE ARTIFICIAL SEIN OBTAINED IN THIS MANNER, AND ITS USE IN SKIN GRAFTS

5 ABSTRACT

The invention relates to biocompatible membranes constructed of materials of natural, synthetic or semisynthetic origin, and having a thickness of between 10 and 500 μ , characterised by containing an ordered series of holes of a constant size between 10 and 1000 μ ,
10 separated from each other by a constant distance of between 50 and 1000 μ , and obtained by perforation by mechanical, thermal laser or ultraviolet radiation means, they being suitable for use as a support for the in vitro growth of epithelial cells, the invention also relating to the artificial skin obtained thereby and its use
15 in grafts.

(Fig. 1 a)

9605810-2

REPLACEMENT SHEET
25 OCT 1996

1/5

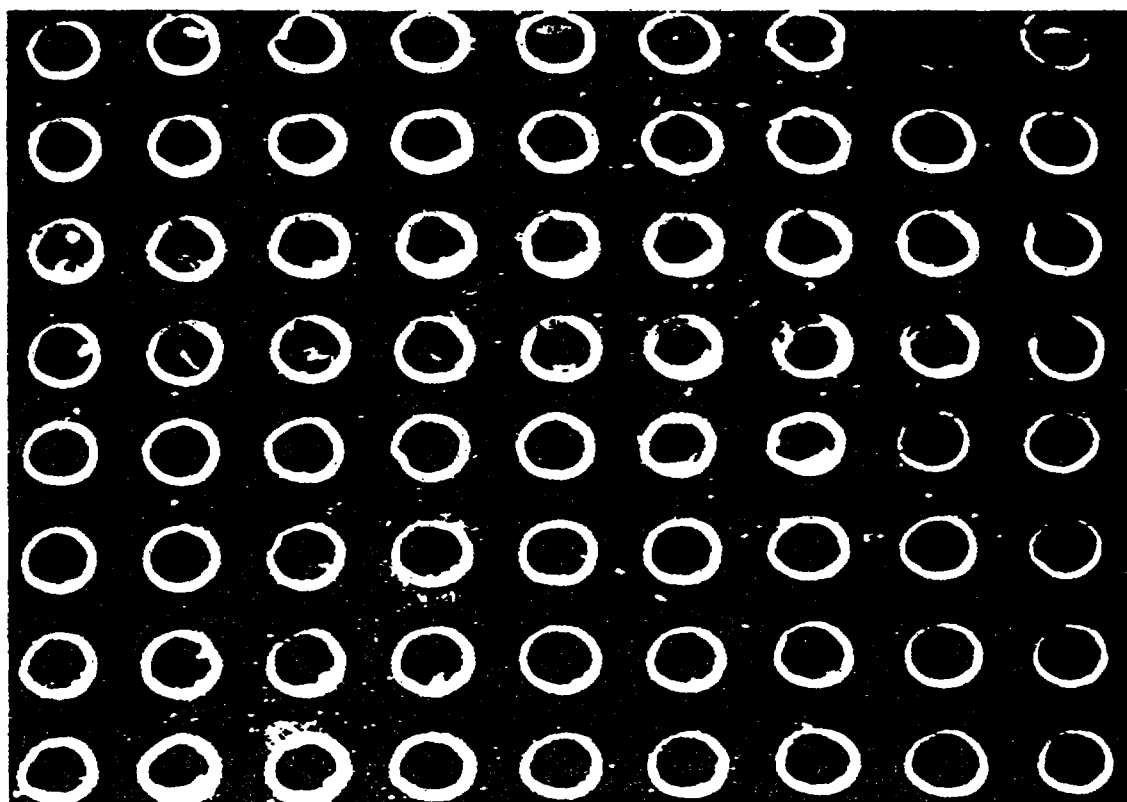


Fig. 1 a

9605810-2

8-0103038

REPLACEMENT SHEET

25 OCT 1996

2/5

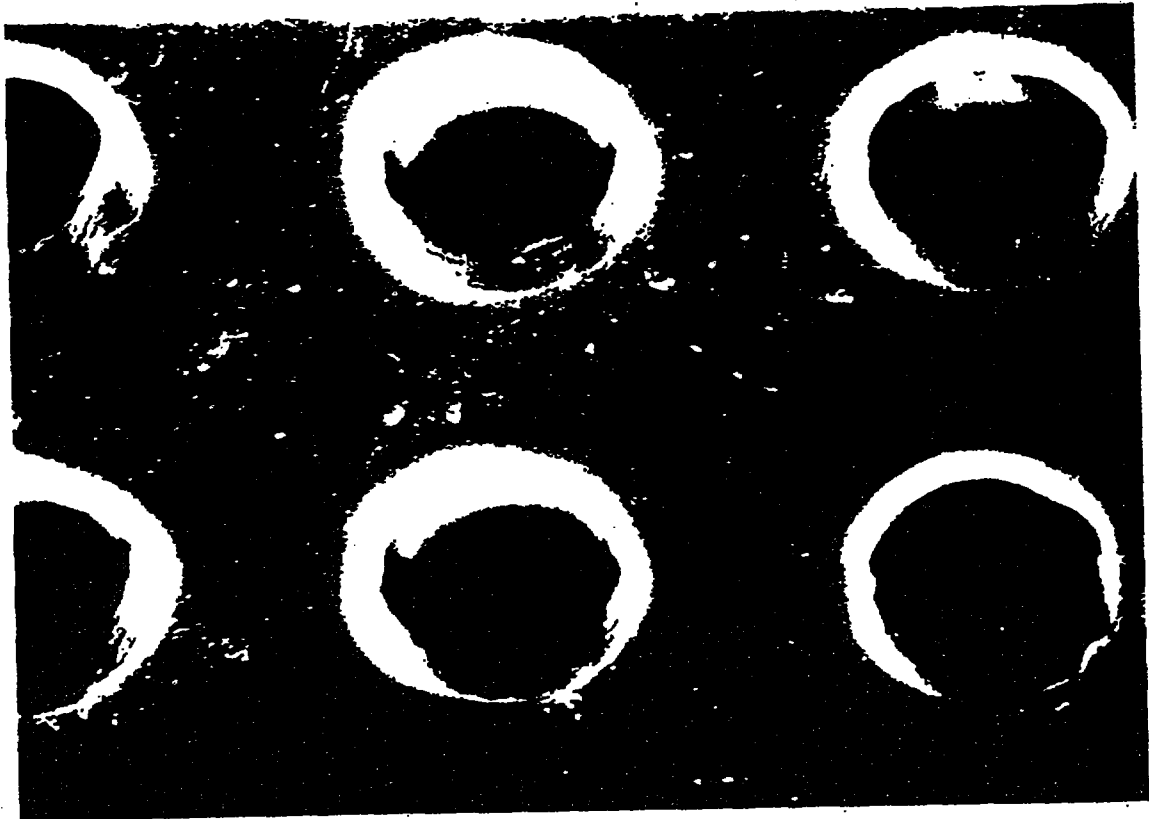


Fig. 1 b

3/5

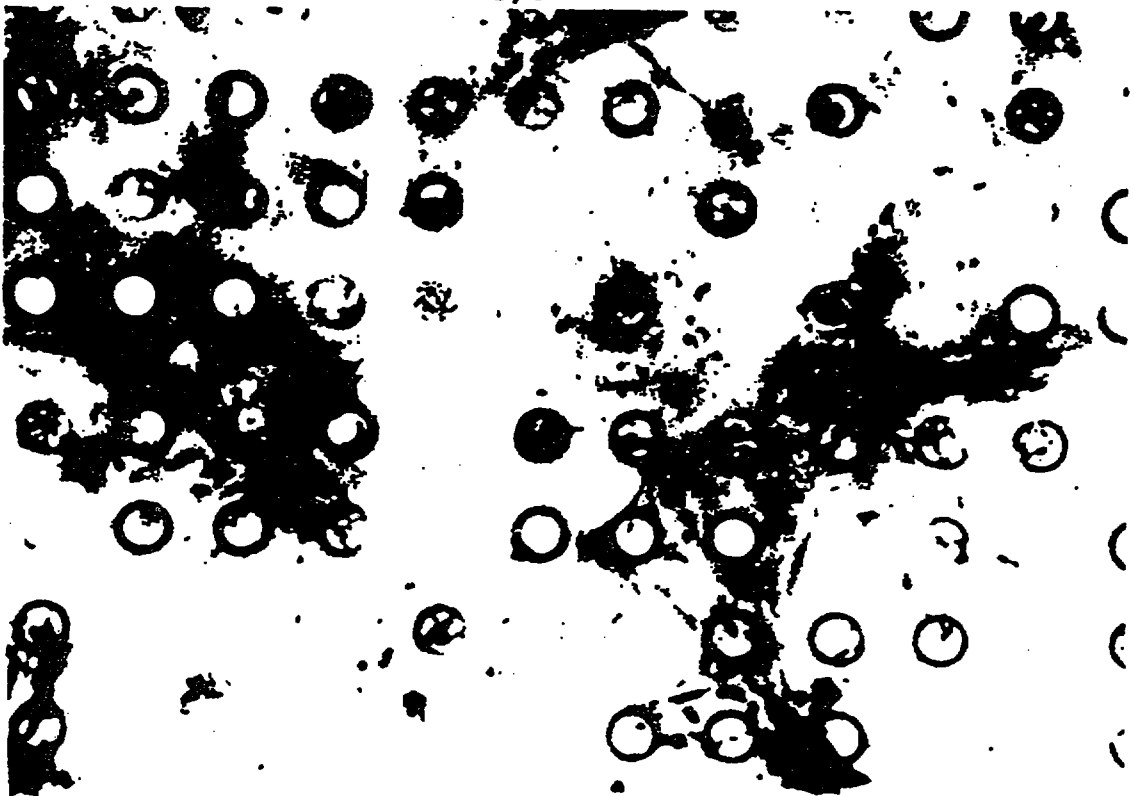


Fig. 2

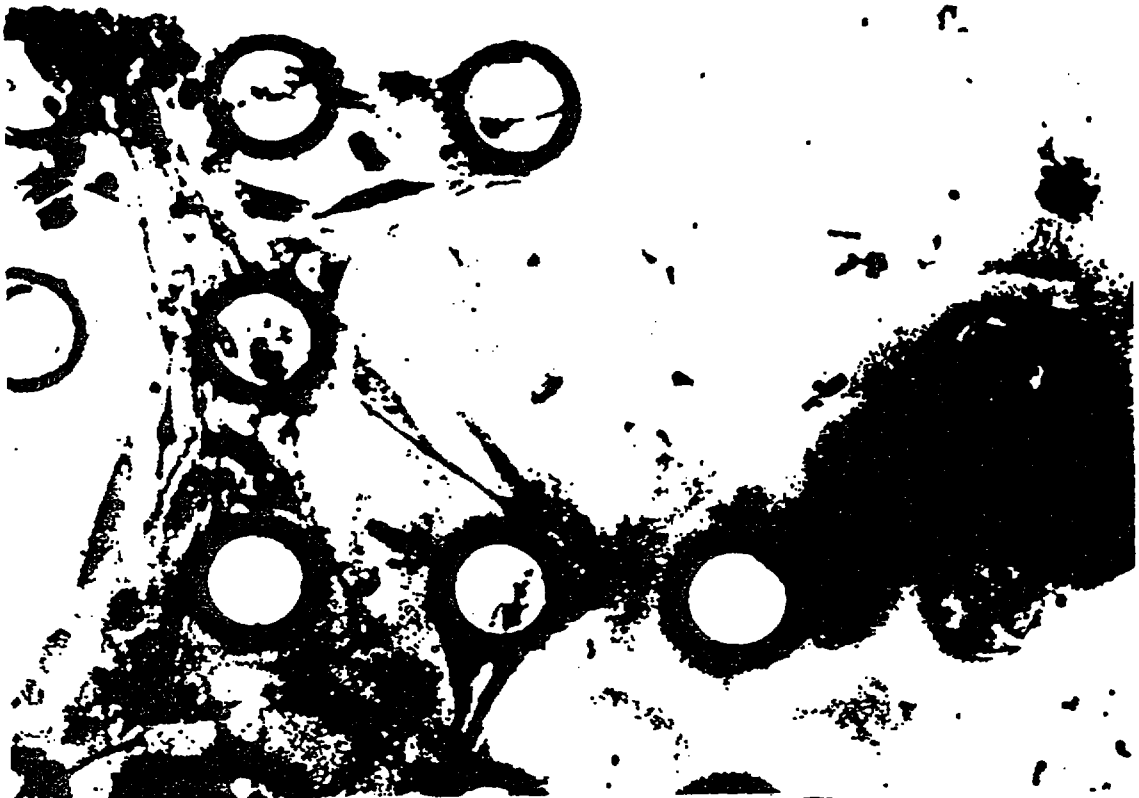


Fig. 3

REC SHEET
25 OCT 1996

REPLACEMENT SHEET

25 OCT 1996

4/5

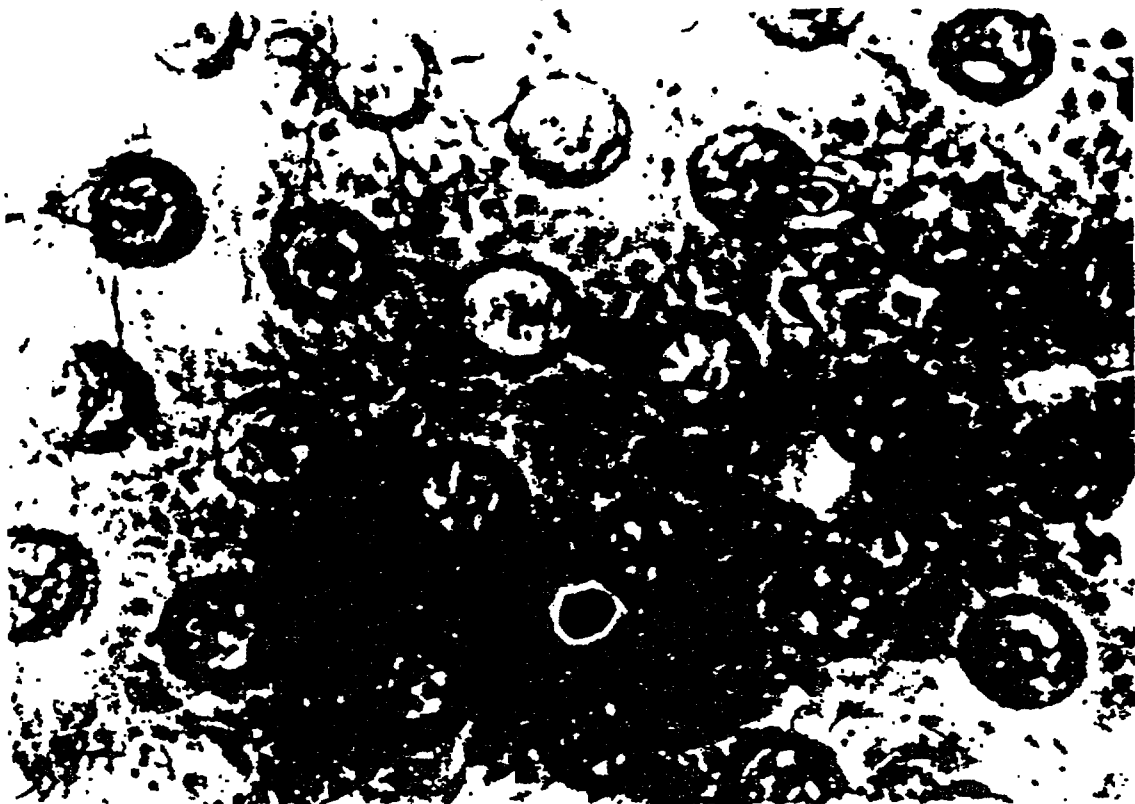


Fig. 4

REPLACEMENT SHEET

25 OCT 1996

5/5

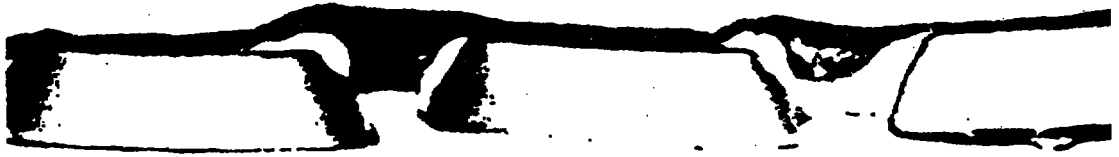


Fig. 5



Fig. 6

9-01000000

☒ Description : paged 3,34,4-5 to paged
☒ Claim(s) : paged 11 to paged 13.
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

3

10 DEC 1997

DATE OF RECEIPT and S. I. Boyce et al. WO-A-88-08305 describe the use of membranes

5 formed from collagen and GAG to promote on their surface the growth of keratinocytes, so reducing the surface porosity of the material. A continuous non-porous layer is also interposed to limit the epidermic culture development to the membrane surface. The composite skin replacement thus obtained has an unidirectional application orientation and is less effective in reducing wound contraction than autograft or xenograft. The possible antigenicity of these dermic substituents, which can result in rejection of the graft, has not yet been properly ascertained.

Object of the invention

The object of the present invention is to provide biocompatible membranes which enable in vitro culture of keratinocytes, with culture development in a much shorter time than that previously possible. An important result of the membranes according to this invention is the ability to obtain colonization by homologous or heterologous epithelial cells in a time which is surprisingly short (6-10 days) compared with the time normally required (20-40 days) by traditional methods for preparing comparable areas of in vitro epidermis cultures.

This advantage results in the preparation in a short time of an artificial skin which allows very rapid coverage of an area on which an epithelial transplantation is required, so reducing the risks relating to excessive organic liquid loss or infection.

25 A further object of the present invention is to provide biocompatible membranes which allow rapid development of keratinocyte cultures with an excellent donor surface/coverable

This Sheet Has Been Replaced



REPLACEMENT SHEET

10 DEC 1997

3a

surface ratio, of between 1:20 and 1:200, this being considerably higher than previously obtainable with traditional methods.

A further object of the present invention is to provide a

This Sheet Has Been Replaced



10 DEC 1997

biocompatible and preferably bioreabsorbable artificial skin which can be produced in a short time, is strong, and is easily handled at the moment of transplantation, and which moreover can be applied to the site of the lesion independently of its original orientation in the culture vessel, and can be easily stored. In this respect, an advantage of the artificial skin according to the present invention is that it can be easily cryopreserved to allow the creation of a bank of epithelial tissue, including heterologous. The possibility of cryopreservation also considerably reduces or eliminates, after at least two cycles, the antigenic potential of the surface antigens expressed by the epithelial cells.

Description

These and further objects are attained by the biocompatible membranes according to the present invention, formed by materials belonging to one of the following classes:

- a) materials of natural origin selected from the group consisting of: collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches natural rubbers and mixtures thereof;
- b) bioresorbable materials of synthetic origin selected from the group consisting of: polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones and polyurethanes and mixture thereof;
- c) materials of synthetic origin selected from the group consisting of: silicone, silane or siloxane rubbers, polytetrafluorethylene,

This Sheet Has Been Replaced



perfluoropolyethers, polystyrene or vinylpolychloride, polyacrylate or derivatives thereof, polyhydroxyacrylate, polyhydroxymethacrylate, carboxyvinylpolymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives, polyethylene and polypropylene and mixture thereof,

d) materials of semisynthetic origin, selected from the group consisting of collagen crosslinked with crosslinking agents selected from the group consisting of dialdehydes, bicarboxylic acids or halides thereof, diamines, and esters of hyaluronic, gellane, and alginic acid,

having a thickness of between 10 and 500 μm and holes of a size between 10 and 1000 μm , characterised by being perforated and by the fact that said holes have a defined and constant size and form an ordered series wherein they are separated by a constant distance of between 50 and 1000 μm .

The membranes preferably consist of semisynthetic derivatives of hyaluronic acid, in particular ester derivatives thereof such as those described in Examples 6, 7 and 24 of EPA 0216453 filed on 7.7.86, these being biocompatible and biodegradable materials able





* C L M S *

11

REPLACEMENT SHEET

10 DEC 1997

CLAIMS

1. Biocompatible membranes formed by materials belonging to one of the following classes:
 - a) materials of natural origin selected from the group consisting of: collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches natural rubbers and mixtures thereof;
 - b) bioresorbable materials of synthetic origin selected from the group consisting of : polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones and polyurethanes and mixture thereof;
 - c) materials of synthetic origin selected from the group consisting of: silicone, silane or siloxane rubbers, polytetrafluorethylene, perfluoropolyethers, polystyrene or vinylpolychloride, polyacrylate or derivatives thereof , polyhydroxyacrylate, polyhydroxymethacrylate, carboxyvinylpolymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives polyethylene and polypropylene and mixture thereof,
 - d) materials of semisynthetic origin, selected from the group consisting of collagen crosslinked with crosslinking agents selected from the group consisting of dialdehydes, bicarboxylic acids or halides thereof, diamines, and esters of hyaluronic,

This Sheet Has Been Replaced





REPLACEMENT SHEET

10 DEC 1997

12

25 gellane, and alginic acid,

26 having a thickness of between 10 and 500 μm and holes of a size
27 between 10 and 1000 μm , characterised by being perforated and by
28 the fact that said holes have a defined and constant size and form
29 an ordered series wherein they are separated by a constant distance
30 of between 50 and 1000 μm .

1 2. The biocompatible membranes as claimed in claim 1, characterised in
2 that the thickness is between 20 and 40 μm .

1 3. The biocompatible membranes as claimed in claim 1, characterised in
2 that the hole size is between 40 and 70 μm .

1 4. The biocompatible membranes as claimed in claim 1, characterized in
2 that the distance between holes is 80 μm .

1 5. The biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible membrane consists of hyaluronic acid
3 benzyl ester with 100% esterification.

1 6. A process for preparing the biocompatible membranes as claimed
2 in claim 1 comprising perforating a continuous membrane via a
3 suitable screening system, using mechanical or laser perforation
4 devices.

1 7. The process for preparing biocompatible membranes as claimed in
2 claim 6, characterised in that the mechanical perforation device is
3 a punch.

1 8. The process for preparing biocompatible membranes as claimed
2 in claim 6, characterised in that the laser perforation device is a
3 UV radiation laser.

This Sheet Has Been Replaced





REPLACEMENT SHEET

10 DEC 1997

13

9. Artificial skin composed of the biocompatible membranes as claimed in claim 1 and of microcolonies of autologous or heterologous keratinocytes or other epithelial cells in the active proliferation stage present within the holes of said biocompatible membranes.

STAMPED TEXT: 10 DEC 1997

This Sheet Has Been Replaced



REPLACEMENT SHEET
☒ Description : paged 1 to 15 paged
☒ Claim(s) : paged 11 to paged 13..
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

9605810-2 1P25

REPLACEMENT SHEET

04 JUN 1998

DATE OF RECEIPT 4/6/98.....

3

and S. T. Boyce in WO-A-88-08305 describe the use of membranes

formed from collagen and GAG to promote on their surface the growth of keratinocytes, so reducing the surface porosity of the material.

5 A continuous non-porous layer is also interposed to limit the epidermic culture development to the membrane surface. The composite skin replacement thus obtained has an unidirectional application orientation and is less effective in reducing wound contraction than autograft or xenograft. The possible antigenicity of these dermic substituents, which can result in rejection of the
10 graft, has not yet been properly ascertained.

Object of the invention

The object of the present invention is to provide biocompatible membranes which enable in vitro culture of keratinocytes, with culture development in a much shorter time than that previously
15 possible. An important result of the membranes according to this invention is the ability to obtain colonization by homologous or heterologous epithelial cells in a time which is surprisingly short (6-10 days) compared with the time normally required (20-40 days) by traditional methods for preparing comparable areas of in vitro
20 epidermis cultures.

This advantage results in the preparation in a short time of an artificial skin which allows very rapid coverage of an area on which an epithelial transplantation is required, so reducing the risks relating to excessive organic liquid loss or infection.

25 A further object of the present invention is to provide biocompatible membranes which allow rapid development of keratinocyte cultures with an excellent donor surface/coverable

04 JUN 1998

3a

surface ratio, of between 1:20 and 1:200, this being considerably higher than previously obtainable with traditional methods.

A further object of the present invention is to provide a

biocompatible and preferably bioreabsorbable artificial skin which can be produced in a short time, is strong, and is easily handled at the moment of transplantation, and which moreover can be applied to the site of the lesion independently of its original orientation in the culture vessel, and can be easily stored. In this respect, an advantage of the artificial skin according to the present invention is that it can be easily cryopreserved to allow the creation of a bank of epithelial tissue, including heterologous. The possibility of cryopreservation also considerably reduces or eliminates, after at least two cycles, the antigenic potential of the surface antigens expressed by the epithelial cells.

Description

These and further objects are attained by the biocompatible membranes according to the present invention, formed by materials belonging to one of the following classes:

- a) materials of natural origin selected from the group consisting of: collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches natural rubbers and mixtures thereof;
- b) bioresorbable materials of synthetic origin selected from the group consisting of : polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones and polyurethanes and mixture thereof;
- c) materials of synthetic origin selected from the group consisting of: silicone, silane or siloxane rubbers, polytetrafluorethylene,

REPLACEMENT SHEET

04 JUN 1998

04 JUN 1998

perfluoropolyethers, polystyrene or vinylpolychloride, polyacrylate or derivatives thereof, polyhydroxyacrylate, polyhydroxymethacrylate, carboxyvinylpolymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives, polyethylene and polypropylene and mixture thereof,

5

10


d) materials of semisynthetic origin, selected from the group consisting of collagen crosslinked with crosslinking agents selected from the group consisting of dialdehydes, bicarboxylic acids or halides thereof, diamines, and esters of hyaluronic, gellane, and alginic acid,

15

having a thickness of between 10 and 500 μm and holes of a size between 10 and 1000 μm , characterised by being perforated and by the fact that said holes have a defined and constant size and form an ordered series wherein they are separated by a constant distance of between 50 and 1000 μm .

20

The membranes preferably consist of semisynthetic derivatives of hyaluronic acid, in particular ester derivatives thereof such as those described in Examples 6, 7 and 24 of EPA 0216453 filed on 7.7.86, these being biocompatible and biodegradable materials able

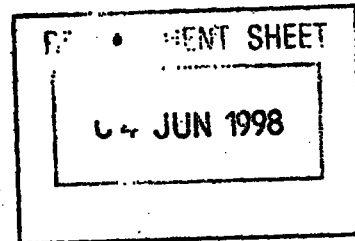

CLAIMS

1. Biocompatible membranes formed by materials belonging to one of the following classes:
 - a) materials of natural origin selected from the group consisting of: collagen or coprecipitates of collagen and glycosaminoglycans, cellulose, gelled polysaccharides such as chitin, chitosan, pectins or pectic acids, agar, agarose, xanthan gum, gellan, alginic acid or alginates, polymannans or polyglucans, starches natural rubbers and mixtures thereof;
 - b) bioresorbable materials of synthetic origin selected from the group consisting of : polylactic acid, polyglycolic acid or copolymers thereof or their derivatives, polydioxanones, polyphosphazenes, polysulphones and polyurethanes and mixture thereof;
 - c) materials of synthetic origin selected from the group consisting of: silicone, silane or siloxane rubbers, polytetrafluorethylene, perfluoropolyethers, polystyrene or vinylpolychloride, polyacrylate or derivatives thereof , polyhydroxyacrylate, polyhydroxymethacrylate, carboxyvinylpolymers and their derivatives, maleic anhydride polymers and their derivatives, polyvinylchloride, polyvinylalcohol and its derivatives polyethylene and polypropylene and mixture thereof,
 - d) materials of semisynthetic origin, selected from the group consisting of collagen crosslinked with crosslinking agents selected from the group consisting of dialdehydes, bicarboxylic acids or halides thereof, diamines, and esters of hyaluronic.



REPL... ENT SHEET

04 JUN 1998

12

25 gellane, and alginic acid,

26 having a thickness of between 10 and 500 μm and holes of a size
27 between 10 and 1000 μm , characterised by being perforated and by
28 the fact that said holes have a defined and constant size and form
29 an ordered series wherein they are separated by a constant distance
30 of between 50 and 1000 μm .

1 2. The biocompatible membranes as claimed in claim 1, characterised in
2 that the thickness is between 20 and 40 μm .

1 3. The biocompatible membranes as claimed in claim 1, characterised in
2 that the hole size is between 40 and 70 μm .

1 4. The biocompatible membranes as claimed in claim 1, characterized in
2 that the distance between holes is 80 μm .

1 5. The biocompatible membranes as claimed in claim 1, characterised in
2 that the biocompatible membrane consists of hyaluronic acid
3 benzyl ester with 100% esterification.

1 6. A process for preparing the biocompatible membranes as claimed
2 in claim 1 comprising perforating a continuous membrane via a
3 suitable screening system, using mechanical or laser perforation
4 devices.

1 7. The process for preparing biocompatible membranes as claimed in
2 claim 6, characterised in that the mechanical perforation device is
3 a punch.

1 8. The process for preparing biocompatible membranes as claimed
2 in claim 6, characterised in that the laser perforation device is a
3 UV radiation laser.



REPLACEMENT SHEET

04 JUN 1998

13

9. Artificial skin composed of the biocompatible membranes as claimed in claim 1 and of microcolonies of autologous or heterologous keratinocytes or other epithelial cells in the active proliferation stage present within the holes of said biocompatible membranes.