

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number
WO 2004/074595 A1

(51) International Patent Classification⁷: **E04D 3/363**

(74) Agent: **HERMAN DE GROOT, Johan, Willem**; Corus Technology BV, P.O. Box 10000, NL-1970 CA IJmuiden (NL).

(21) International Application Number:
PCT/EP2004/001719

(22) International Filing Date: 20 February 2004 (20.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03075544.1 24 February 2003 (24.02.2003) EP
03078269.2 16 October 2003 (16.10.2003) EP

(71) Applicant (for all designated States except US): **CORUS BAUSYSTEME GMBH** [DE/DE]; August-Horch-Strasse 20-22, 56070 Koblenz (DE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **DÖHREN, Hans-Jürgen** [DE/DE]; Krükenmorgen 16, 55452 Guldental (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **ELONGATE RETAINING ELEMENT FOR BUILDING SHEETS**

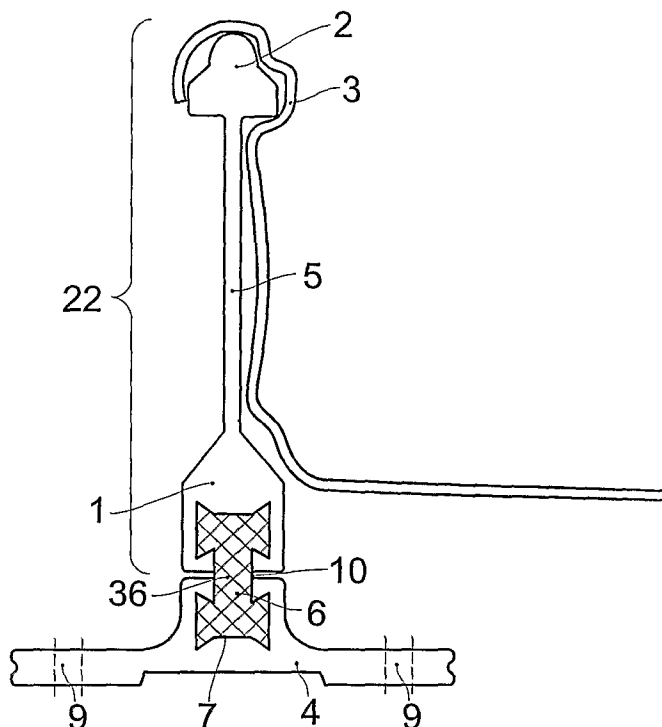

(57) Abstract: The invention relates to an elongate retaining element for building sheets comprising an elongate engagement section with a head section at one of said engagement section for engaging at least one building sheet, by flanging a free end of said building sheet over said head section, and an elongate base section for mounting the elongate retaining element on a support structure wherein the direction of elongation of the engagement section, base section and of the retaining element are the same, characterised in that the engagement section and the base section are connected by means for reducing the thermal conduction between the engagement section and the base section where the means has a lower thermal conductivity than the engagement section and base section.

WO 2004/074595 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.