

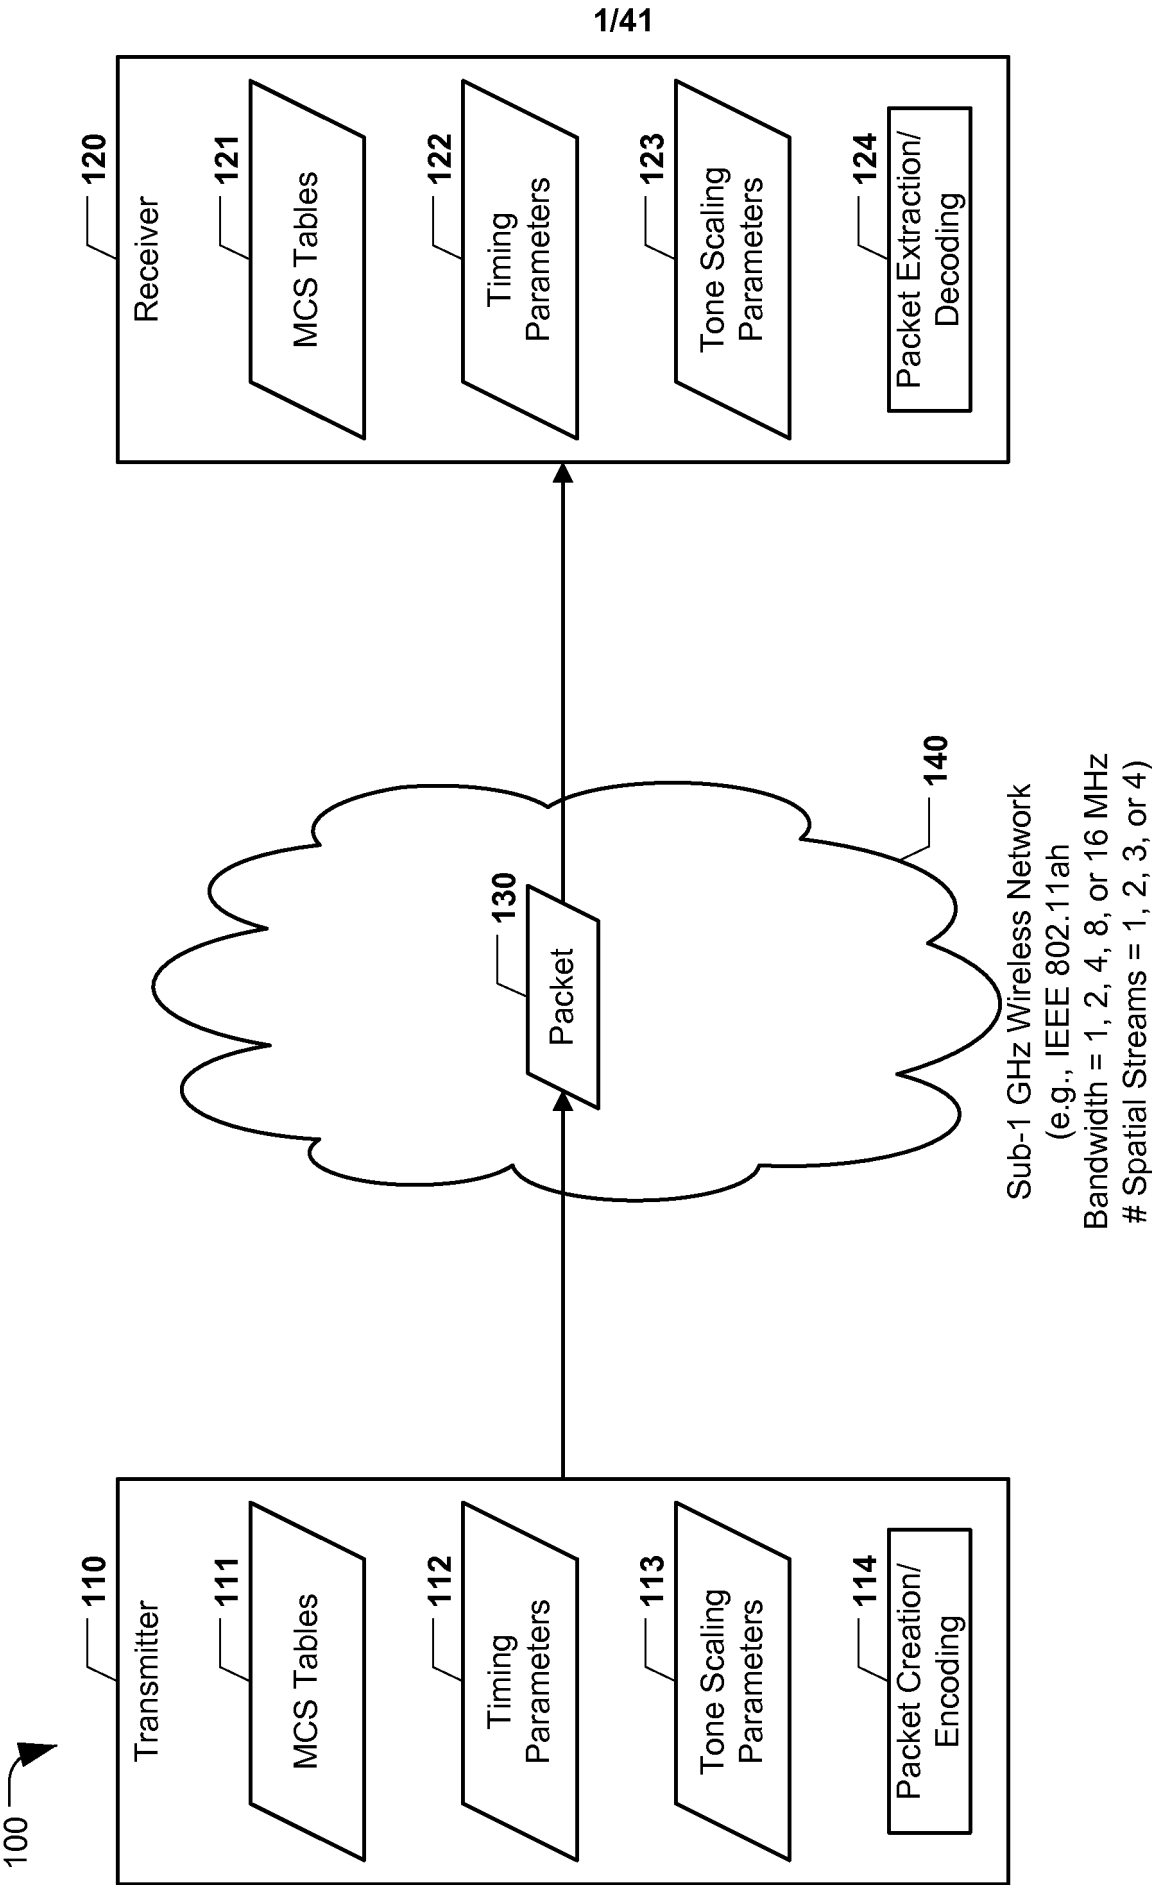


FIG. 1

1 MHz, 1 Spatial Stream - Option 1

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/4	1	24	2	24	6	1	150.0	166.7
1	BPSK	1/2	1	24	2	24	12	1	300.0	333.3
2	QPSK	1/2	2	24	2	48	24	1	600.0	666.7
3	QPSK	3/4	2	24	2	48	36	1	900.0	1000.0
4	16-QAM	1/2	4	24	2	96	48	1	1200.0	1333.3
5	16-QAM	3/4	4	24	2	96	72	1	1800.0	2000.0
6	64-QAM	2/3	6	24	2	144	96	1	2400.0	2666.7
7	64-QAM	3/4	6	24	2	144	108	1	2700.0	3000.0
8	64-QAM	5/6	6	24	2	144	120	1	3000.0	3333.3
9	256-QAM	3/4	8	24	2	192	144	1	3600.0	4000.0
10	256-QAM	5/6	8	24	2	192	160	1	4000.0	4444.4

2/41

MCS Idx = MCS Index
 Mod = Modulation Scheme
 R = Coding Rate
 N_sd = # data symbols
 N_sp = # pilot symbols
 N_bpscs = # bits per subcarrier symbol
 N_cbps = # coded bits per OFDM symbol
 N_dbps = # data bits per OFDM symbol
 N_es = # encoders used
 GI = Guard Interval

FIG. 2A

1 MHz, 1 Spatial Stream - Option 2

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	24	2	24	12	1	300.0	333.3
1	QPSK	1/2	2	24	2	48	24	1	600.0	666.7
2	QPSK	3/4	2	24	2	48	36	1	900.0	1000.0
3	16-QAM	1/2	4	24	2	96	48	1	1200.0	1333.3
4	16-QAM	3/4	4	24	2	96	72	1	1800.0	2000.0
5	64-QAM	2/3	6	24	2	144	96	1	2400.0	2666.7
6	64-QAM	3/4	6	24	2	144	108	1	2700.0	3000.0
7	64-QAM	5/6	6	24	2	144	120	1	3000.0	3333.3
8	256-QAM	3/4	8	24	2	192	144	1	3600.0	4000.0
9	256-QAM	5/6	8	24	2	192	160	1	4000.0	4444.4
10	BPSK	1/4	1	24	2	24	6	1	150.0	166.7

FIG. 2B

4/41

1 MHz, 1 Spatial Stream - Option 3

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	24	2	24	12	1	300.0	333.3
1	QPSK	1/2	2	24	2	48	24	1	600.0	666.7
2	QPSK	3/4	2	24	2	48	36	1	900.0	1000.0
3	16-QAM	1/2	4	24	2	96	48	1	1200.0	1333.3
4	16-QAM	3/4	4	24	2	96	72	1	1800.0	2000.0
5	64-QAM	2/3	6	24	2	144	96	1	2400.0	2666.7
6	64-QAM	3/4	6	24	2	144	108	1	2700.0	3000.0
7	64-QAM	5/6	6	24	2	144	120	1	3000.0	3333.3
8	256-QAM	3/4	8	24	2	192	144	1	3600.0	4000.0
9	256-QAM	5/6	8	24	2	192	160	1	4000.0	4444.4
15	BPSK	1/4	1	24	2	24	6	1	150.0	166.7

FIG. 2C

1 MHz, 2 Spatial Streams

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	24	2	48	24	1	600.0	666.7
1	QPSK	1/2	2	24	2	96	48	1	1200.0	1333.3
2	QPSK	3/4	2	24	2	96	72	1	1800.0	2000.0
3	16-QAM	1/2	4	24	2	192	96	1	2400.0	2666.7
4	16-QAM	3/4	4	24	2	192	144	1	3600.0	4000.0
5	64-QAM	2/3	6	24	2	288	192	1	4800.0	5333.3
6	64-QAM	3/4	6	24	2	288	216	1	5400.0	6000.0
7	64-QAM	5/6	6	24	2	288	240	1	6000.0	6666.7
8	256-QAM	3/4	8	24	2	384	288	1	7200.0	8000.0
9	256-QAM	5/6	8	24	2	384	320	1	8000.0	8888.9

FIG. 3A

1 MHz, 3 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	24	2	72	36	1	900.0	1000.0
1	QPSK	1/2	2	24	2	144	72	1	1800.0	2000.0
2	QPSK	3/4	2	24	2	144	108	1	2700.0	3000.0
3	16-QAM	1/2	4	24	2	288	144	1	3600.0	4000.0
4	16-QAM	3/4	4	24	2	288	216	1	5400.0	6000.0
5	64-QAM	2/3	6	24	2	432	288	1	7200.0	8000.0
6	64-QAM	3/4	6	24	2	432	324	1	8100.0	9000.0
7	64-QAM	5/6	6	24	2	432	360	1	9000.0	10000.0
8	256-QAM	3/4	8	24	2	576	432	1	10800.0	12000.0
9	256-QAM	5/6	8	24	2	576	480	1	12000.0	13333.3

FIG. 3B

1 MHz, 4 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	24	2	96	48	1	1200.0	1333.3
1	QPSK	1/2	2	24	2	192	96	1	2400.0	2666.7
2	QPSK	3/4	2	24	2	192	144	1	3600.0	4000.0
3	16-QAM	1/2	4	24	2	384	192	1	4800.0	5333.3
4	16-QAM	3/4	4	24	2	384	288	1	7200.0	8000.0
5	64-QAM	2/3	6	24	2	576	384	1	9600.0	10666.7
6	64-QAM	3/4	6	24	2	576	432	1	10800.0	12000.0
7	64-QAM	5/6	6	24	2	576	480	1	12000.0	13333.3
8	256-QAM	3/4	8	24	2	768	576	1	14400.0	16000.0
9	256-QAM	5/6	8	24	2	768	640	1	16000.0	17777.8

FIG. 3C

2 MHz, 1 Spatial Stream

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	52	4	52	26	1	650.0	722.2
1	QPSK	1/2	2	52	4	104	52	1	1300.0	1444.4
2	QPSK	3/4	2	52	4	104	78	1	1950.0	2166.7
3	16-QAM	1/2	4	52	4	208	104	1	2600.0	2888.9
4	16-QAM	3/4	4	52	4	208	156	1	3900.0	4333.3
5	64-QAM	2/3	6	52	4	312	208	1	5200.0	5777.8
6	64-QAM	3/4	6	52	4	312	234	1	5850.0	6500.0
7	64-QAM	5/6	6	52	4	312	260	1	6500.0	7222.2
8	256-QAM	3/4	8	52	4	416	312	1	7800.0	8666.7
9	256-QAM	5/6	8	52	4	416	346 2/3	1	8666.7	9629.6

FIG. 4A

2 MHz, 2 Spatial Streams

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	52	4	104	52	1	1300.0	1444.4
1	QPSK	1/2	2	52	4	208	104	1	2600.0	2888.9
2	QPSK	3/4	2	52	4	208	156	1	3900.0	4333.3
3	16-QAM	1/2	4	52	4	416	208	1	5200.0	5777.8
4	16-QAM	3/4	4	52	4	416	312	1	7800.0	8666.7
5	64-QAM	2/3	6	52	4	624	416	1	10400.0	11555.6
6	64-QAM	3/4	6	52	4	624	468	1	11700.0	13000.0
7	64-QAM	5/6	6	52	4	624	520	1	13000.0	14444.4
8	256-QAM	3/4	8	52	4	832	624	1	15600.0	17333.3
9	256-QAM	5/6	8	52	4	832	693 1/3	1	17333.3	19259.3

FIG. 4B

2 MHz, 3 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	52	4	156	78	1	1950.0	2166.7
1	QPSK	1/2	2	52	4	312	156	1	3900.0	4333.3
2	QPSK	3/4	2	52	4	312	234	1	5850.0	6500.0
3	16-QAM	1/2	4	52	4	624	312	1	7800.0	8666.7
4	16-QAM	3/4	4	52	4	624	468	1	11700.0	13000.0
5	64-QAM	2/3	6	52	4	936	624	1	15600.0	17333.3
6	64-QAM	3/4	6	52	4	936	702	1	17550.0	19500.0
7	64-QAM	5/6	6	52	4	936	780	1	19500.0	21666.7
8	256-QAM	3/4	8	52	4	1248	936	1	23400.0	26000.0
9	256-QAM	5/6	8	52	4	1248	1040	1	26000.0	28888.9

FIG. 4C

2 MHz, 4 Spatial Streams

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	52	4	208	104	1	2600.0	2888.9
1	QPSK	1/2	2	52	4	416	208	1	5200.0	5777.8
2	QPSK	3/4	2	52	4	416	312	1	7800.0	8666.7
3	16-QAM	1/2	4	52	4	832	416	1	10400.0	11555.6
4	16-QAM	3/4	4	52	4	832	624	1	15600.0	17333.3
5	64-QAM	2/3	6	52	4	1248	832	1	20800.0	23111.1
6	64-QAM	3/4	6	52	4	1248	936	1	23400.0	26000.0
7	64-QAM	5/6	6	52	4	1248	1040	1	26000.0	28888.9
8	256-QAM	3/4	8	52	4	1664	1248	1	31200.0	34666.7
9	256-QAM	5/6	8	52	4	1664	1386 2/3	1	34666.7	38518.5

FIG. 4D

4 MHz, 1 Spatial Stream

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	108	6	108	54	1	1350.0	1500.0
1	QPSK	1/2	2	108	6	216	108	1	2700.0	3000.0
2	QPSK	3/4	2	108	6	216	162	1	4050.0	4500.0
3	16-QAM	1/2	4	108	6	432	216	1	5400.0	6000.0
4	16-QAM	3/4	4	108	6	432	324	1	8100.0	9000.0
5	64-QAM	2/3	6	108	6	648	432	1	10800.0	12000.0
6	64-QAM	3/4	6	108	6	648	486	1	12150.0	13500.0
7	64-QAM	5/6	6	108	6	648	540	1	13500.0	15000.0
8	256-QAM	3/4	8	108	6	864	648	1	16200.0	18000.0
9	256-QAM	5/6	8	108	6	864	720	1	18000.0	20000.0

FIG. 5A

4 MHz, 2 Spatial Streams

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	108	6	216	108	1	2700.0	3000.0
1	QPSK	1/2	2	108	6	432	216	1	5400.0	6000.0
2	QPSK	3/4	2	108	6	432	324	1	8100.0	9000.0
3	16-QAM	1/2	4	108	6	864	432	1	10800.0	12000.0
4	16-QAM	3/4	4	108	6	864	648	1	16200.0	18000.0
5	64-QAM	2/3	6	108	6	1296	864	1	21600.0	24000.0
6	64-QAM	3/4	6	108	6	1296	972	1	24300.0	27000.0
7	64-QAM	5/6	6	108	6	1296	1080	1	27000.0	30000.0
8	256-QAM	3/4	8	108	6	1728	1296	1	32400.0	36000.0
9	256-QAM	5/6	8	108	6	1728	1440	1	36000.0	40000.0

FIG. 5B

4 MHz, 3 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	108	6	324	162	1	4050.0	4500.0
1	QPSK	1/2	2	108	6	648	324	1	8100.0	9000.0
2	QPSK	3/4	2	108	6	648	486	1	12150.0	13500.0
3	16-QAM	1/2	4	108	6	1296	648	1	16200.0	18000.0
4	16-QAM	3/4	4	108	6	1296	972	1	24300.0	27000.0
5	64-QAM	2/3	6	108	6	1944	1296	1	32400.0	36000.0
6	64-QAM	3/4	6	108	6	1944	1458	1	36450.0	40500.0
7	64-QAM	5/6	6	108	6	1944	1620	1	40500.0	45000.0
8	256-QAM	3/4	8	108	6	2592	1944	1	48600.0	54000.0
9	256-QAM	5/6	8	108	6	2592	2160	1	54000.0	60000.0

FIG. 5C

4 MHz, 4 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	108	6	432	216	1	5400.0	6000.0
1	QPSK	1/2	2	108	6	864	432	1	10800.0	12000.0
2	QPSK	3/4	2	108	6	864	648	1	16200.0	18000.0
3	16-QAM	1/2	4	108	6	1728	864	1	21600.0	24000.0
4	16-QAM	3/4	4	108	6	1728	1296	1	32400.0	36000.0
5	64-QAM	2/3	6	108	6	2592	1728	1	43200.0	48000.0
6	64-QAM	3/4	6	108	6	2592	1944	1	48600.0	54000.0
7	64-QAM	5/6	6	108	6	2592	2160	1	54000.0	60000.0
8	256-QAM	3/4	8	108	6	3456	2592	2	64800.0	72000.0
9	256-QAM	5/6	8	108	6	3456	2880	2	72000.0	80000.0

FIG. 5D

8 MHz, 1 Spatial Stream

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	234	117	1	2925.0	3250.0
1	QPSK	1/2	2	234	8	468	234	1	5850.0	6500.0
2	QPSK	3/4	2	234	8	468	351	1	8775.0	9750.0
3	16-QAM	1/2	4	234	8	936	468	1	11700.0	13000.0
4	16-QAM	3/4	4	234	8	936	702	1	17550.0	19500.0
5	64-QAM	2/3	6	234	8	1404	936	1	23400.0	26000.0
6	64-QAM	3/4	6	234	8	1404	1053	1	26325.0	29250.0
7	64-QAM	5/6	6	234	8	1404	1170	1	29250.0	32500.0
8	256-QAM	3/4	8	234	8	1872	1404	1	35100.0	39000.0
9	256-QAM	5/6	8	234	8	1872	1560	1	39000.0	43333.3

FIG. 6A

8 MHz. 2 Spatial Streams

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	468	234	1	5850.0	6500.0
1	QPSK	1/2	2	234	8	936	468	1	11700.0	13000.0
2	QPSK	3/4	2	234	8	936	702	1	17550.0	19500.0
3	16-QAM	1/2	4	234	8	1872	936	1	23400.0	26000.0
4	16-QAM	3/4	4	234	8	1872	1404	1	35100.0	39000.0
5	64-QAM	2/3	6	234	8	2808	1872	1	46800.0	52000.0
6	64-QAM	3/4	6	234	8	2808	2106	1	52650.0	58500.0
7	64-QAM	5/6	6	234	8	2808	2340	2	58500.0	65000.0
8	256-QAM	3/4	8	234	8	3744	2808	2	70200.0	78000.0
9	256-QAM	5/6	8	234	8	3744	3120	2	78000.0	86666.7

FIG. 6B

8 MHz, 3 Spatial Streams

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	702	351	1	8775.0	9750.0
1	QPSK	1/2	2	234	8	1404	702	1	17550.0	19500.0
2	QPSK	3/4	2	234	8	1404	1053	1	26325.0	29250.0
3	16-QAM	1/2	4	234	8	2808	1404	1	35100.0	39000.0
4	16-QAM	3/4	4	234	8	2808	2106	1	52650.0	58500.0
5	64-QAM	2/3	6	234	8	4212	2808	2	70200.0	78000.0
6	64-QAM	3/4	6	234	8	4212	3159	2	78975.0	87750.0
7	64-QAM	5/6	6	234	8	4212	3510	2	87750.0	97500.0
8	256-QAM	3/4	8	234	8	5616	4212	2	105300.0	117000.0
9	256-QAM	5/6	8	234	8	5616	4680	3	117000.0	130000.0

FIG. 6C

8 MHz, 4 Spatial Streams

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	936	468	1	11700.0	13000.0
1	QPSK	1/2	2	234	8	1872	936	1	23400.0	26000.0
2	QPSK	3/4	2	234	8	1872	1404	1	35100.0	39000.0
3	16-QAM	1/2	4	234	8	3744	1872	1	46800.0	52000.0
4	16-QAM	3/4	4	234	8	3744	2808	2	70200.0	78000.0
5	64-QAM	2/3	6	234	8	5616	3744	2	93600.0	104000.0
6	64-QAM	3/4	6	234	8	5616	4212	2	105300.0	117000.0
7	64-QAM	5/6	6	234	8	5616	4680	3	117000.0	130000.0
8	256-QAM	3/4	8	234	8	7488	5616	3	140400.0	156000.0
9	256-QAM	5/6	8	234	8	7488	6240	3	156000.0	173333.3

FIG. 6D

16 MHz, 1 Spatial Stream

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	468	234	1	5850.0	6500.0
1	QPSK	1/2	2	468	16	936	468	1	11700.0	13000.0
2	QPSK	3/4	2	468	16	936	702	1	17550.0	19500.0
3	16-QAM	1/2	4	468	16	1872	936	1	23400.0	26000.0
4	16-QAM	3/4	4	468	16	1872	1404	1	35100.0	39000.0
5	64-QAM	2/3	6	468	16	2808	1872	1	46800.0	52000.0
6	64-QAM	3/4	6	468	16	2808	2106	1	52650.0	58500.0
7	64-QAM	5/6	6	468	16	2808	2340	2	58500.0	65000.0
8	256-QAM	3/4	8	468	16	3744	2808	2	70200.0	78000.0
9	256-QAM	5/6	8	468	16	3744	3120	2	78000.0	86666.7

FIG. 7A

16 MHz, 2 Spatial Streams

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	936	468	1	11700.0	13000.0
1	QPSK	1/2	2	468	16	1872	936	1	23400.0	26000.0
2	QPSK	3/4	2	468	16	1872	1404	1	35100.0	39000.0
3	16-QAM	1/2	4	468	16	3744	1872	1	46800.0	52000.0
4	16-QAM	3/4	4	468	16	3744	2808	2	70200.0	78000.0
5	64-QAM	2/3	6	468	16	5616	3744	2	93600.0	104000.0
6	64-QAM	3/4	6	468	16	5616	4212	2	105300.0	117000.0
7	64-QAM	5/6	6	468	16	5616	4680	3	117000.0	130000.0
8	256-QAM	3/4	8	468	16	7488	5616	3	140400.0	156000.0
9	256-QAM	5/6	8	468	16	7488	6240	3	156000.0	173333.3

FIG. 7B

16 MHz, 3 Spatial Streams – Option 1

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1404	702	1	17550.0	19500.0
1	QPSK	1/2	2	468	16	2808	1404	1	35100.0	39000.0
2	QPSK	3/4	2	468	16	2808	2106	1	52650.0	58500.0
3	16-QAM	1/2	4	468	16	5616	2808	2	70200.0	78000.0
4	16-QAM	3/4	4	468	16	5616	4212	2	105300.0	117000.0
5	64-QAM	2/3	6	468	16	8424	5616	3	140400.0	156000.0
6	64-QAM	3/4	6	468	16	8424	6318	3	157950.0	175500.0
7	64-QAM	5/6	6	468	16	8424	7020	4	175500.0	195000.0
8	256-QAM	3/4	8	468	16	11232	8424	4	210600.0	234000.0
9	256-QAM	5/6	8	468	16	11232	9360	5	234000.0	260000.0

FIG. 7C

16 MHz, 3 Spatial Streams – Option 2

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1404	702	1	17550.0	19500.0
1	QPSK	1/2	2	468	16	2808	1404	1	35100.0	39000.0
2	QPSK	3/4	2	468	16	2808	2106	1	52650.0	58500.0
3	16-QAM	1/2	4	468	16	5616	2808	2	70200.0	78000.0
4	16-QAM	3/4	4	468	16	5616	4212	2	105300.0	117000.0
5	64-QAM	2/3	6	468	16	8424	5616	3	140400.0	156000.0
6	64-QAM	3/4	6	468	16	8424	6318	3	157950.0	175500.0
7	64-QAM	5/6	6	468	16	8424	7020	4	175500.0	195000.0
8	256-QAM	3/4	8	468	16	11232	8424	4	210600.0	234000.0
9	256-QAM	5/6	8	468	16	11232	9360	6	234000.0	260000.0

FIG. 7D

16 MHz, 4 Spatial Streams – Option 1

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1872	936	1	23400.0	26000.0
1	QPSK	1/2	2	468	16	3744	1872	1	46800.0	52000.0
2	QPSK	3/4	2	468	16	3744	2808	2	70200.0	78000.0
3	16-QAM	1/2	4	468	16	7488	3744	2	93600.0	104000.0
4	16-QAM	3/4	4	468	16	7488	5616	3	140400.0	156000.0
5	64-QAM	2/3	6	468	16	11232	7488	4	187200.0	208000.0
6	64-QAM	3/4	6	468	16	11232	8424	4	210600.0	234000.0
7	64-QAM	5/6	6	468	16	11232	9360	5	234000.0	260000.0
8	256-QAM	3/4	8	468	16	14976	11232	6	280800.0	312000.0
9	256-QAM	5/6	8	468	16	14976	12480	6	312000.0	346666.7

FIG. 8A

25/41

16 MHz, 4 Spatial Streams – Option 2

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1872	936	1	23400.0	26000.0
1	QPSK	1/2	2	468	16	3744	1872	1	46800.0	52000.0
2	QPSK	3/4	2	468	16	3744	2808	2	70200.0	78000.0
3	16-QAM	1/2	4	468	16	7488	3744	2	93600.0	104000.0
4	16-QAM	3/4	4	468	16	7488	5616	3	140400.0	156000.0
5	64-QAM	2/3	6	468	16	11232	7488	4	187200.0	208000.0
6	64-QAM	3/4	6	468	16	11232	8424	4	210600.0	234000.0
7	64-QAM	5/6	6	468	16	11232	9360	6	234000.0	260000.0
8	256-QAM	3/4	8	468	16	14976	11232	6	280800.0	312000.0
9	256-QAM	5/6	8	468	16	14976	12480	6	312000.0	346666.7

FIG. 8B

4 MHz, 4 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	108	6	432	216	1	5400.0	6000.0
1	QPSK	1/2	2	108	6	864	432	1	10800.0	12000.0
2	QPSK	3/4	2	108	6	864	648	1	16200.0	18000.0
3	16-QAM	1/2	4	108	6	1728	864	1	21600.0	24000.0
4	16-QAM	3/4	4	108	6	1728	1296	1	32400.0	36000.0
5	64-QAM	2/3	6	108	6	2592	1728	1	43200.0	48000.0
6	64-QAM	3/4	6	108	6	2592	1944	1	48600.0	54000.0
7	64-QAM	5/6	6	108	6	2592	2160	1	54000.0	60000.0
8	256-QAM	3/4	8	108	6	3456	2592	1	64800.0	72000.0
9	256-QAM	5/6	8	108	6	3456	2880	1	72000.0	80000.0

FIG. 9A

8 MHz, 2 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	468	234	1	5850.0	6500.0
1	QPSK	1/2	2	234	8	936	468	1	11700.0	13000.0
2	QPSK	3/4	2	234	8	936	702	1	17550.0	19500.0
3	16-QAM	1/2	4	234	8	1872	936	1	23400.0	26000.0
4	16-QAM	3/4	4	234	8	1872	1404	1	35100.0	39000.0
5	64-QAM	2/3	6	234	8	2808	1872	1	46800.0	52000.0
6	64-QAM	3/4	6	234	8	2808	2106	1	52650.0	58500.0
7	64-QAM	5/6	6	234	8	2808	2340	1	58500.0	65000.0
8	256-QAM	3/4	8	234	8	3744	2808	1	70200.0	78000.0
9	256-QAM	5/6	8	234	8	3744	3120	1	78000.0	86666.7

FIG. 9B

28/41

8 MHz, 3 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	702	351	1	8775.0	9750.0
1	QPSK	1/2	2	234	8	1404	702	1	17550.0	19500.0
2	QPSK	3/4	2	234	8	1404	1053	1	26325.0	29250.0
3	16-QAM	1/2	4	234	8	2808	1404	1	35100.0	39000.0
4	16-QAM	3/4	4	234	8	2808	2106	1	52650.0	58500.0
5	64-QAM	2/3	6	234	8	4212	2808	1	70200.0	78000.0
6	64-QAM	3/4	6	234	8	4212	3159	1	78975.0	87750.0
7	64-QAM	5/6	6	234	8	4212	3510	1	87750.0	97500.0
8	256-QAM	3/4	8	234	8	5616	4212	1	105300.0	117000.0
9	256-QAM	5/6	8	234	8	5616	4680	1	117000.0	130000.0

FIG. 9C

29/41

8 MHz, 4 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N_bps	N_sd	N_sp	N_cbps	N_dbps	N_es	Data_rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	234	8	936	468	1	11700.0	13000.0
1	QPSK	1/2	2	234	8	1872	936	1	23400.0	26000.0
2	QPSK	3/4	2	234	8	1872	1404	1	35100.0	39000.0
3	16-QAM	1/2	4	234	8	3744	1872	1	46800.0	52000.0
4	16-QAM	3/4	4	234	8	3744	2808	1	70200.0	78000.0
5	64-QAM	2/3	6	234	8	5616	3744	1	93600.0	104000.0
6	64-QAM	3/4	6	234	8	5616	4212	1	105300.0	117000.0
7	64-QAM	5/6	6	234	8	5616	4680	1	117000.0	130000.0
8	256-QAM	3/4	8	234	8	7488	5616	1	140400.0	156000.0
9	256-QAM	5/6	8	234	8	7488	6240	1	156000.0	173333.3

FIG. 9D

30/41

16 MHz, 1 Spatial Stream (Single Encoder)

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	468	234	1	5850.0	6500.0
1	QPSK	1/2	2	468	16	936	468	1	11700.0	13000.0
2	QPSK	3/4	2	468	16	936	702	1	17550.0	19500.0
3	16-QAM	1/2	4	468	16	1872	936	1	23400.0	26000.0
4	16-QAM	3/4	4	468	16	1872	1404	1	35100.0	39000.0
5	64-QAM	2/3	6	468	16	2808	1872	1	46800.0	52000.0
6	64-QAM	3/4	6	468	16	2808	2106	1	52650.0	58500.0
7	64-QAM	5/6	6	468	16	2808	2340	1	58500.0	65000.0
8	256-QAM	3/4	8	468	16	3744	2808	1	70200.0	78000.0
9	256-QAM	5/6	8	468	16	3744	3120	1	78000.0	86666.7

FIG. 10A

31/41

16 MHz, 2 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N_bpscs	N_sd	N_sp	N_cbps	N_dbps	N_es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	936	468	1	11700.0	13000.0
1	QPSK	1/2	2	468	16	1872	936	1	23400.0	26000.0
2	QPSK	3/4	2	468	16	1872	1404	1	35100.0	39000.0
3	16-QAM	1/2	4	468	16	3744	1872	1	46800.0	52000.0
4	16-QAM	3/4	4	468	16	3744	2808	1	70200.0	78000.0
5	64-QAM	2/3	6	468	16	5616	3744	1	93600.0	104000.0
6	64-QAM	3/4	6	468	16	5616	4212	1	105300.0	117000.0
7	64-QAM	5/6	6	468	16	5616	4680	1	117000.0	130000.0
8	256-QAM	3/4	8	468	16	7488	5616	1	140400.0	156000.0
9	256-QAM	5/6	8	468	16	7488	6240	1	156000.0	173333.3

FIG. 10B

32/41

16 MHz, 3 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N _{bpscs}	N _{sd}	N _{sp}	N _{cbps}	N _{dbps}	N _{es}	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1404	702	1	17550.0	19500.0
1	QPSK	1/2	2	468	16	2808	1404	1	35100.0	39000.0
2	QPSK	3/4	2	468	16	2808	2106	1	52650.0	58500.0
3	16-QAM	1/2	4	468	16	5616	2808	1	70200.0	78000.0
4	16-QAM	3/4	4	468	16	5616	4212	1	105300.0	117000.0
5	64-QAM	2/3	6	468	16	8424	5616	1	140400.0	156000.0
6	64-QAM	3/4	6	468	16	8424	6318	1	157950.0	175500.0
7	64-QAM	5/6	6	468	16	8424	7020	1	175500.0	195000.0
8	256-QAM	3/4	8	468	16	11232	8424	1	210600.0	234000.0
9	256-QAM	5/6	8	468	16	11232	9360	1	234000.0	260000.0

FIG. 10C

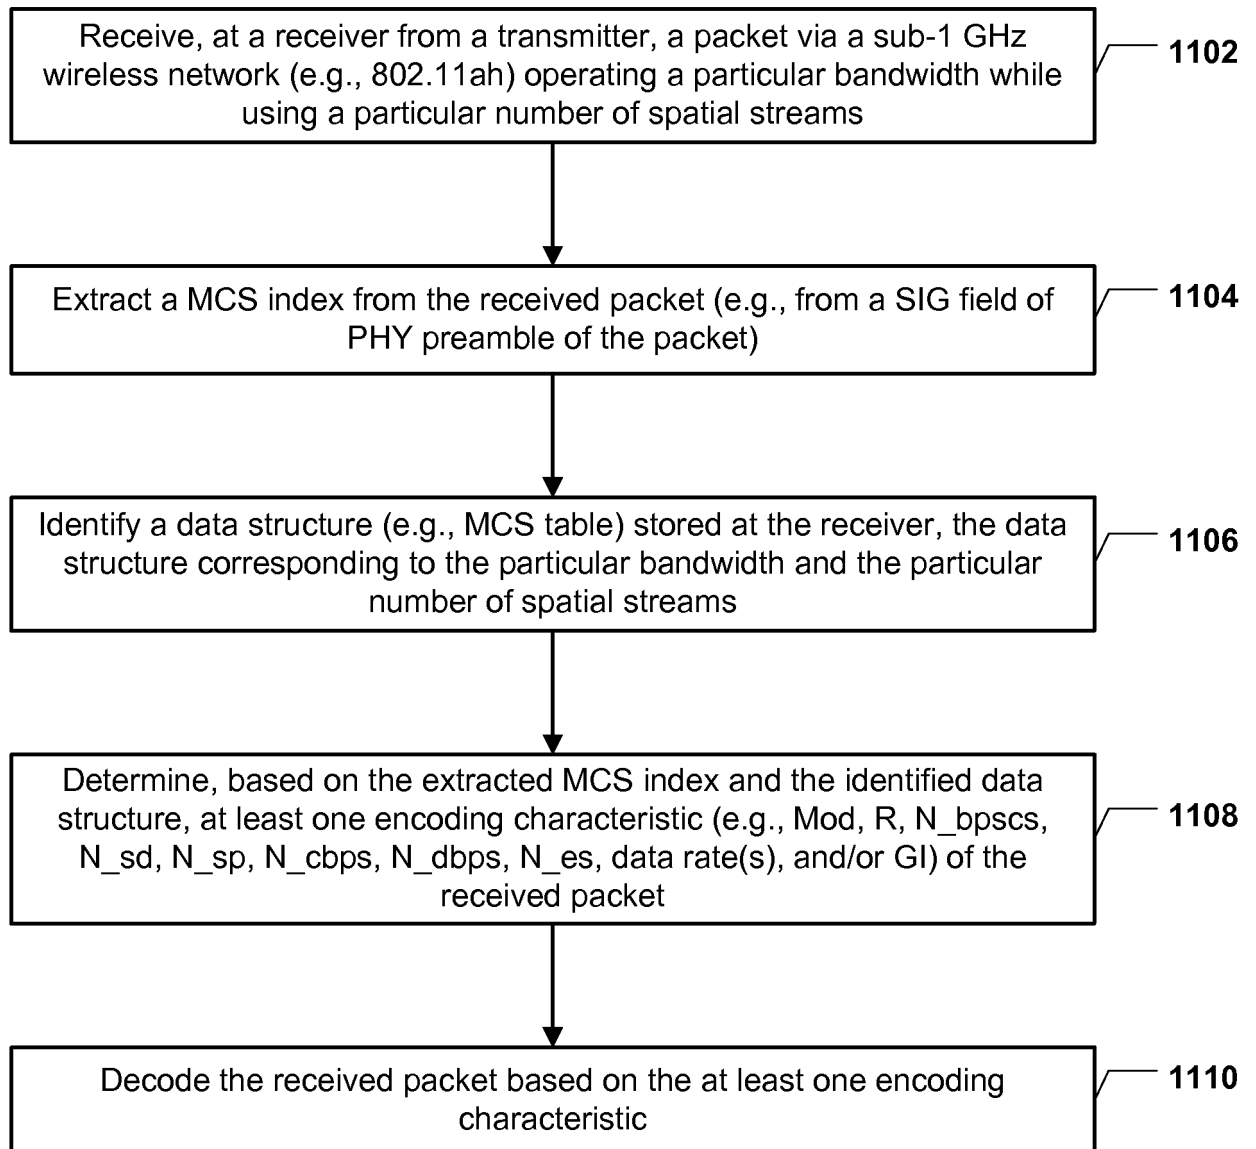
16 MHz, 4 Spatial Streams (Single Encoder)

MCS Idx	Mod	R	N bpscs	N sd	N sp	N cbps	N dbps	N es	Data rate (Kbps)	
									8us GI	4us GI
0	BPSK	1/2	1	468	16	1872	936	1	23400.0	26000.0
1	QPSK	1/2	2	468	16	3744	1872	1	46800.0	52000.0
2	QPSK	3/4	2	468	16	3744	2808	1	70200.0	78000.0
3	16-QAM	1/2	4	468	16	7488	3744	1	93600.0	104000.0
4	16-QAM	3/4	4	468	16	7488	5616	1	140400.0	156000.0
5	64-QAM	2/3	6	468	16	11232	7488	1	187200.0	208000.0
6	64-QAM	3/4	6	468	16	11232	8424	1	210600.0	234000.0
7	64-QAM	5/6	6	468	16	11232	9360	1	234000.0	260000.0
8	256-QAM	3/4	8	468	16	14976	11232	1	280800.0	312000.0
9	256-QAM	5/6	8	468	16	14976	12480	1	312000.0	346666.7

FIG. 10D

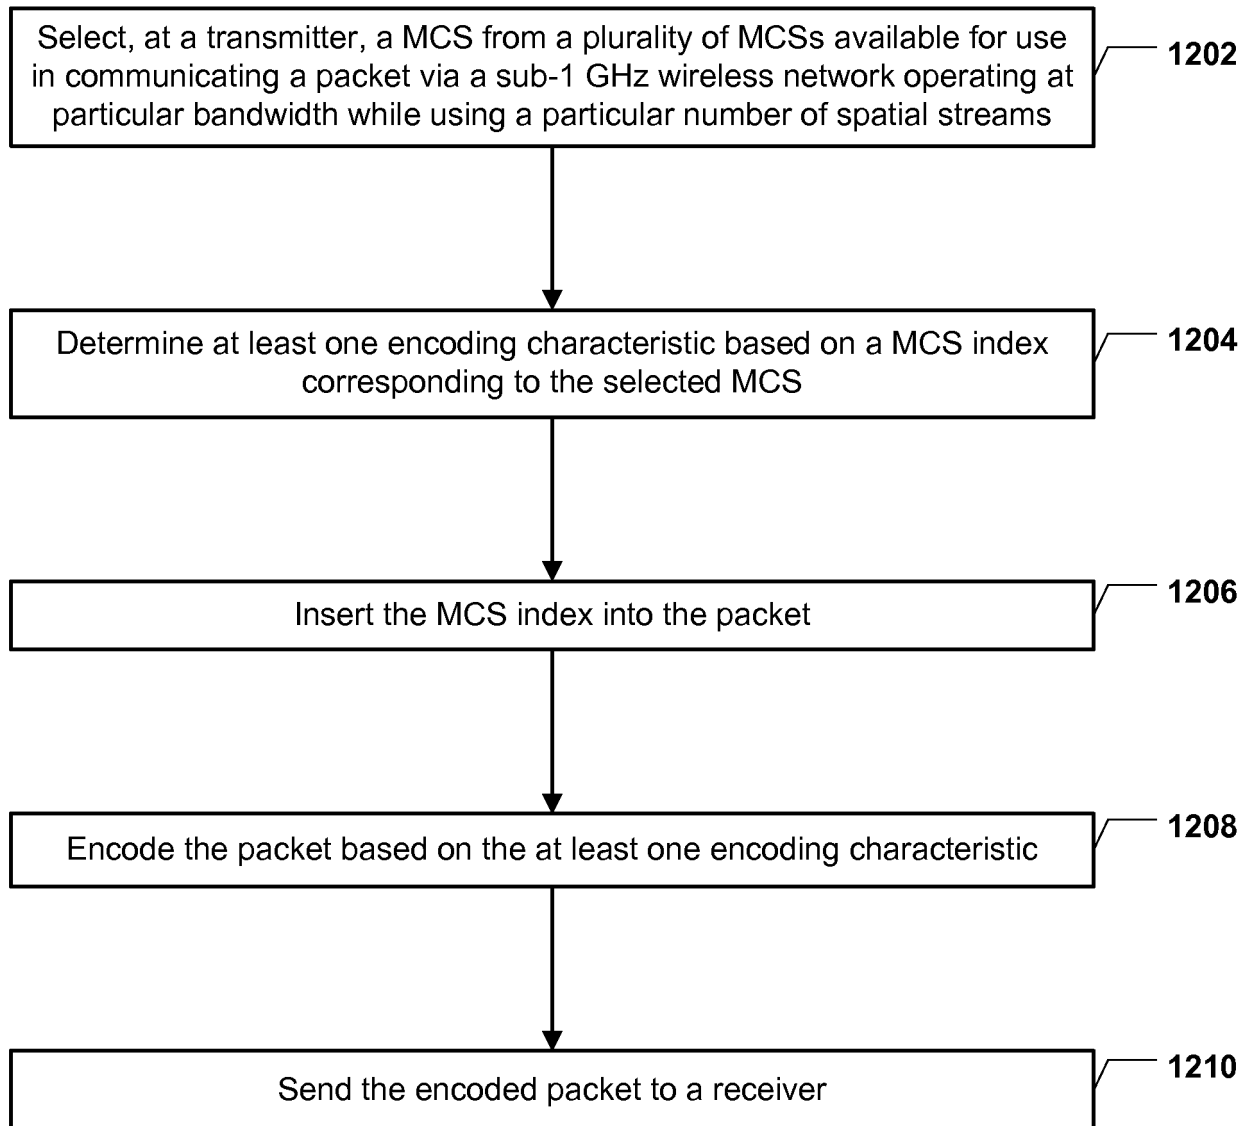
34/41

1100

**FIG. 11**

35/41

1200

**FIG. 12**

1300 →

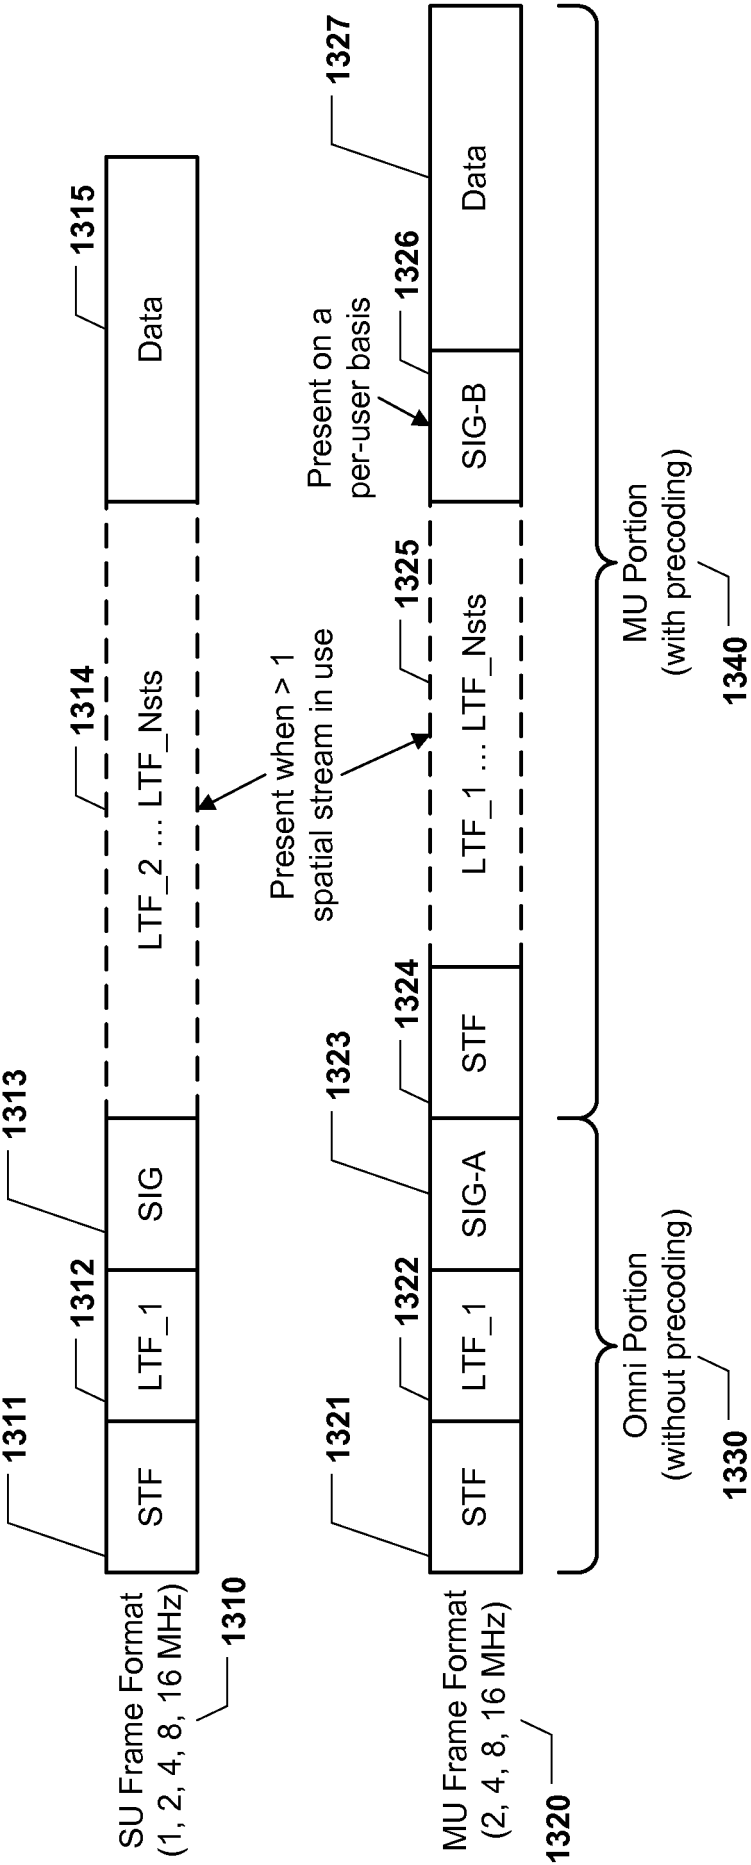


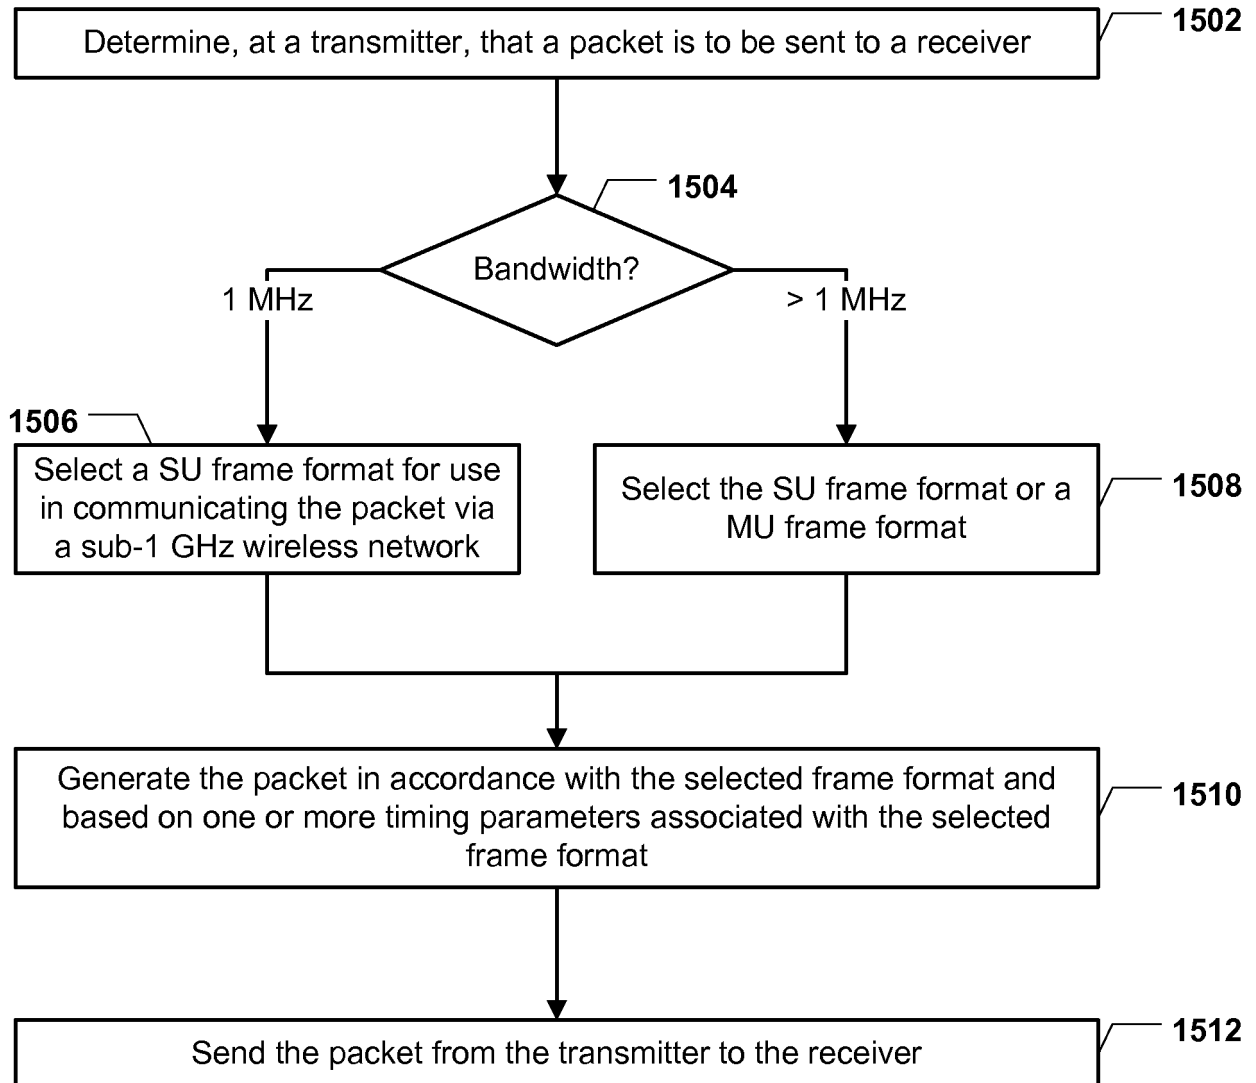
FIG. 13

Parameter	1 MHz	2 MHz	4 MHz	8 MHz	16 MHz	Description
N_sd	24	52	108	234	468	Number of complex data subcarriers
N_sp	2	4	6	8	16	Number of pilot subcarriers
N_st	26	56	114	242	484	Number of total subcarriers (excluding guards)
N_sr	13	28	58	122	250	Highest data subcarrier index
delta_f	31.25KHz					Subcarrier frequency spacing
T_dft	32us					IDFT/DFT period
T_gi	8us = T_dft/4					Guard interval duration
T_gi2	16us					Double guard interval duration
T_gis	4us = T_dft/8					Short guard interval duration
T_syml	40us = T_dft + T_gi = 1.25 x T_dft					OFDM symbol duration w/ Long GI
T_syms	36us = T_dft + T_gis = 1.125 x T_dft					OFDM symbol duration w/ Short GI
T_sym	T_syml or T_syms depending on the GI used					OFDM symbol duration
N_service	16					Number of bits in the SERVICE field
N_tail	6					Number of tails bits per BCC encoder
T_stf	160us = 20 x T_dft/4	80us = 10 x T_dft/4				Duration of STF field for SU and MU formats
T_ltf1	160us = T_gi2 + 2 x T_dft + T_gi + T_dft + T_gi + T_dft	80us = T_gi2 + 2 x T_dft				Duration of LTF1 field for SU and MU formats
T_sig	240us = 6 x T_syml or 200us = 5 x T_syml	80us = 2 x T_syml				Duration of SIG field for SU format, SIG-A for MU format
T_mimo_ltf	40us = T_syml					Duration of each LTF symbol after the SIG for SU format [whenever Nsts>1] and duration of each LTF after SIG-A in the MU format
T_mu_stf		40us = 5 x T_dft/4				Duration of MU STF field for MU format
T_sig_b		40us = T_syml				Duration of SIG-B field for MU format

FIG. 14

38/41

1500

**FIG. 15**

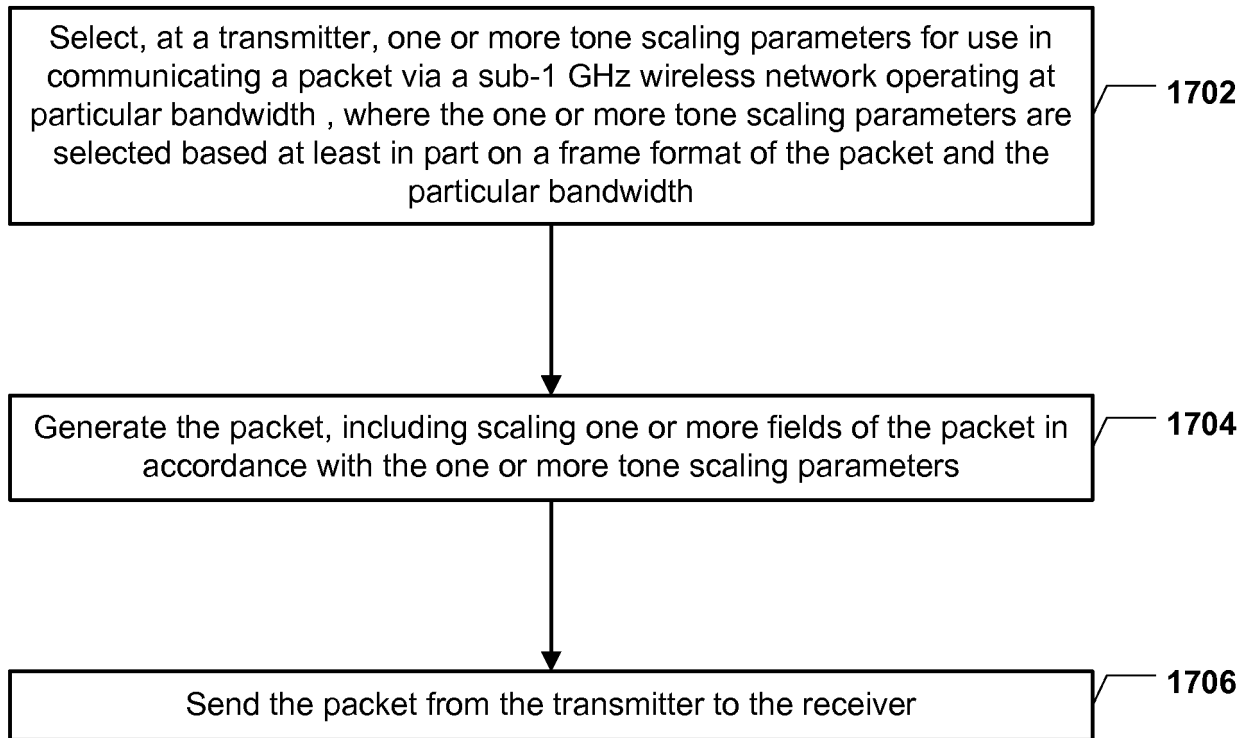
1600 →

Field	Tone Scaling Parameter as a function of bandwidth						GI duration
	1 MHz	2 MHz	4 MHz	8 MHz	16 MHz		
SU format	STF	6	12	24	48	96	-
	LTF_1						1MHz: T_gi2 for first 2 OFDM symbols, T_gi1 for last 2 OFDM symbols
	SIG	26	56	114	242	484	>= 2MHz: T_gi2
	MIMO-LTF	26	52	104	208	416	T_gi1
		26	56	114	242	484	T_gi1
MU format	Data						T_gi or T_gis (depending on Short GI bit indication in SIG)
	STF	26	56	114	242	484	-
	LTF_1		12	24	48	96	T_gi2
	SIG-A		56	114	242	484	T_gi1
	MU-STF		52	104	208	416	-
	MIMO-LTF		12	24	48	96	T_gi1
	SIG-B		56	114	242	484	T_gi1
MU format	Data		56	114	242	484	T_gi or T_gis (depending on Short GI bit indication in SIG-A)

FIG. 16

40/41

1700

**FIG. 17**

1800 →

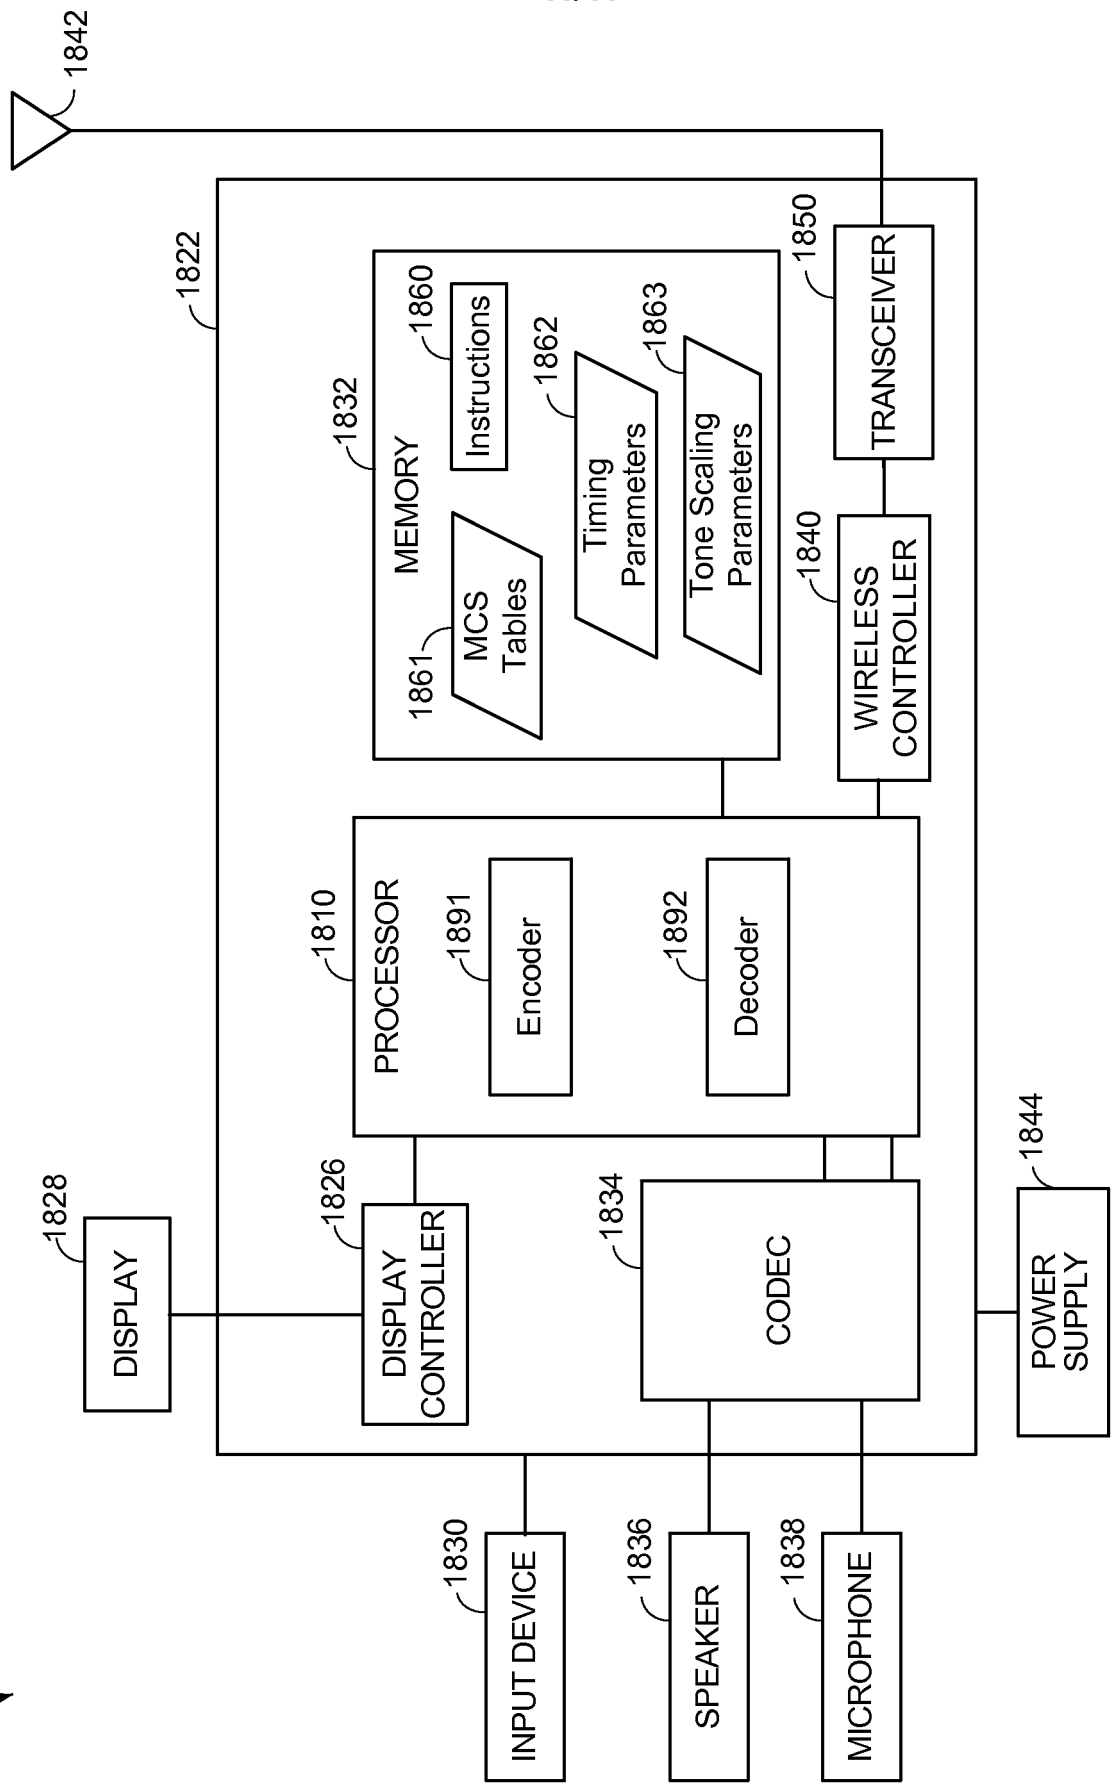


FIG. 18