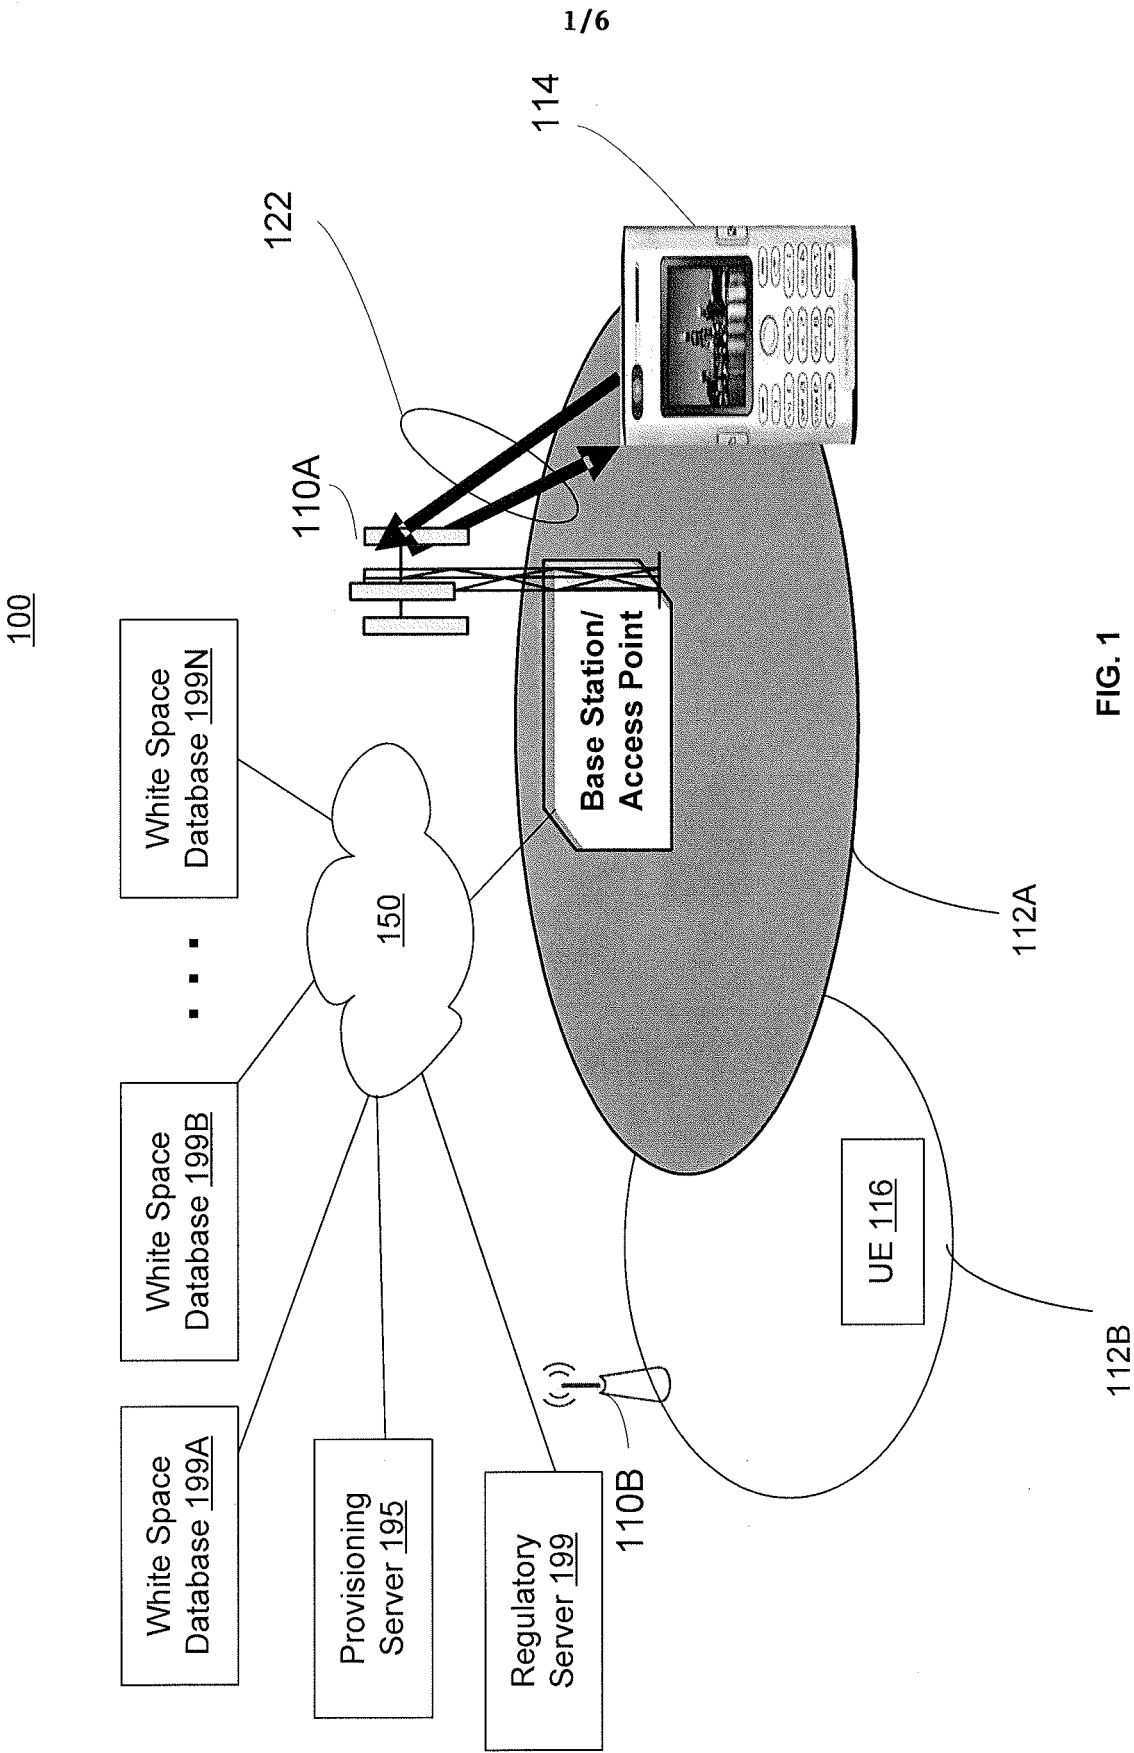




2/6

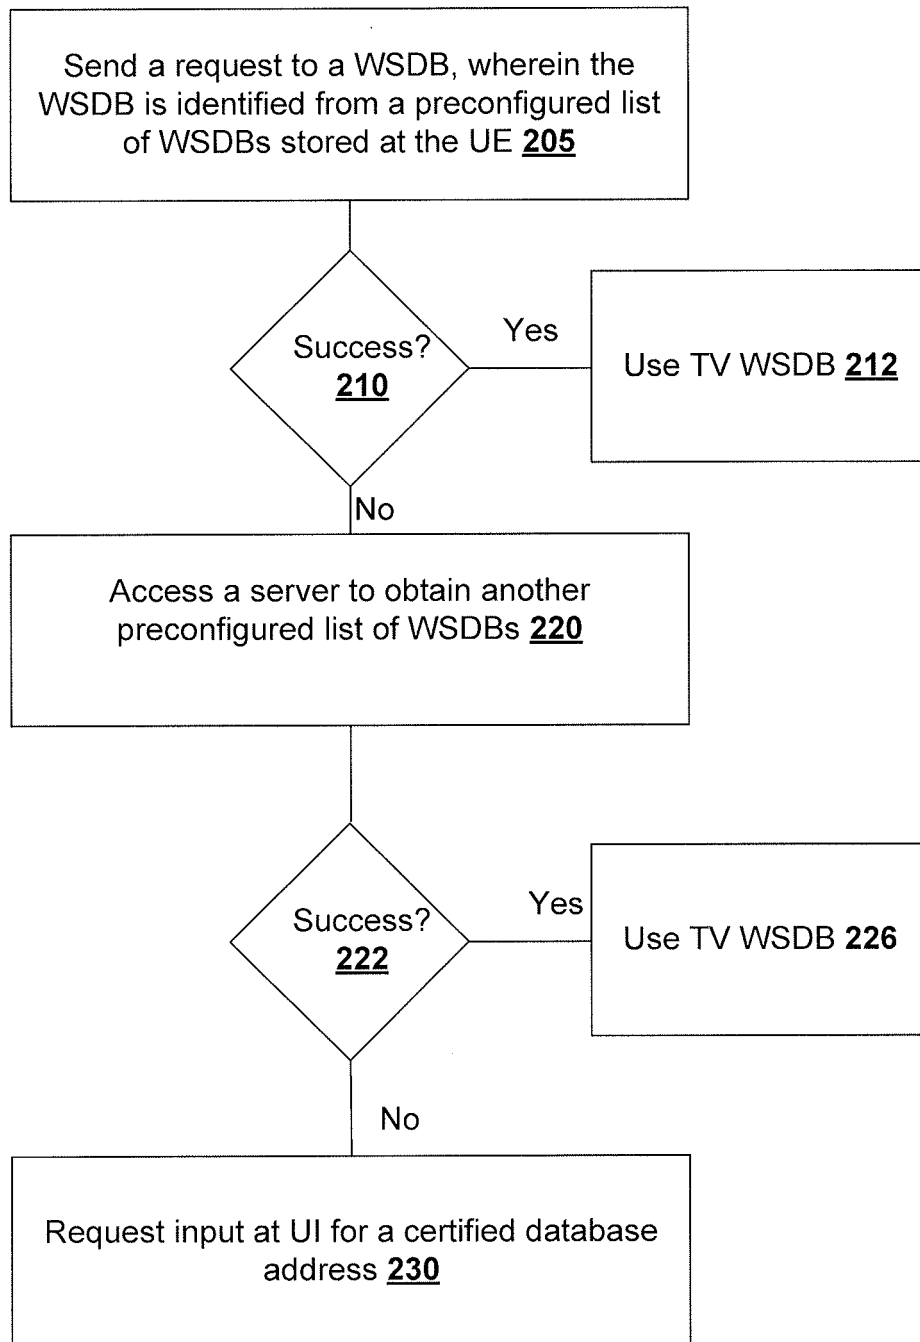
200

FIG. 2

3/6

300

Send a request to a WSDB, wherein the WSDB is identified from a preconfigured list of WSDBs stored at the UE 310

Receive a response including at least one of an updated address where the WSDB can be reached, an address of another WSDB, and a time associated with when the WSDB and the other WSDB can be accessed 320

FIG. 3

4/6

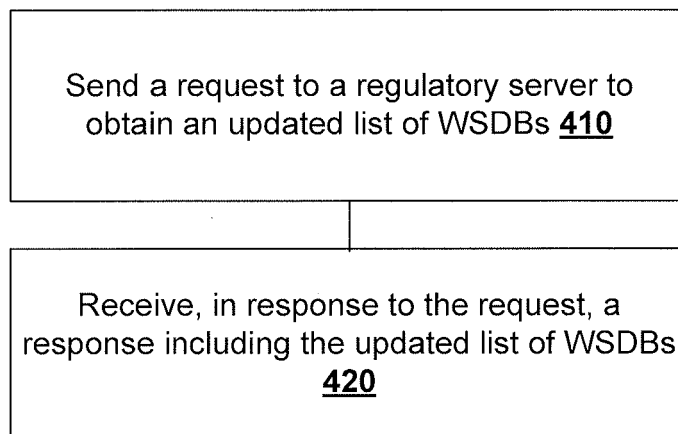
400

FIG. 4

5/6

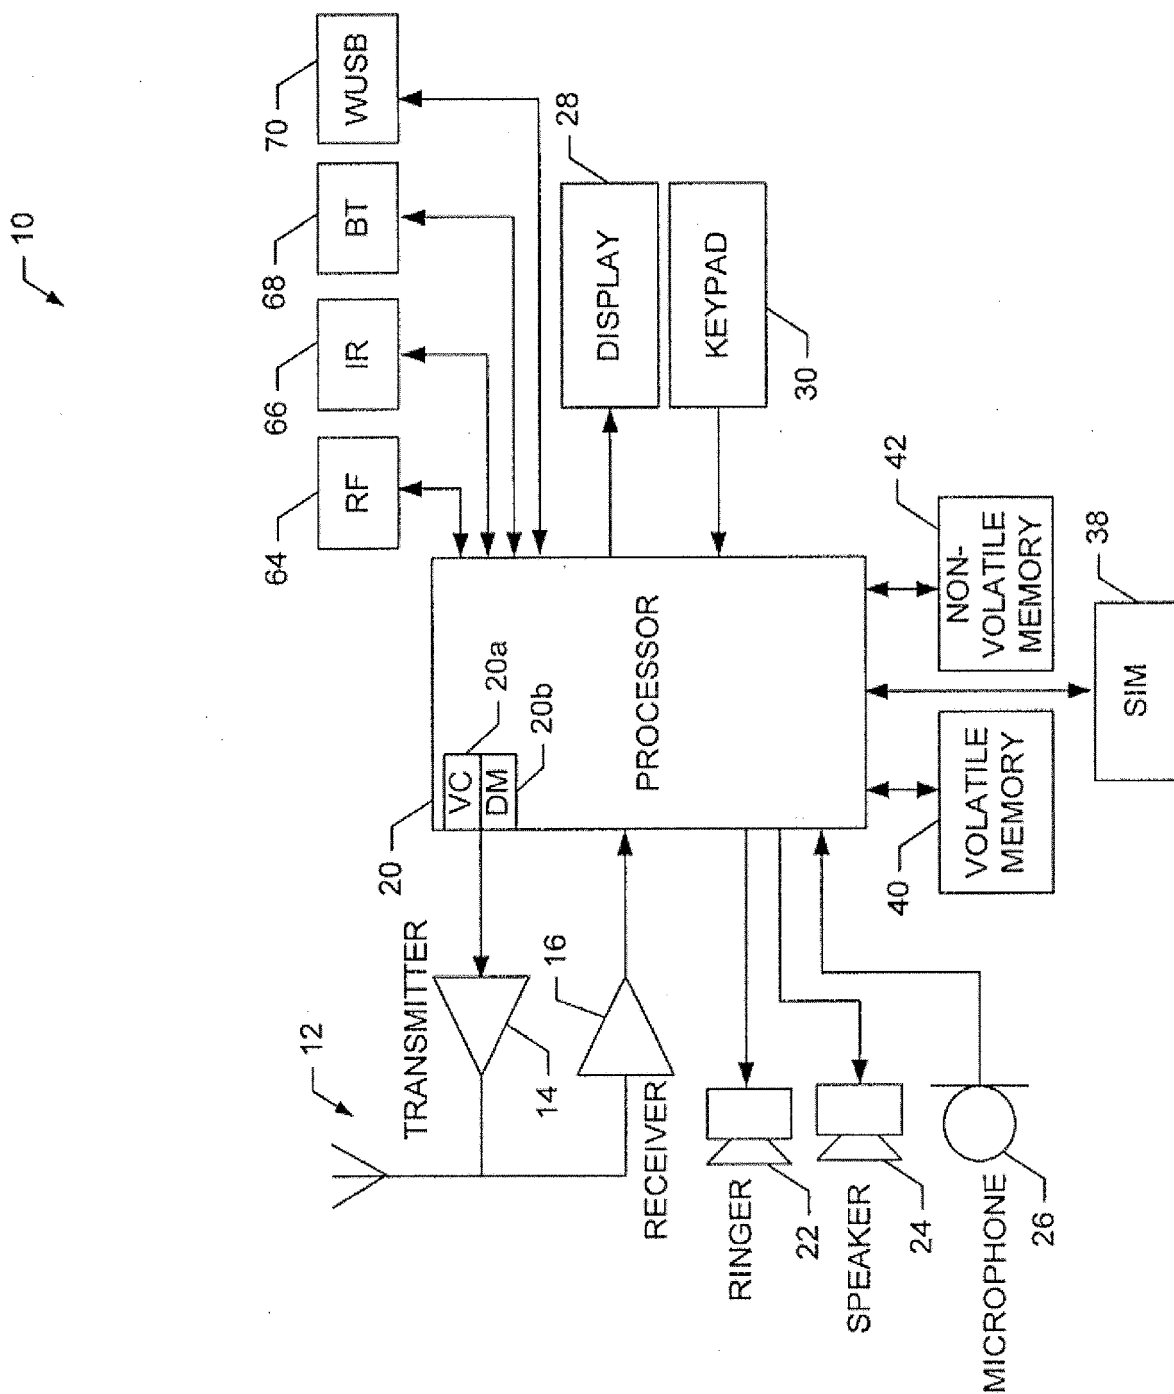


FIG. 5

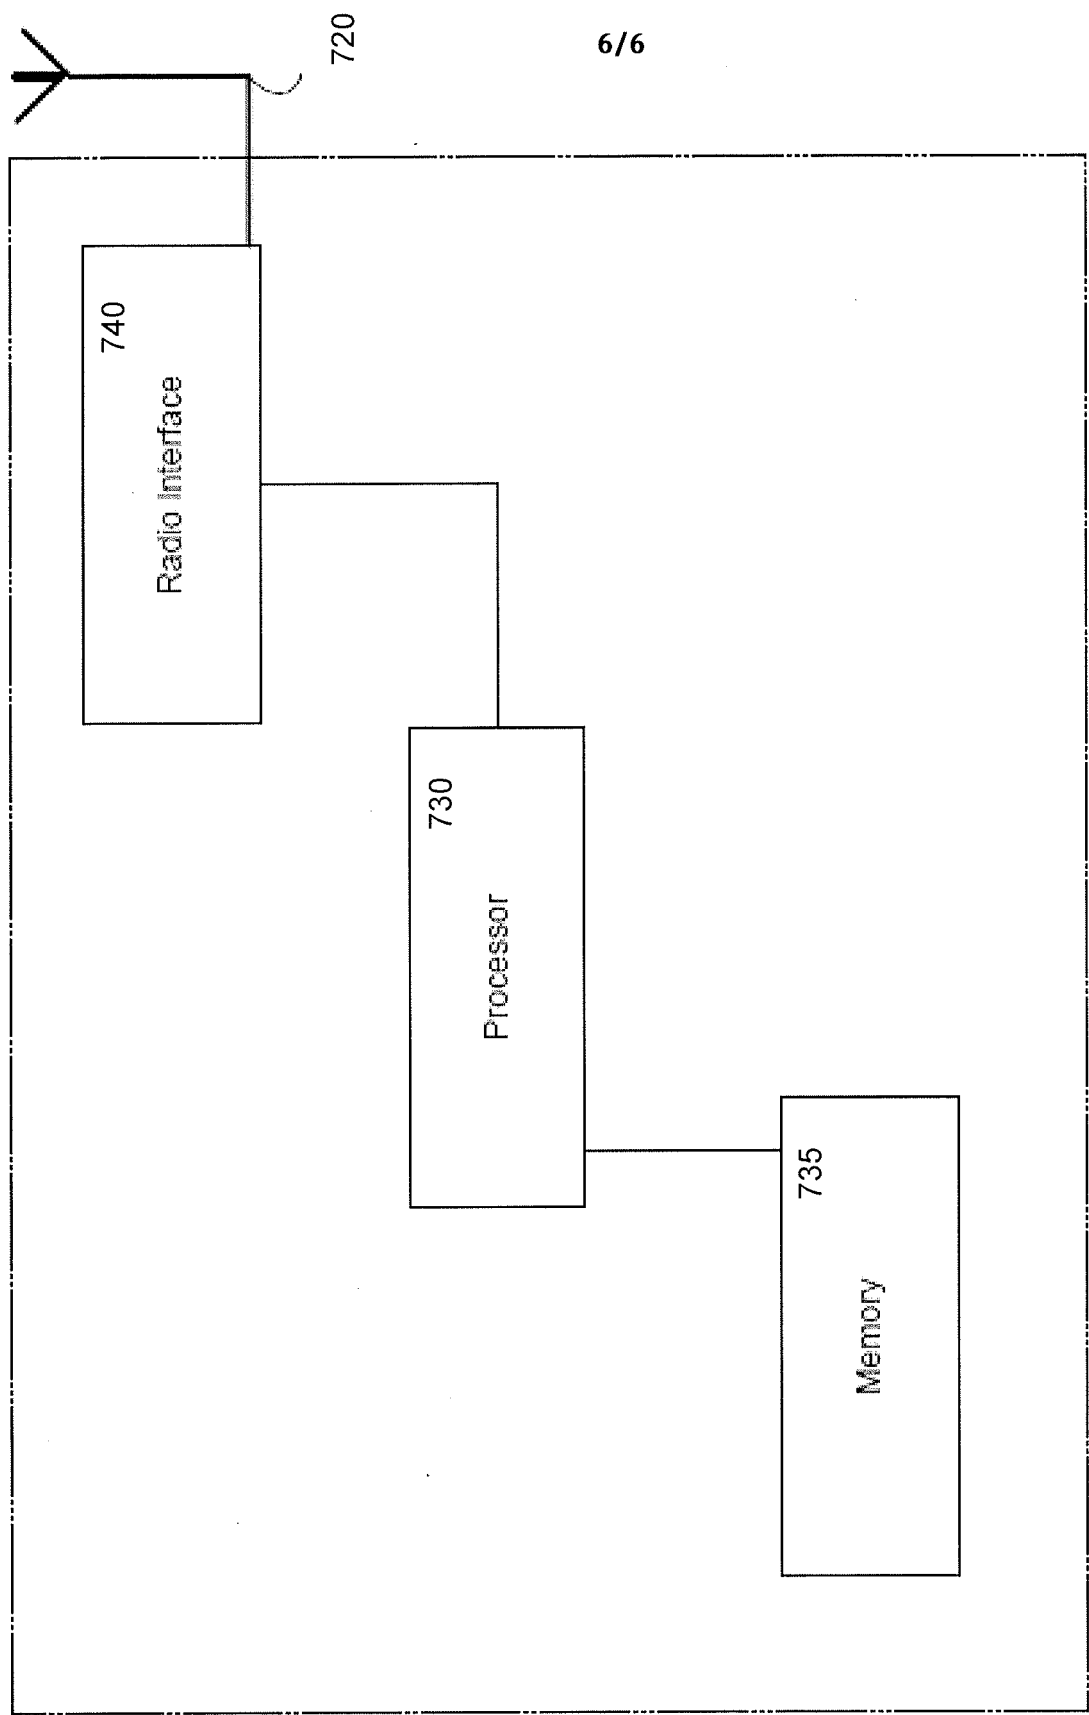


FIG. 6