

configuring a first radio channel and/or a second radio channel for a first PDU session, or configuring a first radio channel and/or a second radio channel for at least one same QoS flow of a first PDU session

11

FIG. 1

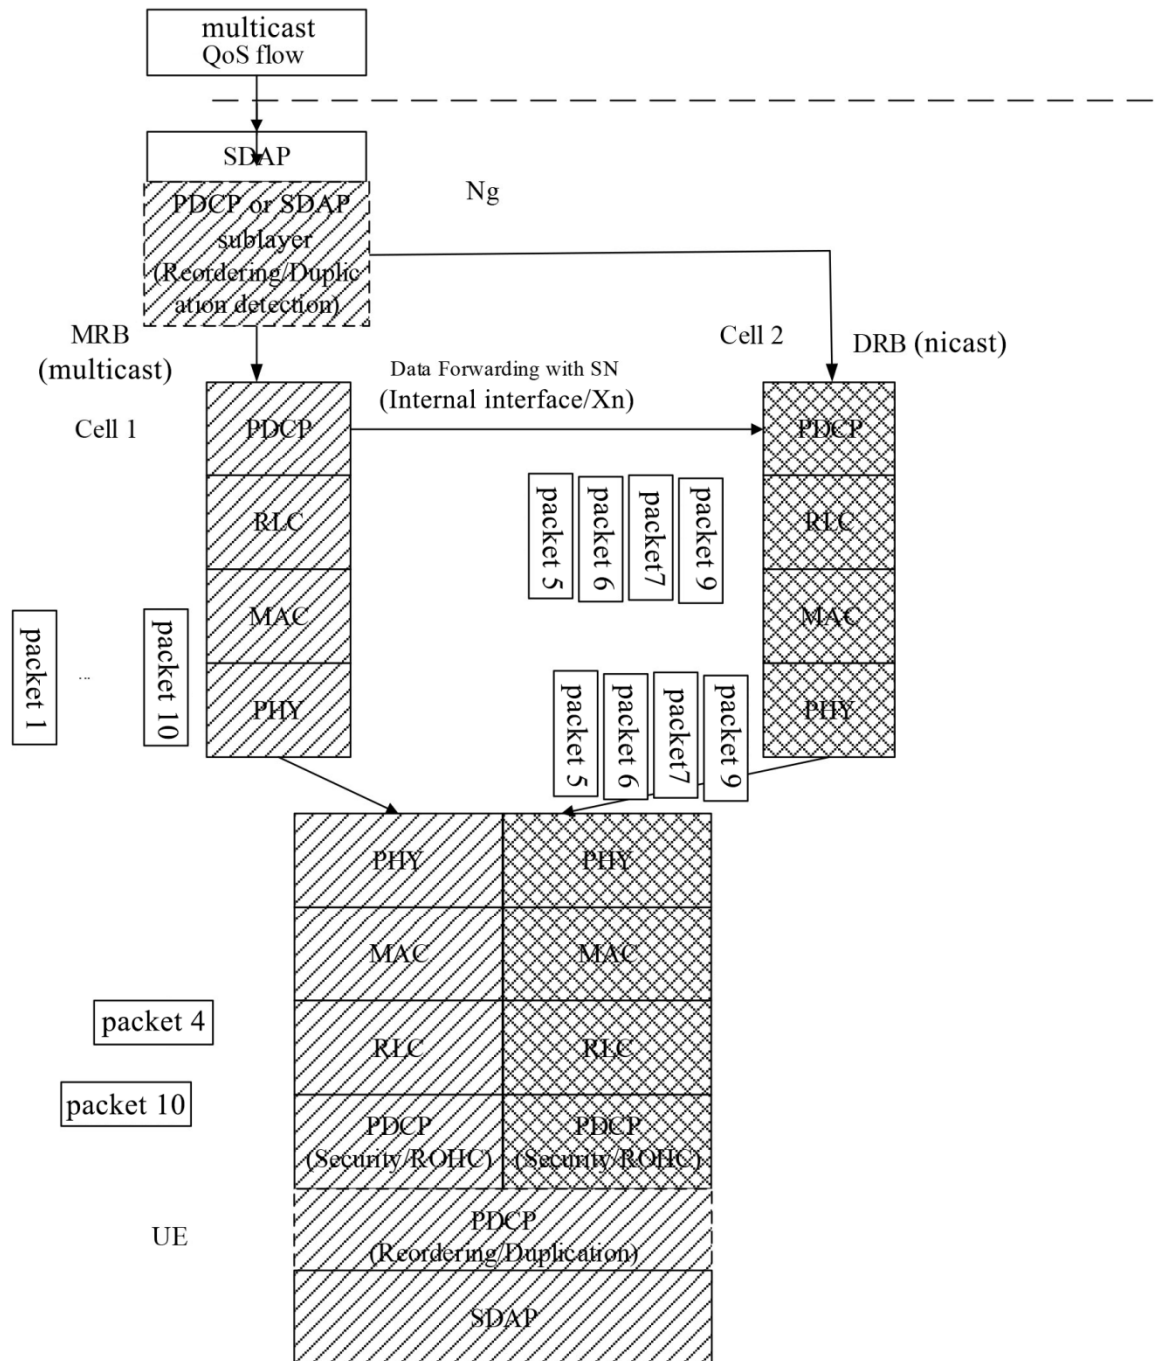


FIG. 2

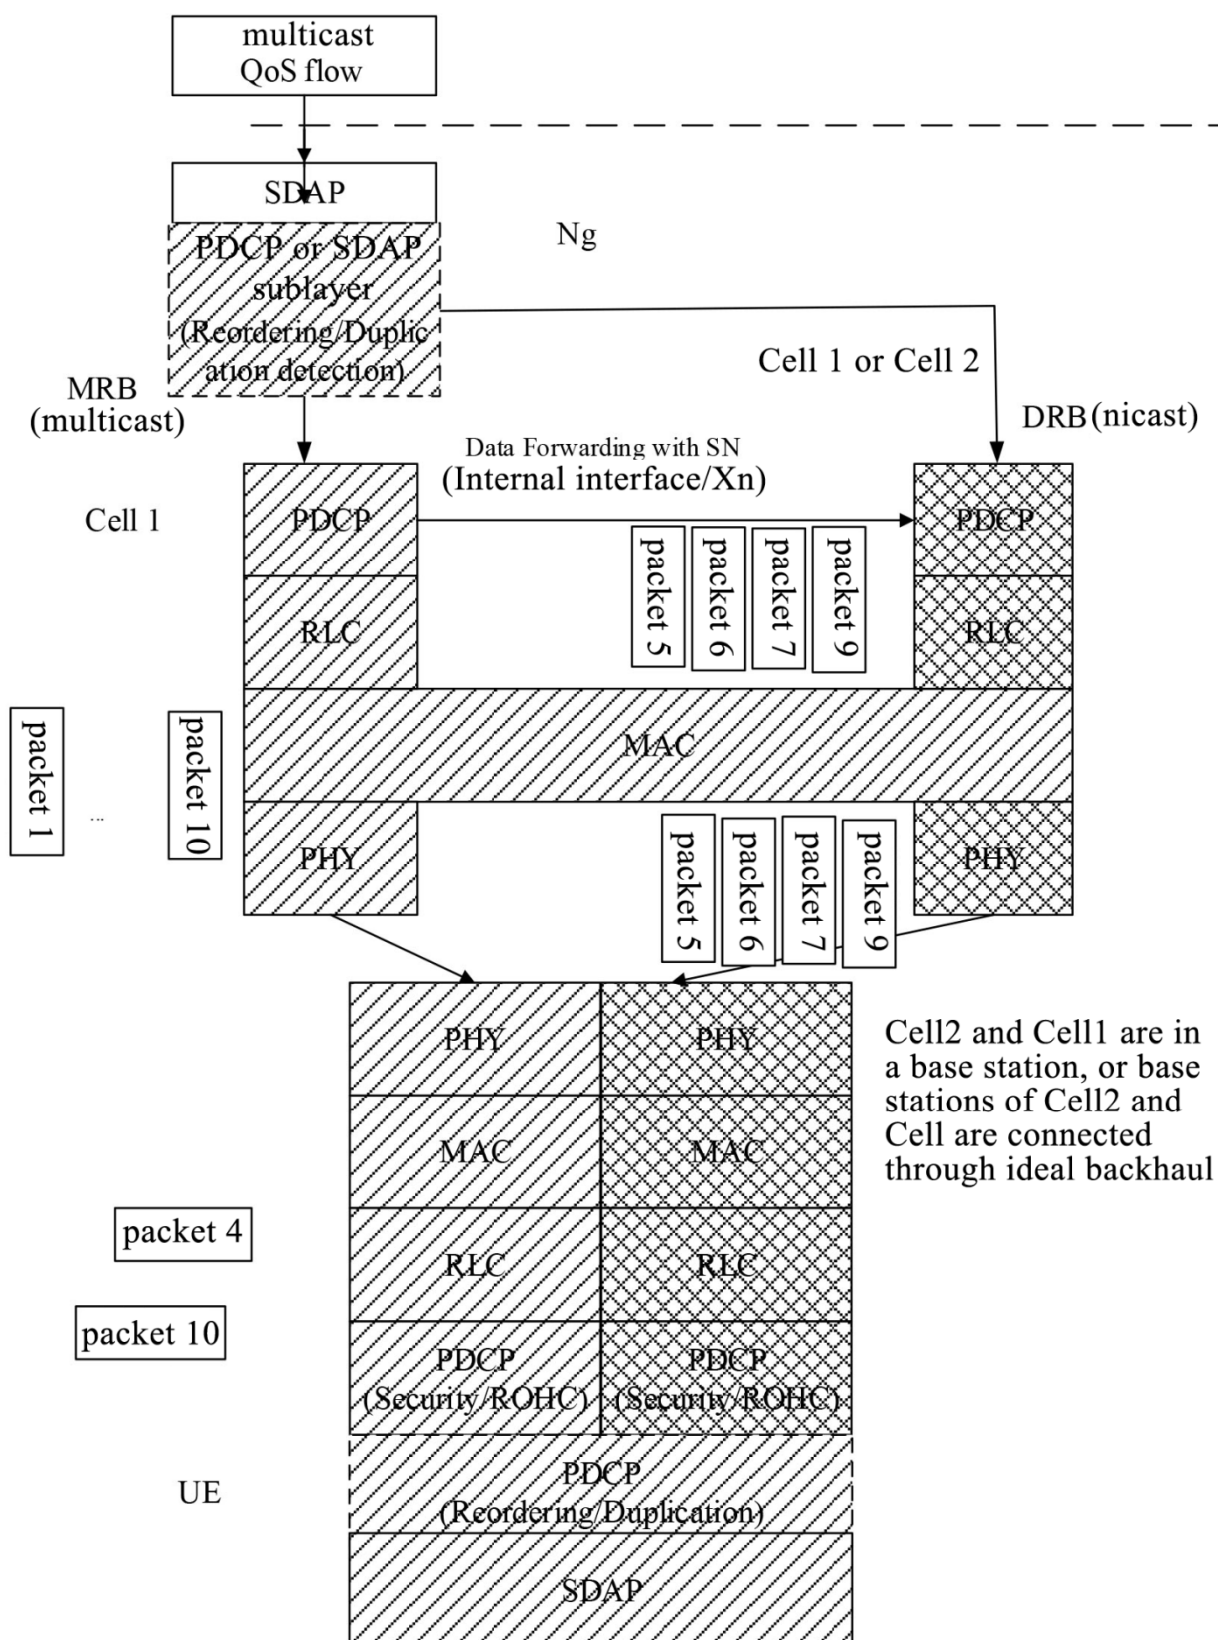


FIG. 3







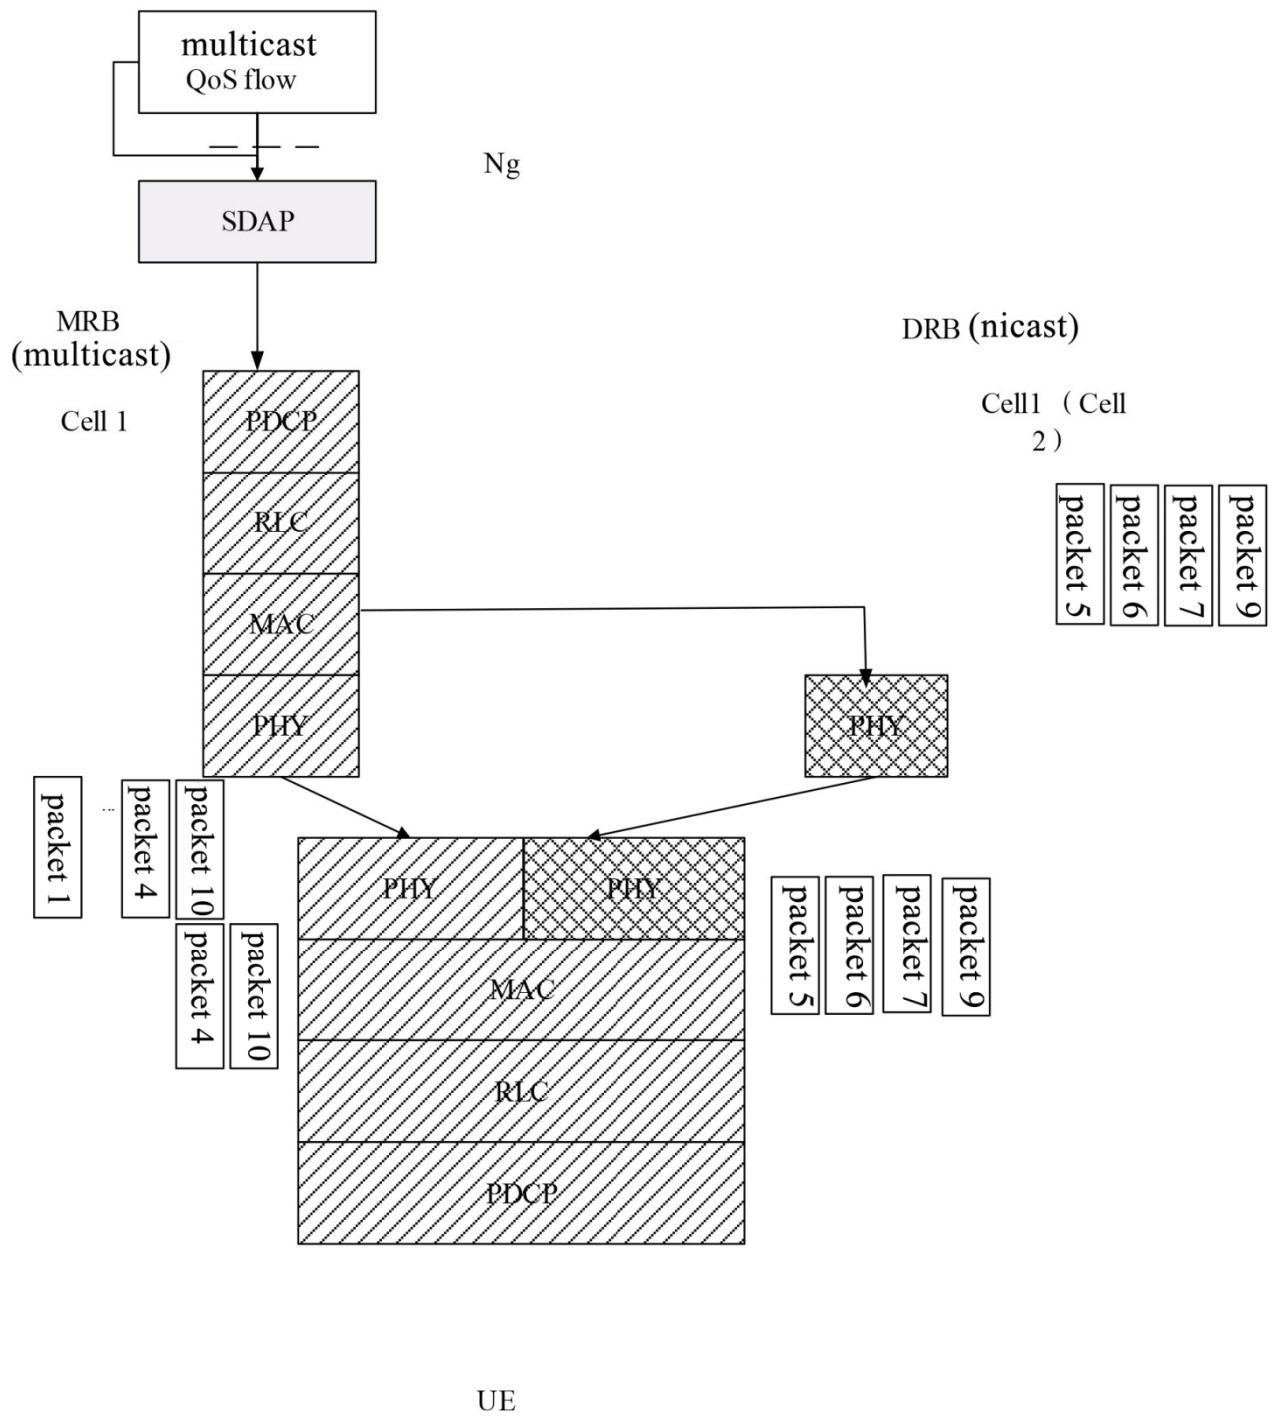


FIG. 7

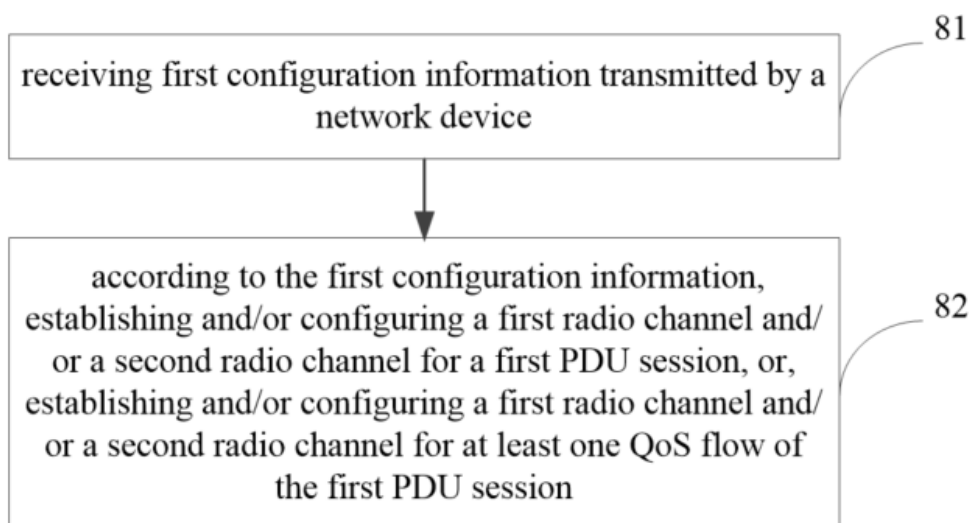


FIG. 8

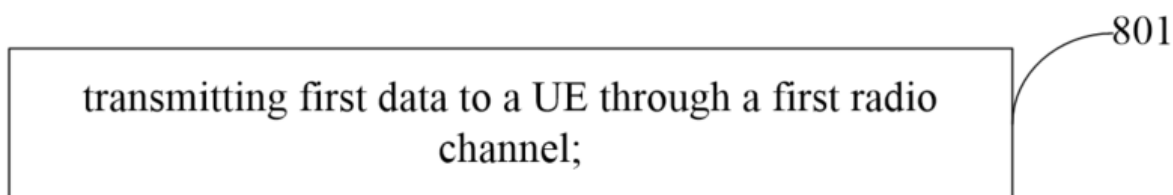


FIG. 8a

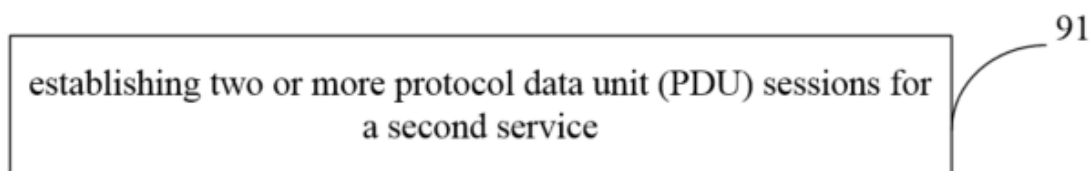


FIG. 9

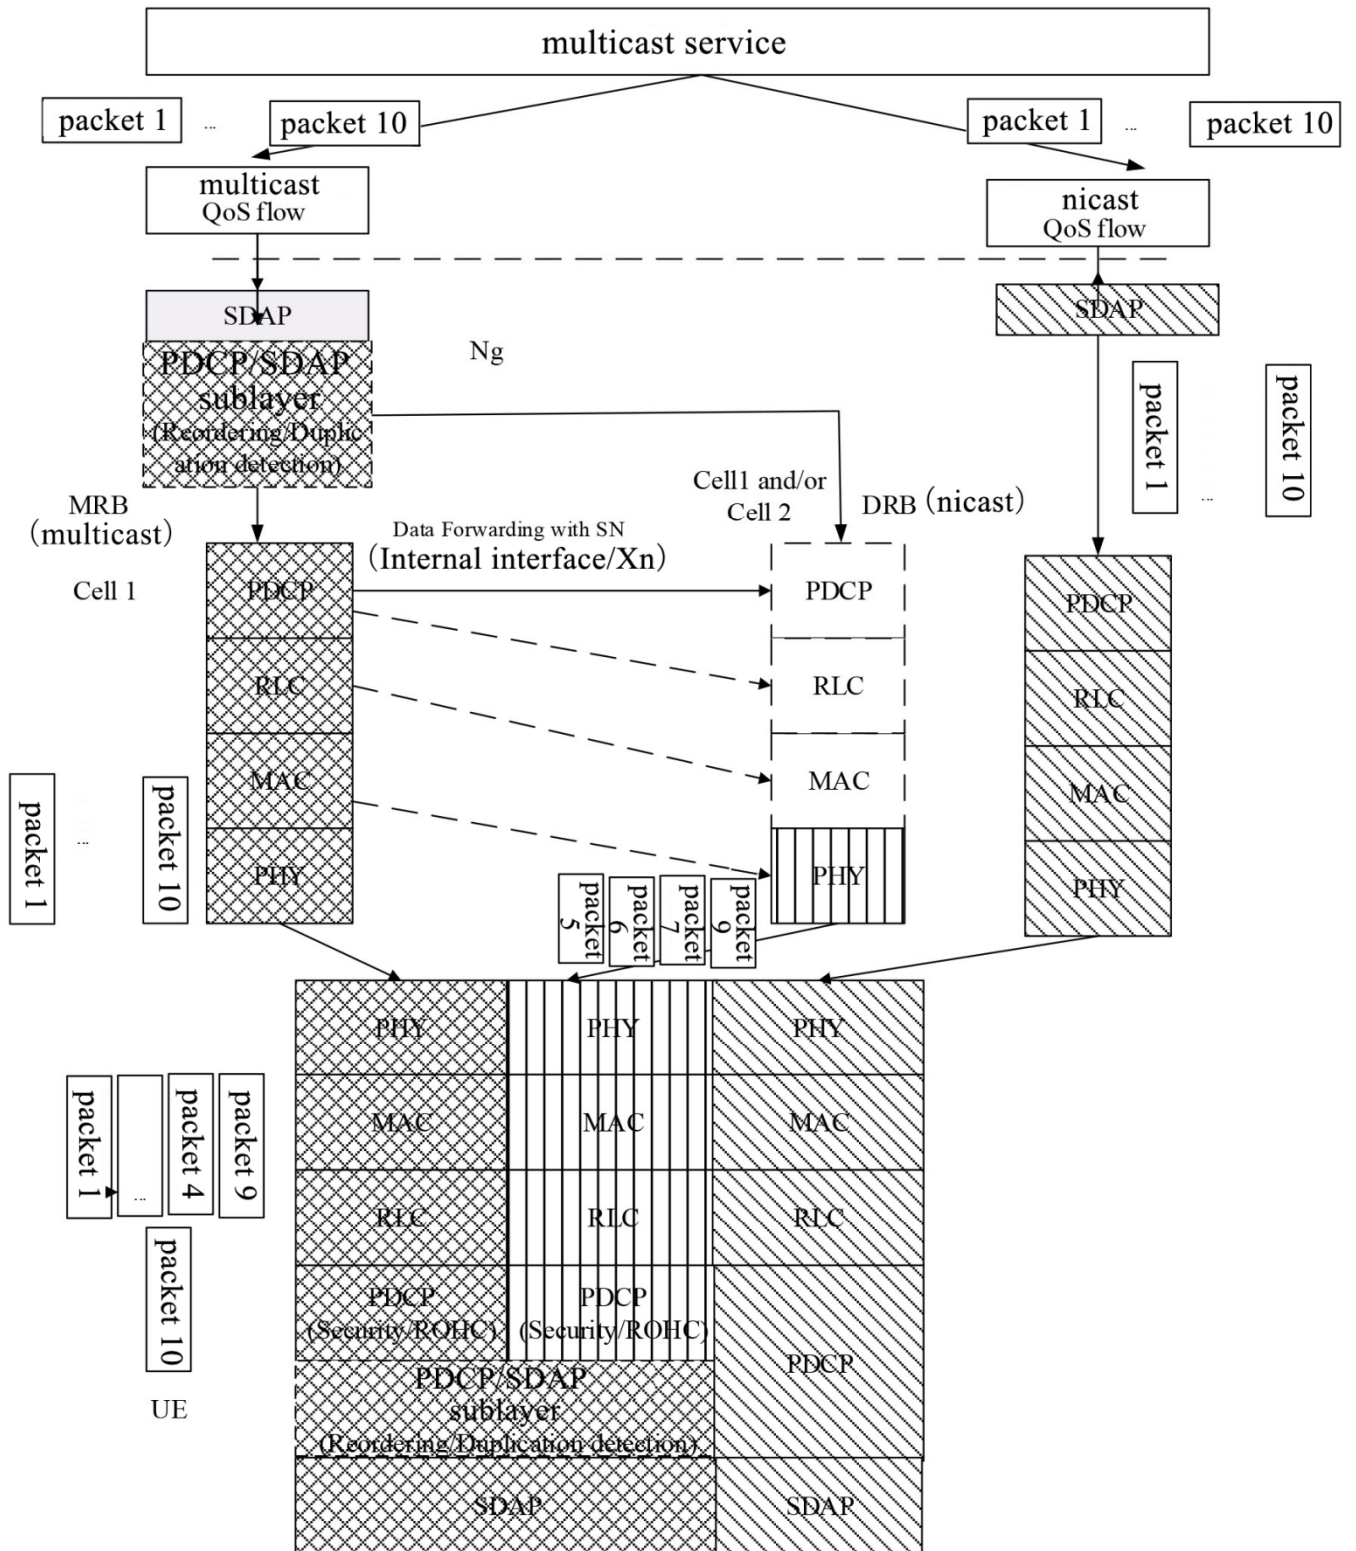


FIG. 10

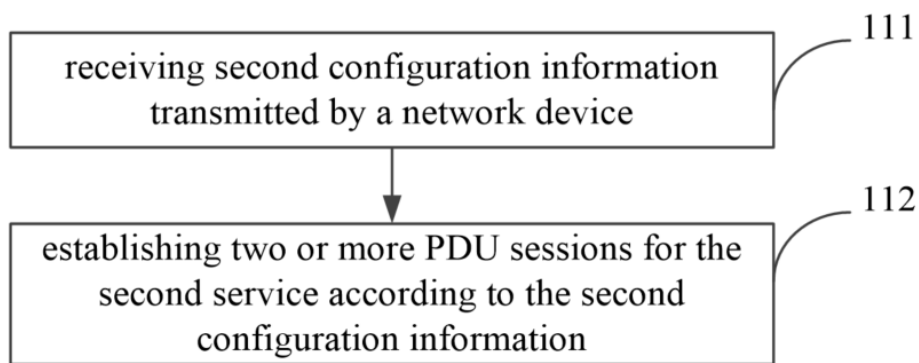


FIG. 11

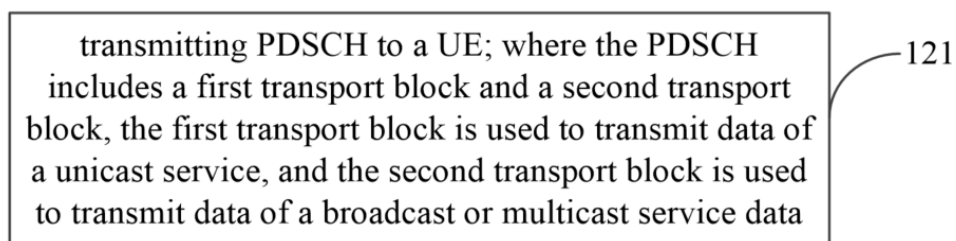


FIG. 12

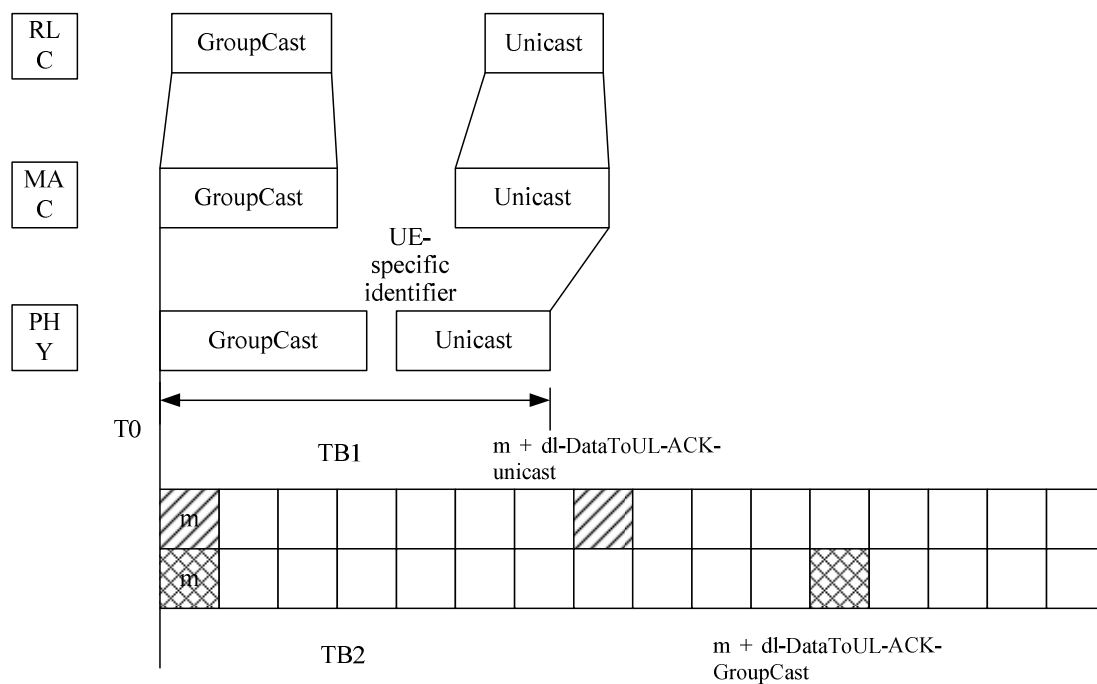


FIG. 13

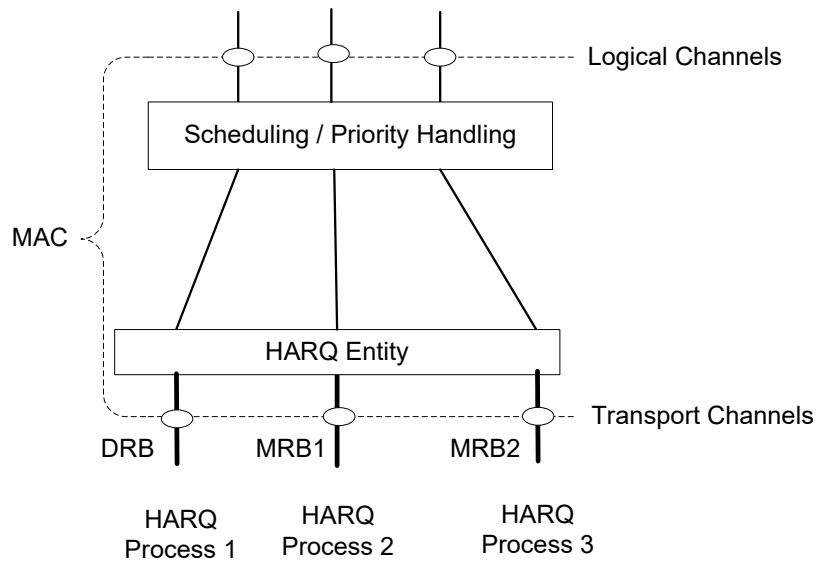


FIG. 14

receiving PDSCH transmitted by a network node, where the PDSCH includes a first transport block and a second transport block, the first transport block is used to transmit data of a unicast service, and the second transport block is used to transmit data of a broadcast or multicast service

151

FIG. 15

transmitting data of a unicast service to a UE through a first BWP, and transmitting data of a broadcast or multicast service to the UE through a second BWP.

161

FIG. 16

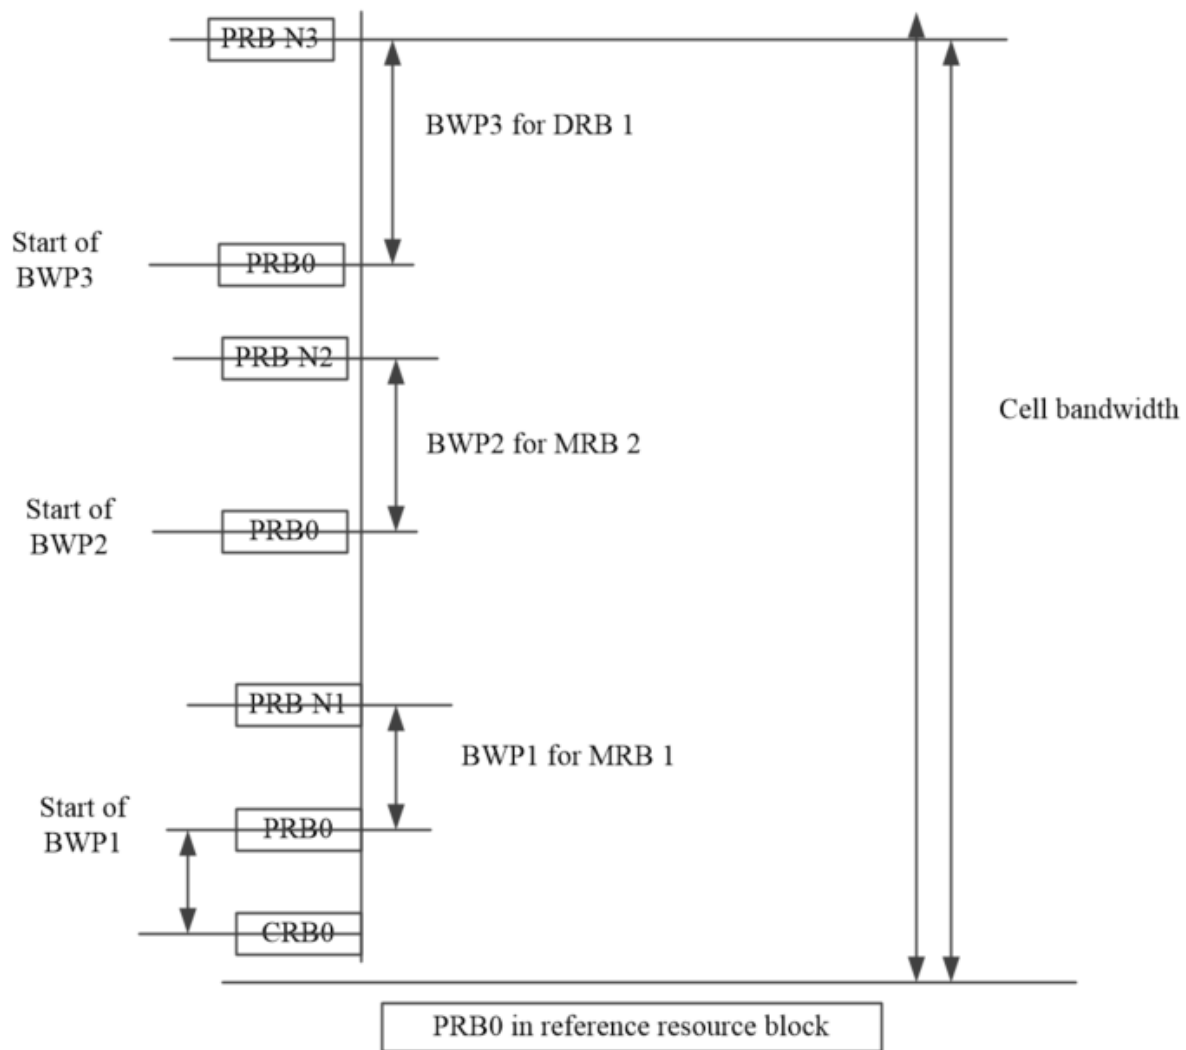


FIG. 17

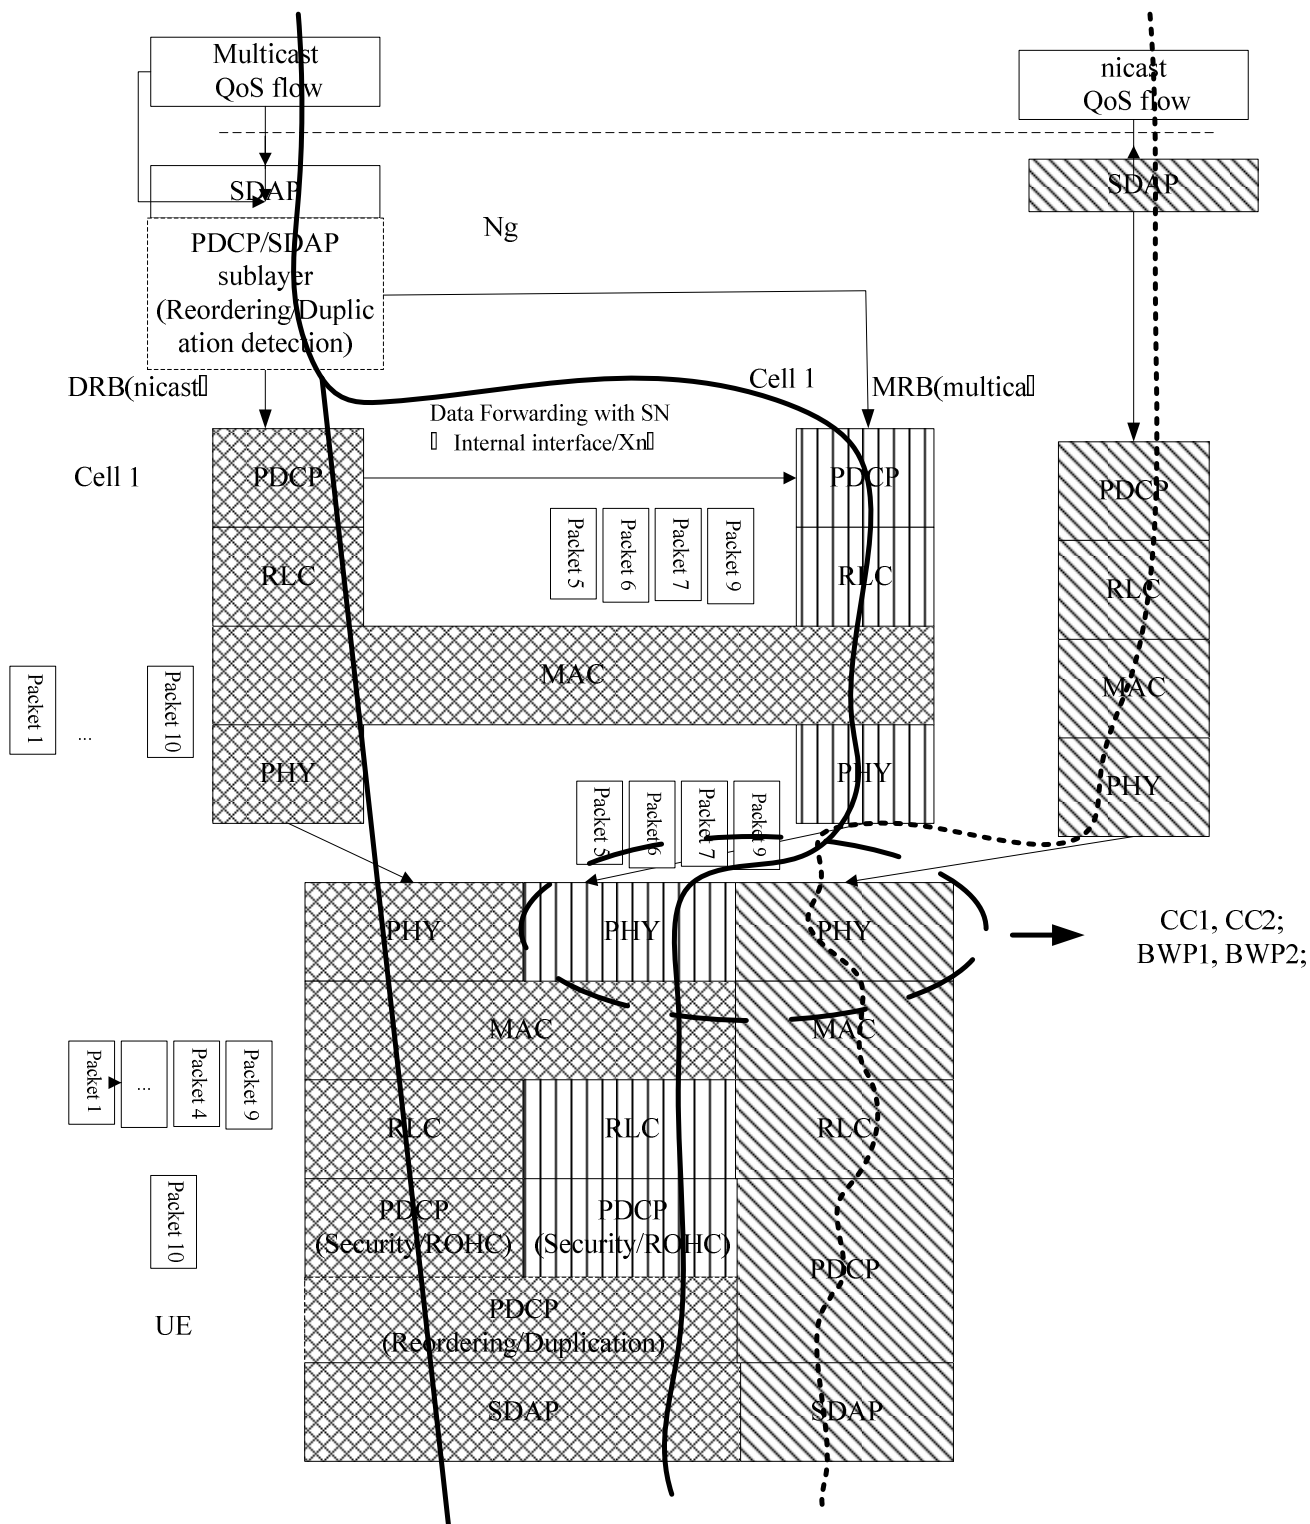


FIG. 18

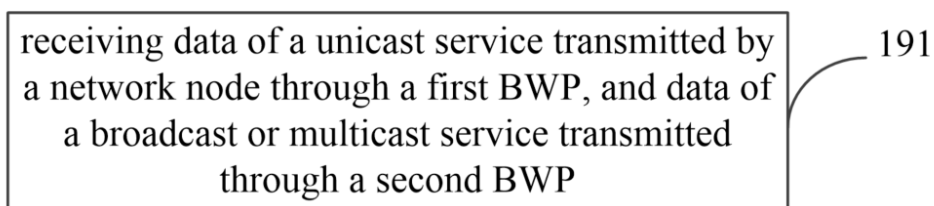


FIG. 19

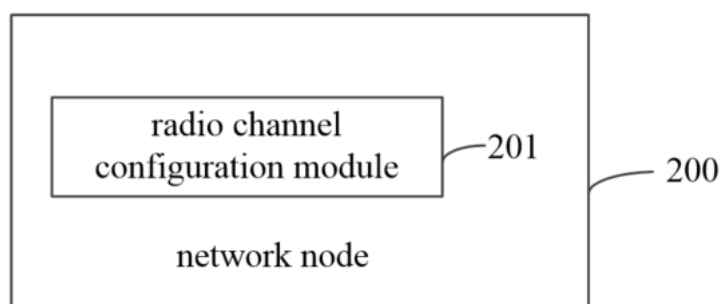


FIG. 20

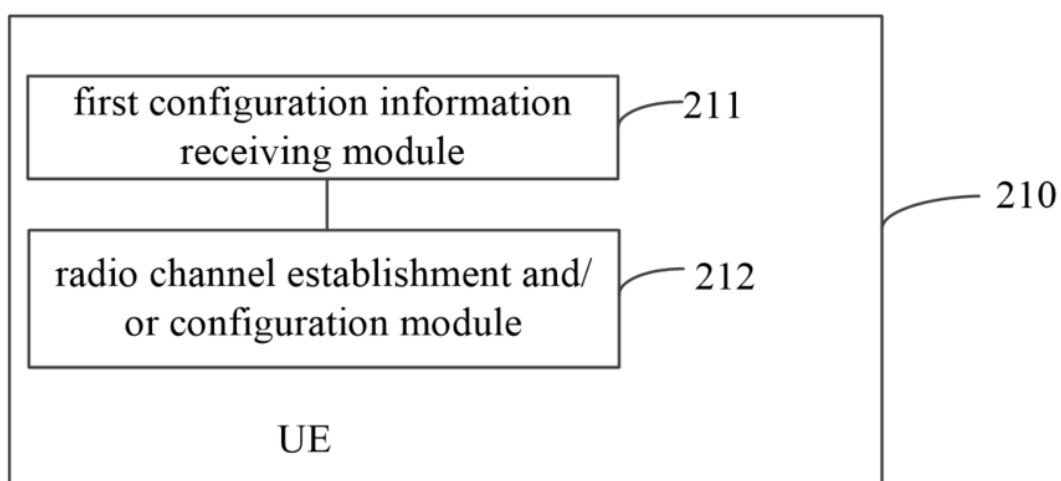


FIG. 21

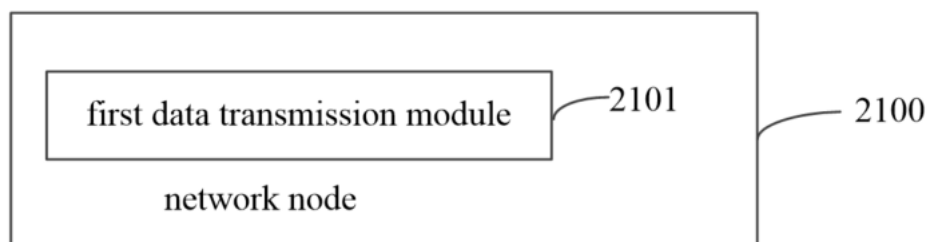


FIG. 21a

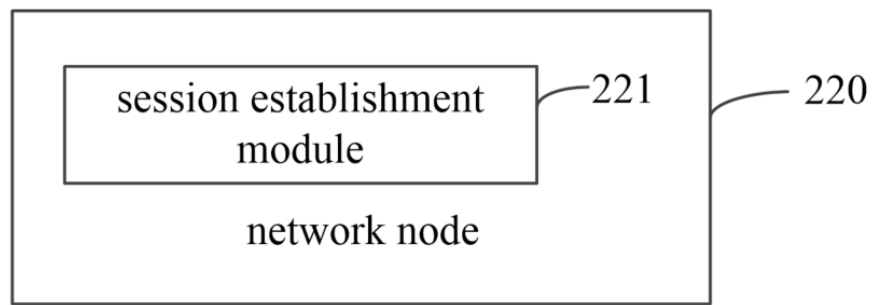


FIG. 22

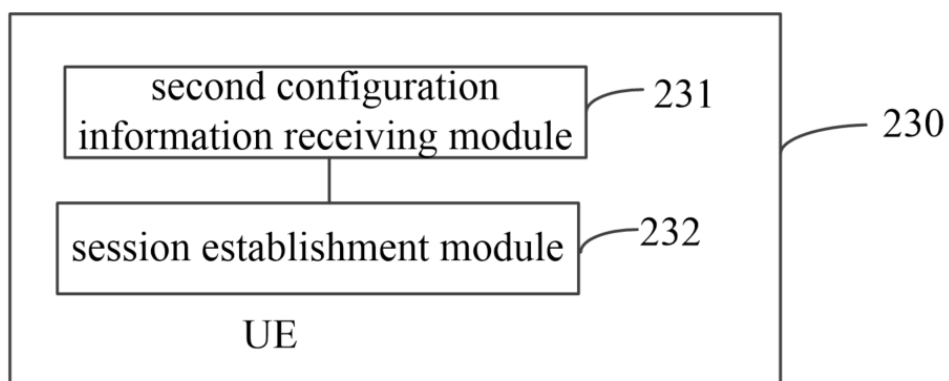


FIG. 23

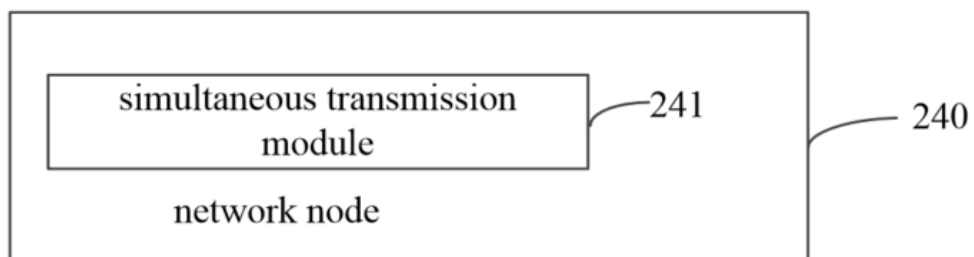


FIG. 24

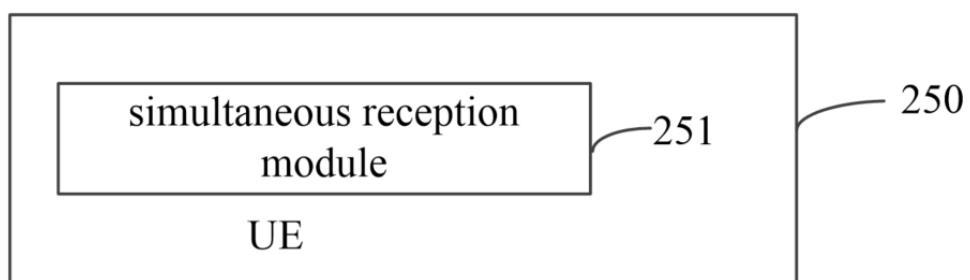


FIG. 25

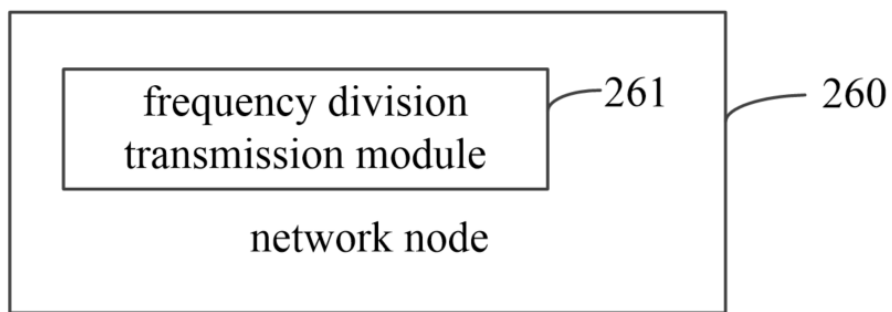


FIG. 26

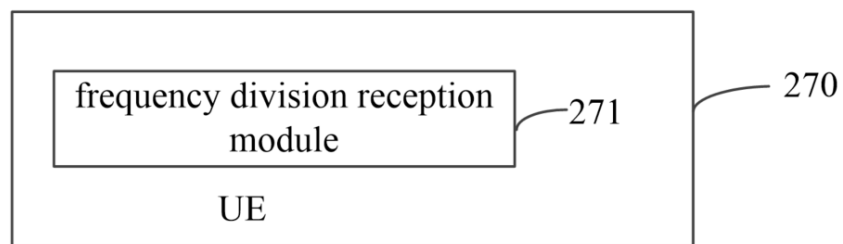


FIG. 27

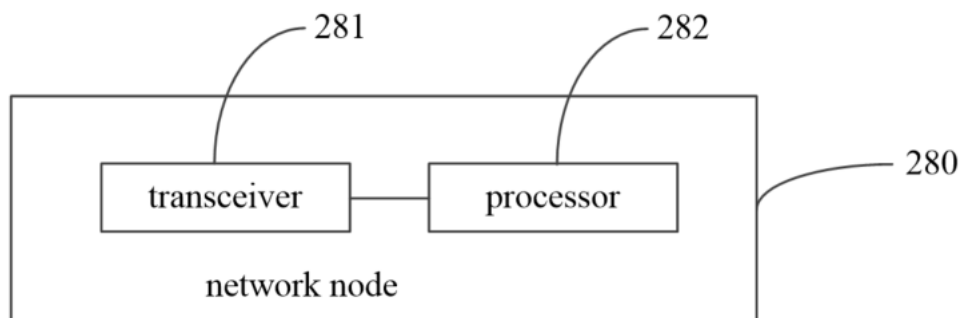


FIG. 28

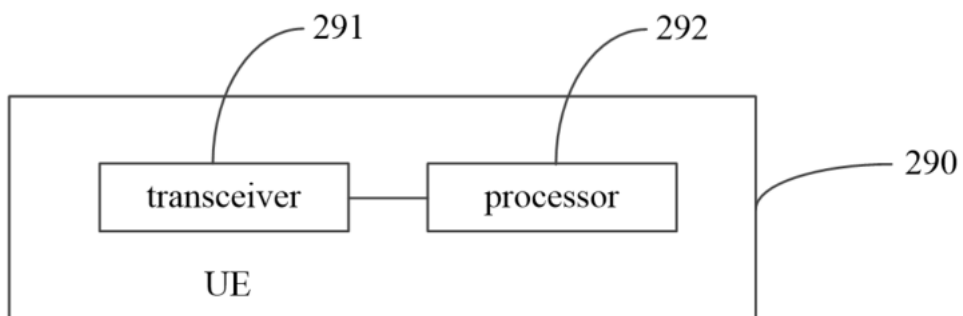


FIG. 29

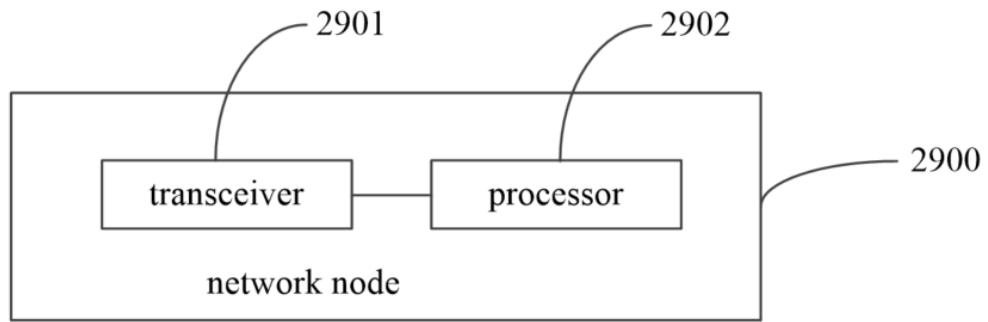


FIG. 29a

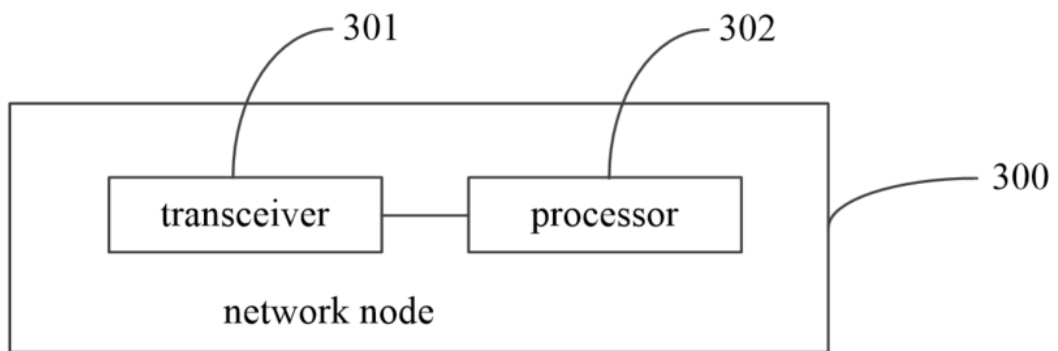


FIG. 30

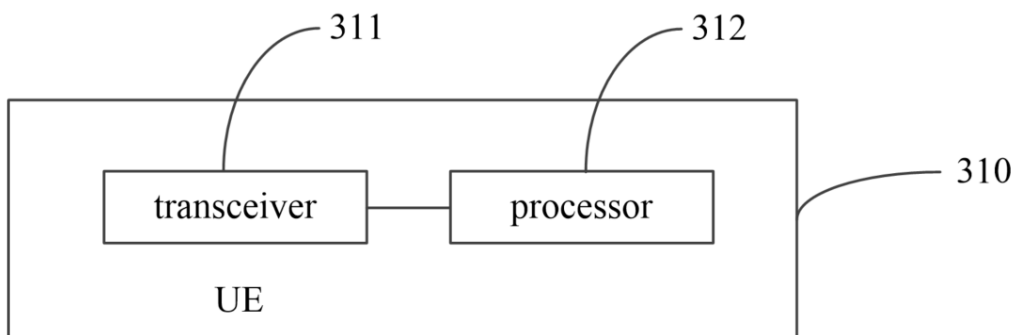


FIG. 31

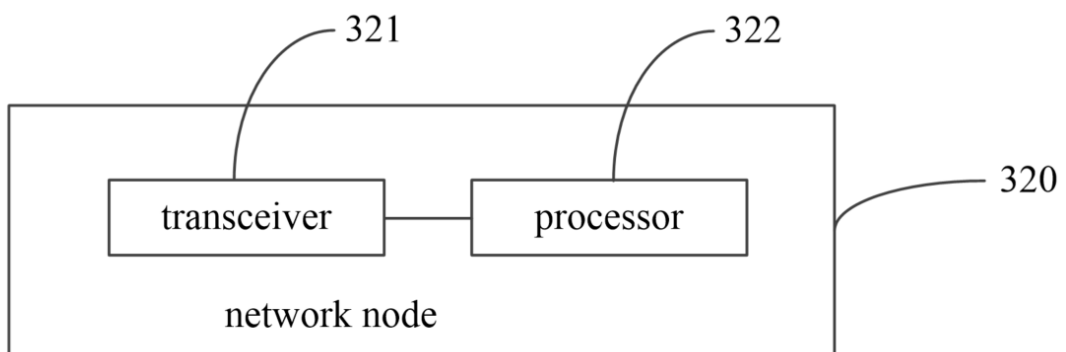


FIG. 32

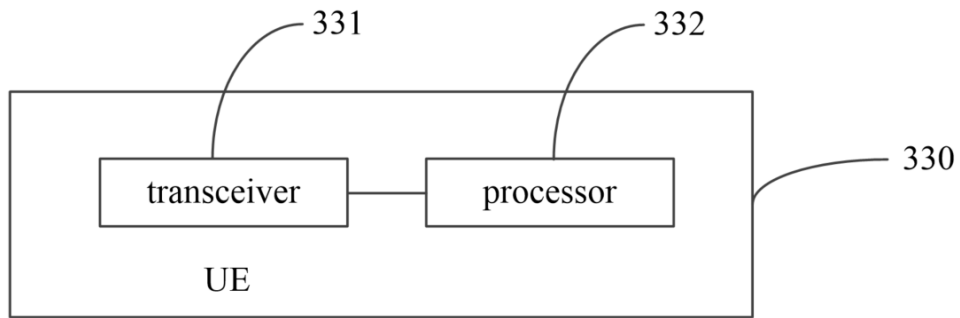


FIG. 33

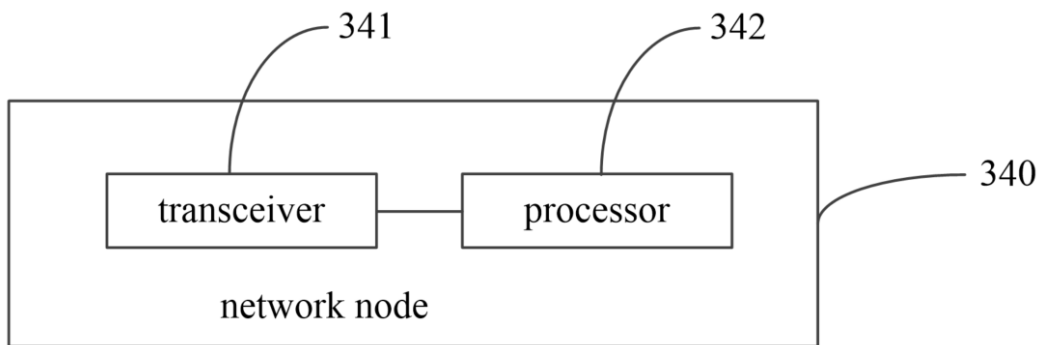


FIG. 34

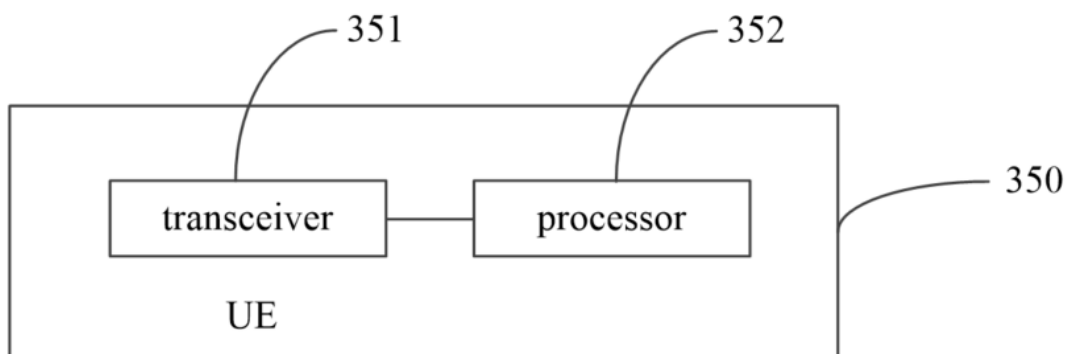


FIG. 35

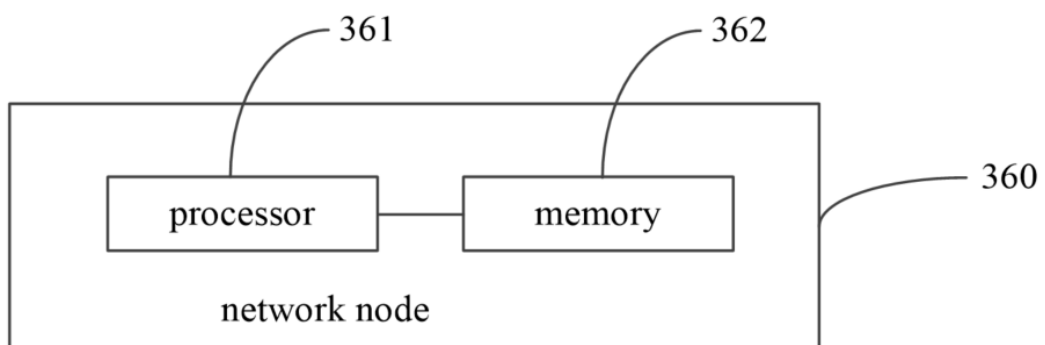


FIG. 36

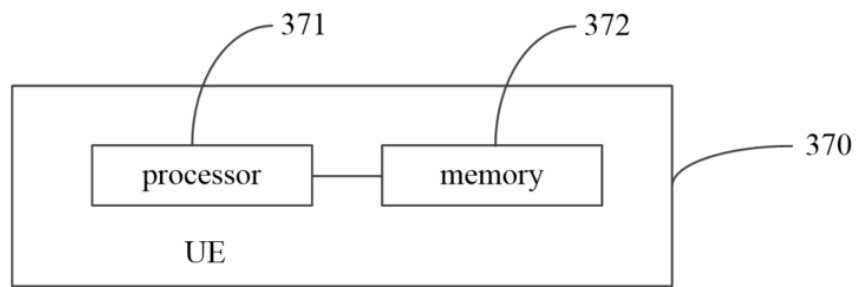


FIG. 37

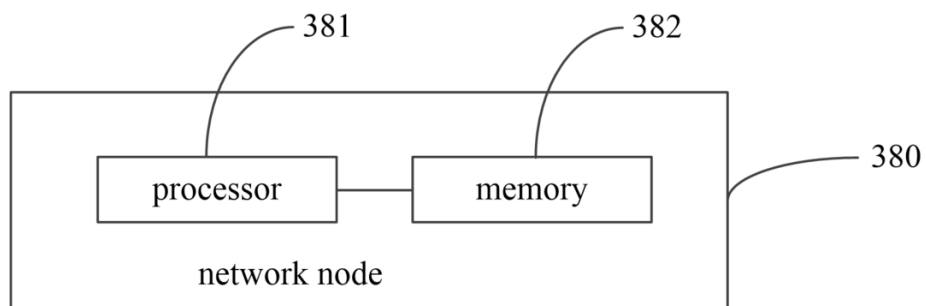


FIG. 38

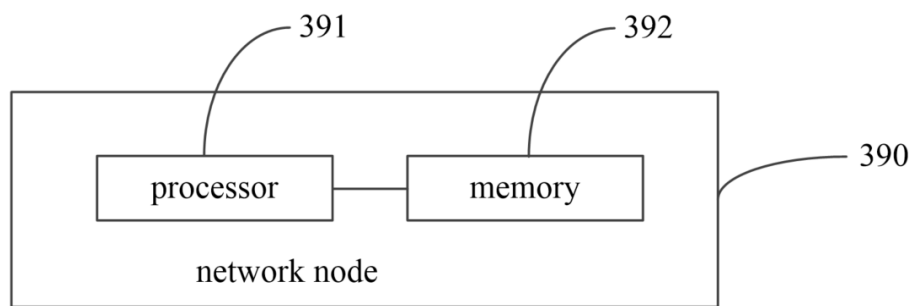


FIG. 39

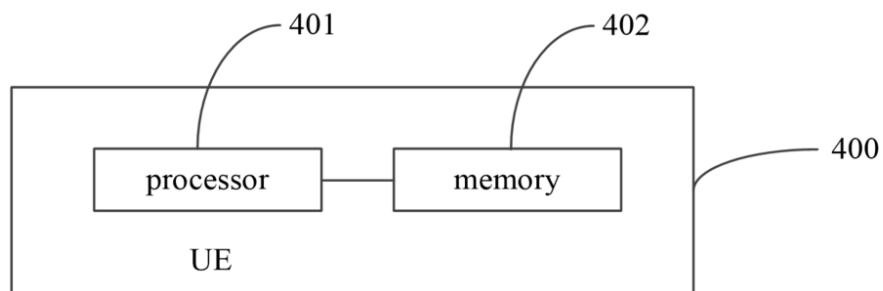


FIG. 40

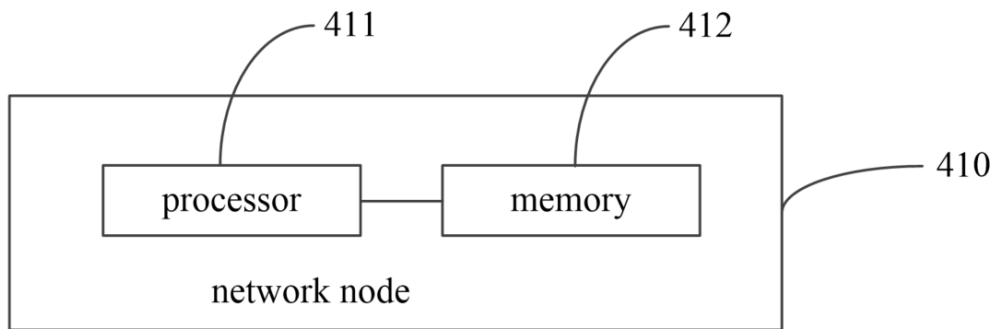


FIG. 41

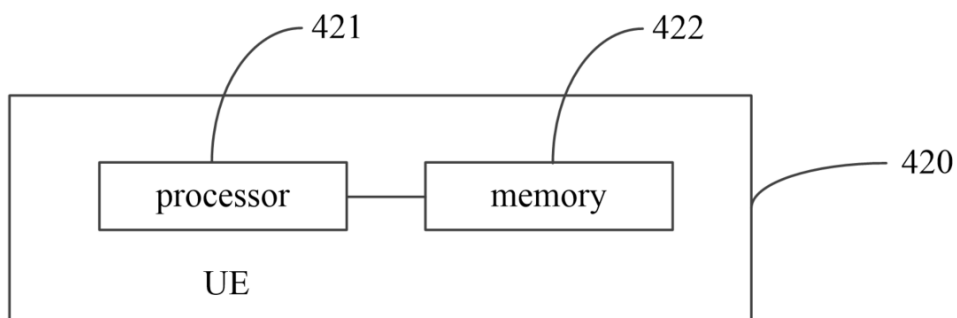


FIG. 42

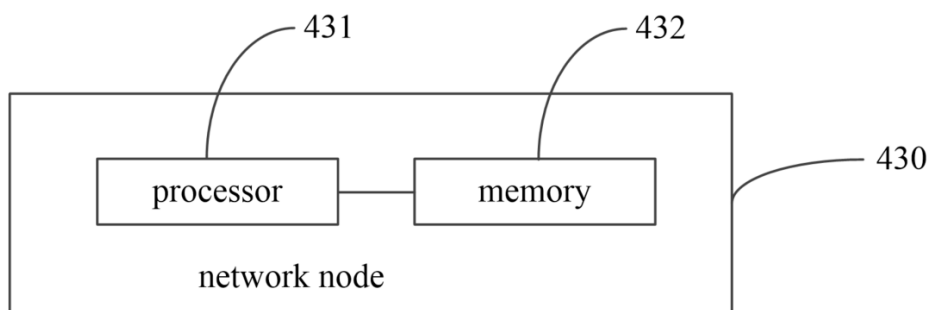


FIG. 43

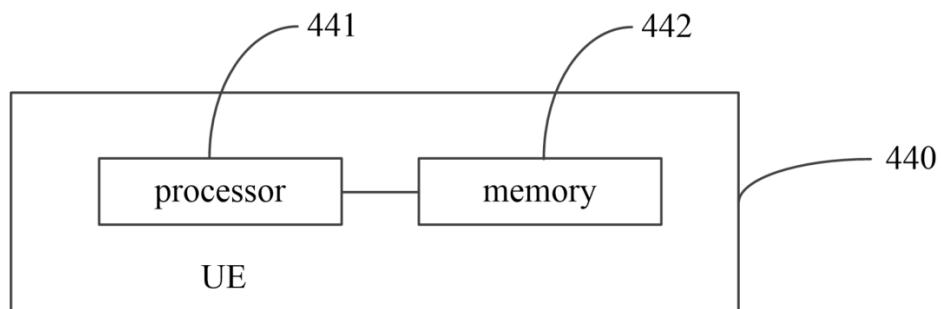


FIG. 44