



(51) International Patent Classification:

G06F 21/00 (2013.01) H04W 12/04 (2009.01)
H04L 9/08 (2006.01) H04W 12/06 (2009.01)
H04L 9/32 (2006.01)

(21) International Application Number:

PCT/FI2011/050953

(22) International Filing Date:

31 October 2011 (31.10.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOLTMANN, Silke** [DE/FI]; Härkäpurontie 15, FI-01800 Klaukkala (FI). **LAITINEN, Pekka Johannes** [FI/FI]; Pikkumatintie 11 B, FI-00640 Helsinki (FI).

(74) Agent: **ESPATENT OY**; Kaivokatu 10 D, FI-00100 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SECURITY MECHANISM FOR EXTERNAL CODE

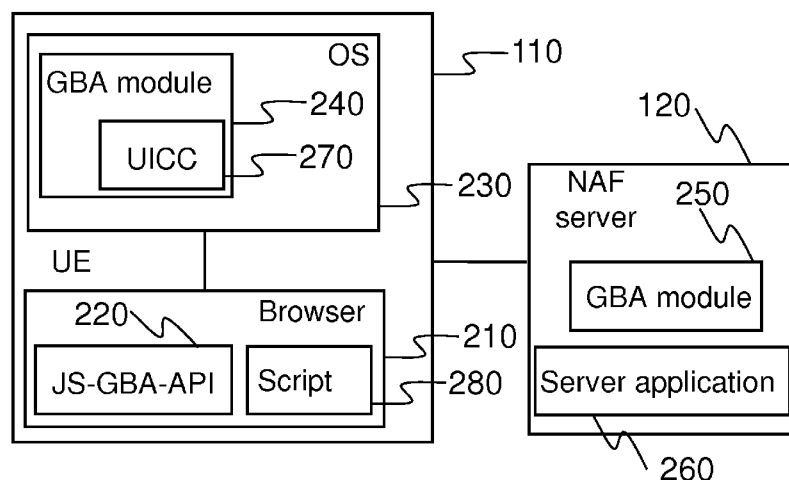


Fig. 2

(57) Abstract: A method for providing a security mechanism for an external code, wherein the method includes receiving the external code comprising a request for a server specific bootstrapping key (Ks_NAF). The method further comprises determining a server identifier (NAF-Id) and a security token. Furthermore, the method comprises generating the server specific bootstrapping key (Ks_NAF) based on the server identifier (NAF-Id), and generating an external code specific bootstrapping key (Ks_js_NAF) using the server specific bootstrapping key (Ks_NAF) and the security token. The method also comprises using the external code specific bootstrapping key (Ks_js_NAF) for the security mechanism of the external code.