

TITLE

POLAR GROUP-CONTAINING OLEFIN COPOLYMER, PROCESS FOR
PREPARING THE SAME, THERMOPLASTIC RESIN COMPOSITION
CONTAINING THE COPOLYMER, AND USES THEREOF

5

FIELD OF THE INVENTION

The present invention relates to a polar group-
containing olefin copolymer, a process for preparing
the copolymer, a thermoplastic resin composition
10 containing the copolymer and uses thereof. More
particularly, the invention relates to a polar group-
containing olefin copolymer having excellent adhesion
properties to metals or polar resins and excellent
flexibility, a process for preparing the copolymer, a
15 thermoplastic resin composition containing the
copolymer and uses thereof.

BACKGROUND OF THE INVENTION

Polyolefins generally have advantages such as
20 excellent moldability, heat resistance, mechanical
properties, hygienic qualities, water vapor permeation
resistance and appearance of molded articles thereof,
and hence they are broadly used for extrusion molded
articles, blow molded articles and injection molded

articles.

The polyolefins, however, contain no polar group in the molecule, so that they have low compatibility with polar resins such as nylon and EVOH and low
5 adhesion properties to polar resins and metals. Therefore, it is difficult to use the polyolefins by blending or laminating them with these materials. In addition, molded products of the polyolefins have problems of poor surface hydrophilic properties and
10 poor antistatic properties.

To solve such problems, there has been heretofore widely used a method of grafting polar group-containing monomers on the polyolefins through radical
polymerization to enhance affinity for the polar
15 materials.

Engineering plastics such as nylon have excellent heat resistance and strength, and hence they are used for electronic/electric parts. The engineering plastics such as nylon generally have low impact
20 resistance, so that they are sometimes blended with olefin copolymers to improve the impact resistance.

The polyolefins, however, contain no polar group in the molecule and show low compatibility with polar resins, and therefore a method of grafting polar

monomers on the polyolefins to improve compatibility with the polar resins has been heretofore widely used.

In this method, however, intermolecular crosslinking of polyolefins and breaking of molecular chains take place with the graft reaction, and hence viscosity matching of the graft polymer and the polar resin is difficult, and satisfactory compatibility is not obtained in some cases. Further, a gel component produced by intermolecular crosslinking or a foreign matter (foreign matter attached to a lip of a die) produced by breaking of molecular chains may cause bad appearance of the molded products.

In Japanese Patent Laid-Open Publications No. 259012/1989, No. 259012/1989, No. 51510/1990, No. 51511/1990 and No. 177403/1991, a process comprising copolymerizing an α -olefin and a polar group-containing monomer using a Ti catalyst or a V catalyst is described. According to this process, intermolecular crosslinking and breaking of molecular chains hardly take place, but in the use of these polymerization catalysts, the resulting copolymer has an ununiform molecular structure such as wide molecular weight distribution or high inversion content. On this account, orientation of the polar groups toward the

interface between the copolymer and the polar material may be unsatisfactory, and adhesion properties to the polar materials and compatibility therewith may be insufficient. In the use as a composition, effects in
5 adhesion properties and compatibility are not exhibited unless a graft copolymer is added in a large amount.

In order to enhance surface hydrophilic properties and antistatic properties, a method of adding a small amount of a low-molecular weight surface
10 active agent to the polyolefin and molding the mixture has been used. In this method, however, the added surface active agent bleeds out on the surface, and after molding, the film surface sometimes has a problem of whitening. The surface active agent having bled out
15 on the surface runs off together with water droplets sticking thereto, so that a problem that effects by the surface active agent do not last long may take place.

The present inventors have studied in the light of the above problems. As a result, they have found
20 that a copolymer having a specific molecular structure and a composition containing the copolymer are excellent in compatibility with polar resins and adhesion properties to polar resins and metals, and they have also found that the copolymer and the

composition have excellent surface hydrophilic properties and antistatic properties. Moreover, the present inventors have found the copolymer and the composition can be favorably applied to various uses.

- 5 As a process for preparing an olefin polymer such as an ethylene homopolymer, an ethylene/ α -olefin copolymer, a propylene homopolymer or a propylene/ α -olefin copolymer, a process comprising polymerizing an olefin in the presence of a titanium catalyst
- 10 comprising a solid titanium catalyst component containing magnesium, halogen and an electron donor, and an organoaluminum compound, or a vanadium catalyst comprising a vanadium compound and an organoaluminum compound has been heretofore known. In the
- 15 copolymerization of a polar monomer using such catalyst, there reside problems that the molecular weight distribution or the composition distribution is wide and the polymerization activity is low. As disclosed in Japanese Patent Laid-Open Publications No.
- 20 259012/1989, No. 51510/1990, No. 51511/1990 and No. 177403/1991, when an olefin and a polar group-containing monomer are copolymerized using a Ziegler catalyst to prepare, for example, a polyolefin containing a polar group, polymerization at low

temperatures is only carried out, so that this process is known to have a problem of low activity. It is generally known that an olefin is polymerized in the presence of a metallocene catalyst comprising a
5 transition metal compound such as zirconocene and an organoaluminum oxy-compound (aluminoxane). It is also known that if the metallocene catalyst is used, an olefin polymer having a high molecular weight is obtained with high activity and the resulting olefin
10 polymer has narrow molecular weight distribution and narrow composition distribution.

As a process for preparing a polyolefin containing a polar group, a process using a metallocene catalyst is also known. For example, it is publicly
15 known that polymerization of an OH group-containing olefin is conducted using a metallocene compound having a ligand of non-crosslinked cyclopentadienyl group, crosslinked or non-crosslinked bisindenyl group, or ethylene crosslinked unsubstituted indenyl
20 group/fluorenyl group, as described in *Macromolecules*, 28, 5351 (1995), *Macromolecules*, 29, 5255 (1996), and *Polymer Preprints*, Japan, 49(2), 215 (2000).

If is publicly known that polymerization of an olefin having NR_2 (R: alkyl group) as a polar group is

conducted using a metallocene compound having a ligand of non-crosslinked cyclopentadienyl group, crosslinked or non-crosslinked bisindenyl group, or crosslinked unsubstituted indenyl group/cyclopentadienyl group, as
5 described in *Macromolecules*, 31, 2019 (1998) and *Macromolecules*, 32, 14(1999).

A process using an organometallic compound other than the metallocene compound is publicly known, as described in *Science*, 287, 460 (2000), OCOP2000 at Oslo,
10 and *Books of Abstracts* (C.W. Chien). These processes, however, have a disadvantage of extremely low polymerization activity.

On this account, protection of the polar group by a protective group is carried out. A method of
15 protection is described in, for example, *Macromolecules*, 31, 2019 (1998), *J. Am. Chem. Soc.*, 114, 9679 (1992), *Polymer Preprints*, Japan, 49(2), 209 (2000) and *Polymer Preprints*, Japan, 49(2), 209 (2000).

In the above processes, however, the protective
20 group is introduced, and after the reaction, the protective group must be removed, so that the operations are complicated.

Under such circumstances, the present inventors have studied and found that an olefin polymer

containing a polar group can be prepared with high polymerization activity by copolymerizing an olefin and a polar group-containing monomer in the presence of a transition metal catalyst into which a cyclopentadienyl
5 group or other special ligands have been introduced, without using radical polymerization or a Ziegler polymerization catalyst. Based on the finding, the present invention has been accomplished.


A method of selectively introducing the polar
10 group at only one end of the polymer chain or inside of the main chain and at one end of the main chain has been heretofore unknown. Then, the present inventors have found a method of selectively introducing the polar group at only one end of the polymer chain or
15 inside of the main chain and at one end of the main chain, and accomplished the present invention.

OBJECT OF THE INVENTION

It is an object of the present invention to
20 provide a polar group-containing olefin copolymer having excellent adhesion properties to metals or polar resins and excellent compatibility therewith, a process for preparing the copolymer, a thermoplastic resin composition containing the copolymer and uses thereof.

SUMMARY OF THE INVENTION

The first embodiment of the polar group-containing olefin copolymer according to the present invention comprises a constituent unit represented by the following formula (1), a constituent unit represented by the following formula (2) and a constituent unit represented by the following formula (3), has a molecular weight distribution (Mw/Mn) of not more than 3, and has an intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum of said copolymer, of not more than 1.0:

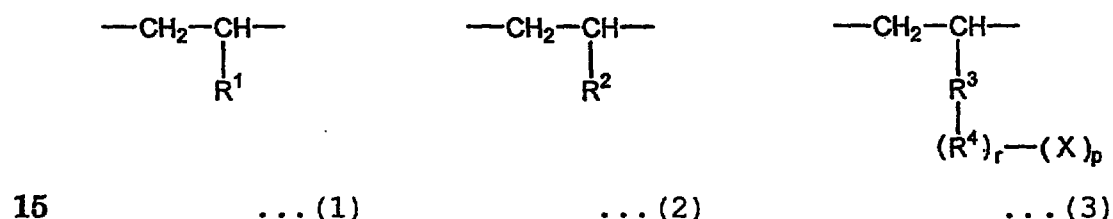

wherein R^1 and R^2 may be the same or different and are each a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group of 1 to 18 carbon atoms; R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; r is 0 or 1; X is a polar group selected from an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic acid group, a carboxylic ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a

20

mercapto group; p is an integer of 1 to 3; and when p is 2 or 3, each X may be the same or different, and in this case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X may be bonded to
5 the same or different atom of R^4 .

In the present invention, R^3 in the constituent unit represented by the formula (3) is preferably a hydrocarbon group of 11 or more carbon atoms.


In the present invention, X in the constituent
10 unit represented by the formula (3) is preferably a polar group selected from a phenolic hydroxyl group, a carboxylic ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group

15 In the present invention, it is preferable that R^1 in the constituent unit represented by the formula (1) and R^2 in the constituent unit represented by the formula (2) are each a hydrocarbon group of 2 or more carbon atoms, preferably 2 to 18 carbon atoms, and the
20 crystallinity of said copolymer, as determined by X-ray diffractometry, is not less than 10 %.


In the present invention, it is preferable that R^1 in the constituent unit represented by the formula (1) and R^2 in the constituent unit represented by the

formula (2) are each a hydrocarbon group of 2 or more carbon atoms, preferably 2 to 18 carbon atoms, and the crystallinity of said copolymer, as determined by X-ray diffractometry, is preferably less than 10 %.


- 5 The second embodiment of the polar group-containing olefin copolymer according to the present invention is a branched type copolymer comprising a constituent unit represented by the following formula (1) and a constituent unit represented by the following
- 10 formula (4), and optionally a constituent unit represented by the following formula (5), having a molecular weight distribution (Mw/Mn) of not more than 3, and having an intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum
- 15 of said copolymer, of not more than 1.0:



... (1)



... (4)



... (5)

wherein R^1 is a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group of 1 to 18 carbon

atoms; R^5 is a hydrocarbon group; R^6 is a hetero atom or a group containing a hetero atom; r is 0 or 1; Z is a polymer segment obtained by any one of anionic polymerization, ring-opening polymerization and

5 polycondensation; W is a hydroxyl group or an epoxy group; p is an integer of 1 to 3, q is 0, 1 or 2, and $p+q \leq 3$; when p is 2 or 3, each $-O-Z$ may be the same or different, and in this case, if r is 0, $-O-Z$ may be bonded to the same or different atom of R^5 , and if r is

10 1, $-O-Z$ may be bonded to the same or different atom of R^6 ; when q is 2, each W may be the same or different, and in this case, if r is 0, W may be bonded to the same or different atom of R^5 , and if r is 1, W may be bonded to the same or different atom of R^6 ; in case of

15 $p \geq 1$ and $q \geq 1$, if r is 0, W and $-O-Z$ may be bonded to the same or different atom of R^5 , and if r is 1, W and $-O-Z$ may be bonded to the same or different atom of R^6 ; m is 0 or 1; n is an integer of 1 to 3; and when n is 2 or 3, each W may be the same or different, and in this case,


20 if m is 0, W may be bonded to the same or different atom of R^6 , and if m is 1, W may be bonded to the same or different atom of R^7 .

In the present invention, it is preferable that, in the formula (4), r is 0 and Z is a polymer segment


obtained by anionic polymerization.

In the present invention, it is preferable that, in the formula (4), Z is a polymer segment obtained by ring-opening polymerization or polycondensation.


- 5 The third embodiment of the polar group-containing olefin copolymer according to the present invention comprises a constituent unit represented by the following formula (1) and a constituent unit represented by the following formula (6), and
- 10 optionally a constituent unit represented by the following formula (3), has a molecular weight distribution (Mw/Mn) of not more than 3, and has an intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum of said copolymer,
- 15 of not more than 1.0:



... (1)



... (3)

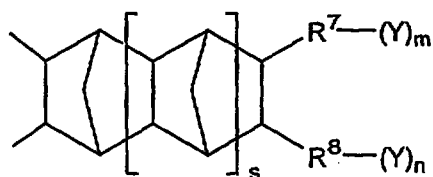

... (6)

wherein R^1 is a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group of 1 to 18 carbon atoms; R^3 is a hydrocarbon group; R^4 is a hetero atom

or a group containing a hetero atom; R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; R^8 is a hydrogen atom, a direct bond or an aliphatic hydrocarbon group of 1 or more carbon
 5 atoms; Y is a polar group containing O and/or N; m and n are each an integer of 0 to 2, and $m+n$ is not 0; s is 0 or 1; r is 0 or 1; X is a polar group selected from an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic acid group, a carboxylic ester group, an
 10 acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group; p is an integer of 1 to 3; when p is 2 or 3, each X may be the same or different, and in this case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X
 15 may be bonded to the same or different atom of R^4 .


The first embodiment of the process for preparing a polar group containing olefin copolymer according to the present invention comprises copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon
 20 atoms and at least one polar group-containing monomer selected from a polar group-containing monomer represented by the following formula (7) and a polar group-containing monomer represented by the following formula (8) in the presence of a catalyst comprising:

(A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and


(B) at least one compound selected from:

- 5 (B-1) an organoaluminum oxy-compound,
 (B-2) a compound which reacts with the compound (A) to form an ion pair, and
 (B-3) an organoaluminum compound;

10

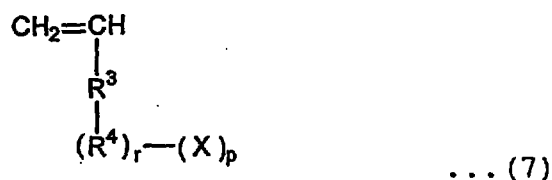

wherein R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; r is 0 or 1; X is
 15 a polar group selected from an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic acid group, a carboxylic ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group; p is an integer of 1 to 3; when p is 2
 20 or 3, each X may be the same or different, and in this case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X may be bonded to the same or different atom of R^4 ;

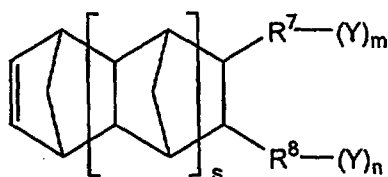


... (8)

- 5 wherein R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; R^8 is a hydrogen atom, a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; Y is a polar group containing O and/or N; m and n are each an integer of 0 to 2, and
- 10 $m+n$ is not 0; and s is 0 or 1.

In the first embodiment of the process for preparing a polar group-containing olefin copolymer according to the present invention, it is preferable that the transition metal compound (A) is represented

15 by any one of the following formulas (11), (12), (13), (14), (15) and (16) and the polar group-containing monomer is a polar group-containing monomer of the formula (7) wherein X is -OH or an amino group;

20

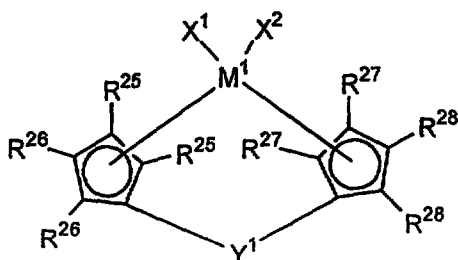

... (11)

wherein M^1 is a transition metal atom of Group 4 of the

periodic table; R^{25} , R^{26} , R^{27} and R^{28} may be the same or different and are each a hydrogen atom, a nitrogen-containing group, a phosphorus-containing group, a hydrocarbon group of 1 to 20 carbon atoms, a

5 halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group or a halogen atom; of the groups indicated by R^{25} , R^{26} , R^{27} and R^{28} , a part of the groups neighboring with each other may be bonded to


10 form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-

15 containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent

20 germanium-containing group, a divalent tin-containing group, $-O-$, $-CO-$, $-S-$, $-SO-$, $-SO_2-$, $-Ge-$, $-Sn-$, $-NR^{21}-$, $-P(R^{21})-$, $-P(O)(R^{21})-$, $-BR^{21}-$ or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group


of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

5



... (12)

wherein M^1 is a transition metal atom selected from
 10 Group 4 of the periodic table; Cp is a cyclopentadienyl group or its derivative that is π -bonded to M^1 ; Z^1 is a ligand containing an oxygen atom, a sulfur atom, a boron atom or an element of Group 14 of the periodic table; Y^1 is a ligand containing an atom selected from
 15 a nitrogen atom, a phosphorus atom, an oxygen atom and a sulfur atom; and each X^1 may be the same or different and is a hydrogen atom, a halogen atom, a hydrocarbon group which has 20 or less carbon atoms and may contain 1 or more double bonds, a silyl group containing 20 or
 20 less silicon atoms, a germyl group containing 20 or less germanium atoms or a boronyl group containing 20 or less boron atoms;

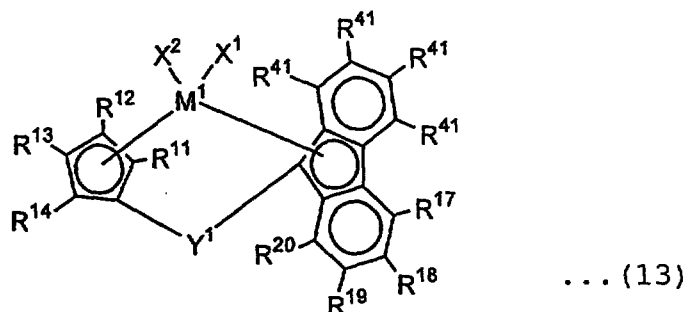

wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{11} to R^{14} , R^{17} to R^{20} , and R^{41} may be the same or different and are each a


10 hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{13} ,

15 R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded (except a case where all of R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} are hydrogen atoms and

20 a case where R^{12} or R^{13} is a tert-butyl group and the residual R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} are hydrogen atoms); X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to

20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, $-O-$, $-CO-$, $-S-$, $-SO-$, $-SO_2-$, $-Ge-$, $-Sn-$, $-NR^{21}-$, $-P(R^{21})-$, $-P(O)(R^{21})-$, $-BR^{21}-$ or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

20

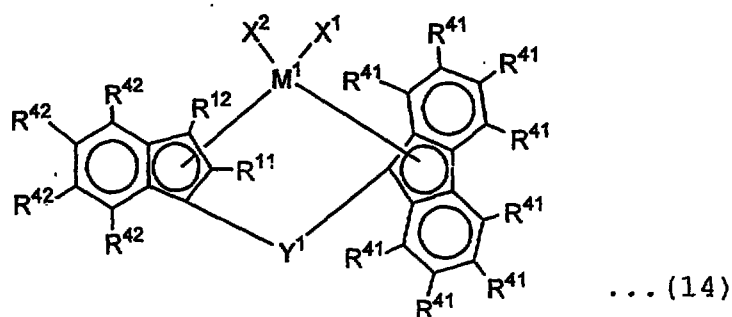


wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{11} , R^{12} , R^{41} and R^{42} may be the same or different and are each a hydrocarbon

group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R^{11} , R^{12} , R^{41} and R^{42} are hydrogen atoms, Y^1 is not ethylene), a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound

residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);


5

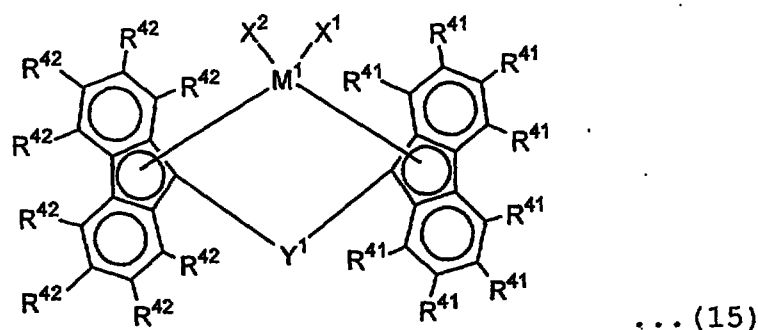

- 10 wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{41} and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a
- 15 sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups
- 20 are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a

halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

15

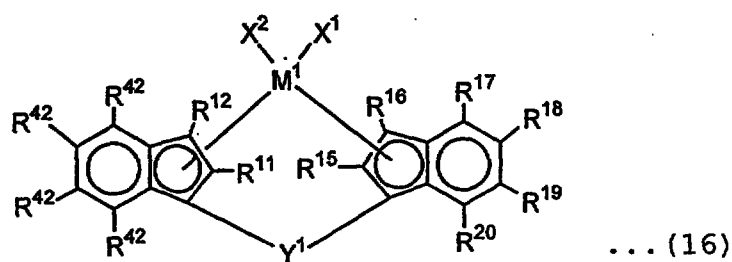

20 wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R¹¹, R¹², R¹⁵ to R²⁰, and R⁴² may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms,

an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R¹¹, R¹², R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴², a part of the groups

5 neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X¹ and X² may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms,

10 an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y¹ is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R¹¹, R¹², R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴² are hydrogen atoms, Y¹ is

15 not ethylene), a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹-

20 or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to

20 carbon atoms are bonded to the nitrogen atom).

In the first embodiment of the process for preparing a polar group-containing olefin copolymer according to the present invention, it is preferable
5 that the transition metal compound (A) is represented by any one of the above formulas (11), (12), (13), (14), (15) and (16) and the polar group-containing monomer is a polar group-containing monomer of the above formula (7) wherein X is $-NR'R''$ (R' and R'' may be the same or
10 different and are each a hydrogen atom or an alkyl group).

The second embodiment of the process for preparing a polar group-containing olefin copolymer according to the present invention comprises
15 copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon atoms and at least one polar group-containing monomer selected from a polar group-containing monomer represented by the following formula (7), a polar group-containing monomer represented by
20 the following formula (8) and a macromonomer represented by the following formula (9) in the presence of a catalyst comprising:

(A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to


Group 10 of the periodic table, and

(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the
5 compound (A) to form an ion pair, and

(B-3) an organoaluminum compound;

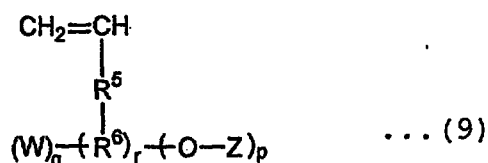

10

wherein R^5 is a hydrocarbon group; R^6 is a hetero atom or a group containing a hetero atom; r is 0 or 1; Z is a polymer segment obtained by any one of anionic polymerization, ring-opening polymerization and
15 polycondensation; W is a hydroxyl group or an epoxy group; p is an integer of 1 to 3, q is 0, 1 or 2, and $p+q \leq 3$; when p is 2 or 3, each $-\text{O}-Z$ may be the same or different, and in this case, if r is 0, $-\text{O}-Z$ may be bonded to the same or different atom of R^5 , and if r is
20 1, $-\text{O}-Z$ may be bonded to the same or different atom of R^6 ; when q is 2, each W may be the same or different, and in this case, if r is 0, W may be bonded to the same or different atom of R^5 , and if r is 1, W may be bonded to the same or different atom of R^6 ; and in case

of $p \geq 1$ and $q \geq 1$, if r is 0, W and -O-Z may be each bonded to the same or different atom of R^5 , and if r is 1, W and -O-Z may be each bonded to the same or different atom of R^6 .

5 The third embodiment of the process for preparing a branched type polar group-containing olefin copolymer according to the present invention comprises copolymerizing at least one olefin selected from α -olefins of 2 to 20 carbon atoms, a polar group-
10 containing monomer represented by the following formula (10), and optionally, a polar group-containing monomer represented by the above formula (8) in the presence of a catalyst comprising:

(A) a compound of a transition metal selected
15 from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and


(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the
20 compound (A) to form an ion pair, and

(B-3) an organoaluminum compound,

and then conducting any one of the following steps (i) and (ii);

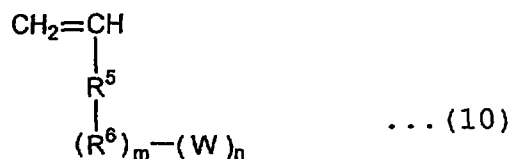

5

wherein R^5 is a hydrocarbon group; R^6 is a hetero atom or a group containing a hetero atom; m is 0 or 1; W is a hydroxyl group or an epoxy group; n is an integer of 1 to 3; and when n is 2 or 3, each W may be the same or different, and in this case, if m is 0, W may be bonded to the same or different atom of R^5 , and if m is 1, W may be bonded to the same or different atom of R^6 ;

(i) from the W portion of the copolymerized polar group-containing monomer, a Z portion is formed by anionic polymerization, ring-opening polymerization or polycondensation;

(ii) the W portion of the copolymerized polar group-containing monomer is allowed to react with a terminal functional group of a polymer obtained by anionic polymerization, ring-opening polymerization and polycondensation.

The thermoplastic resin composition according to the present invention contains the polar group-containing olefin copolymer.

The adhesive resin according to the present invention comprises the polar group-containing olefin copolymer or the thermoplastic resin composition.

5 The compatibilizing agent according to the present invention comprises the polar group-containing olefin copolymer or the thermoplastic resin composition.

The resin modifier according to the present invention comprises the polar group-containing olefin copolymer or the thermoplastic resin composition.

10 The filler dispersant according to the present invention comprises the polar group-containing olefin copolymer or the thermoplastic resin composition.

The dispersant according to the present invention comprises the polar group-containing olefin copolymer
15 or the thermoplastic resin composition.

The film or the sheet according to the invention comprises the polar group-containing olefin copolymer or the thermoplastic resin composition.

20


DETAILED DESCRIPTION OF THE INVENTION

The polar group-containing olefin copolymer, the process for preparing the copolymer, the thermoplastic resin composition containing the copolymer and their uses according to the invention are described in detail

hereinafter.

Polar group-containing olefin copolymer

The first embodiment of the polar group-containing olefin copolymer of the invention comprises
 5 a constituent unit represented by the following formula (1) (also referred to as a "constituent unit (1)" hereinafter), a constituent unit represented by the following formula (2) (also referred to as a "constituent unit (2)" hereinafter) and a constituent
 10 unit represented by the following formula (3) (also referred to as a "constituent unit (3)" hereinafter).

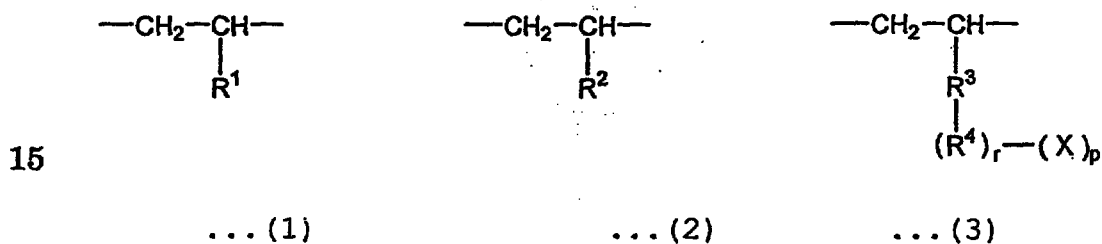

In the above formulas, R^1 and R^2 may be the same or different and are each a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group
 20 of 1 to 18 carbon atoms.

Examples of the straight-chain or branched aliphatic hydrocarbon groups of 1 to 18 carbon atoms include methyl, ethyl, n-propyl, isopropyl, 2-methylpropyl, n-butyl, isobutyl, sec-butyl, tert-butyl,

1,1-dimethylpropyl, 2,2-dimethylpropyl, pentyl, neopentyl, n-hexyl, 1-ethyl-1-methylpropyl, 1,1-diethylpropyl, 2-ethylhexyl, octyl, decyl and dodecyl. Of these, preferable are hydrocarbon groups of 1 to 10
5 carbon atoms, particularly 1 to 6 carbon atoms.

R^3 is a hydrocarbon group, such as a saturated or unsaturated aliphatic hydrocarbon group, an alicyclic hydrocarbon group or an aromatic hydrocarbon group.

The saturated or unsaturated hydrocarbon group is,
10 for example, a straight-chain or branched hydrocarbon group of 1 to 20 carbon atoms, and examples thereof include methylene, ethylene, trimethylene, methylethylene, tetramethylene, methyltrimethylene, pentamethylene, hexamethylene, heptamethylene,
15 octamethylene, nonamethylene, decamethylene, undecamethylene, dodecamethylene, tetradecamethylene, pentadecamethylene, hexadecamethylene, heptadecamethylene, octadecamethylene, nonadecamethylene and eicosamethylene.

20 The alicyclic hydrocarbon group is preferably a group having an alicyclic structure as a part of its structure and having 3 to 20 carbon atoms, and examples thereof include cyclopropylene, cyclopentylene, cyclohexylene and cyclooctylene.

The aromatic hydrocarbon group is preferably a group having an aromatic ring as a part of its structure and having 6 to 20 carbon atoms, and examples thereof include -Ph-, -Ph-CH₂-, -Ph-(CH₂)₂-, -Ph-
 5 (CH₂)₃-, -Ph-(CH₂)₆-, -Ph-(CH₂)₁₀-, -Ph-(CH₂)₁₁-, -Ph-(CH₂)₁₂- and -Ph-(CH₂)₁₄-.

When r is 1 and R^4 is bonded to R^3 , the valence of R^3 is 2. When r is 0 and each X of p is bonded to R^3 , the valence of R^3 is $p+1$.

10 R^4 is a hetero atom or a group containing a hetero atom.

The hetero atom is, for example, an oxygen atom, a nitrogen atom or a sulfur atom, preferably an oxygen atom or a nitrogen atom.

15 The group containing a hetero atom is, for example, a group containing an oxygen atom, a nitrogen atom or a sulfur atom, and examples thereof include -O-, -C(=O)-, -C(=O)O-, -OC(=O)O-, -C(=O)NH-, -NH-,
 -N-
 |
 (tertiary amine), -S-, and aliphatic, alicyclic or
 20 aromatic hydrocarbon groups containing these groups.

Specifically, there can be mentioned such structures as exemplified with respect to the later-described polar group-containing monomers.

The hetero atom in R^4 or the carbon atom to which

the hetero atom is bonded is preferably bonded to R^3 , and examples of such structures include $-R^3-O-R-X$, $-R^3-C(=O)-R-X$, $-R^3-C(=O)O-R-X$, $-R^3-OC(=O)O-R-X$, $-R^3-C(=O)NH-R-X$ and $-R^3-S-R-X$ (R is methylene, phenylene or
 5 cyclohexylene).

When R^4 contains a carbon atom, the number of carbon atoms to form R^4 is in the range of preferably 1 to 20, more preferably 1 to 10, particularly preferably 1 to 5.

10 r is 0 or 1. When r is 0, X is bonded to any one of carbon atoms for forming R^3 . When r is 1, X is bonded to any one of carbon atoms for forming R^4 .

X is a polar group selected from an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic
 15 acid group, a carboxylic ester group, an acid anhydride group, an amino group (primary, secondary and tertiary), an amide group, an epoxy group and a mercapto group.

When X is an alcoholic hydroxyl group, the polar group-containing olefin copolymer is excellent in
 20 coating properties, surface hydrophilic properties (anti-fogging properties), antistatic properties, adhesion properties to polar resins (urethane resin, epoxy resin, etc.), filler dispersibility, moisture absorption properties, gas barrier properties (in case

of high content), water absorption properties (in case of high content of alcoholic hydroxyl group), dispersibility in water and oil resistance (in case of high content of alcoholic hydroxyl group).

5 When X is a phenolic hydroxyl group, the polar group-containing olefin copolymer is excellent in adhesion properties to polar resins (aromatic polymer, phenolic resin, etc.) and compatibility with polar resins (aromatic polymer, phenolic resin, etc.).

10 When X is a carboxyl group, the polar group-containing olefin copolymer is excellent in adhesion properties to metals, dispersibility in water (particularly in case of metallic salt), pigment dispersibility, filler dispersibility and oil

15 resistance (in case of high content of carboxyl group).

 When X is a carboxylic ester group, the polar group-containing olefin copolymer is excellent in adhesion properties to polar resins (nylon, EVOH, etc.), compatibility with polar resins (nylon, EVOH, etc.) and
20 surface hydrophilic properties.

 When X is an epoxy group, the polar group-containing olefin copolymer is excellent in adhesion properties to metals, adhesion properties to polar resins (polyester, epoxy resin, nylon, EVOH, urea resin,

etc.), compatibility with polar resins (polyester, epoxy resin, nylon, EVOH, urea resin, etc.), pigment dispersibility and coating properties.

When X is an acid anhydride group, the polar
5 group-containing olefin copolymer is excellent in
adhesion properties to metals, adhesion properties to
polar resins (nylon, EVOH, polyester, etc.),
compatibility with polar resins (nylon, EVOH, polyester,
etc.), pigment dispersibility, filler dispersibility
10 and dispersibility in water (particularly in case of
metallic salt).

When X is an amino group, the polar group-
containing olefin copolymer is excellent in adhesion
properties to polar resins (epoxy resin, polyketone,
15 polyurethane, etc.), coating properties, antifungal
properties (in case of ammonium salt), ion exchange
properties (in case of ammonium salt), surface
hydrophilic properties (particularly in case of
ammonium salt), antistatic properties (particularly in
20 case of ammonium salt), pigment dispersibility and
filler dispersibility (particularly in case of ammonium
salt).

When X is an amide group, the polar group-
containing olefin copolymer is excellent in adhesion

properties to polyamide and compatibility with polyamide.

When X is a mercapto group, the polar group-containing olefin copolymer is excellent in adhesion properties to rear periodic transition metals such as Fe, Cu, Co, Ni, Cd and Zn, compatibility with polyamide and polyester, and adhesion properties to polyamide and polyester.

p is an integer of 1 to 3, and when p is 2 or 3, each X may be the same or different. When p is 2 or 3 and r is 0, X may be bonded to the same or different atom of R^3 , and when p is 2 or 3 and r is 1, X may be bonded to the same or different atom of R^4 .

In the polar group-containing olefin copolymer of the invention, the constituent unit (1), the constituent unit (2) and the constituent unit (3) are bonded usually at random.

Composition of copolymer

In the polar group-containing olefin copolymer of the invention, the molar ratio ((1)+(2):(3)) between the total of the constituent unit (1) and the constituent unit (2), and the constituent unit (3) is in the range of usually 99.99:0.01 to 0.01:99.99, preferably 99.95:0.05 to 10:90, more preferably

99.9:0.1 to 30:70.

The molar ratio ((1):(2)) between the constituent unit (1) and the constituent unit (2) is in the range of usually 99.99:0.01 to 0.01:99.99, preferably 99:1 to
5 1:99, more preferably 90:10 to 10:90.

The polar group-containing olefin copolymer of the invention may contain two or more kinds of the constituent units (1), may contain two or more kinds of the constituent units (2), and may contain two or more
10 kinds of the constituent units (3).

Other copolymerizable components

The polar group-containing olefin copolymer of the invention may contain constituent units other than the constituent unit (1), the constituent unit (2) and
15 the constituent unit (3), within limits not detrimental to the objects of the present invention.

Examples of the constituent units which may be contained include constituent units derived from cyclic olefins other than the polar group-containing monomer
20 represented by the formula (8), non-conjugated polyenes, hydroxyl group-containing ethylenically unsaturated compounds, amino group-containing ethylenically unsaturated compounds, epoxy group-containing ethylenically unsaturated compounds, aromatic vinyl

compounds, unsaturated carboxylic acids and their derivatives, vinyl ester compounds, and vinyl chloride.

When these constituent units are contained, the amount thereof is not more than 30 mol %, preferably
5 not more than 20 mol %, more preferably not more than 10 mol %, based on all constituent units to constitute the polar group-containing olefin copolymer.

Properties of copolymer

The weight-average molecular weight (Mw) of the
10 polar group-containing olefin copolymer of the invention is in the range of usually 500 to 2,000,000, preferably 800 to 1,500,000, more preferably 1,000 to 1,300,000, and the molecular weight distribution (Mw/Mn) thereof is usually not more than 3, preferably
15 not more than 2.8, more preferably not more than 2.7.

When the molecular weight distribution (Mw/Mn) is not more than 3, the polar group-containing olefin copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and
20 a polar material and has excellent adhesion properties to a polar material and excellent compatibility with a polar material.


The Mw and Mw/Mn were determined from data obtained by the measurement at 140°C in an

orthodichlorobenzene solvent using GPC (gel permeation chromatography).

The intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ in the ^{13}C -NMR spectrum of the polar group-
 5 containing olefin copolymer is not more than 1.0, preferably not more than 0.8, more preferably not more than 0.5.

When the intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) is not more than 1.0, the polar group-containing olefin
 10 copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and a polar material.

$T_{\alpha\alpha}$ and $T_{\alpha\beta}$ in the ^{13}C -NMR spectrum are each a peak intensity of CH_2 present in the constituent unit
 15 derived from an α -olefin of 4 or more carbon atoms, and as shown below, they mean two kinds of CH_2 different in the position to the tertiary carbon.

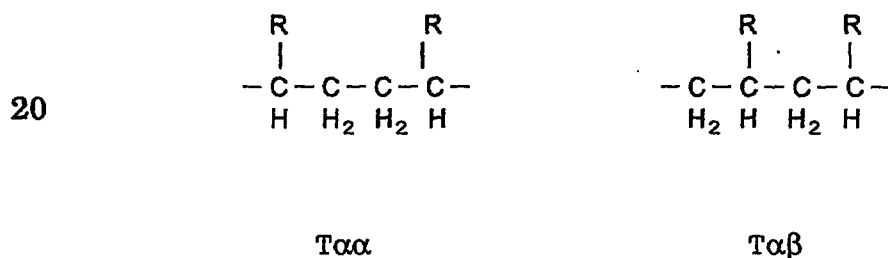

The $T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$ intensity ratio can be

determined in the following manner.

A ^{13}C -NMR spectrum of the polar group-containing olefin copolymer is measured by the use of, for example, a Japan Electron Optics Laboratory JEOL-GX270 NMR
5 measuring device. The measurement is made using a mixed solution of hexachlorobutadiene/ d_6 -benzene (2/1, by volume) having a sample concentration of 5 weight % under the conditions of 67.8 MHz, 25°C and d_6 -benzene as a standard (128 ppm). The ^{13}C -NMR spectrum measured
10 is analyzed in accordance with the proposals by Lindemann Adams (Analysis Chemistry 43, p. 1245 (1971)) and J.C. Randall (Review Macromolecular Chemistry Physics, C29, 201 (1989)) to determine the $\text{T}\alpha\beta/(\text{T}\alpha\alpha+\text{T}\alpha\beta)$ intensity ratio.

15 Examples of the polar group-containing olefin copolymer according to the first embodiment of the invention include the following polar group-containing olefin copolymers (I) to (VI).

Polar group-containing olefin copolymer (I)

20 In the polar group-containing olefin copolymer (I), it is preferable that R^1 in the formula (1) and R^2 in the formula (2) are each a hydrogen atom or a methyl group and R^1 and R^2 are the same as each other.

In the polar group-containing olefin copolymer

(I), a preferred combination of the constituent unit (1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent unit selected from examples of the constituent units (1) shown in Table 1 and a constituent unit selected from examples of the constituent units (3) shown in Table 1. Specific examples of such combinations include combinations of 1-A, 1-B, 1-C, 1-D, 1-E, 1-F, 1-G, 1-H, 1-I, 1-J, 1-K, 1-L, 1-M, 2-A, 2-B, 2-C, 2-D, 2-E, 2-F, 2-G, 2-H, 2-I, 2-J, 2-K, 2-L and 2-M.

The above combinations are those wherein R^1 and R^2 are the same as each other, and the constituent units (1) include the constituent units (2).

In the above-mentioned combination examples, numerals indicate examples of the constituent units (1), and alphabets indicate examples of the constituent units (3).

Table 1

No.	Constituent unit (1)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C-C-CH}_2 \\ \text{H}_2 \text{ H}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	B	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C-(CH}_2\text{)}_2\text{CH}_2 \\ \text{H}_2 \end{array}$
		C	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C-(CH}_2\text{)}_6\text{CH}_2 \\ \text{H}_2 \end{array}$
		D	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C-(CH}_2\text{)}_7\text{CH}_2 \\ \text{H}_2 \end{array}$
		E	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C-(CH}_2\text{)}_9\text{CH}_2 \\ \text{H}_2 \end{array}$
		F	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC-C-C-CH}_2 \\ \text{H}_2 \text{ H}_2 \end{array}$
		G	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC-C-(CH}_2\text{)}_2\text{CH}_2 \\ \text{H}_2 \end{array}$
		H	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC-C-(CH}_2\text{)}_6\text{CH}_2 \\ \text{H}_2 \end{array}$
		I	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC-C-(CH}_2\text{)}_{10}\text{CH}_2 \\ \text{H}_2 \end{array}$
		J	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{O} \diagup \text{CH-(CH}_2\text{)}_5\text{CH}_2 \\ \text{H}_2\text{C} \diagdown \end{array}$

		K	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \\ \text{O}-\text{C}-\text{CH}-\text{C}-\text{C}=\text{C}-\text{C}-\text{C}-\text{CH}_2 \\ \quad \quad \quad \quad \\ \text{O}=\text{C} \quad \text{H}_2 \quad \text{H} \quad \text{H} \quad \text{H}_2 \quad \text{H}_2 \end{array} $
		L	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \\ \text{O}-\text{C}-\text{CH}-\left(\text{C}-\text{C}=\text{C}\right)_4-\text{CH}_2 \\ \quad \quad \quad \quad \\ \text{O}=\text{C} \quad \text{H}_2 \quad \text{H} \quad \text{H} \end{array} $
		M	$ \begin{array}{c} \text{HO}-\text{C}_6\text{H}_4-\text{O}-\text{C}-\left(\text{CH}_2\right)_2-\text{CH}_2 \\ \\ \text{H}_2 \end{array} $

The polar group-containing olefin copolymer (I) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins, compatibility and flexibility.

5 Polar group-containing olefin copolymer (II)

In the polar group-containing olefin copolymer (II), R^1 in the formula (1) and R^2 in the formula (2) are different from each other.

In the polar group-containing olefin copolymer
 10 (II), a preferred combination of the constituent unit (1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent unit selected from examples of the constituent units (1) and the constituent units (2) shown in Table 2 and
 15 a constituent unit selected from examples of the constituent units (3) shown in Table 2. Specific examples of such combinations include combinations of
 1-A, 1-B, 1-C, 1-D, 1-E, 1-F, 1-G, 1-H, 1-I, 1-J, 1-K,
 1-L, 1-M, 2-A, 2-B, 2-C, 2-D, 2-E, 2-F, 2-G, 2-H, 2-I,
 20 2-J, 2-K, 2-L, 2-M, 3-A, 3-B, 3-C, 3-D, 3-E, 3-F, 3-G,
 3-H, 3-I, 3-J, 3-K, 3-L, 3-M, 4-A, 4-B, 4-C, 4-D, 4-E,
 4-F, 4-G, 4-H, 4-I, 4-J, 4-K, 4-L, 4-M, 5-A, 5-B, 5-C,
 5-D, 5-E, 5-F, 5-G, 5-H, 5-I, 5-J, 5-K, 5-L, 5-M, 6-A,
 6-B, 6-C, 6-D, 6-E, 6-F, 6-G, 6-H, 6-I, 6-J, 6-K, 6-L,

6-M, 7-A, 7-B, 7-C, 7-D, 7-E, 7-F, 7-G, 7-H, 7-I, 7-J,
7-K, 7-L and 7-M.

In the above-mentioned combination examples,
numerals indicate examples of the constituent units (1)
5 and (2), and alphabets indicate examples of the
constituent units (3).

Table 2

No.	Constituent unit (1), (2)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	B	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
3	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$	C	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
4	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---CH}_2 \\ \\ \text{CH}_3 \end{array}$	D	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_7\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
5	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---(CH}_2\text{)}_4\text{CH}_2 \end{array}$	E	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_8\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
6	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	F	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
7	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	G	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		H	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		I	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_{10}\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		J	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{O} \\ \\ \text{H}_2\text{C} \end{array} \text{CH---(CH}_2\text{)}_5\text{CH}_2$

		K	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \diagup \quad \diagdown \\ \text{O} \quad \text{O} \\ \diagdown \quad \diagup \\ \text{O}=\text{C}-\text{CH}-\text{C}-\text{C}=\text{C}-\text{C}-\text{C}-\text{CH}_2 \\ \quad \quad \quad \text{H}_2 \quad \quad \quad \text{H} \quad \text{H} \quad \quad \quad \text{H}_2 \quad \text{H}_2 \end{array} \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $
		L	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \diagup \quad \diagdown \\ \text{O} \quad \text{O} \\ \diagdown \quad \diagup \\ \text{O}=\text{C}-\text{CH}-\left(\begin{array}{c} \text{C}-\text{C}=\text{C} \\ \text{H}_2 \quad \text{H} \quad \text{H} \end{array} \right)_4 \text{CH}_2 \end{array} \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $
		M	$ \text{HO}-\text{C}_6\text{H}_4-\text{O}-\text{C}(\text{H}_2)-\left(\text{CH}_2 \right)_2 \text{CH}_2 \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $

It is preferable that the polar group-containing olefin copolymer (II) contains no other copolymerizable components previously mentioned and is formed from only the constituent unit (1), the constituent unit (2) and
5 the constituent unit (3). Especially when X is an alcoholic hydroxyl group, a phenolic hydroxyl group or an amino group, the polar group-containing olefin copolymer is particularly preferably formed from only the constituent unit (1), the constituent unit (2) and
10 the constituent unit (3).

The polar group-containing olefin copolymer (II) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins, compatibility and flexibility.

15 Polar group-containing olefin copolymer (III)

In the polar group-containing olefin copolymer (III), R^3 in the formula (3) is a hydrocarbon group of 11 or more carbon atoms.

In the polar group-containing olefin copolymer
20 (III), a preferred combination of the constituent unit (1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent unit selected from examples of the constituent units (1) and (2) shown in Table 3 and a constituent unit

selected from examples of the constituent units (3) shown in Table 3. Specific examples of such combinations include combinations of 1-A, 1-B, 1-C, 2-A, 2-B, 2-C, 3-A, 3-B, 3-C, 4-A, 4-B, 4-C, 5-A, 5-B, 5-C, 5 6-A, 6-B, 6-C, 7-A, 7-B, 7-C, 8-A, 8-B, 8-C, 9-A, 9-B, 9-C, 10-A, 10-B and 10-C.

In Table 3, by the description of one kind of a constituent unit in the column of the constituent units (1) and (2) is meant that R^1 and R^2 are the same as each other, and by the description of three kinds of constituent units in the column of the constituent units (1) and (2) is meant that two kinds of the constituent units (1) or the constituent units (2) are contained.

15 In the above-mentioned combination examples, numerals indicate examples of the constituent units (1) and (2), and alphabets indicate examples of the constituent units (3).

Table 3

No.	Constituent unit (1), (2)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_9\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	B	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_{10}\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
3	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	C	$\begin{array}{c} \text{O}=\text{C---CH}_2 \quad \text{---CH}_2\text{---CH---} \\ \quad \quad \quad \\ \text{O} \quad \quad \quad \text{CH} \quad \text{---(C---C=C---)}_4\text{---CH}_2 \\ \quad \quad \quad \quad \quad \\ \text{O}=\text{C} \quad \text{H}_2 \quad \text{H} \quad \text{H} \end{array}$
4	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$		
5	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$		
6	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$		
7	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---CH}_2 \\ \quad \\ \text{H} \quad \text{CH}_3 \end{array}$		
8	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---(CH}_2\text{)}_4\text{CH}_2 \end{array}$		
9	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$		
10	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$		

It is preferable that the polar group-containing olefin copolymer (III) contains no other copolymerizable components previously mentioned and is formed from only the constituent unit (1), the constituent unit (2) and the constituent unit (3). Especially when X is an alcoholic hydroxyl group, a phenolic hydroxyl group or an amino group, the polar group-containing olefin copolymer is particularly preferably formed from only the constituent unit (1), the constituent unit (2) and the constituent unit (3).

The polar group-containing olefin copolymer (III) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins and compatibility.

Polar group-containing olefin copolymer (IV)

In the polar group-containing olefin copolymer (IV), X in the formula (3) is a polar group selected from a phenolic hydroxyl group, a carboxylic ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group.

In the polar group-containing olefin copolymer (IV), a preferred combination of the constituent unit (1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent

unit selected from examples of the constituent units (1) shown in Table 4 and a constituent unit selected from examples of the constituent units (3) shown in Table 4. Specific examples of such combinations

- 5 include combinations of 1-A, 1-B, 1-C, 1-D, 2-A, 2-B, 2-C, 2-D, 3-A, 3-B, 3-C, 3-D, 4-A, 4-B, 4-C, 4-D, 5-A, 5-B, 5-C, 5-D, 6-A, 6-B, 6-C, 6-D, 7-A, 7-B, 7-C, 7-D, 8-A, 8-B, 8-C, 8-D, 9-A, 9-B, 9-C, 9-D, 10-A, 10-B, 10-C and 10-D.

- 10 The above combinations are those wherein R^1 and R^2 are the same as each other, and the constituent units (1) include the constituent units (2).

- In the above-mentioned combination examples, numerals indicate examples of the constituent units (1),
 15 and alphabets indicate examples of the constituent units (3).

Table 4

No.	Constituent unit (1)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{O} \\ / \quad \backslash \\ \text{H}_2\text{C} \quad \text{CH}(\text{CH}_2)_5\text{CH}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	B	$\begin{array}{c} \text{O=C-CH}_2 \quad \text{---CH}_2\text{---CH---} \\ \qquad \qquad \qquad \\ \text{O-C-CH-C-H=H-C-C-CH}_2 \\ \qquad \quad \quad \quad \\ \text{O=C} \quad \text{H}_2 \quad \quad \text{H}_2 \quad \text{H}_2 \end{array}$
3	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-CH}_2 \end{array}$	C	$\begin{array}{c} \text{O=C-CH}_2 \quad \text{---CH}_2\text{---CH---} \\ \qquad \qquad \qquad \\ \text{O-C-CH-(C-C=C)}_4\text{-CH}_2 \\ \qquad \quad \quad \quad \\ \text{O=C} \quad \text{H}_2 \quad \quad \text{H} \quad \text{H} \end{array}$
4	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	D	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO-C}_6\text{H}_4\text{-O-C(CH}_2)_2\text{CH}_2 \end{array}$
5	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-CH}_2 \end{array}$		
6	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-C-C-CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$		
7	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-C-CH}_2 \\ \quad \\ \text{H} \quad \text{CH}_3 \end{array}$		
8	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-(CH}_2)_4\text{CH}_2 \end{array}$		
9	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-CH}_2 \end{array}$		
10	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array} \quad \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C-CH}_2 \end{array}$		

The polar group-containing olefin copolymer (IV) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins and compatibility.

5 Polar group-containing olefin copolymer (V)

In the polar group-containing olefin copolymer (V), R^1 in the formula (1) and R^2 in the formula (2) are each a hydrocarbon group of 2 or more carbon atoms, preferably 2 to 18 carbon atoms, and the crystallinity
10 of the copolymer, as determined by X-ray diffractometry, is not less than 10 %, preferably 15 to 80 %, more preferably 20 to 70 %.

The crystallinity can be measured by X-ray diffractometry (in accordance with S.L. AGGARWAL, *J.*
15 *Polymer Sci.*, 18, 17 (1955)) or the like.

The stereoregularity (isotacticity) of the polar group-containing olefin copolymer (V) is usually not less than 20 %, preferably 30 to 100 %, more preferably 40 to 100 %.

20 In the polar group-containing olefin copolymer (V), a preferred combination of the constituent unit (1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent unit selected from examples of the constituent units

(1) shown in Table 5 and a constituent unit selected from examples of the constituent units (3) shown in Table 5. Specific examples of such combinations include combinations of 1-A, 1-B, 1-C, 1-D, 1-E, 1-F, 5 1-G, 1-H, 1-I, 1-J, 1-K, 1-L, 1-M, 2-A, 2-B, 2-C, 2-D, 2-E, 2-F, 2-G, 2-H, 2-I, 2-J, 2-K, 2-L and 2-M.

The above combinations are those wherein R^1 and R^2 are the same as each other, and the constituent units (1) include the constituent units (2).

10 In the above-mentioned combination examples, numerals indicate examples of the constituent units (1), and alphabets indicate examples of the constituent units (3).

Table 5

No.	Constituent unit (1)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---CH}_2 \\ \\ \text{CH}_3 \end{array}$	B	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		C	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		D	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_7\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		E	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_9\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		F	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
		G	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		H	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		I	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_{10}\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		J	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{O} \\ \diagup \quad \diagdown \\ \text{H}_2\text{C} \quad \text{CH---(CH}_2\text{)}_5\text{CH}_2 \end{array}$

		K	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \\ \text{O}-\text{C}-\text{CH}-\text{C}-\text{C}=\text{C}-\text{C}-\text{C}-\text{CH}_2 \\ \quad \quad \quad \quad \\ \text{H}_2 \quad \text{H} \quad \text{H} \quad \text{H}_2 \quad \text{H}_2 \end{array} \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $
		L	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \\ \text{O}-\text{C}-\text{CH}-\left(\text{C}-\text{C}=\text{C}\right)_4-\text{CH}_2 \\ \quad \quad \quad \quad \\ \text{H}_2 \quad \text{H} \quad \text{H} \end{array} \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $
		M	$ \text{HO}-\text{C}_6\text{H}_4-\text{O}-\text{C}(\text{H}_2)-\left(\text{CH}_2\right)_2-\text{CH}_2 \begin{array}{c} -\text{CH}_2-\text{CH}- \\ \\ \text{CH}_2 \end{array} $

The polar group-containing olefin copolymer (V) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins, compatibility and rigidity.

5 Polar group-containing olefin copolymer (VI)

In the polar group-containing olefin copolymer (VI), R^1 in the formula (1) and R^2 in the formula (2) are each a hydrocarbon group of 2 or more carbon atoms, preferably 2 to 18 carbon atoms, and the crystallinity
10 of the copolymer, as determined by X-ray diffractometry, is less than 10 %, preferably not more than 5 %, more preferably not more than 2 %.

It is preferable that the polar group-containing olefin copolymer (VI) contains no other copolymerizable
15 components previously mentioned and is formed from only the constituent unit (1), the constituent unit (2) and the constituent unit (3). Especially when X is an alcoholic hydroxyl group, a phenolic hydroxyl group or an amino group, the polar group-containing olefin
20 copolymer is particularly preferably formed from only the constituent unit (1), the constituent unit (2) and the constituent unit (3).

In the polar group-containing olefin copolymer (VI), a preferred combination of the constituent unit

(1), the constituent unit (2) and the constituent unit (3) is, for example, a combination of a constituent unit selected from examples of the constituent units (1) shown in Table 6 and a constituent unit selected
5 from examples of the constituent units (3) shown in Table 6. Specific examples of such combinations include combinations of 1-A, 1-B, 1-C, 1-D, 1-E, 1-F, 1-G, 1-H, 1-I, 1-J, 1-K, 1-L, 1-M, 2-A, 2-B, 2-C, 2-D, 2-E, 2-F, 2-G, 2-H, 2-I, 2-J, 2-K, 2-L and 2-M.

10 The above combinations are those wherein R^1 and R^2 are the same as each other, and the constituent units (1) include the constituent units (2).

 In the above-mentioned combination examples, numerals indicate examples of the constituent units (1),
15 and alphabets indicate examples of the constituent units (3).


Table 6

No.	Constituent unit (1)	No.	Constituent unit (3)
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$	A	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---(CH}_2\text{)}_4\text{CH}_2 \end{array}$	B	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		C	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		D	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_7\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		E	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HO---C---(CH}_2\text{)}_9\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		F	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---C---CH}_2 \\ \quad \\ \text{H}_2 \quad \text{H}_2 \end{array}$
		G	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_2\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		H	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_6\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		I	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{HOOC---C---(CH}_2\text{)}_{10}\text{CH}_2 \\ \\ \text{H}_2 \end{array}$
		J	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{O} \\ \quad \diagup \\ \text{H}_2\text{C---CH---(CH}_2\text{)}_5\text{CH}_2 \end{array}$

		K	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \diagup \quad \diagdown \\ \text{O} \quad \text{CH} \\ \diagdown \quad \diagup \\ \text{O}=\text{C}-\text{CH} \end{array} \begin{array}{c} \text{H} \quad \text{H} \\ \diagup \quad \diagdown \\ \text{C}=\text{C} \\ \diagdown \quad \diagup \\ \text{H}_2 \quad \text{H}_2 \end{array} \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_2 \end{array} $
		L	$ \begin{array}{c} \text{O}=\text{C}-\text{CH}_2 \\ \diagup \quad \diagdown \\ \text{O} \quad \text{CH} \\ \diagdown \quad \diagup \\ \text{O}=\text{C}-\text{CH} \end{array} \begin{array}{c} \text{H} \quad \text{H} \quad \text{H} \quad \text{H} \\ \diagup \quad \diagdown \quad \diagup \quad \diagdown \\ (\text{C}-\text{C}=\text{C})_4 \\ \diagdown \quad \diagup \quad \diagdown \quad \diagup \\ \text{H}_2 \quad \text{H} \quad \text{H} \quad \text{H} \end{array} \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_2 \end{array} $
		M	$ \begin{array}{c} \text{HO} \text{---} \text{C}_6\text{H}_4 \text{---} \text{O} \text{---} \text{C} \text{---} (\text{CH}_2)_2 \text{CH}_2 \\ \\ \text{H}_2 \end{array} \begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_2 \end{array} $

The polar group-containing olefin copolymer (VI) according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins, compatibility, tackiness and flexibility.

- 5 The second embodiment of the polar group-containing olefin copolymer of the invention is a branched type polar group-containing olefin copolymer comprising a constituent unit represented by the following formula (1) and a constituent unit
- 10 represented by the following formula (4) (also referred to as a "constituent unit (4)), and optionally a constituent unit represented by the following formula (5) (also referred to as a "constituent unit (5)).

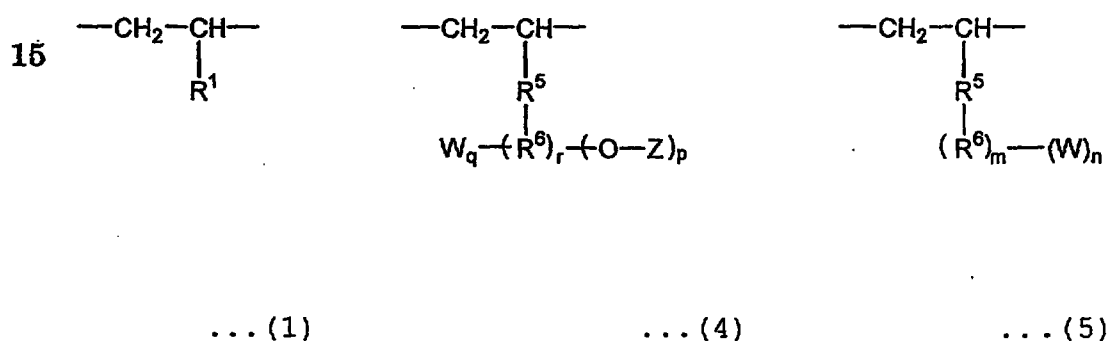

- 20 The constituent unit represented by the formula (1) is identical with the aforesaid constituent unit (1).

In the formulas (4) and (5), R^5 is a hydrocarbon group, such as a saturated or unsaturated hydrocarbon

group, an alicyclic hydrocarbon group or an aromatic hydrocarbon group, and examples of such hydrocarbon groups include the same groups as previously described with respect to R^3 in the formula (3).

5 In the formula (4), when r is 1 and R^6 is bonded to R^5 , the valence of R^5 is 2. When r is 0 and each $-O-Z$ of p or each W of q is bonded to R^5 , the valence of R^5 is $p+q+1$.

10 In the formula (5), when m is 1 and R^6 is bonded to R^5 , the valence of R^5 is 2. When m is 0 and each W of n is bonded to R^5 , the valence of R^5 is $n+1$.

Although R^5 in the formula (4) and R^5 in the formula (5) may be the same or different, they preferably are the same as each other.

15 In the formulas (4) and (5), R^6 is a hetero atom or a group containing a hetero atom, and examples the hetero atoms and the groups containing the hetero atom include the same atoms and groups as previously described with respect to R^4 in the formula (3).

20 In the formula (4), the hetero atom in R^6 or the carbon atom to which the hetero atom is bonded is preferably bonded to R^5 , and examples of such structures include $-R^5-O-R-O-Z$, $-R^5-C(=O)-R-O-Z$, $-R^5-C(=O)O-R-O-Z$, $-R^5-OC(=O)O-R-O-Z$, $-R^5-C(=O)NH-R-O-Z$ and

$-R^5-S-R-O-Z$ (R is methylene, phenylene or cyclohexylene). The above examples are those wherein p is 1 and q is 0 in the formula (4), and the same shall apply to other cases.

- 5 In the formula (5), the hetero atom in R^6 or the carbon atom to which the hetero atom is bonded is preferably bonded to R^5 , and examples of such structures include $-R^5-O-R-W$, $-R^5-C(=O)-R-W$, $-R^5-C(=O)O-R-W$, $-R^5-OC(=O)O-R-X$, $-R^5-C(=O)NH-R-W$ and $-R^5-S-$
- 10 $R-W$ (R is methylene, phenylene or cyclohexylene). The above examples are those wherein n is 1 in the formula (5), and the same shall apply to other cases.

- When R^6 contains a carbon atom in the formulas (4) and (5), the number of carbon atoms to form R^6 is
- 15 in the range of preferably 1 to 20, more preferably 1 to 10, particularly preferably 1 to 5.

Although R^6 in the formula (4) and R^6 in the formula (5) may be the same or different, they preferably are the same as each other.

- 20 In the formula (4), r is 0 or 1. When r is 0, $-O-Z$ is bonded to any one of carbon atoms for forming R^5 . When r is 1, $-O-Z$ is bonded to any one of carbon atoms for forming R^6 .

In the formula (5), m is 0 or 1. When m is 0, W

is bonded to any one of carbon atoms for forming R⁵.

When m is 1, W is bonded to any one of carbon atoms for forming R⁶.

In the formula (4), Z is a polymer segment
5 obtained by anionic polymerization, ring-opening polymerization or polycondensation.

Examples of the polymer segments include segments obtained by anionic polymerization of one or more monomers selected from methyl methacrylate, ethyl
10 methacrylate, butyl acrylate, acrylonitrile and acrylamide, segments obtained by ring-opening polymerization of lactone, lactide, siloxane, lactam, cyclic ether, oxazoline, ethylene oxide, propylene oxide, etc., and segments obtained by polycondensation
15 of monomers, such as polycarboxylic acid and polyhydric alcohol, polycarboxylic acid and polyamine, or hydroxycarboxylic acid.

Examples of polar monomers employed in formation of the polymer segment include:

20 (meth)acrylic acid esters, such as monoesters of monovalent alcohols and acrylic acid or methacrylic acid, specifically,

methylacrylate, methylmethacrylate, ethylacrylate, propylmethacrylate, butylacrylate, 2-

- ethylhexylmethacrylate, laurylacrylate,
 stearylmetacrylate,
 1,1,1,3,3,3-hexafluoroisopropylacrylate,
 1,1,1,3,3,3-hexafluoroisopropylmethacrylate,
 5 2,2,2-trifluoroethylacrylate,
 2,2,2-trifluoroethylmethacrylate,
 1H,1H,2H,2H-heptadecafluorodecylacrylate, allylacrylate,
 allylmethacrylate, cyclohexylmethacrylate,
 glycidylacrylate, glycidylmethacrylate,
 10 tetrahydrofurfurylacrylate, benzylacrylate and β -
 phenylethylmethacrylate;
 monoesters of divalent alcohols with a terminal
 protected by an ether linkage and acrylic acid or
 methacrylic acid, such as
 15 2-methoxyethylacrylate, 2-ethoxyethylmethacrylate,
 2-phenoxyethylacrylate,
 2-dicyclopentenylloxyethylacrylate,
 1-methoxy-2-propylmethacrylate, 3-methoxypropylacrylate,
 4-ethoxybutylmethacrylate, 6-methoxyhexamethylacrylate,
 20 methoxydiethyleneglycolacrylate,
 phenoxydipropyleneglycolmethacrylate,
 ethoxytripropyleneglycolmethacrylate,
 ethoxypolyethyleneglycolacrylate and
 methoxypolypropyleneglycolmethacrylate;

- polyvalent esters of a divalent or more alcohol
and acrylic acid or methacrylic acid, such as
ethyleneglycoldiacrylate, ethyleneglycoldimethacrylate,
propyleneglycoldiacrylate,
5 propyleneglycoldimethacrylate,
1,3-propanediol dimethacrylate,
1,4-butanediol diacrylate,
1,6-hexanediol dimethacrylate,
neopentylglycol diacrylate,
10 neopentylglycol dimethacrylate,
diethyleneglycol diacrylate,
dipropyleneglycol dimethacrylate,
triethyleneglycol dimethacrylate,
tripropyleneglycol diacrylate,
15 polyethyleneglycol diacrylate,
polypropyleneglycol diacrylate,
polypropyleneglycol dimethacrylate, glycerintriacrylate,
glycerintrimethacrylate,
pentaerythritol tetramethacrylate,
20 dipentaerythritol hexaacrylate,
trimethylolpropane triacrylate,
poly(ethyleneoxido)triol triacrylate,
poly(propyleneoxido)triol triacrylate and
poly(propyleneoxido)triol trimethacrylate;

esters of alcohols having an ester linkage and acrylic or methacrylic acid, such as

2-benzoyloxyethyl acrylate,

2-benzoyloxyethyl methacrylate, 2-acetyloxy acrylate,

5 5-tetrahydrofurfuryloxycarbonylpentyl acrylate,

5-tetrahydrofurfuryloxycarbonylpentyl methacrylate and

2,2,6,6-tetramethyl-4-oxy-5-oxa-heptane-1,7-diyl-diacrylate;

esters of alcohols having a cyclic acetal linkage

10 and acrylic acid or methacrylic acid, such as

2-tertial-butyl-1,3-dioxycyclopentane-2'-ylmethacrylate and

2-tertial-butyl-5-ethyl-5-vinylcarbonyloxymethyl-1,3-dioxycyclohexane-2' (2)-ylacrylate;

15 esters of oxysuccinimide and acrylic or methacrylic acid, such as

N-oxysuccinimido acrylate and N-oxysuccinimido methacrylate;

esters of an alcohol having a secondary amino

20 group and acrylic acid or methacrylic acid, such as 2-dimethylaminoethyl acrylate and

2-ethylpropylaminoethyl methacrylate; and

esters of an alcohol having a cyano group and acrylic acid or methacrylic acid, such as

2-cyanoethyl acrylate and 2-cyanopropylmethacrylate.

Examples of (meth)acrylonitriles include acrylonitrile and methacrylonitrile.

Acrylamides include acrylamide, N-monosubstituted
 5 or N,N-disubstituted acrylamides, for example, acrylamide;

N-monosubstituted acrylamides, such as
 N-methylacrylamide, N-ethylacrylamide,
 N-propylacrylamide, N-butylacrylamide,
 10 N-octylacrylamide, N-phenylacrylamide,
 N-glycidylacrylamide and N,N'-ethylenebisacrylamide;

N,N-disubstituted monoacrylamides, such as
 N,N-dimethylacrylamide, N-ethyl-N-methylacrylamide,
 N,N-diethylacrylamide, N,N-di-n-propylacrylamide,
 15 N,N-dioctylacrylamide, N,N-diphenylacrylamide,
 N-ethyl-N-glycidylacrylamide, N,N-diglycidylacrylamide,
 N-methyl-N-(4-glycidyloxybutyl)acrylamide,
 N-methyl-N-(5-glycidyloxypentyl)acrylamide,
 N-methyl-N-(6-glycidyloxyhexyl)acrylamide,
 20 N-acryloylpyrrolidine, N-acryloyl-L-prolinemethylester,
 N-acryloylpiperidine, N-acryloylmorpholine and
 1-acryloylimidazole; and

N,N'-disubstituted bisacrylamides, such as
 N,N'-diethyl-N,N'-ethylenebisacrylamide,

N,N'-dimethyl-N,N'-hexamethylenebisacrylamide and di(N,N'-ethylene)bisacrylamide.

Examples of vinylpyridines include vinyl- or isopropenyl-substituted pyridines, such as

- 5 2-vinylpyridine, 2-isopropenylpyridine and 4-vinylpyridine.

Examples of N-substituted maleimide include:

N-aliphatic-substituted maleimides, such as N-methylmaleimide and N-ethylmaleimide; and

- 10 N-aromatic-substituted maleimides, such as N-phenylmaleimide and N-(4-methylphenyl)maleimide.

Examples of vinyl ketones include:

- 15 methyl vinyl ketone, isopropenyl methyl ketone, ethyl vinyl ketone, ethyl isopropenyl ketone, butyl vinyl ketone and phenyl vinyl ketone.

Examples of styrene derivatives include:

p-methoxycarbonyl styrene, p-tertiary-butoxycarbonyl styrene and p-cyano styrene.

- 20 Examples of the polar monomer include alkylene oxide compounds, for example, epoxy compounds, such as ethylene oxide, propylene oxide, 1,2-butylene oxide, 2,3-butylene oxide, styrene oxide, cyclohexene oxide, epichlorohydrin, epibromohydrin, methylglycidylether, allylglycidylether and phenylglycidylether. Of these,

preferable are ethylene oxide, propylene oxide, 1,2-butylene oxide and styrene oxide. Highly preferable are propylene oxide and ethylene oxide. Propylene oxide is extremely preferred.

5 Of these, preferable are polymer segments obtained by anionic polymerization of (meth)acrylic esters and polymer segments obtained by ring-opening polymerization of ethylene oxide or propylene oxide.

 There is no specific limitation on the molecular
10 weight of the polymer segment, and for example, the weight-average molecular weight is in the range of 200 to 1,000,000, preferably 500 to 100,000.

 When Z is polyethylene oxide or polypropylene oxide, the polar group-containing olefin copolymer is
15 excellent in coating properties, surface hydrophilic properties (anti-fogging properties), antistatic properties, adhesion properties to polar resins (urethane resin, epoxy resin, etc.), compatibility with the polar resins, moisture absorption properties, water
20 absorption properties (in case of high content of Z), dispersibility in water and oil resistance (in case of high content of Z).

 When Z is PMMA, the polar group-containing olefin copolymer is excellent in surface hardness, adhesion

properties to metals, pigment dispersibility, filler dispersibility, oil resistance (in case of high content of Z), adhesion properties to polar resins (acrylic resin, nylon, EVOH, etc.) and compatibility with the
5 polar resins.

When Z is polyacrylonitrile or polyacrylamide, the polar group-containing olefin copolymer is excellent in surface hardness, surface hydrophilic properties (anti-fogging properties), antistatic
10 properties, coating properties, adhesion properties to metals, adhesion properties to polar resins (polyacrylonitrile, polyacrylamide, polyamide, polyester, etc.), compatibility with the polar resins, dispersibility in water, biocompatibility, stimulation
15 response, moisture absorption properties and water absorption properties.

When Z is polyethyl methacrylate or polybutyl acrylate, the polar group-containing olefin copolymer is excellent in adhesion properties to metals, adhesion
20 properties to polar resins (acrylic resin, nylon, EVOH, etc.), compatibility with the polar resins and oil resistance.

When Z is polyamide (including ring-opening polymer of lactam), the polar group-containing olefin

copolymer is excellent in adhesion properties to polar resins (polyamide, etc.), compatibility with the polar resins, gas barrier properties and oil resistance.

When Z is polyester (including ring-opening
5 polymer of lactam), the polar group-containing olefin copolymer is excellent in adhesion properties to polar resins (polyester, etc.), compatibility with the polar resins and gas barrier properties.

In the formula (4), p is an integer of 1 to 3,
10 and when p is 2 or 3, each -O-Z may be the same or different. When p is 2 or 3 and r is 0, -O-Z may be bonded to the same or different atom of R⁵. When p is 2 or 3 and r is 1, -O-Z may be bonded to the same or different atom of R⁶.

15 In the formulas (4) and (5), W is a hydroxyl group or an epoxy group.

Although W in the formula (4) and W in the formula (5) may be the same or different, they are preferably the same as each other.

20 In the formula (4), q is 0, 1 or 2, and when q is 2, each W may be the same or different. When q is 2 and r is 0, W may be bonded to the same or different atom of R⁵. When q is 2 and r is 1, W may be bonded to the same or different atom of R⁶.

In case of $p \geq 1$ and $q \geq 1$, when r is 0, W and $-O-Z$ may be each bonded to the same or different atom of R^5 , and when r is 1, W and $-O-Z$ may be each bonded to the same or different atom of R^6 , and

5 $p+q \leq 3$.

In the formula (5), n is an integer of 1 to 3, and when n is 2 or 3, each W may be the same or different. When n is 2 or 3 and m is 0, W may be bonded to the same or different atom of R^5 . When n is
 10 2 or 3 and m is 1, W may be bonded to the same or different atom of R^6 .

In the second embodiment of the polar group-containing olefin copolymer of the invention, the constituent unit (1), the constituent unit (4), and
 15 optionally, the constituent unit (5) are bonded usually at random.

Composition of copolymer

In the second embodiment of the polar group-containing olefin copolymer of the invention, the molar
 20 ratio $((1):(4)+(5))$ between the constituent unit (1) and the total of the constituent unit (4) and the constituent unit (5) is in the range of usually 99.99:0.01 to 0.01:99.99, preferably 99.95:0.05 to 10:90, more preferably 99.9:0.1 to 30:70. The molar

ratio ((4):(5)) between the constituent unit (4) and the constituent unit (5) is in the range of usually 100:0 to 0.01:99.99, preferably 100:0 to 1:99, more preferably 100:0 to 10:90.

5 The second embodiment of the polar group-containing olefin copolymer of the invention may contain two or more kinds of the constituent units (1), may contain two or more kinds of the constituent units (4), and may contain two or more kinds of the
10 constituent units (5).

 In the present invention, a preferred combination of the constituent unit (1), the constituent unit (4) and the constituent unit (5) is, for example, a combination of a constituent unit selected from
15 examples of the constituent units (1) shown in Table 7, a constituent unit selected from examples of the $-R^5-$ $(R^6)_r-O-$ portions and examples of the Z portions of constituent units (4) shown in Table 7, and a constituent unit selected from examples of the
20 constituent units (5) shown in Table 7. Specific examples of such combinations include combinations of:
1-A-Z1-a, 1-A-Z2-a, 1-A-Z3-a, 1-A-Z4-a, 1-A-Z5-a,
1-A-Z6-a, 1-A-Z7-a, 1-B-Z1-b, 1-B-Z2-b, 1-B-Z3-b,
1-B-Z4-b, 1-B-Z5-b, 1-B-Z6-b, 1-B-Z7-b, 1-C-Z1-c,

- 1-C-Z2-c, 1-C-Z3-c, 1-C-Z4-c, 1-C-Z5-c, 1-C-Z6-c,
1-C-Z7-c,
- 2-A-Z1-a, 2-A-Z2-a, 2-A-Z3-a, 2-A-Z4-a, 2-A-Z5-a,
2-A-Z6-a, 2-A-Z7-a, 2-B-Z1-b, 2-B-Z2-b, 2-B-Z3-b,
5 2-B-Z4-b, 2-B-Z5-b, 2-B-Z6-b, 2-B-Z7-b, 2-C-Z1-c,
2-C-Z2-c, 2-C-Z3-c, 2-C-Z4-c, 2-C-Z5-c, 2-C-Z6-c,
2-C-Z7-c,
- 3-A-Z1-a, 3-A-Z2-a, 3-A-Z3-a, 3-A-Z4-a, 3-A-Z5-a,
3-A-Z6-a, 3-A-Z7-a, 3-B-Z1-b, 3-B-Z2-b, 3-B-Z3-b,
10 3-B-Z4-b, 3-B-Z5-b, 3-B-Z6-b, 3-B-Z7-b, 3-C-Z1-c,
3-C-Z2-c, 3-C-Z3-c, 3-C-Z4-c, 3-C-Z5-c, 3-C-Z6-c,
3-C-Z7-c,
- 4-A-Z1-a, 4-A-Z2-a, 4-A-Z3-a, 4-A-Z4-a, 4-A-Z5-a,
4-A-Z6-a, 4-A-Z7-a, 4-B-Z1-b, 4-B-Z2-b, 4-B-Z3-b,
15 4-B-Z4-b, 4-B-Z5-b, 4-B-Z6-b, 4-B-Z7-b, 4-C-Z1-c,
4-C-Z2-c, 4-C-Z3-c, 4-C-Z4-c, 4-C-Z5-c, 4-C-Z6-c,
4-C-Z7-c,
- 5-A-Z1-a, 5-A-Z2-a, 5-A-Z3-a, 5-A-Z4-a, 5-A-Z5-a,
5-A-Z6-a, 5-A-Z7-a, 5-B-Z1-b, 5-B-Z2-b, 5-B-Z3-b,
20 5-B-Z4-b, 5-B-Z5-b, 5-B-Z6-b, 5-B-Z7-b, 5-C-Z1-c,
5-C-Z2-c, 5-C-Z3-c, 5-C-Z4-c, 5-C-Z5-c, 5-C-Z6-c,
5-C-Z7-c,
- 6-A-Z1-a, 6-A-Z2-a, 6-A-Z3-a, 6-A-Z4-a, 6-A-Z5-a,
6-A-Z6-a, 6-A-Z7-a, 6-B-Z1-b, 6-B-Z2-b, 6-B-Z3-b,

- 6-B-Z4-b, 6-B-Z5-b, 6-B-Z6-b, 6-B-Z7-b, 6-C-Z1-c,
 6-C-Z2-c, 6-C-Z3-c, 6-C-Z4-c, 6-C-Z5-c, 6-C-Z6-c,
 6-C-Z7-c,
- 7-A-Z1-a, 7-A-Z2-a, 7-A-Z3-a, 7-A-Z4-a, 7-A-Z5-a,
 5 7-A-Z6-a, 7-A-Z7-a, 7-B-Z1-b, 7-B-Z2-b, 7-B-Z3-b,
 7-B-Z4-b, 7-B-Z5-b, 7-B-Z6-b, 7-B-Z7-b, 7-C-Z1-c,
 7-C-Z2-c, 7-C-Z3-c, 7-C-Z4-c, 7-C-Z5-c, 7-C-Z6-c,
 7-C-Z7-c,
- 8-A-Z1-a, 8-A-Z2-a, 8-A-Z3-a, 8-A-Z4-a, 8-A-Z5-a,
 10 8-A-Z6-a, 8-A-Z7-a, 8-B-Z1-b, 8-B-Z2-b, 8-B-Z3-b,
 8-B-Z4-b, 8-B-Z5-b, 8-B-Z6-b, 8-B-Z7-b, 8-C-Z1-c,
 8-C-Z2-c, 8-C-Z3-c, 8-C-Z4-c, 8-C-Z5-c, 8-C-Z6-c,
 8-C-Z7-c,
- 9-A-Z1-a, 9-A-Z2-a, 9-A-Z3-a, 9-A-Z4-a, 9-A-Z5-a,
 15 9-A-Z6-a, 9-A-Z7-a, 9-B-Z1-b, 9-B-Z2-b, 9-B-Z3-b,
 9-B-Z4-b, 9-B-Z5-b, 9-B-Z6-b, 9-B-Z7-b, 9-C-Z1-c,
 9-C-Z2-c, 9-C-Z3-c, 9-C-Z4-c, 9-C-Z5-c, 9-C-Z6-c and
 9-C-Z7-c.

In the above-mentioned combination examples,

20 numerals indicate examples of the constituent units (1),
 A, B and C indicate examples of the $-R^5-(R^6)_r-O-$
 portions of the constituent units (4), Z1 to Z7
 indicate examples of the Z portions of the constituent
 units (4), and a, b and C indicate examples of the $-R^5-$

$(R^6)_m - W_n$ - portions of the constituent units (5).

Table 7

No.	Constituent unit (1)	Constituent unit (4)				Constituent unit (5)
		No.	$-R^5-(R^6)_r-O-$	No.	Z	
1	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H} \end{array}$	A	$-(\text{CH}_2)_3-O-$ (r = 0)	Z 1	Polyethylene oxide	a $-(\text{CH}_2)_3-OH$ (m = 0)
2	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{CH}_3 \end{array}$	B	$-(\text{CH}_2)_4-O-$ (r = 0)	Z 2	Polypropylene oxide	b $-(\text{CH}_2)_4-OH$ (m = 0)
3	$\begin{array}{c} \text{---CH}_2\text{---CH---} \\ \\ \text{H}_3\text{C---CH}_2 \end{array}$	C	$-(\text{CH}_2)_4\text{CH(OH)CH}_2-O-$ (r = 0)	Z 3	Polymethyl methacrylate	c $-(\text{CH}_2)_4\text{CH(OH)CH}_2-OH$ (m = 0)
4	$\begin{array}{cc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & \\ \text{H} & \text{CH}_3 \end{array}$			Z 4	Polyacrylo nitrile	
5	$\begin{array}{cc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & \\ \text{H} & \text{H}_3\text{C---CH}_2 \end{array}$			Z 5	Polyacrylamide	
6	$\begin{array}{cc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & \\ \text{H} & \text{H}_3\text{C---C---C---CH}_2 \\ & \text{H}_2 \text{ H}_2 \end{array}$			Z 6	Polyε- caprolactone	
7	$\begin{array}{cc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & \\ \text{H} & \text{H}_3\text{C---(CH}_2)_4\text{CH}_2 \end{array}$			Z 7	Polyε- caprolactam	
8	$\begin{array}{cc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & \\ \text{CH}_3 & \text{H}_3\text{C---CH}_2 \end{array}$					
9	$\begin{array}{ccc} \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} & \text{---CH}_2\text{---CH---} \\ & & \\ \text{H} & \text{CH}_3 & \text{H}_3\text{C---CH}_2 \end{array}$					

Other copolymerizable components

The branched type polar group-containing olefin copolymer of the invention may contain constituent units other than the constituent unit (1), the constituent unit
5 (4) and the constituent unit (5), within limits not detrimental to the objects of the present invention.

Examples of the constituent units which may be contained include constituent units derived from cyclic olefins other than the polar group-containing monomer
10 represented by the following formula (10), non-conjugated polyenes, hydroxyl group-containing ethylenically unsaturated compounds, amino group-containing ethylenically unsaturated compounds, epoxy group-containing ethylenically unsaturated compounds, aromatic vinyl compounds,
15 unsaturated carboxylic acids and their derivatives, vinyl ester compounds, and vinyl chloride.

When these constituent units are contained, the amount thereof is not more than 30 mol %, preferably not more than 20 mol %, more preferably not more than 10 mol %,
20 based on all constituent units to constitute the polar group-containing olefin copolymer.

Properties of copolymer

The weight-average molecular weight (M_w) of the polar group-containing olefin copolymer of the second embodiment
25 of the invention is in the range of usually 500 to

2,000,000, preferably 1,000 to 1,500,000, more preferably 5,000 to 1,300,000, and the molecular weight distribution (M_w/M_n) thereof is usually not more than 3, preferably not more than 2.8, more preferably not more than 2.5.

5 When the molecular weight distribution (M_w/M_n) is not more than 3, the polar group-containing olefin copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and a polar material and has excellent adhesion properties to a polar material and
10 excellent compatibility with a polar material.

 The intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ in the ^{13}C -NMR spectrum of the polar group-containing olefin copolymer is not more than 1.0, preferably not more than 0.8, more preferably not more than 0.5.


15 When the intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) is not more than 1.0, the polar group-containing olefin copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and a polar material.

 The second embodiment of the polar group-containing
20 olefin copolymer of the invention is excellent in adhesion properties to metals and polar materials such as polar resins, compatibility therewith, surface hydrophilic properties, coating properties, printability, anti-fogging properties, antistatic properties, oil resistance,
25 biocompatibility, dispersibility in water, dispersibility


in solvent, pigment dispersibility, filler dispersibility, transparency, mechanical strength and moldability.

The third embodiment of the polar group-containing olefin copolymer of the invention comprises a constituent unit represented by the following formula (1) and a constituent unit represented by the following formula (6) (also referred to as a "constituent unit (6)"), and optionally a constituent unit represented by the following formula (3).


10



... (1)



... (3)

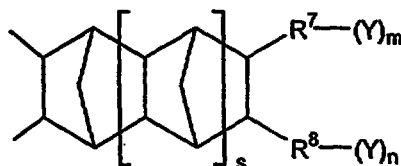

... (6)


15

The constituent unit represented by the formula (1) is identical with the aforesaid constituent unit (1), and the constituent unit represented by the formula (3) is identical with the aforesaid constituent unit (3).

20

In the third embodiment of the polar group-containing olefin copolymer of the invention, the constituent unit represented by the formula (3) is also preferably a constituent unit represented by the following formula (3').

25




... (3')

In the formula (3'), $\text{R}^{3'}$ is a hydrocarbon group,
 5 preferably a hydrocarbon group of 1 to 20 carbon atoms,
 more preferably a hydrocarbon group of 3 to 20 carbon atoms.

p is an integer of 1 to 3, preferably 1.

X' is a polar group containing O and/or N, preferably
 -OR, -COOR, -CRO, -NR₂, an epoxy group,

10



-C≡N, -OH, -COOH or NH₂.

The constituent unit represented by the formula (3')
 15 is, for example, a constituent unit derived from the polar
 group-containing monomer represented by the following
 formula (7').

In the formula (6), R^7 is a direct bond or an
 aliphatic hydrocarbon group of 1 or more carbon atoms,
 20 preferably a direct bond or a hydrocarbon group of 1 to 10
 carbon atoms.

R^8 is a hydrogen atom, a direct bond or an aliphatic
 hydrocarbon group of 1 or more carbon atoms, preferably a

direct bond or a hydrocarbon group of 1 to 10 carbon atoms.

Y is a polar group containing O and/or N, and preferred examples of such polar groups include the same groups as previously described with respect to X'.

5 m and n are each an integer of 0 to 2, and m+n is not 0. s is 0 or 1.

The constituent unit represented by the formula (6) is, for example, a constituent unit derived from the polar group-containing monomer represented by the following
10 formula (8).

In the third embodiment of the polar group-containing olefin copolymer of the invention, the constituent unit (1), the constituent unit (3) and the constituent unit (6) are bonded usually at random.

15 Composition of copolymer

In the third embodiment of the polar group-containing olefin copolymer of the invention, the molar ratio ((1):(3)+(6)) between the constituent unit (1) and the total of the constituent unit (3) and the constituent unit
20 (6) is in the range of usually 99.99:0.01 to 0.01:99.99, preferably 99.95:0.05 to 10:90, more preferably 99.9:0.1 to 30:70. The molar ratio ((3):(6)) between the constituent unit (3) and the constituent unit (6) is in the range of usually 0:100 to 99.99:0.01, preferably 0:100 to 99:1, more
25 preferably 0:100 to 90:10.

The third embodiment of the polar group-containing olefin copolymer of the invention may contain two or more kinds of the constituent units (1), may contain two or more kinds of the constituent units (3), and may contain two or
5 more kinds of the constituent units (6).

Other copolymerizable components

The polar group-containing olefin copolymer of the invention may contain constituent units other than the constituent unit (1), the constituent unit (3) and the
10 constituent unit (6), within limits not detrimental to the objects of the present invention.

Examples of the constituent units which may be contained include constituent units derived from cyclic olefins other than the polar group-containing monomer
15 represented by the following formula (8) or (7), non-conjugated polyenes, hydroxyl group-containing ethylenically unsaturated compounds, amino group-containing ethylenically unsaturated compounds, epoxy group-containing ethylenically unsaturated compounds, aromatic vinyl
20 compounds, unsaturated carboxylic acids and their derivatives, vinyl ester compounds, and vinyl chloride.

When these constituent units are contained, the amount thereof is not more than 30 mol %, preferably not more than 20 mol %, more preferably not more than 10 mol %,
25 based on all constituent units to constitute the

polar group-containing olefin copolymer.

Properties of copolymer

The weight-average molecular weight (M_w) of the third embodiment of the polar group-containing olefin copolymer of the invention is in the range of usually 500 to 2,000,000, preferably 1,000 to 1,500,000, more preferably 5,000 to 1,300,000, and the molecular weight distribution (M_w/M_n) thereof is usually not more than 3, preferably not more than 2.8, more preferably not more than 2.5.

When the molecular weight distribution (M_w/M_n) is not more than 3, the polar group-containing olefin copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and a polar material and has excellent adhesion properties to a polar material and excellent compatibility with a polar material.

The intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ in the ^{13}C -NMR spectrum of the polar group-containing olefin copolymer is not more than 1.0, preferably not more than 0.8, more preferably not more than 0.5.

When the intensity ratio ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$) is not more than 1.0, the polar group-containing olefin copolymer is excellent in orientation of the polar groups toward the interface between said copolymer and a polar material.

The third embodiment of the polar group-containing olefin copolymer of the invention is excellent in adhesion

properties to metals and polar materials such as polar resins, compatibility and flexibility.

Process for preparing polar group-containing olefin
5 copolymer

The first embodiment of the process for preparing a polar-group containing olefin copolymer according to the invention comprises copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon atoms and at
10 least one polar group-containing monomer selected from a polar group-containing monomer represented by the following formula (7) and a polar group-containing monomer represented by the following formula (8) in the presence of an olefin polymerization catalyst comprising:

15 (A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and

(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

20 (B-2) a compound which reacts with the compound (A) to form an ion pair (sometimes referred to as an "ionizing ionic compound" hereinafter), and

(B-3) an organoaluminum compound.

When a polar group-containing monomer represented by
25 the following formula (7) is used as the polar group-

containing monomer in the invention, the aforesaid first embodiment of the polar group-containing olefin copolymer is obtained. When a polar group-containing monomer represented by the following formula (8) and optionally a
5 polar group-containing monomer represented by the following formula (7) are used as the polar group-containing monomers in the invention, the aforesaid third embodiment of the polar group-containing olefin copolymer is obtained.

First, the components for forming the olefin
10 polymerization catalyst used in the invention are described.

(A) Transition metal compound

The transition metal compound (A) for use in the invention is a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of
15 the periodic table.


Examples of transition metals selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table include scandium, titanium, zirconium, hafnium, vanadium, niobium, tantalum, palladium, nickel,
20 cobalt, rhodium, yttrium, chromium, molybdenum, tungsten, manganese, rhenium, iron and ruthenium. Of these, preferable are scandium, titanium, zirconium, hafnium, vanadium, niobium, tantalum, palladium, nickel, cobalt and rhodium. Particularly preferable are titanium, zirconium
25 and hafnium.

As the transition metal compound (A), not only Ziegler-Natta catalyst and a metallocene catalyst but also a known organometallic complex is employable in the invention.

5 Examples of the transition metal compounds (A) preferably used are any compounds represented by the following formulae (11) to (16).

The transition metal compound represented by the formula (11) is described below.

10

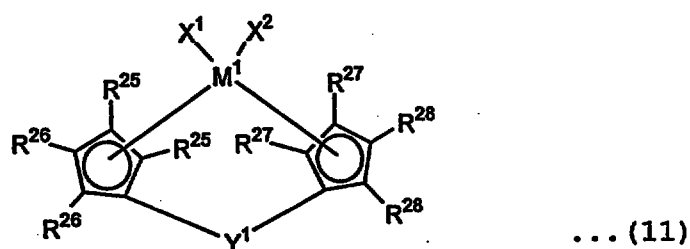

15

In the above formula, M^1 is a transition metal atom of Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, preferably a transition metal atom of Group 4, specifically zirconium, titanium or hafnium,
 20 preferably zirconium.

R^{25} , R^{26} , R^{27} and R^{28} may be the same or different and are each a hydrogen atom, a nitrogen-containing group, a phosphorus-containing group, a hydrocarbon group of 1 to
 25 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20

carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group or a halogen atom.

Examples of the nitrogen-containing groups include
5 amino group; primary amino group; alkylamino groups, such as methylamino, dimethylamino, diethylamino, dipropylamino, dibutylamino and dicyclohexylamino; and arylamino groups or alkylaryl amino groups, such as phenylamino, diphenylamino, ditolylamino, dinaphthylamino and methylphenylamino.

10 Examples of the phosphorus-containing groups include phosphino groups, such as dimethylphosphino and diphenylphosphino.

Examples of the hydrocarbon groups of 1 to 20 carbon atoms include alkyl groups, cycloalkyl groups, alkenyl
15 groups, arylalkyl groups and aryl groups. More specifically, there can be mentioned alkyl groups, such as methyl, ethyl, propyl, butyl, hexyl, octyl, nonyl, dodecyl and eicosyl; cycloalkyl groups, such as cyclopentyl, cyclohexyl, norbornyl and adamantyl; alkenyl groups, such
20 as vinyl, propenyl and cyclohexenyl; arylalkyl groups, such as benzyl, phenylethyl and phenylpropyl; and aryl groups, such as phenyl, tolyl, dimethylphenyl, trimethylphenyl, ethylphenyl, propylphenyl, biphenyl, naphthyl, methylnaphthyl, anthryl and phenanthryl.

Examples of the halogenated hydrocarbon groups of 1 to 20 carbon atoms include groups wherein the above-mentioned hydrocarbon groups of 1 to 20 carbon atoms are substituted with halogens.

5 Examples of the oxygen-containing groups include hydroxyl group; alkoxyl groups, such as methoxy, ethoxy, propoxy and butoxy; aryloxy groups, such as phenoxy, methylphenoxy, dimethylphenoxy and naphthoxy; and arylalkoxyl groups, such as phenylmethoxy and phenylethoxy.

10 Examples of the sulfur-containing groups include groups wherein oxygen is replaced with sulfur in the above-mentioned oxygen-containing groups; sulfonate groups, such as methylsulfonate, trifluoromethanesulfonate, phenylsulfonate, benzyisulfonate, p-toluenesulfonate, 15 trimethylbenzenesulfonate, triisobutylbenzenesulfonate, p-chlorobenzenesulfonate and pentafluorobenzenesulfonate; and sulfinat groups, such as methylsulfinat, phenylsulfinat, benzyisulfinat, p-toluenesulfinat, trimethylbenzenesulfinat and pentafluorobenzenesulfinat.

20 Examples of the silicon-containing groups include monohydrocarbon-substituted silyls, such as methylsilyl and phenylsilyl; dihydrocarbon-substituted silyls, such as dimethylsilyl and diphenylsilyl; trihydrocarbon-substituted silyls, such as trimethylsilyl, triethylsilyl, 25 tripropylsilyl, tricyclohexylsilyl, triphenylsilyl,

dimethylphenylsilyl, methyldiphenylsilyl, tritolylsilyl and
trinaphthylsilyl; silyl ethers of hydrocarbon-substituted
silyls, such as trimethylsilyl ether; silicon-substituted
alkyl groups, such as trimethylsilylmethyl; and silicon-
5 substituted aryl groups, such as trimethylsilylphenyl.

Examples of the halogen atoms include a fluorine atom,
a chlorine atom, a bromine atom and an iodine atom.

Of the groups indicated by R²⁵, R²⁶, R²⁷ and R²⁸, a
part of the groups neighboring with each other may be
10 bonded to form a ring together with carbon atoms to which
those groups are bonded.

R²⁵, R²⁶, R²⁷ and R²⁸ are each shown at two positions,
and for example, R²⁵ and R²⁵ may be the same groups or
different groups. Of the groups indicted by R²⁵ to R²⁸,
15 the groups with the same symbols are a preferred
combination of groups which are linked to form a ring.

Examples of the rings formed from a part of the
neighboring groups out of R²⁵, R²⁶, R²⁷ and R²⁸ together
with carbon atoms to which those groups are bonded include
20 condensed rings, such as benzene ring, naphthalene ring,
acenaphthene ring and indene ring; and groups wherein
hydrogen atoms on these rings are replaced with alkyl
groups such as methyl, ethyl, propyl and butyl.

Of these, preferable is a hydrocarbon group of 1 to
25 20 carbon atoms or a hydrogen atom, and particularly

preferable is a hydrocarbon group of 1 to 4 carbon atoms such as methyl, ethyl, propyl or butyl, a benzene ring formed by bonding of a hydrocarbon group, or a group wherein a hydrogen atom on a benzene ring formed by bonding of a hydrocarbon group is replaced with an alkyl group such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl or tert-butyl.

X^1 and X^2 may be the same or different and are each the same hydrocarbon group of 1 to 20 carbon atoms, halogenated hydrocarbon group of 1 to 20 carbon atoms, oxygen-containing group, sulfur-containing group, silicon-containing group, hydrogen atom or halogen atom as described above with respect to R^{25} , R^{26} , R^{27} and R^{28} . Of these, preferable is a halogen atom, a hydrocarbon group of 1 to 20 carbon atoms or a sulfonate group.

Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, $-O-$, $-CO-$, $-S-$, $-SO-$, $-SO_2-$, $-Ge-$, $-Sn-$, $-NR^{21}-$, $-P(R^{21})-$, $-P(O)(R^{21})-$, $-BR^{21}-$ or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom or a halogen atom).

Examples of the divalent hydrocarbon groups of 1 to 20 carbon atoms include alkylene groups, such as methylene, dimethylmethylene, 1,2-ethylene, dimethyl-1,2-ethylene, 1,3-trimethylene, 1,4-tetramethylene, 1,2-cyclohexylene and 1,4-cyclohexylene; and arylalkylene groups, such as diphenylmethylene and diphenyl-1,2-ethylene.

Examples of the divalent halogenated hydrocarbon groups of 1 to 20 carbon atoms include groups wherein the above-mentioned divalent hydrocarbon groups of 1 to 20 carbon atoms are halogenated, such as chloromethylene.

Examples of the divalent silicon-containing groups include alkylsilylene groups, such as silylene, methylsilylene, dimethylsilylene, diethylsilylene, di(n-propyl)silylene, di(i-propyl)silylene, di(cyclohexyl)silylene, methylphenylsilylene, diphenylsilylene, di(p-tolyl)silylene and di(p-chlorophenyl)silylene; alkylarylsilylene groups; arylsilylene groups; alkyldisilylene groups, such as tetramethyl-1,2-disilylene and tetraphenyl-1,2-disilylene; alkylaryldisilylene groups; and aryldisilylene groups.

Examples of the divalent germanium-containing groups include groups wherein silicon is replaced with germanium in the above-mentioned divalent silicon-containing groups.

Examples of the divalent tin-containing groups include groups wherein silicon is replaced with tin in the

above-mentioned divalent silicon-containing groups.

R²¹ is the same hydrocarbon group of 1 to 20 carbon atoms, halogenated hydrocarbon group of 1 to 20 carbon atoms or halogen atom as described above with respect to
 5 R²⁵, R²⁶, R²⁷ and R²⁸, or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom.

Of these, a substituted silylene group, such as dimethylsilylene, diphenylsilylene or methylphenylsilylene,
 10 is particularly preferable as Y¹.

Examples of the transition metal compounds represented by the formula (11) include
 ethylene-bis(indenyl)dimethyl zirconium,
 ethylene-bis(indenyl)zirconium dichloride,
 15 ethylene-bis(indenyl)zirconium-
 bis(trifluoromethanesulfonate),
 ethylene-bis(indenyl)zirconium-bis(methanesulfonate),
 ethylene-bis(indenyl)zirconium-bis(p-toluenesulfonate),
 ethylene-bis(indenyl)zirconium bis(p-
 20 chlorobenzenesulfonate),
 ethylene-bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
 isopropylidene-bis(cyclopentadienyl)fluorenylzirconium
 dichloride,
 isopropylidene-
 25 bis(cyclopentadienyl)(methylcyclopentadienyl)zirconium

- dichloride,
dimethylsilylene-bis(cyclopentadienyl)zirconium dichloride,
dimethylsilylene-bis(methylcyclopentadienyl)zirconium
dichloride,
5 dimethylsilylene-bis(dimethylcyclopentadienyl)zirconium
dichloride,
dimethylsilylene-bis(trimethylcyclopentadienyl)zirconium
dichloride,
dimethylsilylene-bis(indenyl)zirconium dichloride,
10 dimethylsilylene-bis(indenyl)zirconium-
bis(trifluoromethanesulfonate),
dimethylsilylene-bis(4,5,6,7-tetrahydroindenyl)zirconium
dichloride,
dimethylsilylene-bis(cyclopentadienyl)(fluorenyl)zirconium
15 dichloride,
diphenylsilylene-bis(indenyl)zirconium dichloride,
methylphenylsilylene-bis(indenyl)zirconium dichloride,
rac-dimethylsilylene-bis(2,3,5-
trimethylcyclopentadienyl)zirconium dichloride,
20 rac-dimethylsilylene-bis(2,4,7-
trimethylcyclopentadienyl)zirconium dichloride,
rac-dimethylsilylene-bis(2-methyl-4-tert-
butylcyclopentadienyl)zirconium dichloride,
isopropylidene-(cyclopentadienyl)(fluorenyl)zirconium
25 dichloride,


- dimethylsilylene-(3-tert-butylcyclopentadienyl)(indenyl)zirconium dichloride,
isopropylidene-(4-methylcyclopentadienyl)(3-methylindenyl)zirconium dichloride,
- 5 isopropylidene(4-tert-butylcyclopentadienyl)(3-methylindenyl)zirconium dichloride,
isopropylidene(4-tert-butylcyclopentadienyl)(3-tert-butylindenyl)zirconium dichloride,
dimethylsilylene-(4-methylcyclopentadienyl)(3-
- 10 methylindenyl)zirconium dichloride,
dimethylsilylene-(4-tert-butylcyclopentadienyl)(3-methylindenyl)zirconium dichloride,
dimethylsilylene-(4-tert-butylcyclopentadienyl)(3-tert-butylindenyl)zirconium dichloride,
- 15 dimethylsilylene-(3-tert-butylcyclopentadienyl)(fluorenyl)zirconium dichloride,
isopropylidene-(3-tert-butylcyclopentadienyl)(fluorenyl)zirconium dichloride,
N,N-diphenylaminoboryliden-bis(cyclopentadienyl)zirconium
- 20 dichloride,
N,N-dinaphthylaminoboryliden-bis(cyclopentadienyl)zirconium dichloride,
N,N-dimethylaminoboryliden-bis(cyclopentadienyl)zirconium dichloride and
- 25 N-methyl-N-phenylaminoboryliden-

bis(cyclopentadienyl)zirconium dichloride.

Also available are compounds wherein zirconium is replaced with titanium or hafnium in the above-mentioned compounds.

- 5 The transition metal compound represented by the formula (11) is more specifically a transition metal compound represented by the following formula (11a) or (11b).

10

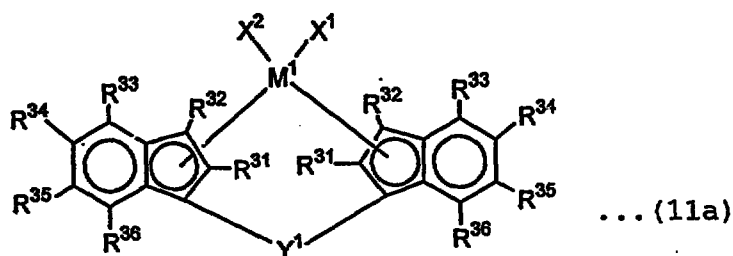

15

In the above formula, M^1 is a transition metal atom of Group 4 of the periodic table, specifically zirconium, titanium or hafnium, preferably zirconium.

- Each R^{31} may be the same or different and is a
- 20 hydrocarbon group of 1 to 6 carbon atoms. Examples of such hydrocarbon groups include alkyl groups, such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, n-pentyl, neopentyl, n-hexyl and cyclohexyl; and alkenyl groups, such as vinyl and propenyl. Of these,
- 25 preferable are alkyl groups whose carbon atoms bonded to

indenyl groups are primary carbon atoms, more preferable are alkyl groups of 1 to 4 carbon atoms, and particularly preferable are methyl and ethyl.

R³², R³⁴, R³⁵ and R³⁶ may be the same or different
 5 and are each a hydrogen atom, a halogen atom or the same hydrocarbon group of 1 to 6 carbon atoms as described above with respect to R³¹.

Each R³³ may be the same or different and is a hydrogen atom or an aryl group of 6 to 16 carbon atoms.
 10 Examples of such aryl groups include phenyl, α -naphthyl, β -naphthyl, anthryl, phenanthryl, pyrenyl, acenaphthyl, phenalenyl, aceanthrylenyl, tetrahydronaphthyl, indanyl and biphenyl. Of these, preferable are phenyl, naphthyl, anthryl and phenanthryl.

15 These aryl groups may be substituted with:

halogen atoms, such as fluorine, chlorine, bromine and iodine;

hydrocarbon groups of 1 to 20 carbon atoms, e.g., alkyl groups, such as methyl, ethyl, propyl, butyl, hexyl,
 20 cyclohexyl, octyl, nonyl, dodecyl, eicosyl, norbornyl and adamantyl; alkenyl groups, such as vinyl, propenyl and cyclohexenyl; arylalkyl groups, such as benzyl, phenylethyl and phenylpropyl; and aryl groups, such as phenyl, tolyl, dimethylphenyl, trimethylphenyl, ethylphenyl, propylphenyl,
 25 biphenyl, α - or β -naphthyl, methylnaphthyl, anthryl,

phenanthryl, benzylphenyl, pyrenyl, acenaphthyl, phenalenyl, aceanthrylenyl, tetrahydronaphthyl, indanyl and biphenyl; and

organosilyl groups, such as trimethylsilyl,
 5 triethylsilyl and triphenylsilyl.

X^1 and X^2 may be the same or different and have the same meanings as those of X^1 and X^2 in the formula (11). Of the aforesaid atoms and groups, preferable is a halogen atom or a hydrocarbon group of 1 to 20 carbon atoms.

10 Y^1 has the same meaning as that of Y^1 in the formula (11). Of the aforesaid groups, preferable is a divalent silicon-containing group, a divalent germanium-containing group, a divalent alkylene group or a divalent boron-containing boronyl group, more preferable is a divalent
 15 silicon-containing group or a divalent alkylene group, and particularly preferable is alkylsilylene, alkylarylsilylene, arylsilylene, alkylakylene or arylalkylene.

Examples of the transition metal compounds represented by the formula (11a) include
 20 rac-dimethylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(β -
 25 naphthyl)indenyl)]zirconium dichloride,

- rac-dimethylsilylene-bis[1-(2-methyl-4-(1-anthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(2-anthryl)indenyl)]zirconium dichloride,
5 rac-dimethylsilylene-bis[1-(2-methyl-4-(9-anthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(p-
10 fluorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(pentafluorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(p-chlorophenyl)indenyl)]zirconium dichloride,
15 rac-dimethylsilylene-bis[1-(2-methyl-4-(m-chlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(o-chlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(o,p-
20 dichlorophenyl)phenylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(p-bromophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-methyl-4-(p-tolyl)indenyl)]zirconium dichloride,
25 rac-dimethylsilylene-bis[1-(2-methyl-4-(m-

- tolyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(o-
 tolyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(o,o'-
 5 dimethylphenyl)-1-indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(p-
 ethylphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(p-i-
 propylphenyl)indenyl)]zirconium dichloride,
 10 rac-dimethylsilylene-bis[1-(2-methyl-4-(p-
 benzylphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(p-
 biphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(m-
 15 biphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(p-
 trimethylsilylenophenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-(m-
 trimethylsilylenophenyl)indenyl)]zirconium dichloride,
 20 rac-dimethylsilylene-bis[1-(2-phenyl-4-
 phenylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-
 phenylindenyl)]zirconium dichloride,
 rac-di-(i-propyl)silylene-bis[1-(2-methyl-4-
 25 phenylindenyl)]zirconium dichloride,

- rac-di-(n-butyl)silylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-dicyclohexylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
5 rac-methylphenylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-diphenylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-di(p-tolyl)silylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
10 rac-di(p-chlorophenyl)silylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-methylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
15 rac-ethylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-dimethylgermylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
rac-dimethylstannylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dichloride,
20 rac-dimethylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dibromide,
rac-dimethylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium dimethyl,
25 rac-dimethylsilylene-bis[1-(2-methyl-4-

- phenylindenyl)]zirconium methylchloride,
 rac-dimethylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium chlorideSO₂Me,
 rac-dimethylsilylene-bis[1-(2-methyl-4-phenylindenyl)]zirconium chlorideOSO₂Me,
 5 rac-dimethylsilylene-bis[1-(2-ethyl-4-phenylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4- α -naphthyl)indenyl)]zirconium dichloride,
 10 rac-dimethylsilylene-bis[1-(2-ethyl-4-(β -naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(2-methyl-1-naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(5-acenaphthyl)indenyl)]zirconium dichloride,
 15 rac-dimethylsilylene-bis[1-(2-ethyl-4-(9-anthryl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
 20 rac-dimethylsilylene-bis[1-(2-ethyl-4-(o-methylphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(m-methylphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(p-methylphenyl)indenyl)]zirconium dichloride,
 25

- rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,3-dimethylphenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,4-dimethylphenyl)indenyl)]zirconium dichloride,
5 rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,5-dimethylphenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,4,6-trimethylphenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(o-
10 chlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(m-chlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(p-chlorophenyl)indenyl)]zirconium dichloride,
15 rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,3-dichlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(2,6-dichlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(3,5-
20 dichlorophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(2-bromophenyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-ethyl-4-(3-bromophenyl)indenyl)]zirconium dichloride,
25 rac-dimethylsilylene-bis[1-(2-ethyl-4-(4-

- bromophenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(4-biphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-ethyl-4-(4-
 5 trimethylsilylphenyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-phenylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 10 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(β -naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(2-methyl-1-naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(5-
 15 acenaphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(9-anthryl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-n-propyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
 20 rac-dimethylsilylene-bis[1-(2-i-propyl-4-phenylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-i-propyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2-i-propyl-4-(β -
 25 naphthyl)indenyl)]zirconium dichloride,

- rac-dimethylsilylene-bis[1-(2-i-propyl-4-(8-methyl-9-naphthyl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-i-propyl-4-(5-acenaphthyl)indenyl)]zirconium dichloride,
- 5 rac-dimethylsilylene-bis[1-(2-i-propyl-4-(9-anthryl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-i-propyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-
- 10 phenylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-(β -naphthyl)indenyl)]zirconium dichloride,
- 15 rac-dimethylsilylene-bis[1-(2-s-butyl-4-(2-methyl-1-naphthyl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-(5-acenaphthyl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-(9-
- 20 anthryl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-s-butyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-n-pentyl-4-phenylindenyl)]zirconium dichloride,
- 25 rac-dimethylsilylene-bis[1-(2-n-pentyl-4-(α -

- naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-phenylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-(α -
- 5 naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-(β -naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-(2-methyl-1-naphthyl)indenyl)]zirconium dichloride,
- 10 rac-dimethylsilylene-bis[1-(2-n-butyl-4-(5-acenaphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-(9-anthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-butyl-4-(9-
- 15 phenanthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-i-butyl-4-phenylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-i-butyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
- 20 rac-dimethylsilylene-bis[1-(2-i-butyl-4-(β -naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-i-butyl-4-(2-methyl-1-naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-i-butyl-4-(5-
- 25 acenaphthyl)indenyl)]zirconium dichloride,

- rac-dimethylsilylene-bis[1-(2-i-butyl-4-(9-anthryl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-i-butyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
5 rac-dimethylsilylene-bis[1-(2-neopentyl-4-phenylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-neopentyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2-n-hexyl-4-phenylindenyl)]zirconium dichloride,
10 rac-dimethylsilylene-bis[1-(2-n-hexyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
rac-methylphenylsilylene-bis[1-(2-ethyl-4-phenylindenyl)]zirconium dichloride,
15 rac-methylphenylsilylene-bis[1-(2-ethyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
rac-methylphenylsilylene-bis[1-(2-ethyl-4-(9-anthryl)indenyl)]zirconium dichloride,
rac-methylphenylsilylene-bis[1-(2-ethyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
20 rac-methylphenylsilylene-bis[1-(2-ethyl-4-phenylindenyl)]zirconium dichloride,
rac-diphenylsilylene-bis[1-(2-ethyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
25 rac-diphenylsilylene-bis[1-(2-ethyl-4-(9-

- anthryl)indenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2-ethyl-4-(9-phenanthryl)indenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2-ethyl-4-(4-biphenyl)indenyl)]zirconium dichloride,
 5 rac-methylene-bis[1-(2-ethyl-4-(4-phenylindenyl))]zirconium dichloride,
 rac-methylene-bis[1-(2-ethyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 10 rac-ethylene-bis[1-(2-ethyl-4-phenylindenyl)]zirconium dichloride,
 rac-ethylene-bis[1-(2-ethyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 rac-ethylene-bis[1-(2-n-propyl-4-(α -naphthyl)indenyl)]zirconium dichloride,
 15 rac-dimethylgermyl-bis[1-(2-ethyl-4-phenylindenyl)]zirconium dichloride,
 rac-dimethylgermyl-bis[1-(2-ethyl-4-(α -naphthyl)indenyl)]zirconium dichloride and
 20 rac-dimethylgermyl-bis[1-(2-n-propyl-4-phenylindenyl)]zirconium dichloride.


Also available are compounds wherein zirconium is replaced with titanium or hafnium in the above-mentioned compounds.

- 25 In the present invention, a racemic modification of

the transition metal compound represented by the formula (11a) is usually used as a catalyst component, but R-form or S-form is also employable.

The transition metal compound represented by the
 5 formula (11a) can be prepared in accordance with the specification and examples of European Patent A No. 0,320,762 described in *Journal of Organometallic Chem.*, 288, pp. 63-67 (1985).

Next, the transition metal compound represented by
 10 the formula (11b) is described.

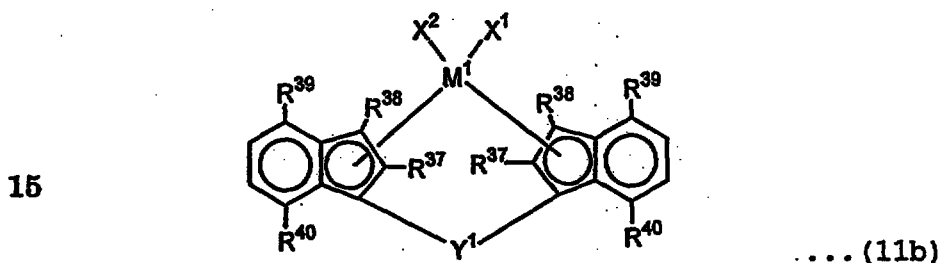

In the above formula, M¹ is a transition metal atom
 20 of Group 4 of the periodic table, specifically titanium, zirconium or hafnium, preferably zirconium.

R³⁷ and R³⁸ may be the same or different and are each
 a hydrogen atom or the same nitrogen-containing group,
 phosphorus-containing group, hydrocarbon group of 1 to 20
 25 carbon atoms, halogenated hydrocarbon group of 1 to 20

carbon atoms, oxygen-containing group, sulfur-containing group, silicon-containing group or halogen atom as described above with respect to R^{25} , R^{26} , R^{27} and R^{28} in the formula (11).

- 5 R^{37} is preferably a hydrocarbon group of 1 to 20 carbon atoms, particularly preferably a hydrocarbon group of 1 to 3 carbon atoms such as methyl, ethyl or propyl.
- R^{38} is preferably a hydrogen atom or a hydrocarbon group of 1 to 20 carbon atoms, particularly preferably a hydrogen
- 10 atom or a hydrocarbon group of 1 to 3 carbon atoms such as methyl, ethyl or propyl.

- R^{39} and R^{40} may be the same or different and are each an alkyl group of 1 to 20 carbon atoms. Examples of such alkyl groups include straight-chain or branched alkyl
- 15 groups, such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, n-pentyl, neopentyl, n-hexyl, cyclohexyl, octyl, nonyl, dodecyl and eicosyl; and cycloalkyl groups, such as norbornyl and adamantyl.

- R^{39} is preferably a secondary or tertiary alkyl group.
- 20 X^1 and X^2 may be the same or different and have the same meanings as those of X^1 and X^2 in the formula (11).

Y^1 has the same meaning as that of Y^1 in the formula (11).

- Examples of the transition metal compounds
- 25 represented by the formula (11b) include

- rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-ethylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-n-propylindenyl)]zirconium dichloride,
5 rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-n-butyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-sec-10 butyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-t-butyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-n-pentyindenyl)]zirconium dichloride,
15 rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-n-hexyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-cyclohexyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-20 methylcyclohexyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-phenylethyindenyl)]zirconium dichloride,
rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-phenyldichloromethylindenyl)]zirconium dichloride,
25 rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-

- chloromethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-trimethylsilylmethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,7-dimethyl-4-trimethylsiloxymethylindenyl)]zirconium dichloride,
 5 rac-diethylsilylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 rac-di(i-propyl)silylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 10 rac-di(n-butyl)silylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 rac-di(cyclohexyl)silylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 rac-methylphenylsilylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 15 rac-methylphenylsilylene-bis[1-(2,7-dimethyl-4-t-butylindenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2,7-dimethyl-4-t-butylindenyl)]zirconium dichloride,
 20 rac-diphenylsilylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2,7-dimethyl-4-ethylindenyl)]zirconium dichloride,
 rac-di(p-tolyl)silylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
 25

- rac-di(p-chlorophenyl)silylene-bis[1-(2,7-dimethyl-4-i-propylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-methyl-4-i-propyl-7-ethylindenyl)]zirconium dibromide,
- 5 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-ethylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-n-propylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-i-propylindenyl)]zirconium dichloride,
- 10 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-n-butylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-sec-butylindenyl)]zirconium dichloride,
- 15 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-t-butylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-n-pentylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-n-hexylindenyl)]zirconium dichloride,
- 20 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-cyclohexylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-methylcyclohexylindenyl)]zirconium dichloride,
- 25 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-

- trimethylsilylmethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-
 trimethylsiloxymethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-
 5 phenylethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-
 phenyldichloromethylindenyl)]zirconium dichloride,
 rac-dimethylsilylene-bis[1-(2,3,7-trimethyl-4-
 chloromethylindenyl)]zirconium dichloride,
 10 rac-diethylsilylene-bis[1-(2,3,7-trimethyl-4-i-
 propylindenyl)]zirconium dichloride,
 rac-di(i-propyl)silylene-bis[1-(2,3,7-trimethyl-4-i-
 propylindenyl)]zirconium dichloride,
 rac-di(n-butyl)silylene-bis[1-(2,3,7-trimethyl-4-i-
 15 propylindenyl)]zirconium dichloride,
 rac-di(cyclohexyl)silylene-bis[1-(2,3,7-trimethyl-4-i-
 propylindenyl)]zirconium dichloride,
 rac-methylphenylsilylene-bis[1-(2,3,7-trimethyl-4-i-
 propylindenyl)]zirconium dichloride,
 20 rac-methylphenylsilylene-bis[1-(2,3,7-trimethyl-4-t-
 butylindenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2,3,7-trimethyl-4-t-
 butylindenyl)]zirconium dichloride,
 rac-diphenylsilylene-bis[1-(2,3,7-trimethyl-4-i-
 25 propylindenyl)]zirconium dichloride,

- rac-diphenylsilylene-bis[1-(2,3,7-trimethyl-4-ethylindenyl)]zirconium dichloride,
- rac-di(p-tolyl)silylene-bis[1-(2,3,7-trimethyl-4-i-propylindenyl)]zirconium dichloride,
- 5 rac-di(p-chlorophenyl)silylene-bis[1-(2,3,7-trimethyl-4-i-propylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-methyl-4-i-propyl-7-methylindenyl)]zirconium dimethyl,
- rac-dimethylsilylene-bis[1-(2-methyl-4-i-propyl-7-methylindenyl)]zirconium methylchloride,
- 10 rac-dimethylsilylene-bis[1-(2-methyl-4-i-propyl-7-methylindenyl)]zirconium-bis(methanesulfonate),
- rac-dimethylsilylene-bis[1-(2-methyl-4-i-propyl-7-methylindenyl)]zirconium-bis(p-phenylsulfinat),
- 15 rac-dimethylsilylene-bis[1-(2-methyl-3-methyl-4-i-propyl-7-methylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-methyl-4,6-di-i-propylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-ethyl-4-i-propyl-7-methylindenyl)]zirconium dichloride,
- 20 rac-dimethylsilylene-bis[1-(2-phenyl-4-i-propyl-7-methylindenyl)]zirconium dichloride,
- rac-dimethylsilylene-bis[1-(2-methylindenyl)]zirconium dichloride,
- 25 rac-ethylene-bis[1-(2,4,7-trimethylindenyl)]zirconium

dichloride and

rac-isopropylidene-bis[1-(2,4,7-trimethylindenyl)]zirconium
dichloride.

Also available are compounds wherein zirconium is
5 replaced with titanium or hafnium in the above-mentioned
compounds.


Of the above compounds, particularly preferable are
compounds having a branched alkyl group, such as i-propyl,
sec-butyl or tert-butyl, at the 4-position.

10 In the present invention, a racemic modification of
the transition metal compound represented by the formula
(11b) is usually used as a catalyst component, but R-form
or S-form is also employable.

The transition metal compound represented by the
15 formula (11b) can be synthesized from an indene derivative
by a known process, for example, a process described in
Japanese Patent Laid-Open Publication No. 268307/1992.

Next, the transition metal compound represented by
the formula (12) is described.

20



25

In the above formula, M^1 is a transition metal atom selected from Group 3 to Group 10 of the periodic table, preferably a transition metal atom selected from Group 4 of the periodic table, more preferably zirconium, titanium or hafnium, particularly preferably zirconium.

Cp is a cyclopentadienyl group or its derivative that is π -bonded to M^1 .

Z^1 is a ligand containing an oxygen atom, a sulfur atom, a boron atom or an element of Group 14 of the periodic table, for example, $-\text{Si}(\text{R}^{22}_2)-$, $-\text{C}(\text{R}^{22}_2)-$, $-\text{Si}(\text{R}^{22}_2)\text{Si}(\text{R}^{22}_2)-$, $-\text{C}(\text{R}^{22}_2)\text{C}(\text{R}^{22}_2)-$, $-\text{C}(\text{R}^{22}_2)\text{C}(\text{R}^{22}_2)\text{C}(\text{R}^{22}_2)-$, $-\text{C}(\text{R}^{22})=\text{C}(\text{R}^{22})-$, $-\text{C}(\text{R}^{22}_2)\text{Si}(\text{R}^{22}_2)-$ or $-\text{Ge}(\text{R}^{22}_2)-$.

Y^1 is a ligand containing a nitrogen atom, a phosphorus atom, an oxygen atom or a sulfur atom, for example, $-\text{N}(\text{R}^{23})-$, $-\text{O}-$, $-\text{S}-$ or $-\text{P}(\text{R}^{23})-$.

Z^1 and Y^1 may together form a condensed ring.

R^{22} is a hydrogen atom, an alkyl, aryl, silyl, halogenated alkyl or halogenated aryl group having up to 20 of non-hydrogen atoms, or a combination of such groups.

R^{23} is an alkyl group of 1 to 10 carbon atoms, an aryl group of 6 to 10 carbon atom or an aralkyl group of 7 to 10 carbon atoms, or may form a condensed ring of up to 30 non-hydrogen atoms together with one or more R^{22} .

Each X^1 may be the same or different and is a hydrogen atom, a halogen atom, a hydrocarbon group which has 20 or less carbon atoms and may contain 1 or more double bonds, a silyl group containing 20 or less silicon
 5 atoms, a germyl group containing 20 or less germanium atoms or a boronyl group containing 20 or less boron atoms.


Examples of the transition metal compounds represented by the formula (12) include

(tert-butylamide) (tetramethyl- η^5 -cyclopentadienyl)-1,2-
 10 ethanediylzirconium dichloride,
 (tert-butylamide) (tetramethyl- η^5 -cyclopentadienyl)-1,2-
 ethanediyltitanium dichloride,
 (methanamide) (tetramethyl- η^5 -cyclopentadienyl)-1,2-
 ethanediylzirconium dichloride,
 15 (methanamide) (tetramethyl- η^5 -cyclopentadienyl)-1,2-
 ethanediyltinanium dichloride,
 (ethanamide) (tetramethyl- η^5 -
 cyclopentadienyl)methylenetitanium dichloride,
 (tert-butylamide) dimethyl (tetramethyl- η^5 -
 20 cyclopentadienyl)silanetitanium dichloride,
 (tert-butylamide) dimethyl (tetramethyl- η^5 -
 cyclopentadienyl)silanezirconium dichloride,
 (benzylamide) dimethyl (tetramethyl- η^5 -
 cyclopentadienyl)silanetitanium dichloride and
 25 (phenylphosphide) dimethyl (tetramethyl- η^5 -

cyclopentadienyl)silanezirconium dibenzyl.

Next, the transition metal compound represented by the formula (13) is described.

5

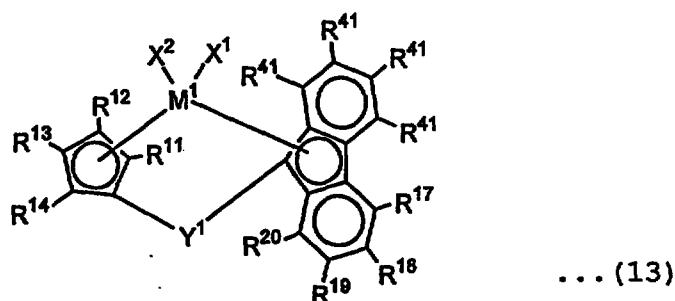

10 In the above formula, M^1 is a transition metal atom selected from Group 3 to Group 10 of the periodic table, preferably a transition metal atom selected from Group 4 of the periodic table, more preferably titanium, zirconium or hafnium, particularly preferably zirconium.

15 R^{11} to R^{14} , R^{17} to R^{20} , and R^{41} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen
20 atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded (except a case where all of R^{11} , R^{12} , R^{13} , R^{14} , R^{17} ,
25 R^{18} , R^{19} , R^{20} and R^{41} are hydrogen atoms and a case where

R¹² or R¹³ is a tert-butyl group and the residual R¹¹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴¹ are hydrogen atoms).

Examples of hydrocarbons of 1 to 40 carbon atoms are alkyl groups of 1 to 20 carbon atoms such as methyl,
 5 ethyl, propyl, butyl, hexyl, cyclohexyl, octyl, nonyl, dodecyl and eicosyl;

aryl groups of 6 to 20 carbon atoms such as phenyl, α - or β -naphthyl, biphenyl, anthryl and phenanthryl;

aryl alkyl groups of 7 to 40 carbon atoms such as
 10 benzyl, phenylethyl, phenylpropyl, phenanthrylmethyl, phenanthrylethyl and phenanthrylpropyl;

aryl alkenyl groups of 8 to 40 carbon atoms such as vinylphenanthryl;

alkyl aryl groups of 7 to 40 carbon atoms such as
 15 methylphenanthryl, ethylphenanthryl and propylphenanthryl; and

alkenyl groups of 2 to 10 carbon atoms such as vinyl, propenyl and cyclohexenyl.

Examples of the halogenated hydrocarbon groups of 1
 20 to 40 carbon atoms include groups wherein the above-mentioned hydrocarbon groups of 1 to 40 carbon atoms are substituted with halogens.

Examples of the oxygen-containing groups, the sulfur-containing groups, the silicon-containing groups and the
 25 halogen atoms include the same groups and atoms as

previously described with respect to R^{25} , R^{26} , R^{27} and R^{28} in the formula (11).

X^1 and X^2 may be the same or different and have the same meanings as those of X^1 and X^2 in the formula (11).

5 Y^1 has the same meaning as that of Y^1 in the formula (11).

Examples of the transition metal compounds represented by the formula (13) include

isopropylidene-(cyclopentadienyl) (fluorenyl) zirconium

10 dichloride,

dimethylsilylene-(3-tert-butylcyclopentadienyl) (fluorenyl) zirconium dichloride,

isopropylidene-(3-tert-butylcyclopentadienyl) (fluorenyl) zirconium dichloride,

15 isopropylidene-(cyclopentadienyl) (2,7-tert-butylfluorenyl) zirconium dichloride,

dimethylsilylene-(2-methyl-cyclopentadienyl) (2,7-tert-butylfluorenyl) zirconium dichloride,

dimethylsilylene-(2-methyl-

20 cyclopentadienyl) (fluorenyl) zirconium dichloride,

dimethylsilylene-(cyclopentadienyl) (2,7-tert-butylfluorenyl) zirconium dichloride,


isopropylidene-(2-methyl-cyclopentadienyl) (2,7-tert-butylfluorenyl) zirconium dichloride,

25 isopropylidene-(2-methyl-cyclopentadienyl) (3,6-tert-

butylfluorenyl)zirconium dichloride,
 dimethylsilylene-(2-methyl-cyclopentadienyl) (3,6-tert-
 butylfluorenyl)zirconium dichloride and
 diphenylmethylene(cyclopentadienyl) (fluorenyl)zirconium
 5 dichloride.

Also available are compounds wherein zirconium is
 replaced with titanium or hafnium in the above-mentioned
 compounds.

Next, the transition metal compound represented by
 10 the formula (14) is described.

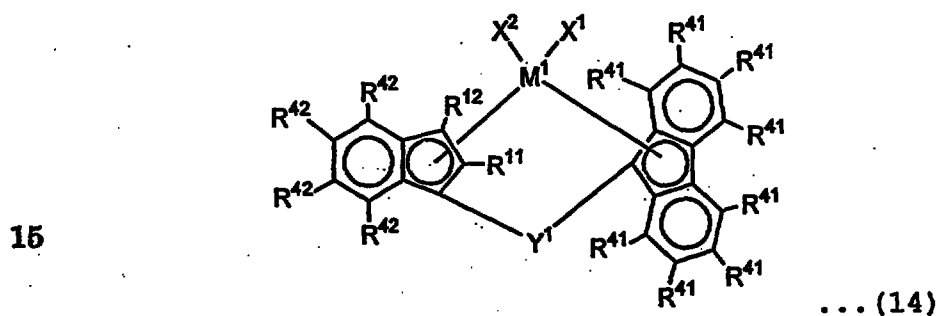

In the above formula, M^1 is a transition metal atom
 selected from Group 3 to Group 10 of the periodic table,
 20 preferably a transition metal atom selected from Group 4 of
 the periodic table, more preferably titanium, zirconium or
 hafnium, particularly preferably zirconium.

R^{11} , R^{12} , R^{41} and R^{42} may be the same or different
 and are each a hydrocarbon group of 1 to 40 carbon atoms, a
 25 halogenated hydrocarbon group of 1 to 40 carbon atoms, an

oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom.

Examples of the hydrocarbon groups of 1 to 40 carbon atoms include the same groups as previously described with
 5 respect to R^{11} to R^{14} , R^{17} to R^{20} and R^{41} in the formula (13).

Examples of the oxygen-containing groups, the sulfur-containing group, the silicon-containing groups and the halogen atoms include the same groups and atoms as
 10 previously described with respect to R^{25} , R^{26} , R^{27} and R^{28} in the formula (11). Of the groups indicated by R^{11} , R^{12} , R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded. Of the groups
 15 indicated by R^{11} , R^{12} , R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded.

X^1 and X^2 may be the same or different and have the same meanings as those of X^1 and X^2 in the formula (11).

20 Y^1 has the same meaning as that of Y^1 in the formula (11), but when all of R^{11} , R^{12} , R^{41} and R^{42} are hydrogen atoms, Y^1 is not ethylene.

Examples of the transition metal compounds represented by the formula (14) include
 25 Ethylene[2-methyl-4(9-phenanthryl)-1-indenyl](9-

- fluorenyl)zirconium dichloride,
 Ethylene[2-methyl-4(9-phenanthryl)-1-indenyl](2,7-dimethyl-9-fluorenyl)zirconium dichloride,
 Ethylene[2-methyl-4(9-phenanthryl)-1-indenyl](2,7-di-t-
- 5 butyl-9-fluorenyl)zirconium dichloride,
 ethylene(2-methyl-4,5-benzo-1-indenyl)(9-fluorenyl)zirconium dichloride,
 ethylene(2-methyl-4,5-benzo-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium dichloride,
- 10 ethylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
 ethylene(2-methyl-4,5-benzo-1-indenyl)(2,7-dibromo-9-fluorenyl)zirconium dichloride,
 ethylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-
- 15 9-fluorenyl)zirconium dichloride,
 ethylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-dibromo-9-fluorenyl)zirconium dichloride,
 ethylene(2-methyl- α -acenaphtho-1-indenyl)(9-fluorenyl)zirconium dichloride,
- 20 ethylene(2-methyl- α -acenaphtho-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium dichloride,
 ethylene(2-methyl- α -acenaphtho-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
 dimethylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl](9-
- 25 fluorenyl)zirconium dichloride,

- dimethylsilylene[2-n-propyl-4(9-phenanthryl)-1-indenyl] (9-fluorenyl)zirconium dichloride,
- dimethylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl] (2,7-dimethyl-9-fluorenyl)zirconium dichloride,
- 5 dimethylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl] (2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (9-fluorenyl)zirconium dichloride,
- dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (2,7-
- 10 dimethyl-9-fluorenyl)zirconium dichloride,
- dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- dimethylsilylene(2-methyl- α -acenaphto-1-indenyl) (9-fluorenyl)zirconium dichloride,
- 15 dimethylsilylene(2-methyl- α -acenaphto-1-indenyl) (2,7-
- dimethyl-9-fluorenyl)zirconium dichloride,
- dimethylsilylene(2-methyl- α -acenaphto-1-indenyl) (2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- diphenylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl] (9-
- 20 fluorenyl)zirconium dichloride,
- diphenylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl] (2,7-
- dimethyl-9-fluorenyl)zirconium dichloride,
- diphenylsilylene[2-methyl-4(9-phenanthryl)-1-indenyl] (2,7-
- di-t-butyl-9-fluorenyl)zirconium dichloride,
- 25 diphenylsilylene(2-methyl-4,5-benzo-1-indenyl) (9-

- fluorenyl)zirconium dichloride,
 diphenylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 diphenylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-
 5 butyl-9-fluorenyl)zirconium dichloride,
 diphenylsilylene(2-methyl- α -acenaphto-1-indenyl)(9-
 fluorenyl)zirconium dichloride,
 diphenylsilylene(2-methyl- α -acenaphto-1-indenyl)(2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 10 diphenylsilylene(2-methyl- α -acenaphto-1-indenyl)(2,7-di-t-
 butyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene[2-methyl-4(9-phenanthryl)-1-
 indenyl](9-fluorenyl)zirconium dichloride,
 methylphenylsilylene[2-methyl-4(9-phenanthryl)-1-
 15 indenyl](2,7-dimethyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene[2-methyl-4(9-phenanthryl)-1-
 indenyl](2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene(2-methyl-4,5-benzo-1-indenyl)(9-
 fluorenyl)zirconium dichloride,
 20 methylphenylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-
 t-butyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene(2-methyl- α -acenaphto-1-indenyl)(9-
 25 fluorenyl)zirconium dichloride,

- methylphenylsilylene(2-methyl- α -acenaphto-1-indenyl) (2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 methylphenylsilylene(2-methyl- α -acenaphto-1-indenyl) (2,7-
 di-t-butyl-9-fluorenyl)zirconium dichloride,
 5 ethylene[3-methyl-4(9-phenanthryl)-1-indenyl] (9-
 fluorenyl)zirconium dichloride,
 ethylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-dimethyl-
 9-fluorenyl)zirconium dichloride,
 ethylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-di-t-
 10 butyl-9-fluorenyl)zirconium dichloride,
 ethylene(3-methyl-4,5-benzo-1-indenyl) (9-
 fluorenyl)zirconium dichloride,
 ethylene(3-methyl-4,5-benzo-1-indenyl) (2,7-dimethyl-9-
 fluorenyl)zirconium dichloride,
 15 ethylene(3-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-
 fluorenyl)zirconium dichloride,
 ethylene(3-methyl- α -acenaphto-1-indenyl) (9-
 fluorenyl)zirconium dichloride,
 ethylene(3-methyl- α -acenaphto-1-indenyl) (2,7-dimethyl-9-
 20 fluorenyl)zirconium dichloride,
 ethylene(3-methyl- α -acenaphto-1-indenyl) (2,7-di-t-butyl-9-
 fluorenyl)zirconium dichloride,
 dimethylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (9-
 fluorenyl)zirconium dichloride,
 25 dimethylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-

- dimethyl-9-fluorenyl)zirconium dichloride,
 dimethylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-
 di-t-butyl-9-fluorenyl)zirconium dichloride,
 dimethylsilylene(3-methyl-4,5-benzo-1-indenyl) (9-
 5 fluorenyl)zirconium dichloride,
 dimethylsilylene(3-methyl-4,5-benzo-1-indenyl) (2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 dimethylsilylene(3-methyl-4,5-benzo-1-indenyl) (2,7-di-t-
 butyl-9-fluorenyl)zirconium dichloride,
 10 dimethylsilylene(3-methyl- α -acenaphto-1-indenyl) (9-
 fluorenyl)zirconium dichloride,
 dimethylsilylene(3-methyl- α -acenaphto-1-indenyl) (2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 dimethylsilylene(3-methyl- α -acenaphto-1-indenyl) (2,7-di-t-
 15 butyl-9-fluorenyl)zirconium dichloride,
 diphenylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (9-
 fluorenyl)zirconium dichloride,
 diphenylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-
 dimethyl-9-fluorenyl)zirconium dichloride,
 20 diphenylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl] (2,7-
 di-t-butyl-9-fluorenyl)zirconium dichloride,
 diphenylsilylene(3-methyl-4,5-benzo-1-indenyl) (9-
 fluorenyl)zirconium dichloride,
 diphenylsilylene(3-methyl-4,5-benzo-1-indenyl) (2,7-
 25 dimethyl-9-fluorenyl)zirconium dichloride,

- diphenylsilylene(3-methyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
diphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(9-fluorenyl)zirconium dichloride,
- 5 diphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium dichloride,
diphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
methylphenylsilylene[3-methyl-4(9-phenanthryl)-1-
- 10 indenyl](9-fluorenyl)zirconium dichloride,
methylphenylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl](2,7-dimethyl-9-fluorenyl)zirconium dichloride,
methylphenylsilylene[3-methyl-4(9-phenanthryl)-1-indenyl](2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- 15 methylphenylsilylene(3-methyl-4,5-benzo-1-indenyl)(9-fluorenyl)zirconium dichloride,
methylphenylsilylene(3-methyl-4,5-benzo-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium dichloride,
methylphenylsilylene(3-methyl-4,5-benzo-1-indenyl)(2,7-di-
- 20 t-butyl-9-fluorenyl)zirconium dichloride,
methylphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(9-fluorenyl)zirconium dichloride,
methylphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium dichloride,
- 25 methylphenylsilylene(3-methyl- α -acenaphto-1-indenyl)(2,7-

- di-t-butyl-9-fluorenyl)zirconium dichloride,
ethylene(2-methyl-4,5-benzo-1-indenyl)(2,7-
ditrimethylsilyl-9-fluorenyl)zirconium dichloride,
ethylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-
5 9-fluorenyl)zirconium dichloride,
ethylene(2,7-dimethyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-
9-fluorenyl)zirconium dichloride,
ethylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-
di-t-butyl-9-fluorenyl)zirconium dichloride,
10 dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-
ditrimethylsilyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-
butyl-9-fluorenyl)zirconium-bis(methanesulfonate),
dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-
15 butyl-9-fluorenyl)zirconium-bis(trifluoromethanesulfonate),
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
di(trimethylsilyl)-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
di(trimethylsilyl)-9-fluorenyl)zirconium-
20 bis(methanesulfonate),
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
di(trimethylsilyl)-9-fluorenyl)zirconium-
bis(trifluoromethanesulfonate),
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-
25 t-butyl-9-fluorenyl)zirconium dichloride,

- dimethylsilylene(2,7-dimethyl-4,5-benzo-1-indenyl)(2,7-di-
t-butyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-
indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- 5 dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-dibromo-
9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
dibromo-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-
- 10 butoxy-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-
t-butoxy-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-
diphenyl-9-fluorenyl)zirconium dichloride,
- 15 dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
diphenyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-i-
propyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-
- 20 i-propyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-
dimethyl-9-fluorenyl)zirconium dichloride,
dimethylsilylene(2,6-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride,
- 25 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-

- indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium
dichloride,
- dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
- 5 dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
- 10 indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
indenyl) (2,7-dimethyl-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
- 15 dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium
dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
- 20 dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-
- 25 indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,

- dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-dimethyl-9-fluorenyl) zirconium dichloride,
 dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium-bis (methanesulfonate),
- 5 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-
- 10 t-butoxy-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium-bis (methanesulfonate),
- 15 dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-
- 20 dimethyl-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di (trimethylsilyl-9-fluorenyl) zirconium-bis (methanesulfonate),
 dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
- 25 indenyl) (2,7-dibromo-9-fluorenyl) zirconium-

- bis(methanesulfonate),
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-t-butoxy-9-fluorenyl)zirconium-bis(methanesulfonate),
- 5 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-diphenyl-9-fluorenyl)zirconium-bis(methanesulfonate),
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-i-propyl-9-fluorenyl)zirconium-bis(methanesulfonate),
- 10 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-dimethyl-9-fluorenyl)zirconium-bis(methanesulfonate),
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium-bis(methanesulfonate),
- 15 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di(trimethylsilyl)-9-fluorenyl)zirconium-bis(methanesulfonate),
- 20 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-dibromo-9-fluorenyl)zirconium-bis(methanesulfonate),
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-t-butoxy-9-fluorenyl)zirconium-bis(methanesulfonate),
- 25 bis(methanesulfonate),

- dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium-bis(methanesulfonate),
- dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium-bis(methanesulfonate),
- 5 dimethylsilylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-dimethyl-9-fluorenyl) zirconium-bis(methanesulfonate),
- 10 dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butoxy-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 15 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-t-butoxy-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 20 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 25

- dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-dimethyl-9-(4,5-methylenephenanthryl))zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di(trimethylsilyl)-9-(4,5-methylenephenanthryl))zirconium dichloride,
- 5 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-dibromo-9-(4,5-methylenephenanthryl))zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-t-butoxy-9-(4,5-methylenephenanthryl))zirconium dichloride,
- 10 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-diphenyl-9-(4,5-methylenephenanthryl))zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-i-propyl-9-(4,5-methylenephenanthryl))zirconium dichloride,
- 15 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-t-butyl-9-(4,5-methylenephenanthryl))zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-trimethylsilyl)-9-(4,5-methylenephenanthryl))zirconium dichloride,
- 20 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-trimethylsilyl)-9-(4,5-methylenephenanthryl))zirconium dichloride,
- 25 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-trimethylsilyl)-9-(4,5-methylenephenanthryl))zirconium dichloride,

- methylenephenanthryl)) zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-dibromo-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 5 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-t-butoxy-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-diphenyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 10 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-i-propyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 dimethylsilylene(2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl)(2,7-di-t-butyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 15 dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di(trimethylsilyl)-9-(4,5-methylenephenanthryl)) zirconium dichloride,
- 20 dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di-t-butyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 dimethylsilylene(2,6-dimethyl-4,5-benzo-1-indenyl)(2,7-di(trimethylsilyl)-9-(4,5-methylenephenanthryl)) zirconium
- 25

- dichloride,
 dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-t-butyl-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 5 dimethylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di(trimethylsilyl)-9-(4,5-methylenephenanthryl)) zirconium dichloride,
 dimethylmethylen (2-methyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
 10 dimethylmethylen (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-
 15 t-butoxy-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2-methyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
 20 dimethylmethylen (2-methyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylen (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-
 25 dimethyl-9-fluorenyl) zirconium dichloride,

- dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
- 5 dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
- 10 dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-dimethyl-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
- 15 dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium dichloride,
- 20 dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-di-t-butoxy-9-fluorenyl) zirconium dichloride,
- dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-diphenyl-9-fluorenyl) zirconium dichloride,
- 25 dimethylmethylene (2,7-dimethyl-4,5-(1-methyl-benzo)-1-

- indenyl) (2,7-di-i-propyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2,7-dimethyl-4,5-(1-methyl-benzo)-1-indenyl) (2,7-dimethyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-
- 5 butyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2-methyl-4,5-benzo-1-indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
- 10 dimethylmethylenes (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
 dimethylmethylenes (2,7-dimethyl-4,5-(2-methyl-benzo)-1-
- 15 indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium dichloride,
 dimethylsilylenes (2-methyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium η^4 -1-phenyl-1,3-pentadiene,
 dimethylsilylenes (2-methyl-4,5-benzo-1-indenyl) (2,7-
- 20 di(trimethylsilyl)-9-fluorenyl) zirconium η^4 -1,4-diphenylbutadiene,
 dimethylsilylenes (2-methyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium η^4 -2,4-hexadiene,
 dimethylsilylenes (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-
- 25 t-butyl-9-fluorenyl) zirconium η^4 -1,4-diphenyl-1,3-

butadiene,


dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di(trimethylsilyl)-9-fluorenyl) zirconium η 4-3-methyl-1,3-pentadiene,

- 5 dimethylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-dibromo-9-fluorenyl) zirconium η 4-2,4-hexadiene,
diphenylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-ditrimethylsilyl-9-fluorenyl) zirconium dichloride,
diphenylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-
- 10 t-butyl-9-fluorenyl) zirconium dichloride,
diphenylsilylene (2,7-dimethyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
diphenylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
- 15 methylphenylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di(trimethyl)silyl-9-fluorenyl) zirconium dichloride,
methylphenylsilylene (2,6-dimethyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
methylphenylsilylene (2,7-dimethyl-4,5-benzo-1-indenyl) (2,7-
- 20 di-t-butyl-9-fluorenyl) zirconium dichloride,
methylphenylsilylene (2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride,
ethylene (2-methyl-7-trimethylsilyl-4,5-benzo-1-indenyl) (2,7-di-t-butyl-9-fluorenyl) zirconium dichloride
- 25 and

dimethylsilylene(2-methyl-7-trimethylsilyl-4,5-(1-methylbenzo)-1-indenyl)(2,7-di-t-butyl-9-fluorenyl)zirconium dichloride.

Also available are compounds wherein zirconium is replaced with titanium or hafnium in the above-mentioned compounds.

Next, the transition metal compound represented by the formula (15) is described.

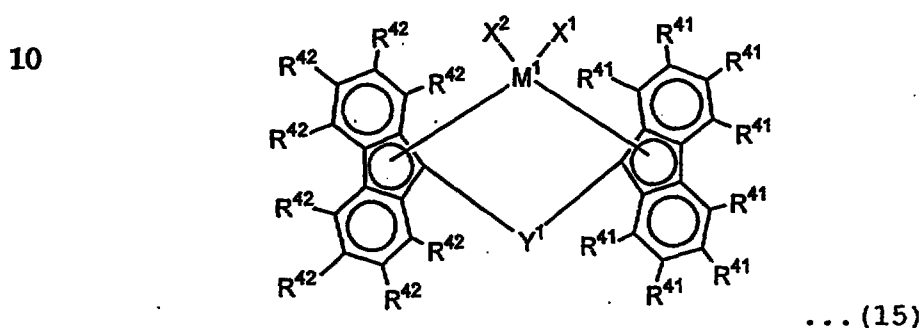

15

In the above formula, M^1 is a transition metal atom selected from Group 3 to Group 10 of the periodic table, preferably a transition metal atom selected from Group 4 of the periodic table, more preferably titanium, zirconium or hafnium, particularly preferably zirconium.

20

R^{41} and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom.

25

Examples of the hydrocarbon groups of 1 to 40 carbon atoms include the same groups as previously described with respect to R¹¹ to R¹⁴, R¹⁷ to R²⁰ and R⁴¹ in the formula (13).

5 Examples of the oxygen-containing groups, the sulfur-containing group, the silicon-containing groups and the halogen atoms include the same groups and atoms as previously described with respect to R²⁵, R²⁶, R²⁷ and R²⁸ in the formula (11). Of the groups indicated by R⁴¹ and
10 R⁴², a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded

X¹ and X² may be the same or different and have the same meanings as those of X¹ and X² in the formula (11).

15 Y¹ has the same meaning as that of Y¹ in the formula (11).

Examples of the transition metal compounds represented by the formula (15) include

ethylene-bis(fluorenyl)dimethyl zirconium,

20 ethylene-bis(fluorenyl)zirconium dichloride,

ethylene-bis(fluorenyl)zirconium-

bis(trifluoromethanesulfonate),


ethylene-bis(fluorenyl)zirconium-bis(methanesulfonate),

dimethylsilylene-bis(fluorenyl)zirconium dichloride,

25 dimethylsilylene-bis(fluorenyl)zirconium-

bis(trifluoromethanesulfonate),
 diphenylsilylene-bis(fluorenyl)zirconium dichloride,
 dimethylmethylen-bis(fluorenyl)zirconium dichloride,
 dimethylmethylen-bis(2,7-tert-butylfluorenyl)zirconium
 5 dichloride,
 dimethylsilylene-bis(2,7-tert-butylfluorenyl)zirconium
 dichloride,
 dimethylmethylen-bis(3,6-tert-butylfluorenyl)zirconium
 dichloride,
 10 dimethylsilylene-bis(3,6-tert-butylfluorenyl)zirconium
 dichloride, and
 N,N-diphenylaminoboryliden-bis(fluorenyl)zirconium
 dichloride.

Next, the transition metal compound represented by
 15 the formula (16) is described.

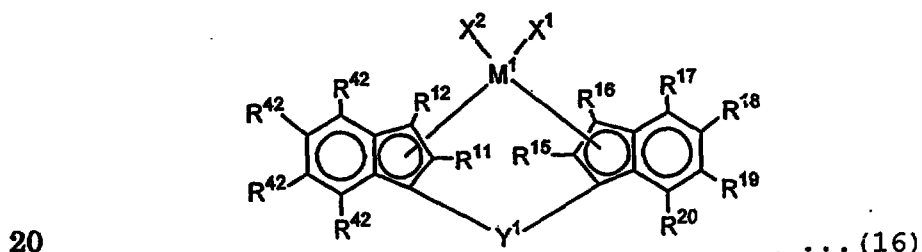

In the above formula, M^1 is a transition metal atom
 selected from Group 4 of the periodic table, specifically
 titanium, zirconium or hafnium, preferably zirconium.

25 R^{11} , R^{12} , R^{15} to R^{20} , and R^{42} may be the same or

different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom.

Examples of the hydrocarbon groups of 1 to 40 carbon atoms include the same groups as previously described with respect to R^{11} to R^{14} , R^{17} to R^{20} and R^{41} in the formula (13).

10 Examples of the oxygen-containing groups, the sulfur-containing group, the silicon-containing groups and the halogen atoms include the same groups and atoms as previously described with respect to R^{25} , R^{26} , R^{27} and R^{28} in the formula (11). Of the groups indicated by R^{11} , R^{12} ,
15 R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded.

X^1 and X^2 may be the same or different and have the same meanings as those of x^1 and x^2 in the formula (11).

20 Y^1 has the same meaning as that of y^1 in the formula (11).

Examples of the transition metal compounds represented by the formula (16) include the same compounds as previously exemplified with respect to the compounds of
25 the formula (11a) or (11b).

Also available are compounds wherein zirconium is replaced with titanium or hafnium in the above-mentioned compounds.

The transition metal compounds (A) mentioned above
5 can be used singly or in combination of two or more kinds.

(B-1) Organoaluminum oxy-compound

The organoaluminum oxy-compound (B-1) for use in the invention may be conventional aluminoxane (also referred to as "alumoxane") or such a benzene-insoluble organoaluminum
10 oxy-compound as exemplified in Japanese Patent Laid-Open Publication No. 78687/1990.

The conventional aluminoxane can be prepared by, for example, the following processes, and is generally obtained as a hydrocarbon solvent solution.

15 (1) An organoaluminum compound such as trialkylaluminum is added to a hydrocarbon medium suspension of a compound containing adsorption water or a salt containing water of crystallization, e.g., magnesium chloride hydrate, copper sulfate hydrate, aluminum sulfate
20 hydrate, nickel sulfate hydrate or cerous chloride hydrate, to allow the organoaluminum compound to react with the adsorption water or the water of crystallization.

(2) Water, ice or water vapor is allowed to directly act on an organoaluminum compound such as

trialkylaluminum in a medium such as benzene, toluene, ethyl ether or tetrahydrofuran.

(3) An organotin oxide such as dimethyltin oxide or dibutyltin oxide is allowed to react with an organoaluminum
5 compound such as trialkylaluminum in a medium such as decane, benzene or toluene.

The aluminoxane may contain a small amount of an organometallic component. Further, it is possible that the solvent or the unreacted organoaluminum compound is
10 distilled off from the recovered solution of aluminoxane and the remainder is redissolved in a solvent.

Examples of the organoaluminum compounds used for preparing the aluminoxane include

trialkylaluminums, such as trimethylaluminum,
15 triethylaluminum, tripropylaluminum, triisopropylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-sec-butylaluminum, tri-tert-butylaluminum, tripentylaluminum, trihexylaluminum, trioctylaluminum and tridecylaluminum;

20 tricycloalkylaluminums, such as tricyclohexylaluminum and tricyclooctylaluminum;

dialkylaluminum halides, such as dimethylaluminum chloride, diethylaluminum chloride, diethylaluminum bromide and diisobutylaluminum chloride;

25 dialkylaluminum hydrides, such as diethylaluminum

hydride and diisobutylaluminum hydride;

dialkylaluminum alkoxides, such as dimethylaluminum methoxide and diethylaluminum ethoxide; and

dialkylaluminum aryloxides, such as diethylaluminum
5 phenoxide.

Of these, preferable are trialkylaluminums and tricycloalkylaluminums.


Additionally, examples of the organoaluminum compounds used for preparing the aluminoxane include
10 isoprenylaluminum represented by the formula (i-
 $C_4H_9)_xAl_y(C_5H_{10})_z$ (wherein x, y and z are each a positive number, and $z \geq 2x$).

The organoaluminum compounds are used singly or in combination of two or more kinds.

15 Examples of the solvents used for preparing the aluminoxane include aromatic hydrocarbons, such as benzene, toluene, xylene, cumene and cymene; aliphatic hydrocarbons, such as pentane, hexane, heptane, octane, decane, dodecane, hexadecane and octadecane; alicyclic hydrocarbons, such as
20 cyclopentane, cyclohexane, cyclooctane and methylcyclopentane; petroleum fractions, such as gasoline, kerosine and gas oil; and halogenated products of these aromatic, aliphatic and alicyclic hydrocarbons (e.g., chlorinated or brominated products thereof). Also
25 employable are ethers such as ethyl ether and

tetrahydrofuran. Of the solvents, particularly preferable are aromatic hydrocarbons.

The organoaluminum oxy-compound for use in the invention is, for example, an organoaluminum oxy-compound
 5 containing boron and represented by the following formula (17):



10

... (17)

wherein R^8 is a hydrocarbon group of 1 to 10 carbon atoms;
 and each R^9 may be the same or different and is a hydrogen
 atom, a halogen atom or a hydrocarbon group of 1 to 10
 15 carbon atoms.

(B-2) Ionizing ionic compound

Examples of the compound (B-2) which reacts with the transition metal compound (A) to form an ion pair (sometimes referred to as an "ionizing ionic compound" hereinafter), that is used in the invention, include Lewis
 20 acid, an ionic compound, a borane compound and a carborane compound, which are described in National Publications of International Patents No. 501950/1989 and No. 502036/1989, Japanese Patent Laid-Open Publications No. 179005/1991, No.
 25 179006/1991, No. 207703/1991 and No. 207704/1991, and U.S.

Patent No. 5,321,106. A heteropoly compound and an isopoly compound are also available.

Examples of the Lewis acid include magnesium-containing Lewis acid, aluminum-containing Lewis acid and
 5 boron-containing Lewis acid. Of these, boron-containing Lewis acid is preferable. The ionic compound is a salt comprising a cationic compound and an anionic compound. The anion reacts with the transition metal compound to make the transition metal compound cationic and thereby form an
 10 ion pair, whereby the transition metal cationic species are stabilized. Examples of such anions include organoboron compound anion, organoarsenic compound anion and organoaluminum compound anion. Preferable are those which are relatively bulky and stabilize the transition metal
 15 cationic species.

The Lewis acids containing boron atoms are, for example, compounds represented by the following formula (18);



20 wherein R', R'' and R''' may be the same or different and are each a fluorine atom or a phenyl group which may have a substituent such as a fluorine atom, a methyl group or a trifluoromethyl group.

Examples of compounds represented by the formula (18)
 25 include trifluoroboron, triphenylboron, tris(4-

fluorophenyl)boron, tris(3,5-difluorophenyl)boron, tris(4-fluoromethylphenyl)boron, tris(pentafluorophenyl)boron, tris(p-tolyl)boron, tris(o-tolyl)boron, tris(3,5-dimethylphenyl)boron and tris[3,5-di(trifluoromethylphenyl)]boron. Of these, preferable is tris(pentafluorophenyl)boron.

The ionic compound is a salt comprising a cationic compound and an anionic compound. An anion is reacted with the above transition metal compound to cationize it and form an ion pair which has a function of stabilizing the cation species of the transition metal compound. Examples of such anions include organic boron compound anion, organic arsenic compound anion and organic aluminum compound anion, and preferable are relatively bulky and can stabilize the transition metal cationic species. Cations include metal cation, organic metal cation, carbonium cation, tropylium cation, oxisonium cation, sulfonium cation, phosphonium cation and ammonium cation and, more in detail, triphenylcarbenium cation, tributylammonium cation, N,N-dimethylammonium cation and ferrocenium cation.

Of these, preferable anions are ionic compounds containing boron compounds as anion.

Examples of the trialkyl-substituted ammonium salts include;

- triethylammoniumtetra(phenyl)boron,
 tripropylammoniumtetra(phenyl)boron, tri(n-
 butyl)ammoniumtetra(phenyl)boron, trimethylammoniumtetra(p-
 tolyl)boron, trimethylammoniumtetra(o-tolyl)boron,
 5 tributylammoniumtetra(pentafluorophenyl)boron,
 tripropylammoniumtetra(o,p-dimethylphenyl)boron,
 tributylammoniumtetra(m,m-dimethylphenyl)boron,
 tributylammoniumtetra(p-trifluoromethylphenyl)boron, tri(n-
 butyl)ammoniumtetra(o-tolyl)boron and tri(n-
 10 butyl)ammoniumtetra(4-fluorophenyl)boron.



Examples of the N,N-dialkylanilinium salts include
 N,N-dimethylaniliniumtetra(phenyl)boron, N,N-
 diethylaniliniumtetra(phenyl)boron and N,N-2,4,6-
 pentamethylaniliniumtetra(phenyl)boron.

- 15 Examples of the dialkylammonium salts include di(n-
 propyl)ammoniumtetra(pentafluorophenyl)boron and
 dicyclohexylammoniumtetra(phenyl)boron.

- Examples of the triarylphosphonium salts include
 triphenylphosphoniumtetra(phenyl)boron,
 20 tri(methylphenyl)phosphoniumtetra(phenyl)boron and
 tri(dimethylphenyl)phosphoniumtetra(phenyl)boron.

Further employable as the ionic compounds containing
 boron are
 triphenylcarbeniumtetrakis(pentafluorophenyl)borate, N,N-

dimethylaniliniumtetrakis(pentafluorophenyl)borate,
 ferroceniumtetra(pentafluorophenyl)borate
 triphenylcarbeniumpentaphenylcyclopentadienyl complex, N,N-
 diethylaniliniumpentaphenylcyclopentadienyl complex and a
 5 boron compound represented by the following formula (19) or
 (20):

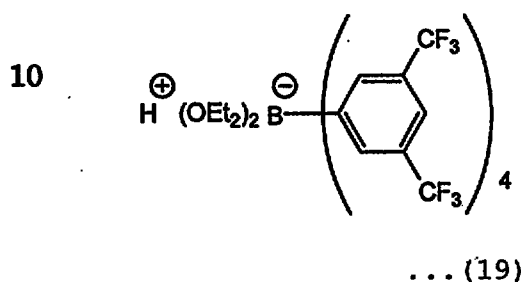

15 Furthermore employable as the ionic compounds having
 a boron atom are the following compounds. (In the following
 ionic compounds, the counter ion is tri(n-butyl)ammonium
 but not restricted.)

Examples of salts of anions include

20 bis[tri(n-butyl)ammonium]nonaborate,
 bis[tri(n-butyl)ammonium]decaborate,
 bis[tri(n-butyl)ammonium]undecaborate,
 bis[tri(n-butyl)ammonium]dodecaborate,
 bis[tri(n-butyl)ammonium]decachlorodecaborate,
 25 bis[tri(n-butyl)ammonium]dodecachlorododecaborate,

- tri(n-butyl)ammonium-1-carbadecaborate,
 tri(n-butyl)ammonium-1-carbaundecaborate,
 tri(n-butyl)ammonium-1-carbadodecaborate,
 tri(n-butyl)ammonium-1-trimethylsilyl-1-carbadecaborate and
 5 tri(n-butyl)ammoniumbromo-1-carbadodecaborate.

Examples of salts of borane compounds, carborane
 complex compounds and carborane anion include

- decaborane(14), 7,8-dicarbaundecaborane(13), 2,7-
 dicarbaundecaborane(13), undecahydrido-7,8-dimethyl-7,8-
 10 dicarbaundecaborane, dodecahydrido-11-methyl-2,7-
 dicarbaundecaborane, tri(n-butyl)ammonium-6-
 carbadecaborate(14), tri(n-butyl)ammonium-6-
 carbadecaborate(12), tri(n-butyl)ammonium-7-
 carbaundecaborate(13), tri(n-butyl)ammonium-7,8-
 15 dicarbaundecaborate(12), tri(n-butyl)ammonium-2,9-
 dicarbaundecaborate(12), tri(n-butyl)ammoniumdodecahydrido-
 8-methyl-7,9-dicarbaundecaborate, tri(n-
 butyl)ammoniumundecahydrido-8-ethyl-7,9-dicarbaundecaborate,
 tri(n-butyl)ammoniumundecahydrido-8-butyl-7,9-
 20 dicarbaundecaborate, tri(n-butyl)ammoniumundecahydrido-8-
 allyl-7,9-dicarbaundecaborate, tri(n-
 butyl)ammoniumundecahydrido-9-trimethylsilyl-7,8-
 dicarbaundecaborate and
 tri(n-butyl)ammoniumundecahydrido-4,6-dibromo-7-
 25 carbaundecaborate.

Examples of salts of carborane compounds and carborane include

- 4-carbanonaborane (14), 1,3-dicarbanonaborane (13),
6,9-dicarbadeccaborane (14),
5 dodecahydrido-1-phenyl-1,3-dicarbanonaborane,
dodecahydrido-1-methyl-1,3-dicarbanonaborane and
undecahydrido-1,3-dimethyl-1,3-dicarbanonaborane.

- Further employable as the ionic compounds containing a boron atom are following metallic carborane salts and
10 metallic boran anion. (In the following ionic compounds, the counter ion is tri(n-butyl)ammonium but not restricted.)

Employable are

- tri(n-butyl)ammoniumbis(nonahydrido-1,3-
15 dicarbanonaborate)cobaltate(III),
tri(n-butyl)ammoniumbis(undecahydrido-7,8-
dicarbaundecaborate)ferrate(III),
tri(n-butyl)ammoniumbis(undecahydrido-7,8-
dicarbaundecaborate)cobaltate(III),
20 tri(n-butyl)ammoniumbis(undecahydrido-7,8-
dicarbaundecaborate)nickelate(III),
tri(n-butyl)ammoniumbis(undecahydrido-7,8-
dicarbaundecaborate)cuprate(III),
tri(n-butyl)ammoniumbis(undecahydrido-7,8-
25 dicarbaundecaborate)aurate(III),

- tri(n-butyl) ammoniumbis(nonahydrido-7,8-dimethyl-7,8-dicarbaundecaborate) ferrate(III),
- tri(n-butyl) ammoniumbis(nonahydrido-7,8-dimethyl-7,8-dicarbaundecaborate) chromate(III),
- 5 tri(n-butyl) ammoniumbis(tribromooctahydrido-7,8-dicarbaundecaborate) cobaltate(III),
- tri(n-butyl) ammoniumbis(dodecahydridodicarbadodecaborate) cobaltate(III),
- bis[tri(n-butyl) ammonium]bis(dodecahydridododecaborate) nickelate(III),
- 10 tris[tri(n-butyl) ammonium]bis(undecahydrido-7-carbaundecaborate) chromate(III),
- bis[tri(n-butyl) ammonium]bis(undecahydrido-7-carbaundecaborate) manganate(IV),
- 15 bis[tri(n-butyl) ammonium]bis(undecahydrido-7-carbaundecaborate) cobaltate(III) and
- bis[tri(n-butyl) ammonium]bis(undecahydrido-7-carbaundecaborate) nickelate(IV).

Further examples of the ionic compounds containing a

- 20 boron atom include following compounds such as
- triphenylcarbeniumtetrakis[(2,3,5,6-tetrafluoro-4-triisopropylsilyl)phenyl]borate,
- N,N-dimethylaniliniumtetrakis[(2,3,5,6-tetrafluoro-4-triisopropylsilyl)phenyl]borate,
- 25 triphenylcarbeniumtetrakis[(2,3,5,6-tetrafluoro-4-dimethyl-

t-butylsilyl)phenyl]borate,

N,N-dimethylaniliniumtetrakis[(2,3,5,6-tetrafluoro-4-

dimethyl-t-butylsilyl)phenyl]borate,

triphenylcarbeniumbis(octafluorobiphenylene)borate,

- 5 N,N-dimethylaniliniumbis(octafluorobiphenylene)borate,
triphenylcarbeniumbis(octafluoro-1,1'-spiro)biboronol and
N,N-dimethylaniliniumbis(octafluoro-1,1'-spiro)biboronol.

- The heteropoly compound comprises an atom selected from silicon, phosphorus, titanium, germanium, arsenic or
- 10 tin and one or more atoms selected from vanadium, niobium, molybdenum and tungsten. Examples of such compounds include phosphovanadic acid, germanovanadic acid, arsenovanadic acid, phosphoniobic acid, germanoniobic acid, silicomolybdic acid, phosphomolybdic acid, titanomolybdic
- 15 acid, germanomolybdic acid, arsenomolybdic acid, stannomolybdic acid, phosphotungstic acid, germanotungstic acid, stannotungstic acid, phosphomolybdovanadic acid, phosphotungstovanadic acid, germanotaungstovanadic acid, phosphomolybdotungstovanadic acid,
- 20 germanomolybdotungstovanadic acid, phosphomolybdotungstic acid, phosphomolybdoniobic acid, salts of these acids, specifically, salts of these acids, for example with metals of Group 1 or 2 of the periodic table such as lithium, sodium, potassium, rubidium, cesium, beryllium, magnesium,
- 25 calcium, strontium and barium and organic salts of the

above acids such as with triphenylethyl salt.

The ionizing ionic compounds may be used singly or in combination of two or more kinds.

(B-3) Organoaluminum compound

5 The organoaluminum compounds (B-3) used in the present invention can be represented by the following formula (21):



10

wherein R^a is a hydrocarbon group of 1 to 12 carbon atoms, X is a halogen atom or a hydrogen atom, and n is 1 to 3.

In the above formula (21), R^a is a hydrocarbon group of 1 to 12 carbon atoms, for example, an alkyl group, a
 15 cycloalkyl group or an aryl group. Examples include a methyl group, ethyl group, n-propyl group, isopropyl group, isobutyl group, pentyl group, hexyl group, octyl group, cyclopentyl group, cyclohexyl group, phenyl group and tolyl group.

20 Examples of the organoaluminum compounds include trialkylaluminums, such as trimethylaluminum, triethylaluminum, triisopropylaluminum, triisobutylaluminum, trioctylaluminum and tri-2-ethylhexylaluminum;
 alkenylaluminums, such as isoprenylaluminum;

dialkylaluminum halides, such as dimethylaluminum chloride, diethylaluminum chloride, diisopropylaluminum chloride, diisobutylaluminum chloride and dimethylaluminum bromide;

- 5 alkylaluminum sesquihalides, such as methylaluminum sesquichloride, ethylaluminum sesquichloride, isopropylaluminum sesquichloride, butylaluminum sesquichloride and ethylaluminum sesquibromide,

- 10 alkylaluminum dihalides, such as methylaluminum dichloride, ethylaluminum dichloride, isopropylaluminum dichloride and ethylaluminum dibromide; and

alkylaluminum hydrides, such as diethylaluminum hydride and diisobutylaluminum hydride.

- 15 Further the organoaluminum compounds (B-3) can be also represented by the following formula (22):



- 20 wherein R^a is the same as previously described, Y is a $-OR^b$ group, $-OSiR^c_3$ group, $-OAlR^d_2$ group, $-NR^e_2$ group, $-SiR^f_3$ group or $-N(R^g)AlR^h_2$ group, n is 1 to 2, and R^b , R^c , R^d and R^h are each a methyl group, ethyl group, isopropyl group, isobutyl group, cyclohexyl group and phenyl group, R^e is hydrogen, a methyl group, ethyl group, isopropyl group,

phenyl group and trimethyl group, and R^f and R^g are each a methyl group and ethyl group.

Examples of the organoaluminum compounds include

- (i) compounds represented by $R_n^aAl(OR^b)_{3-n}$ such as
 5 dimethylaluminum methoxide, diethylaluminum ethoxide and diisobutylaluminum methoxide;
- (ii) compounds represented by $R_n^aAl(OSiR^c_3)_{3-n}$ such as
 $(C_2H_5)_2Al(OSi(CH_3)_3)$, $(iso-C_4H_9)_2Al(OSi(CH_3)_3)$ and $(iso-C_4H_9)_2Al(OSi(C_2H_5)_3)$;
- 10 (iii) compounds represented by $R_n^aAl(OAlR^d_2)_{3-n}$ such as $(C_2H_5)_2Al(OAl(C_2H_5)_2)$ and $(iso-C_4H_9)_2Al(OAl(iso-C_4H_9)_2)$;
- (iv) compounds represented by $R_n^aAl(NR^e_2)_{3-n}$ such as
 $(CH_3)_2Al(N(C_2H_5)_2)$, $(C_2H_5)_2Al(NH(CH_3))$, $(CH_3)_2Al(NH(C_2H_5))$,
 $(C_2H_5)_2Al[N(Si(CH_3)_3)_2]$ and $(iso-C_4H_9)_2Al[N(Si(CH_3)_3)_2]$; and
- 15 (v) compounds represented by $R_n^aAl(SiR^f_3)_{3-n}$ such as $(iso-C_4H_9)_2Al(Si(CH_3)_3)$.

In the present invention, of these, preferable are organoaluminum compounds represented by R^a_3Al , $R_n^aAl(OR^b)_{3-n}$, and $R_n^aAl(OAlR^d_2)_{3-n}$. Particularly preferable are compounds
 20 wherein R^a is an isoalkyl group and $n = 2$.

The organoaluminum compounds can be used in combination of two or more kinds.

The olefin polymerization catalyst used in the present invention comprises the transition metal compound
 25 (A) and at least one compound selected from the group

consisting of the organoaluminum-oxy compound (B-1), the ionizing ionic compound (B-2) and the organoaluminum compound (B-3). For example, in the case that the transition metal compound (A) contains a ligand having a cyclopentadienyl skeleton, the catalyst comprises said compound (A) and the organoaluminum-oxy compound (B-1) and/or the ionizing ionic compound (B-2), and optionally the organoaluminum compound (B-3).

The olefin polymerization catalyst for use in the invention may be a solid catalyst in which the transition metal compound (A) and at least one component selected from the organoaluminum oxy-compound (B-1), the ionizing ionic compound (B-2) and the organoaluminum compound (B-3) are supported on a particle carrier, or a prepolymerized catalyst comprising a particle carrier, the transition metal compound (A), the organoaluminum oxy-compound (B-1) (or the ionizing ionic compound (B-2)), an olefin polymer produced by prepolymerization, and if necessary, the organoaluminum compound (B-3).

An particulate carriers used in the solid catalyst and the prepolymerized catalyst is an inorganic or organic compound in the form of granular or particulate solid having a particle diameter of 10 to 300 μm , preferably 20 to 200 μm .

Preferable examples of the inorganic carrier are porous oxides, inorganic chlorides, clay, clay minerals and ion-exchange layered compounds. Examples of porous oxides include SiO_2 , Al_2O_3 , MgO , ZrO , TiO_2 , B_2O_3 , CaO , ZnO , BaO ,
5 ThO_2 , and mixtures containing these oxides, such as SiO_2 - MgO , SiO_2 - Al_2O_3 , SiO_2 - TiO_2 , SiO_2 - V_2O_5 , SiO_2 - Cr_2O_3 and SiO_2 - TiO_2 - MgO . Of these, preferable are compounds containing SiO_2 and/or Al_2O_3 as the main component.

The inorganic oxides may contain small amounts of
10 carbonate, sulfate, nitrate and oxide components, such as Na_2CO_3 , K_2CO_3 , CaCO_3 , MgCO_3 , Na_2SO_4 , $\text{Al}_2(\text{SO}_4)_3$, BaSO_4 , KNO_3 , $\text{Mg}(\text{NO}_3)_2$, $\text{Al}(\text{NO}_3)_3$, Na_2O , K_2O and Li_2O .

Although the particulate carriers differ in their properties depending upon the type and the preparation
15 process thereof, the particulate carrier preferably has a specific surface area of 50 to 1,000 m^2/g , preferably 100 to 700 m^2/g , and a pore volume of 0.3 to 2.5 cm^3/g . If necessary, the particulate carrier may be calcined at 100 to 1,000 $^\circ\text{C}$, preferably 150 to 700 $^\circ\text{C}$, prior to use.

20 Further the particulate carrier is, for example, a granular or particulate solid organic compound having a particle diameter of 10 to 300 μm . Examples of such organic compounds include (co)polymers produced using an α -olefin of 2 to 14 carbon atoms such as ethylene,
25 propylene, 1-butene or 4-methyl-1-pentene as a main

ingredient and (co)polymers produced using vinylcyclohexane or styrene as a main ingredient.

Examples of the inorganic chlorides employable in the invention include MgCl_2 , MgBr_2 , MnCl_2 and MnBr_2 . The
5 inorganic chloride may be used as it is, or may be used after pulverized by, for example, a ball mill or an oscillating mill. The inorganic chloride may also be used as fine particles of a obtained by dissolving the inorganic chloride in a solvent such as alcohol and then
10 precipitating using a precipitant.

The clay is generally composed mainly of clay minerals. The ion-exchange layered compounds are compounds having a crystal structure wherein planes formed by ionic bonding or the like are laminated in parallel to one
15 another with a weak bond strength, and the ions contained therein are exchangeable. Most of clay minerals are ion-exchange layered compounds. The clay, the clay minerals and the ion-exchange layered compounds employable in the invention are not limited to natural ones but include
20 synthetic ones.

Examples of such clay, clay minerals and ion-exchange layered compounds include clay, clay minerals and ion crystalline compounds having layered crystal structures such as hexagonal closest packing type, antimony type,
25 CdCl_2 type and CdI_2 type.

Particular examples of the clay and the clay minerals include kaolin, bentonite, kibushi clay, gairome clay, allophane, hisingerite, pyrophyllite, mica, montmorillonite, vermiculite, chlorite, palygorskite, kaolinite, nacrite, 5 dickite and halloysite. Particular examples of the ion-exchange layered compounds include crystalline acid salts of polyvalent metals, such as $\alpha\text{-Zr(HAsO}_4)_2 \cdot \text{H}_2\text{O}$, $\alpha\text{-Zr(HPO}_4)_2$, $\alpha\text{-Zr(KPO}_4)_2 \cdot 3\text{H}_2\text{O}$, $\alpha\text{-Ti(HPO}_4)_2$, $\alpha\text{-Ti(HAsO}_4)_2 \cdot \text{H}_2\text{O}$, $\alpha\text{-Sn(HPO}_4)_2 \cdot \text{H}_2\text{O}$, $\gamma\text{-Zr(HPO}_4)_2$, $\gamma\text{-Ti(HPO}_4)_2$ and $\gamma\text{-Ti(NH}_4\text{PO}_4)_2 \cdot \text{H}_2\text{O}$. 10

The clay, the clay minerals and the ion-exchange layered compounds are preferably those having a pore volume, as measured on pores having a radius of not less than 20 Å by a mercury penetration method, of not less than 0.1 cc/g, 15 and are particularly preferably those having a pore volume of 0.3 to 5 cc/g. The pore volume is measured on the pores having a radius of 20 to 3×10^4 Å by a mercury penetration method using a mercury porosimeter.

If a compound having a pore volume, as measured on 20 pores having a radius of not less than 20 Å, of less than 0.1 cc/g is used as the carrier, high polymerization activity tends to be hardly obtained.

It is also preferable that the clay and the clay minerals are subjected to chemical treatments. Any of 25 surface treatments, for example, to remove impurities

attached to the surface and to influence on the crystal structure of the clay, are employable.

Examples of such chemical treatments include acid treatment, alkali treatment, salt treatment and organic
5 substance treatment. The acid treatment can contribute to not only removing impurities from the surface but also eluting cations such as Al, Fe and Mg present in the crystal structure to increase the surface area. The alkali treatment can destroy crystal structure of clay to bring
10 about change in the structure of the clay. The salt treatment and the organic substance treatment can produce, for example, ionic composites, molecular composites, or organic derivative to change the surface area or the distance between layers.

15 The ion-exchange layered compound may be a layered compound in which the exchangeable ions between layers have been exchanged with other large and bulky ions utilizing ion exchange properties to enlarge the distance between the layers. The bulky ion plays a pillar-like roll to support
20 the layer structure and is generally called a "pillar". Introduction of other substances between layers of a layered compound is called "intercalation". Examples of the guest compounds to be intercalated include cationic inorganic compounds, such as TiCl_4 and ZrCl_4 ; metallic
25 alkoxides, such as Ti(OR)_4 , Zr(OR)_4 , PO(OR)_3 and B(OR)_3 (R

is a hydrocarbon group or the like); and metallic hydroxide ions, such as $[\text{Al}_{13}\text{O}_4(\text{OH})_{24}]^{7+}$, $[\text{Zr}_4(\text{OH})_{14}]^{2+}$ and $[\text{Fe}_3\text{O}(\text{OCOCH}_3)_6]^+$. The compounds mentioned above may be used singly or in combination of two or more kinds.

5 The intercalation of the compounds may be carried out in the presence of polymers obtained by hydrolysis of metallic alkoxides such as $\text{Si}(\text{OR})_4$, $\text{Al}(\text{OR})_3$ and $\text{Ge}(\text{OR})_4$ (R is a hydrocarbon group or the like) or in the presence of colloidal inorganic compounds such as SiO_2 . Examples of
10 the pillars include oxides produced by intercalation of the above-mentioned metallic hydroxide ions between layers, followed by dehydration under heating.

 The clay, clay minerals and ion-exchange layered compounds mentioned above may be used as they are, or may
15 be used after they are subjected to a treatment of ball milling, sieving or the like. Moreover, they may be used after they are subjected to water adsorption or dehydration under heating. The clay, clay minerals and ion-exchange layered compounds may be used singly or in combination of
20 two or more kinds.

 Of the above-mentioned materials, preferable are clay and clay minerals, and particularly preferable are montmorillonite, vermiculite, hectorite, taeniolite and synthetic mica.

25 The olefin polymerization catalyst for use in the

invention may contain the following organosilicon compound (C) and/or the following dialkylzinc compound (D).

(C) Organosilicon compound

The organosilicon compound (C) which is used
 5 optionally is represented by the following formula (22):

$$R^1R^2R^3SiH \qquad (22)$$

wherein R^1 , R^2 and R^3 may be the same or different and are each a hydrogen atom, an alkyl group of 1 to 4 carbon atoms, such as methyl, ethyl, propyl, isopropyl, butyl, isobutyl
 10 or tert-butyl, an aryl group of 6 to 12 carbon atoms, such as phenyl or tolyl, an alkylaryl group of 7 to 20 carbon atoms, such as ethylphenyl or ethyltolyl, an arylalkyl group of 7 to 20 carbon atoms, such as phenylethyl or benzyl, an alkoxyl group of 1 to 4 carbon atoms, such as
 15 methoxy, ethoxy, propoxy or butoxy, a fluorinated alkyl group of 3 to 6 carbon atoms, such as 3,3,3-trifluoropropyl, a dialkylamino group containing an alkyl group of 1 to 4 carbon atoms, such as dimethylamino, or a diorganopolysiloxane chain containing 1 to 10 siloxane
 20 units and represented by $R^6_3SiO(SiR^6_2O)_n$ (R^6 is methyl, phenyl, 3,3,3-trifluoropropyl, methoxy or ethoxy, and n is an integer of 0 to 9).

Of these, preferable is a hydrogen atom, methyl, ethyl, isopropyl, isobutyl, 3,3,3-trifluoropropyl
 25 dimethylamino or a group represented by $R^6_3SiO(SiR^6_2O)_n$.

Preferred examples of the organosilicon compounds represented by the formula (22) include phenylsilane, diphenylsilane, phenylmethylsilane, pentamethyldisiloxane, methylsilane and dimethylsilane.

- 5 The organosilicon compounds mentioned above can be used singly or in combination of two or more kinds.

(D) Dialkylzinc compound

The dialkylzinc compound (D) which is used optionally is represented by the following formula (23):



wherein R^4 and R^5 may be the same or different and are each an alkyl group of 1 to 20 carbon atoms, such as methyl, ethyl, propyl, isopropyl, butyl, isobutyl, tert-butyl, hexyl, octyl, nonyl, decyl, dodecyl or eicosyl.

- 15 Of these, preferable is an alkyl group of 1 to 12 carbon atoms, and more preferable is an alkyl group of 1 to 6 carbon atoms.

Preferred examples of the dialkylzinc compounds represented by the formula (23) include diethylzinc,
20 diisobutylzinc and di-n-decylzinc. Of these, diethylzinc is particularly preferable.


The dialkylzinc compounds (D) mentioned above can be used singly or in combination of two or more kinds.

The organosilicon compound (C) and the dialkylzinc
25 compound (D) can be each used as a chain transfer agent in

combination with hydrogen. When the organosilicon compound (C) is used as a chain transfer agent, an olefin polymer having a silyl group at the end is obtained.

Examples of the α -olefins of 2 to 20 carbon atoms include ethylene, propylene, 1-butene, 2-butene, 1-pentene, 3-methyl-1-butene, 1-hexene, 4-methyl-1-pentene, 3-methyl-1-pentene, 3-ethyl-1-pentene, 4,4-dimethyl-1-pentene, 4-methyl-1-hexene, 4,4-dimethyl-1-hexene, 4-ethyl-1-hexene, 3-ethyl-1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene. Of these, preferable is an α -olefin selected from ethylene, propylene, 1-butene, 4-methyl-1-pentene, 1-hexene and 1-octene.

Next, the polar group-containing monomer represented by the formula (7) is described more in detail, below.

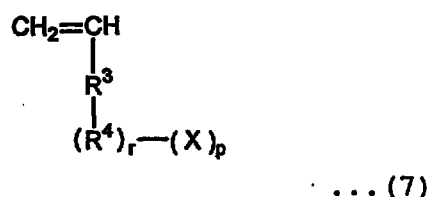

wherein R^3 , R^4 , r , X and p have the same meanings as those of R^3 , R^4 , r , X and p , respectively, in the formula (3).

Examples of the polar group-containing monomers include:

compounds of the formula (7) wherein X is an alcoholic hydroxyl group, specifically

ω -alkenylalcohols, such as

allylalcohol, 4-pentene-1-ol, 5-hexene-1-ol, 6-heptene-1-ol, 7-octene-1-ol, 8-nonene-1-ol, 9-decene-1-ol, 10-undecene-1-ol and 11-dodecene-1-ol;

- 5 alcohols having a straight-chain hydrocarbon group, such as

5-hexene-2-ol, 6-heptene-2-ol, 7-octene-2-ol, 8-nonene-2-ol, 9-decene-2-ol, 10-undecene-2-ol, 6-heptene-3-ol, 7-octene-3-ol, 8-nonene-3-ol, 10 9-decene-3-ol, 10-undecene-3-ol, 11-dodecene-3-ol, 7-octene-4-ol, 8-nonene-4-ol, 9-decene-4-ol, 10-undecene-4-ol, 8-nonene-5-ol, 9-decene-5-ol and 10-undecene-5-ol;

alcohols having a branched hydrocarbon group, such as

- 15 2-ethyl-5-hexene-1-ol, 3-methyl-6-heptene-1-ol, 3-methyl-7-octene-1-ol, 4-methyl-8-nonene-1-ol, 3-ethyl-9-decene-1-ol, 2-methyl-10-undecene-2-ol, 2,2-dimethyl-7-octene-1-ol, 3-ethyl-2-methyl-8-nonene-1-ol, 20 2,2,3-trimethyl-9-decene-1-ol and 2,3,3,4-tetramethyl-10-undecene-2-ol;

diols, such as

9-decene-1,2-diol, 10-undecene-1,2-diol, 11-dodecene-1,2-diol and 11-dodecene-1,2-diol; and

- 25 triols, such as 10-undecene-1,2,3-triol;

compounds of the formula (7) wherein X is a carboxylic acid group, specifically

ω -alkenylcarboxylic acids, such as

- 3-butenoic acid, 5-hexenoic acid, 6-heptenoic acid,
5 7-octenoic acid, 8-nonenoic acid, 9-decenoic acid,
10-undecenoic acid and 11-dodecenoic acid;

alkenylcarboxylic acids having a straight-chain hydrocarbon group, such as

- 2-methyl-5-hexenoic acid, 2-methyl-6-heptenoic acid,
10 2-methyl-7-octenoic acid, 2-methyl-8-nonenoic acid,
2-methyl-9-decenoic acid, 2-methyl-10-undecenoic acid,
2-methyl-11-dodecenoic acid, 2-ethyl-5-hexenoic acid,
2-ethyl-6-heptenoic acid, 2-ethyl-7-octenoic acid,
2-ethyl-8-nonenoic acid, 2-ethyl-9-decenoic acid,
15 2-ethyl-10-undecenoic acid, 2-propyl-5-hexenoic acid,
2-propyl-6-heptenoic acid, 2-propyl-7-octenoic acid,
2-propyl-8-nonenoic acid, 2-propyl-9-decenoic acid,
2-propyl-10-undecenoic acid, 2-butyl-5-hexenoic acid,
2-butyl-6-heptenoic acid, 2-butyl-7-octenoic acid,
20 2-butyl-8-nonenoic acid, 2-butyl-9-decenoic acid and
2-butyl-10-undecenoic acid; and

alkenylcarboxylic acids having a branched hydrocarbon group, such as

- 2-isopropyl-5-hexenoic acid,
25 2-isopropyl-6-heptenoic acid,

- 2-isopropyl-7-octenoic acid,
2-isopropyl-8-nonenoic acid,
2-isopropyl-9-decenoic acid,
2-isopropyl-10-undecenoic acid,
5 2-isobutyl-5-hexenoic acid, 2-t-butyl-6-heptenoic acid,
2-isopropyl-3-methyl-7-octenoic acid,
2-methyl-3-isopropyl-8-nonenoic acid,
3-isobutyl-3-methyl-9-decenoic acid,
2,2-dimethyl-10-undecenoic acid and
10 2,3,3-trimethyl-11-dodecenoic acid;
compounds of the formula (7) wherein X is a
carboxylic acid ester, specifically
 ω -alkenylcarboxylic acid esters, such as
methyl 3-butenate, methyl 5-hexenoate,
15 methyl 6-heptenoate, methyl 7-octenoate,
methyl 8-nonenoate, methyl 9-decenoate,
methyl 10-undecenoate, methyl 11-dodecenoate,
ethyl 5-hexenoate, ethyl 6-heptenoate,
ethyl 7-octenoate, ethyl 8-nonenoate,
20 ethyl 9-decenoate, ethyl 10-undecenoate,
ethyl 11-dodecenoate, isopropyl 5-hexenoate,
isopropyl 6-heptenoate, isopropyl 7-octenoate,
isopropyl 8-nonenoate, isopropyl 9-decenoate,
isopropyl 10-undecenoate, isopropyl 11-dodecenoate,
25 butyl 5-hexenoate, butyl 6-heptenoate,

- butyl 7-octenoate, butyl 8-nonenoate,
 butyl 9-decenoate, butyl 10-undecenoate,
 butyl 11-dodecenoate, pentyl 5-hexenoate,
 pentyl 6-heptenoate, pentyl 7-octenoate,
 5 pentyl 8-nonenoate, pentyl 9-decenoate,
 pentyl 10-undecenoate and pentyl 11-dodecenoate;

alkenylcarboxylic acid esters having a straight-chain hydrocarbon group, such as

- methyl 2-methyl-5-hexenoate, methyl 2-methyl-6-heptenoate,
 10 ethyl 2-methyl-7-octenoate, methyl 2-methyl-8-nonenoate,
 butyl 2-methyl-9-decenoate, ethyl 2-methyl-10-undecenoate,
 butyl 2-ethyl-5-hexenoate, ethyl 2-ethyl-6-heptenoate,
 isopropyl 2-ethyl-7-octenoate, ethyl 2-ethyl-8-nonenoate,
 methyl 2-ethyl-9-decenoate, ethyl 2-ethyl-10-undecenoate,
 15 methyl 2-propyl-5-hexenoate, methyl 2-propyl-6-heptenoate,
 ethyl 2-propyl-7-octenoate, methyl 2-propyl-9-decenoate,
 ethyl 2-propyl-10-undecenoate, methyl 2-butyl-7-octenoate,
 methyl 2-butyl-8-nonenoate, methyl 2-butyl-9-decenoate and
 methyl 2-butyl-10-undecenoate; and

- 20 alkenylcarboxylic acids having a branched hydrocarbon group, such as

- butyl 2-isopropyl-5-hexenoate,
 ethyl 2-isopropyl-6-heptenoate,
 methyl 2-isopropyl-7-octenoate,
 25 methyl 2-isopropyl-8-nonenoate,

butyl 2-isopropyl-9-decenoate,
 methyl 2-isopropyl-10-undecenoate,
 methyl 2-isobutyl-5-hexenoate,
 methyl 2-t-butyl-6-heptenoate,

- 5 ethyl 2-isopropyl-3-methyl-7-octenoate and
 propyl 3-isobutyl-3-methyl-9-decenoate;

compounds wherein X in the formula (7) is an acid
 anhydride group, such as (2,7-octadienyl)succinic anhydride,
 pentapropenylsuccinic anhydride and compounds wherein the
 10 carboxylic acid group is replaced with a carboxylic
 anhydride group in the above-exemplified compounds wherein
 X is a carboxylic acid group;

compounds of the formula (7) wherein X is an amino
 group, specifically

- 15 ω -alkenylamines, such as allylamine, 5-hexene amine,
 6-heptene amine, 7-octene amine, 8-nonene amine,
 9-decene amine, 10-undecene amine and
 11-dodecene amine;

- alkenylamines having a straight-chain hydrocarbon
 20 group, such as
 2-methyl-5-hexene amine, 2-methyl-6-heptene amine,
 2-methyl-7-octene amine, 2-methyl-8-nonene amine,
 2-methyl-9-decene amine, 2-methyl-10-undecene amine,
 2-methyl-11-dodecene amine, 2-ethyl-5-hexene amine,
 25 2-ethyl-6-heptene amine, 2-ethyl-7-octene amine,
 2-ethyl-8-nonene amine, 2-ethyl-9-decene amine,

- 2-ethyl-10-undecene amine, 2-propyl-5-hexene amine,
 2-propyl-6-heptene amine, 2-propyl-5-hexene amine,
 2-propyl-6-heptene amine, 2-propyl-7-octene amine,
 2-propyl-8-nonene amine, 2-propyl-9-decene amine,
 5 2-propyl-10-undecene amine, 2-butyl-5-hexene amine,
 2-butyl-6-heptene amine, 2-butyl-7-octene amine,
 2-butyl-8-nonene amine, 2-butyl-9-decene amine and
 2-butyl-10-undecene amine;

- alkenylamines having a branched hydrocarbon group,
 10 such as
 2-isopropyl-5-hexene amine, 2-isopropyl-6-heptene amine,
 2-isopropyl-7-octene amine, 2-isopropyl-8-nonene amine,
 2-isopropyl-9-decene amine,
 2-isopropyl-10-undecene amine,
 15 2-isobutyl-5-hexene amine, 2-t-butyl-6-heptene amine,
 2-isopropyl-3-methyl-7-octene amine,
 2-methyl-3-isopropyl-8-nonene amine,
 3-isobutyl-3-methyl-9-decene amine,
 2,2-dimethyl-10-undecene amine and
 20 2,3,3-trimethyl-11-dodecene amine;

- N-alkyl- ω -alkenylamines, such as
 N-methyl-5-hexene amine, N-methyl-6-heptene amine,
 N-methyl-7-octene amine, N-methyl-8-nonene amine,
 N-methyl-9-decene amine, N-methyl-10-undecene amine,
 25 N-methyl-11-dodecene amine, N-ethyl-5-hexene amine,

N-ethyl-6-heptene amine, N-ethyl-7-octene amine,
 N-ethyl-8-nonene amine, N-ethyl-9-decene amine,
 N-ethyl-10-undecene amine and
 N-ethyl-11-dodecene amine;

- 5 N-alkylalkenylamines having a straight-chain
 hydrocarbon group, such as

N-methyl-6-heptene-2-amine, N-ethyl-7-octene-2-amine, N-
 methyl-8-nonene-2-amine, N-ethyl-9-decene-2-amine,
 N-methyl-10-undecene-2-amine, N-ethyl-8-nonene-3-amine, N-
 10 methyl-9-decene-3-amine, N-ethyl-10-undecene-3-amine, N-
 ethyl-8-nonene-4-amine, N-methyl-9-decene-4-amine and N-
 ethyl-10-undecene-4-amine;

N-alkylalkenylamines having a branched hydrocarbon
 group, such as

- 15 N-methyl-2-methyl-5-hexene amine,
 N-ethyl-2-methyl-6-heptene amine,
 N-methyl-2-methyl-7-octene amine,
 N-ethyl-2-methyl-8-nonene amine,
 N-ethyl-2-methyl-9-decene amine,
 20 N-methyl-2-methyl-10-undecene amine,
 N-methyl-2-ethyl-7-octene amine,
 N-ethyl-2-ethyl-9-decene amine and
 N-methyl-2-ethyl-10-undecene amine;

N,N-dialkyl- ω -alkenylamines, such as

- 25 N,N-dimethyl-5-hexene amine,

- N,N-dimethyl-6-heptene amine,
 N,N-dimethyl-7-octene amine,
 N,N-dimethyl-8-nonene amine,
 N,N-dimethyl-9-decene amine,
 5 N,N-dimethyl-10-undecene amine,
 N,N-dimethyl-11-dodecene amine,
 N,N-diethyl-5-hexene amine, N,N-diethyl-6-heptene amine,
 N,N-diethyl-7-octene amine, N,N-diethyl-8-nonene amine,
 N,N-diethyl-9-decene amine,
 10 N,N-diethyl-10-undecene amine and
 N,N-diethyl-11-dodecene amine;
 N,N-dialkylalkenylamines having a straight-chain
 hydrocarbon group, such as
 N,N-dimethyl-6-heptene-2-amine,
 15 N,N-diethyl-7-octene-2-amine,
 N,N-dimethyl-8-nonene-2-amine,
 N,N-diethyl-9-decene-2-amine,
 N,N-dimethyl-10-undecene-2-amine,
 N,N-diethyl-8-nonene-3-amine,
 20 N,N-dimethyl-9-decene-3-amine,
 N,N-diethyl-10-undecene-3-amine,
 N,N-diethyl-8-nonene-4-amine,
 N,N-dimethyl-9-decene-4-amine and
 N,N-diethyl-10-undecene-4 amine; and
 25 N,N-dialkylalkenylamines having a branched

hydrocarbon group, such as

- N,N-dimethyl-2-methyl-5-hexene amine,
- N,N-diethyl-2-methyl-6-heptene amine,
- N,N-dimethyl-2-methyl-7-octene amine,
- 5 N,N-diethyl-2-methyl-8-nonene amine,
- N,N-diethyl-2-methyl-9-decene amine,
- N,N-dimethyl-2-methyl-10-undecene amine,
- N,N-dimethyl-2-ethyl-7-octene amine,
- N,N-diethyl-2-ethyl-9-decene amine and
- 10 N,N-dimethyl-2-ethyl-10-undecene amine;

compounds of the formula (7) wherein X is an amido group, specifically

- ω -alkenylamides, such as allylamide, 5-hexene amide,
- 6-heptene amide, 7-octene amide, 8-nonene amide,
- 15 9-decene amide,
- 10-undecene amide and 11-dodecene amide;

- alkenylamides having a straight-chain hydrocarbon group, such as 6-heptene-2-amide, 7-octene-2-amide,
- 8-nonene-2-amide, 9-decene-2-amide, 10-undecene-2-amide, 8-
- 20 nonene-3-amide, 9-decene-3-amide, 10-undecene-3-amide, 11-dodecene-3-amide, 8-nonene-4-amide, 9-decene-4-amide, 10-undecene-4-amide, 11-dodecene-4-amide, 9-decene-5-amide and 10-undecene-5-amide;

N-alkyl- ω -alkenylamides, such as

- 25 N-methyl-5-hexene amide,

- N-methyl-6-heptene amide, N-methyl-7-octene amide,
 N-methyl-8-nonene amide, N-methyl-9-decene amide,
 N-methyl-10-undecene amide, N-methyl-11-dodecene amide,
 N-ethyl-5-hexene amide, N-ethyl-6-heptene amide,
 5 N-ethyl-7-octene amide, N-ethyl-8-nonene amide,
 N-ethyl-9-decene amide, N-ethyl-10-undecene amide and
 N-ethyl-11-dodecene amide;

N,N-dialkyl- ω -alkenylamides, such as

- N,N-dimethyl-5-hexene amide,
 10 N,N-dimethyl-6-heptene amide,
 N,N-dimethyl-7-octene amide,
 N,N-dimethyl-8-nonene amide,
 N,N-dimethyl-9-decene amide,
 N,N-dimethyl-10-undecene amide,
 15 N,N-dimethyl-11-dodecene amide,
 N,N-diethyl-5-hexene amide, N,N-diethyl-6-heptene amide,
 N,N-diethyl-7-octene amide, N,N-diethyl-8-nonene amide,
 N,N-diethyl-9-decene amide,
 N,N-diethyl-10-undecene amide and
 20 N,N-diethyl-11-dodecene amide;

alkenylamides having a branched hydrocarbon group,
 such as

- 2-methyl-5-hexene amide, 2-methyl-6-heptene amide,
 2-methyl-7-octene amide, 2-methyl-8-nonene amide,
 25 2-methyl-9-decene amide, 2-methyl-10-undecene amide,

- 2-ethyl-5-hexene amide, 2-ethyl-6-heptene amide,
 2-ethyl-7-octene amide, 2-ethyl-8-nonene amide,
 2-ethyl-9-decene amide, 2-ethyl-10-undecene amide,
 2-ethyl-11-dodecene amide, 2-propyl-5-hexene amide,
 5 2-propyl-6-heptene amide, 2-propyl-7-octene amide,
 2-propyl-8-nonene amide, 2-propyl-9-decene amide,
 2-propyl-10-undecene amide, 2-propyl-11-dodecene amide,
 2-butyl-5-hexene amide, 2-butyl-6-heptene amide,
 2-butyl-7-octene amide, 2-butyl-8-nonene amide,
 10 2-butyl-9-decene amide and 2-butyl-10-undecene amide;

N,N-dialkylalkenylamides having a branched
 hydrocarbon group, such as

- N,N-dimethyl-2-methyl-5-hexene amide,
 N,N-diethyl-2-methyl-6-heptene amide,
 15 N,N-dimethyl-2-methyl-7-octene amide,
 N,N-diethyl-2-methyl-8-nonene amide,
 N,N-diethyl-2-methyl-9-decene amide,
 N,N-diethyl-2-methyl-10-undecene amide,
 N,N-dimethyl-2-ethyl-7-octene amide,
 20 N,N-diethyl-2-ethyl-9-decene amide and
 N,N-dimethyl-2-ethyl-10-undecene amide;

- alkenylamides, such as 6-heptene-1,2-diamide,
 7-octene-1,2-diamide, 8-nonene-1,2-diamide,
 9-decene-1,3-diamide, 10-undecene-1,3-diamide and
 25 11-dodecene amide;

alkenyltriamides, such as
 9-decene-1,2,3-triamide and
 10-undecene-1,2,3-triamide; and

compounds of the formula (7) wherein X is an epoxy
 5 group, specifically

ω -alkenylepoxides, such as 5-hexene epoxide,
 6-heptene epoxide, 7-octene epoxide, 8-nonene epoxide,
 9-decene epoxide, 10-undecene epoxide and 11-dodecene
 epoxide; and














10 ω -alkenylepoxides having a branched hydrocarbon
 group, such as

2-methyl-5-hexene epoxide, 2-methyl-6-heptene epoxide,
 2-methyl-7-octene epoxide, 2-methyl-8-nonene epoxide,
 2-methyl-9-decene epoxide and












15 2-methyl-10-undecene epoxide; and











compounds wherein X in the formula (7) is a mercapto
 group, such as $\text{CH}_2=\text{CH}-\text{CH}_2-\text{CH}_2-\text{CH}_2-\text{CH}_2-\text{O}-\text{Ph}-\text{SH}$.


Other examples of the polar group-containing monomers
 include compounds represented by the following formulas.

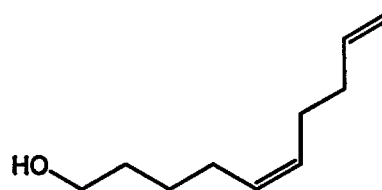

185




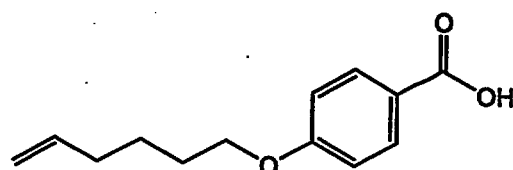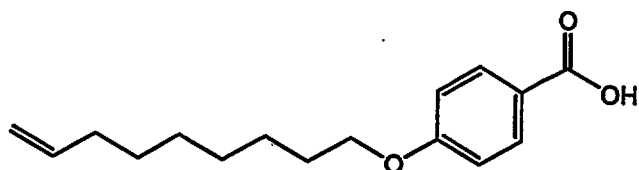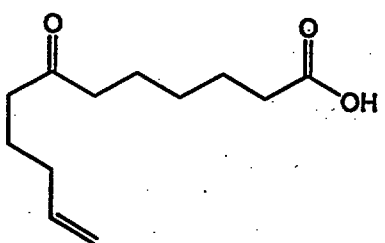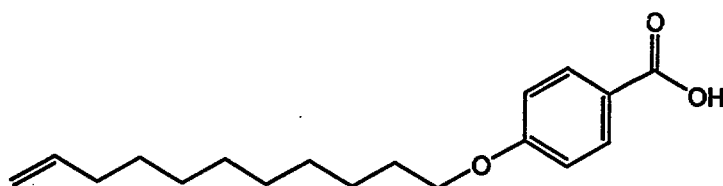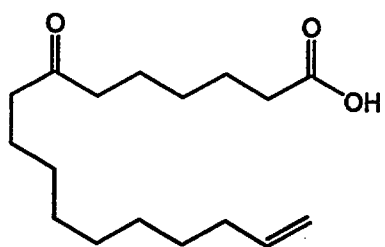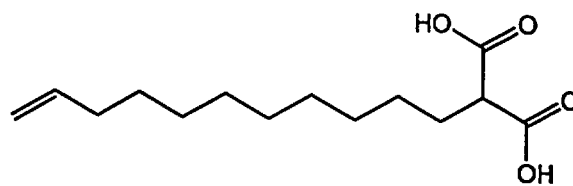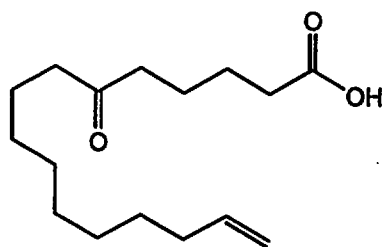

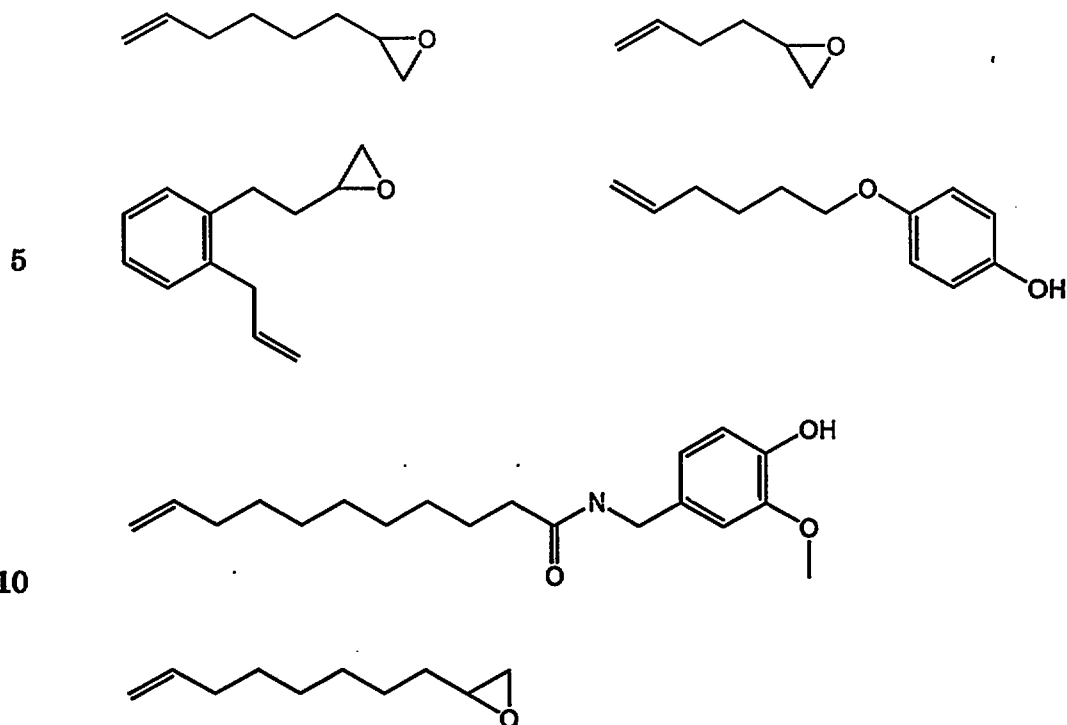

Also available are n-nonyl-1-ol, n-nonyl-1-carboxylic
 15 acid, n-nonyl-1-carboethoxy, 1,2-epoxy-nonyl, (6-hexen-1-yl)succinic anhydride, n-undecyl-1-ol, n-dodecyl-1-carboxylic acid, n-dodecyl-1-carboethoxy, 4-hexenyloxyphenol, 4-hexenyloxy-thiophenol, n-nonyl-1-carboxamide, n-nonyl-1-amino and n-nonyl-1-N-methylamino.

20 In the process for preparing the polar group-containing olefin copolymer according to the first embodiment of the invention, the polar group-containing monomer represented by the formula (7) may be the polar group-containing monomer represented by the following
 25 formula (7');

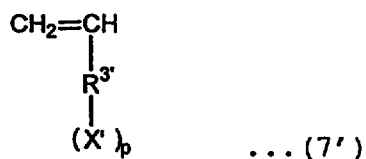

5

wherein $\text{R}^{3'}$, p and X' have the same meanings as those of $\text{R}^{3'}$, p and X' , respectively, in the formula (3').

Examples of polar group-containing monomers of the formula (7') wherein X' is $-\text{OR}$ include:

- 10 ω -alkoxy- α -olefins, such as 3-methoxy-1-propene,
 5-methoxy-1-pentene, 6-methoxy-1-hexene, 7-methoxy-1-
 heptene, 8-methoxy-1-octene, 9-methoxy-1-nonene,
 10-methoxy-1-decene, 11-methoxy-1-undecene,
 5-ethoxy-1-pentene, 6-ethoxy-1-hexene,
 15 7-ethoxy-1-heptene, 3-ethoxy-1-octene,
 9-ethoxy-1-nonene, 10-ethoxy-1-decene,
 11-ethoxy-1-undecene, 5-propoxy-1-pentene,
 6-propoxy-1-hexene, 7-propoxy-1-heptene,
 8-propoxy-1-octene, 9-propoxy-1-nonene,
 20 10-propoxy-1-decene, 11-propoxy-1-undecene,
 5-butoxy-1-pentene, 6-butoxy-1-hexene,
 7-butoxy-1-heptene, 8-butoxy-1-octene,
 9-butoxy-1-nonene, 10-butoxy-1-decene and
 11-butoxy-1-undecene;
 25 ethers having a branched hydrocarbon group, such as

- 7-methoxy-7-methyl-1-heptene,
 8-methoxy-8-methyl-1-octene,
 9-methoxy-8-methyl-1-nonene,
 10-methoxy-9-methyl-1-decene,
 5 11-methoxy-7-ethyl-1-undecene,
 7-ethoxy-6-methyl-1-heptene,
 8-ethoxy-6-ethyl-1-octene, 9-ethoxy-7-ethyl-1-nonene,
 10-ethoxy-ethyl-1-decene, 11-ethoxy-8-propyl-1-undecene,
 6-propoxy-6-methyl-1-hexene,
 10 7-propoxy-7-methyl-1-heptene,
 8-propoxy-8,8-dimethyl-1-octene,
 9-propoxy-9-methyl-1-nonene,
 10-propoxy-9,9-dimethyl-1-decene,
 11-propoxy-10-methyl-1-undecene,
 15 5-butoxy-5-ethyl-1-heptene,
 6-butoxy-6,6-dimethyl-1-hexene,
 7-butoxy-6-methyl-1-heptene,
 8-butoxy-6-ethyl-1-octene, 9-butoxy-9-methyl-1-nonene,
 10-butoxy-8,8-dimethyl-1-decene and
 20 11-butoxy-8,9-diethyl-1-undecene;
 dialkoxy- α -olefins, such as
 9,10-dimethoxy-1-dodecene and
 10,11-dimethoxy-1-undecene; and
 trialkoxy- α -olefins, such as
 25 9,10,11-trimethoxy-1-undecene.

Examples of the polar group-containing monomer of the formula (7') wherein X' is -COOR include:

- ω -alkenylcarboxylic acid esters, such as
- methyl 5-hexenoate, methyl 6-heptenoate,
- 5 methyl 7-octenoate, methyl 8-nonenoate,
- methyl 9-decenoate, methyl 10-undecenoate,
- methyl 11-dodecenoate, ethyl 5-hexenoate,
- ethyl 6-heptenoate, ethyl 7-octenoate,
- ethyl 8-nonenoate, ethyl 9-decenoate,
- 10 ethyl 10-undecenoate, ethyl 11-dodecenoate,
- isopropyl 5-hexenoate, isopropyl 6-heptenoate,
- isopropyl 7-octenoate, isopropyl 8-nonenoate,
- isopropyl 9-decenoate, isopropyl 10-undecenoate,
- isopropyl 11-dodecenoate, butyl 5-hexenoate,
- 15 butyl 6-heptenoate, butyl 7-octenoate,
- butyl 8-nonenoate, butyl 9-decenoate,
- butyl 10-undecenoate, butyl 11-dodecenoate,
- pentyl 5-hexenoate, pentyl 6-heptenoate,
- pentyl 7-octenoate, pentyl 8-nonenoate,
- 20 pentyl 9-decenoate, pentyl 10-undecenoate and
- pentyl 11-dodecenoate;

- alkenylcarboxylic acid esters having a straight-chain hydrocarbon group, such as
- methyl 2-methyl-5-hexenoate, methyl 2-methyl-6-heptenoate,
- 25 ethyl 2-methyl-7-octenoate, methyl 2-methyl-8-nonenoate,

- butyl 2-methyl-9-decenoate, ethyl 2-methyl-10-undecenoate,
 butyl 2-ethyl-5-hexenoate, ethyl 2-ethyl-6-heptenoate,
 isopropyl 2-ethyl-7-octenoate, ethyl 2-ethyl-8-nonenoate,
 methyl 2-ethyl-9-decenoate, ethyl 2-ethyl-10-undecenoate,
 5 methyl 2-propyl-5-hexenoate, methyl 2-propyl-6-heptenoate,
 ethyl 2-propyl-7-octenoate, methyl 2-propyl-9-decenoate,
 ethyl 2-propyl-10-undecenoate, methyl 2-butyl-7-octenoate;
 methyl 2-butyl-8-nonenoate, methyl 2-butyl-9-decenoate,
 and methyl 2-butyl-10-undecenoate; and
 10 alkenylcarboxylic acids having a branched hydrocarbon
 group, such as
 butyl 2-isopropyl-5-hexenoate,
 ethyl 2-isopropyl-6-heptenoate,
 methyl 2-isopropyl-7-octenoate,
 15 methyl 2-isopropyl-8-nonenoate,
 butyl 2-isopropyl-9-decenoate,
 methyl 2-isopropyl-10-undecenoate,
 methyl 2-isobutyl-5-hexenoate,
 methyl 2-t-butyl-6-heptenoate,
 20 ethyl 2-isopropyl-3-methyl-7-octenoate and
 propyl 3-isobutyl-3-methyl-9-decenoate.

Examples of polar group-containing monomers of the
 formula (7') wherein X' is -CRO include:

- alkenylketone having a straight-chain hydrocarbon
 25 group, such as
 5-hexene-2-one, 6-heptene-2-one, 7-octene-2-one,

8-nonene-2-one, 9-decene-2-one, 10-undecene-2-one,
 11-dodecene-2-one, 6-heptene-3-one, 7-octene-3-one,
 8-nonene-3-one, 9-decene-3-one, 10-undecene-3-one,
 11-dodecene-3-one, 7-octene-4-one, 8-nonene-4-one,
 5 9-decene-4-one, 10-undecene-4-one, 11-dodecene-4-one, 9-
 decene-5-one, 10-undecene-5-one and

11-dodecene-5-one;

alkenylketone having a branched hydrocarbon group,
 such as

10 3-methyl-6-heptene-2-one, 3-methyl-7-octene-2-one,
 3-methyl-8-nonene-2-one, 3-methyl-9-decene-2-one,
 3-ethyl-10-undecene-2-one, 3-methyl-11-dodecene-2-one,
 2-methyl-7-octene-3-one, 2-methyl-8-nonene-3-one,
 2-methyl-9-decene-3-one, 2-methyl-10-undecene-3-one,
 15 3-methyl-7-octene-4-one, 3-ethyl-8-nonene-4-one,
 3-ethyl-9-decene-4-one, 3-ethyl-10-undecene-4-one,
 3-ethyl-11-dodecene-4-one, 3-ethyl-9-decene-5-one,
 3-ethyl-10-undecene-5-one and
 3-ethyl-11-dodecene-5-one;

20 alkenyldiketone, such as

8-nonene-2,4-one, 9-decene-2,4-one and
 10-undecene-2,4-one; and

alkenyltriketone, such as

10-undecene-2,4,6-one and 11-dodecene-2,4,6-one.

25 Examples of the polar group-containing monomer of the

formula (7') wherein X' is -NR'R'' (R' and R'' may be the same or different and are a hydrogen atom and/or a hydrocarbon group) include:

ω -alkenylamines, such as

- 5 5-hexene amine, 6-heptene amine, 7-octene amine,
8-nonene amine, 9-decene amine, 10-undecene amine and 11-dodecene amine;

alkenylamines having a straight-chain hydrocarbon group, such as

- 10 2-methyl-5-hexene amine, 2-methyl-6-heptene amine,
2-methyl-7-octene amine, 2-methyl-8-nonene amine,
2-methyl-9-decene amine, 2-methyl-10-undecene amine,
2-methyl-11-dodecene amine, 2-ethyl-5-hexene amine,
2-ethyl-6-heptene amine, 2-ethyl-7-octene amine,
15 2-ethyl-8-nonene amine, 2-ethyl-9-decene amine,
2-ethyl-10-undecene amine, 2-propyl-5-hexene amine,
2-propyl-6-heptene amine, 2-propyl-7-octene amine,
2-propyl-8-nonene amine, 2-propyl-9-decene amine,
20 2-propyl-10-undecene amine, 2-butyl-5-hexene amine,
2-butyl-6-heptene amine, 2-butyl-7-octene amine,
2-butyl-8-nonene amine, 2-butyl-9-decene amine and
2-butyl-10-undecene amine; and

alkenylamines having a branched hydrocarbon group,

- 25 such as

- 2-isopropyl-5-hexene amine, 2-isopropyl-6-heptene amine,
 2-isopropyl-7-octene amine, 2-isopropyl-8-nonene amine,
 2-isopropyl-9-decene amine,
 2-isopropyl-10-undecene amine,
- 5 2-isobutyl-5-hexene amine, 2-t-butyl-6-heptene amine,
 2-isopropyl-3-methyl-7-octene amine,
 2-methyl-3-isopropyl-8-nonene amine,
 3-isobutyl-3-methyl-9-decene amine,
 2,2-dimethyl-10-undecene amine and
- 10 2,3,3-trimethyl-11-dodecene amine.

Also employable are

N-alkyl- ω -alkenylamines, such as

- N-methyl-5-hexene amine, N-methyl-6-heptene amine,
 N-methyl-7-octene amine, N-methyl-8-nonene amine,
- 15 N-methyl-9-decene amine, N-methyl-10-undecene amine,
 N-methyl-11-dodecene amine, N-ethyl-5-hexene amine,
 N-ethyl-6-heptene amine, N-ethyl-7-octene amine,
 N-ethyl-8-nonene amine, N-ethyl-9-decene amine,
 N-ethyl-10-undecene amine and
- 20 N-ethyl-11-dodecene amine;

N-alkylalkenylamines having a straight-chain
 hydrocarbon group, such as

- N-methyl-6-heptene-2-amine, N-ethyl-7-octene-2-amine,
 N-methyl-8-nonene-2-amine, N-ethyl-9-decene-2-amine,
- 25 N-methyl-10-undecene-2-amine, N-ethyl-8-nonene-3-amine,

N-methyl-9-decene-3-amine, N-ethyl-10-undecene-3-amine,
 N-ethyl-8-nonene-4-amine, N-methyl-9-decene-4-amine and
 N-ethyl-10-undecene-4-amine;

N-alkylalkenylamines having a branched hydrocarbon
 5 group, such as

N-methyl-2-methyl-5-hexene amine,

N-ethyl-2-methyl-6-heptene amine,

N-methyl-2-methyl-7-octene amine,

N-ethyl-2-methyl-8-nonene amine,

10 N-ethyl-2-methyl-9-decene amine,

N-methyl-2-methyl-10-undecene amine,

N-methyl-2-ethyl-7-octene amine,

N-ethyl-2-ethyl-9-decene amine

and N-methyl-2-ethyl-10-undecene amine;

15 N,N-dialkyl- ω -alkenylamines, such as

N,N-dimethyl-5-hexene amine,

N,N-dimethyl-6-heptene amine,

N,N-dimethyl-7-octene amine,

N,N-dimethyl-8-nonene amine,

20 N,N-dimethyl-9-decene amine,

N,N-dimethyl-10-undecene amine,

N,N-dimethyl-11-dodecene amine,

N,N-diethyl-5-hexene amine,

N,N-diethyl-6-heptene amine, N,N-diethyl-7-octene amine,

25 N,N-diethyl-8-nonene amine, N,N-diethyl-9-decene amine,

N,N-diethyl-10-undecene amine and

N,N-diethyl-11-dodecene amine;

N,N-dialkylalkenylamines having a straight-chain hydrocarbon group, such as

- 5 N,N-dimethyl-6-heptene-2-amine,
- N,N-diethyl-7-octene-2-amine,
- N,N-dimethyl-8-nonene-2-amine,
- N,N-diethyl-9-decene-2-amine,
- N,N-dimethyl-10-undecene-2-amine,
- 10 N,N-diethyl-8-nonene-3-amine,
- N,N-dimethyl-9-decene-3-amine,
- N,N-diethyl-10-undecene-3-amine,
- N,N-diethyl-8-nonene-4-amine,
- N,N-dimethyl-9-decene-4-amine and
- 15 N,N-diethyl-10-undecene-4-amine; and

N,N-dialkylalkenylamines having a branched hydrocarbon group, such as

- N,N-dimethyl-2-methyl-5-hexene amine,
- N,N-diethyl-2-methyl-6-heptene amine,
- 20 N,N-dimethyl-2-methyl-7-octene amine,
- N,N-diethyl-2-methyl-8-nonene amine,
- N,N-diethyl-2-methyl-9-decene amine,
- N,N-dimethyl-2-methyl-10-undecene amine,
- N,N-dimethyl-2-ethyl-7-octene amine,
- 25 N,N-diethyl-2-ethyl-9-decene amine and

N,N-dimethyl-2-ethyl-10-undecene amine.

Examples of polar group-containing monomers of the formula (7') wherein X' is $-\text{CONR}_2$ (R is a hydrogen atom or a hydrocarbon group) include:

5 ω -alkenylamides, such as

5-hexene amide, 6-heptene amide, 7-octene amide,
8-nonene amide, 9-decene amide, 10-undecene amide and 11-
dodecene amide;

10 alkenylamides having a straight-chain hydrocarbon
group, such as

6-heptene-2-amide, 7-octene-2-amide, 8-nonene-2-amide,
9-decene-2-amide, 10-undecene-2-amide, 8-nonene-3-amide,
9-decene-3-amide, 10-undecene-3-amide,
11-dodecene-3-amide, 8-nonene-4-amide, 9-decene-4-amide,
15 10-undecene-4-amide, 11-dodecene-4-amide,
9-decene-5-amide and 10-undecene-5-amide;

N-alkyl- ω -alkenylamides, such as

N-methyl-5-hexene amide, N-methyl-6-heptene amide,
N-methyl-7-octene amide, N-methyl-8-nonene amide,
20 N-methyl-9-decene amide, N-methyl-10-undecene amide,
N-methyl-11-dodecene amide, N-ethyl-5-hexene amide,
N-ethyl-6-heptene amide, N-ethyl-7-octene amide,
N-ethyl-8-nonene amide, N-ethyl-9-decene amide,
N-ethyl-10-undecene amide and
25 N-ethyl-11-dodecene amide;

N,N-dialkyl- ω -alkenylamides, such as

- N,N-dimethyl-5-hexene amide,
- N,N-dimethyl-6-heptene amide,
- N,N-dimethyl-7-octene amide,
- 5 N,N-dimethyl-8-nonene amide,
- N,N-dimethyl-9-decene amide,
- N,N-dimethyl-10-undecene amide,
- N,N-dimethyl-11-dodecene amide,
- N,N-diethyl-5-hexene amide,
- 10 N,N-diethyl-6-heptene amide, N,N-diethyl-7-octene amide,
- N,N-diethyl-8-nonene amide, N,N-diethyl-9-decene amide,
- N,N-diethyl-10-undecene amide and
- N,N-diethyl-11-dodecene amide;

alkenylamides having a branched hydrocarbon group,

- 15 such as
- 2-methyl-5-hexene amide, 2-methyl-6-heptene amide,
- 2-methyl-7-octene amide, 2-methyl-8-nonene amide,
- 2-methyl-9-decene amide, 2-methyl-10-undecene amide,
- 2-ethyl-5-hexene amide, 2-ethyl-6-heptene amide,
- 20 2-ethyl-7-octene amide, 2-ethyl-8-nonene amide,
- 2-ethyl-9-decene amide, 2-ethyl-10-undecene amide,
- 2-ethyl-11-dodecene amide, 2-propyl-5-hexene amide,
- 2-propyl-6-heptene amide, 2-propyl-7-octene amide,
- 2-propyl-8-nonene amide, 2-propyl-9-decene amide,
- 25 2-propyl-10-undecene amide, 2-propyl-11-dodecene amide,

2-butyl-5-hexene amide, 2-butyl-6-heptene amide,
2-butyl-7-octene amide, 2-butyl-8-nonene amide,
2-butyl-9-decene amide and 2-butyl-10-undecene amide;

N,N-dialkylalkenylamides having a branched

5 hydrocarbon group, such as

N,N-dimethyl-2-methyl-5-hexene amide,

N,N-diethyl-2-methyl-6-heptene amide,

N,N-dimethyl-2-methyl-7-octene amide,

N,N-diethyl-2-methyl-8-nonene amide,

10 N,N-diethyl-2-methyl-9-decene amide,

N,N-diethyl-2-methyl-10-undecene amide,

N,N-dimethyl-2-ethyl-7-octene amide,

N,N-diethyl-2-ethyl-9-decene amide and

N,N-dimethyl-2-ethyl-10-undecene amide;

15 alkenyldiamides, such as

6-heptene-1,2-diamide, 7-octene-1,2-diamide,

8-nonene-1,2-diamide, 9-decene-1,3-diamide,

10-undecene-1,3-diamide and 11-dodecene amide; and

alkenyltriamides, such as

20 9-decene-1,2,3-triamide and 10-undecene-1,2,3-triamide.

Examples of the polar group-containing monomer of the formula (7') wherein X' is -OCOR (R is a hydrocarbon group) are:

carboxylic acid- ω -alkenyl, such as

25 formic acid-5-hexenyl, formic acid-6-heptenyl,

- formic acid-7-octenyl, formic acid-8-nonenyl,
 formic acid-9-decenyl, formic acid-10-undecenyl,
 formic acid-11-dodecenyl, acetic acid-5-hexenyl,
 acetic acid-6-heptenyl, acetic acid-7-octenyl,
- 5 acetic acid-8-nonenyl, acetic acid-9-decenyl,
 acetic acid-10-undecenyl, acetic acid-11-dodecenyl,
 propionic acid-5-hexenyl, propionic acid-6-heptenyl,
 propionic acid-7-octenyl, propionic acid-8-nonenyl,
 propionic acid-9-decenyl, propionic acid-10-undecenyl,
- 10 propionic acid-11-dodecenyl, acetic acid-5-hexenyl, acetic
 acid-6-heptenyl, acetic acid-7-octenyl,
 acetic acid-8-nonenyl, acetic acid-9-decenyl,
 acetic acid-10-undecenyl and acetic acid-11-dodecenyl; and
 carboxylic acid- ω -alkenyl having a branched
- 15 hydrocarbon group, such as
 formic acid-2-methyl-5-hexenyl,
 formic acid-2-methyl-6-heptenyl,
 formic acid-3-ethyl-7-octenyl,
 formic acid-2-methyl-8-nonenyl,
- 20 formic acid-3-ethyl-9-decenyl,
 formic acid-2-methyl-10-undecenyl,
 formic acid-2-methyl-11-dodecenyl,
 acetic acid-2-methyl-5-hexenyl,
 acetic acid-2-methyl-6-heptenyl,
- 25 acetic acid-3-ethyl-3-ethyl-7-octenyl,

- acetic acid-2-methyl-8-nonenyl,
 acetic acid-3-ethyl-9-decenyl,
 acetic acid-2-methyl-10-undecenyl,
 acetic acid-3-ethyl-11-dodecenyl,
 5 propionic acid-2-methyl-5-hexenyl,
 propionic acid-2-methyl-6-heptenyl,
 propionic acid-2-methyl-7-octenyl,
 propionic acid-2-methyl-8-nonenyl,
 propionic acid-2-methyl-9-decenyl,
 10 propionic acid-2-methyl-10-undecenyl,
 propionic acid-2-methyl-11-dodecenyl,
 butyric acid-2-methyl-5-hexenyl,
 butyric acid-2-methyl-6-heptenyl,
 butyric acid-2-methyl-7-octenyl,
 15 butyric acid-3-methyl-8-nonenyl,
 butyric acid-3-methyl-9-decenyl,
 butyric acid-4-methyl-10-undecenyl and
 butyric acid-3-methyl-11-dodecenyl.

- Examples of the polar group-containing monomer of the
 20 formula (7') wherein X' is -CN include:

ω -alkenylnitryls, such as
 5-hexenenitryl, 6-heptenenitryl, 7-octenenitryl,
 8-nonenenitryl, 9-decenenitryl, 10-undecenenitryl and 11-
 dodecenenitryl;

- 25 alkenylnitryls having a straight-chain hydrocarbon

group, such as

- 2-methyl-5-hexenenitryl, 2-methyl-6-heptenenitryl,
 2-methyl-7-octenenitryl, 2-methyl-8-nonenenitryl,
 2-methyl-9-decenenitryl, 2-methyl-10-undecenenitryl,
 5 2-methyl-11-dodecenenitryl, 2-ethyl-5-hexenenitryl,
 2-ethyl-6-heptenenitryl, 2-ethyl-7-octenenitryl,
 2-ethyl-8-nonenenitryl, 2-ethyl-9-decenenitryl,
 2-ethyl-10-undecenenitryl, 2-propyl-5-hexenenitryl,
 2-propyl-6-heptenenitryl, 2-propyl-7-octenenitryl,
 10 2-propyl-8-nonenenitryl, 2-propyl-9-decenenitryl,
 2-propyl-10-undecenenitryl, 2-butyl-5-hexenenitryl,
 2-butyl-6-heptenenitryl, 2-butyl-7-octenenitryl,
 2-butyl-8-nonenenitryl, 2-butyl-9-decenenitryl and
 2-butyl-10-undecenenitryl;
- 15 alkenylnitryls having a branched hydrocarbon group,
 such as
- 2-isopropyl-5-hexenenitryl, 2-isopropyl-6-heptenenitryl,
 2-isopropyl-7-octenenitryl, 2-isopropyl-8-nonenenitryl,
 2-isopropyl-9-decenenitryl,
 20 2-isopropyl-10-undecenenitryl,
 2-isobutyl-5-hexenenitryl, 2-t-butyl-6-heptenenitryl,
 2-isopropyl-3-methyl-7-octenenitryl,
 2-methyl-3-isopropyl-8-nonenenitryl,
 3-isobutyl-3-methyl-9-decenenitryl,
 25 2,2-dimethyl-10-undecenenitryl and

2,3,3-trimethyl-11-dodecenenitryl;

alkenyldinitryl, such as

10-undecene-1,2-dinitryl and 11-dodecene-1,2-dinitryl; and

alkenyltrinitryl, such as

5 10-undecene-1,2,3-trinitryl.

Examples of the polar group-containing monomers of the formula (7') wherein X' is -OH include:

ω -alkenylalcohols, such as

4-pentene-1-ol, 5-hexene-1-ol, 6-heptene-1-ol, 7-octene-1-ol,
10 10-undecene-1-ol and 11-dodecene-1-ol;

alcohols having a straight-chain hydrocarbon group, such as

5-hexene-2-ol, 6-heptene-2-ol, 7-octene-2-ol,
15 8-nonene-2-ol, 9-decene-2-ol, 10-undecene-2-ol,
6-heptene-3-ol, 7-octene-3-ol, 8-nonene-3-ol,
9-decene-3-ol, 10-undecene-3-ol,
11-dodecene-3-ol, 7-octene-4-ol, 8-nonene-4-ol, 9-decene-4-ol,
10-undecene-4-ol, 8-nonene-5-ol,
20 9-decene-5-ol and 10-undecene-5-ol;

alcohols having a branched hydrocarbon group, such as

2-ethyl-5-hexene-1-ol, 3-methyl-6-heptene-1-ol,
3-methyl-7-octene-1-ol, 4-methyl-8-nonene-1-ol,
3-ethyl-9-decene-1-ol, 2-methyl-10-undecene-2-ol,
25 2,2-dimethyl-7-octene-1-ol,

3-ethyl-2-methyl-8-nonene-1-ol,
 2,2,3-trimethyl-9-decene-1-ol and
 2,3,3,4-tetramethyl-10-undecene-2-ol;

diols, such as

- 5 9-decene-1,2-diol, 10-undecene-1,2-diol,
 11-dodecene-1,2-diol and 11-dodecene-1,2-diol; and
 triols, such as 10-undecene-1,2,3-triol.

Examples of the polar group-containing monomer of the
 formula (7') wherein X' is -CHO include:

- 10 ω -alkenylaldehydes, such as

5-hexenal, 6-heptenal, 7-octenal, 8-nonenal, 9-decenal,
 10-undecenal and 11-dodecenal;

alkenylaldehydes having a straight-chain hydrocarbon
 group, such as

- 15 2-methyl-5-hexenal, 2-methyl-6-heptenal,
 2-methyl-7-octenal, 2-methyl-8-nonenal,
 2-methyl-9-decenal, 2-methyl-10-undecenal,
 2-methyl-11-dodecenal, 2-ethyl-5-hexenal,
 2-ethyl-6-heptenal, 2-ethyl-7-octenal,
 20 2-ethyl-8-nonenal, 2-ethyl-9-decenal,
 2-ethyl-10-undecenal, 2-propyl-5-hexenal,
 2-propyl-6-heptenal, 2-propyl-7-octenal,
 2-propyl-8-nonenal, 2-propyl-9-decenal,
 2-propyl-10-undecenal, 2-butyl-5-hexenal,
 25 2-butyl-6-heptenal, 2-butyl-7-octenal,

2-butyl-8-nonenal, 2-butyl-9-decenal and
2-butyl-10-undecenal; and

alkenylaldehydes having a branched hydrocarbon group,
such as

- 5 2-isopropyl-5-hexenal, 2-isopropyl-6-heptenal,
2-isopropyl-7-octenal, 2-isopropyl-8-nonenal,
2-isopropyl-9-decenal, 2-isopropyl-10-undecenal,
2-isobutyl-5-hexenal, 2-t-butyl-6-heptenal,
2-isopropyl-3-methyl-7-octenal,
10 2-methyl-3-isopropyl-8-nonenal,
3-isobutyl-3-methyl-9-decenal,
2,2-dimethyl-10-undecenal and
2,3,3-trimethyl-11-dodecenal.

- Examples of the polar group-containing monomers of
15 the formula (7') wherein X' is -COOH include:

ω -alkenylcarboxylic acids, such as acryl acid,
5-hexenoic acid, 6-heptenoic acid, 7-octenoic acid,
8-nonenoic acid, 9-decenoic acid, 10-undecenoic acid and
11-dodecenoic acid;

- 20 alkenylcarboxylic acids having a straight-chain
hydrocarbon group, such as
2-methyl-5-hexenoic acid, 2-methyl-6-heptenoic acid,
2-methyl-7-octenoic acid, 2-methyl-8-nonenoic acid,
2-methyl-9-decenoic acid, 2-methyl-10-undecenoic acid,
25 2-methyl-11-dodecenoic acid, 2-ethyl-5-hexenoic acid,

- 2-ethyl-6-heptenoic acid, 2-ethyl-7-octenoic acid,
 2-ethyl-8-nonenoic acid, 2-ethyl-9-decenoic acid,
 2-ethyl-10-undecenoic acid, 2-propyl-5-hexenoic acid,
 2-propyl-6-heptenoic acid, 2-propyl-7-octenoic acid,
 5 2-propyl-8-nonenoic acid, 2-propyl-9-decenoic acid,
 2-propyl-10-undecenoic acid, 2-butyl-5-hexenoic acid,
 2-butyl-6-heptenoic acid, 2-butyl-7-octenoic acid,
 2-butyl-8-nonenoic acid, 2-butyl-9-decenoic acid and
 2-butyl-10-undecenoic acid; and
- 10 alkenylcarboxylic acids having a branched hydrocarbon
 group, such as
- 2-isopropyl-5-hexenoic acid,
 2-isopropyl-6-heptenoic acid,
 2-isopropyl-7-octenoic acid,
 15 2-isopropyl-8-nonenoic acid,
 2-isopropyl-9-decenoic acid,
 2-isopropyl-10-undecenoic acid,
 2-isobutyl-5-hexenoic acid,
 2-t-butyl-6-heptenoic acid,
- 20 2-isopropyl-3-methyl-7-octenoic acid,
 2-methyl-3-isopropyl-8-nonenoic acid,
 3-isobutyl-3-methyl-9-decenoic acid,
 2,2-dimethyl-10-undecenoic acid and
 2,3,3-trimethyl-11-dodecenoic acid.
- 25 Examples of the polar group-containing monomer of the

formula (7') wherein X' is an epoxy group include:

ω -alkenylepoxides, such as

5-hexene epoxide, 6-heptene epoxide, 7-octene epoxide,
8-nonene epoxide, 9-decene epoxide, 10-undecene epoxide and

5 11-dodecene epoxide; and

alkenylepoxides having a branched hydrocarbon group,
such as


2-methyl-5-hexene epoxide, 2-methyl-6-heptene epoxide,

2-methyl-7-octene epoxide, 2-methyl-8-nonene epoxide,

10 2-methyl-9-decene epoxide and

2-methyl-10-undecene epoxide.

15

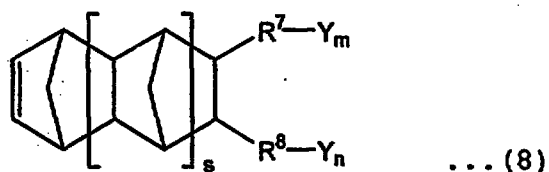

wherein R^7 , R^8 , Y, m, n and s have the same meanings as
those of R^7 , R^8 , Y, m, n and s, respectively, in the

20 formula (6).

In the above formula (8), R^7 and R^8 are preferably a
direct bond or a hydrocarbon group of 1 to 10 carbon atoms
and Y is preferably -OR, -COOR, -CRO,


$$\begin{array}{ccc} \text{-CNR}_2 & \text{-OCR} & \\ \parallel & \parallel & \\ \text{O} & , & \text{O} \end{array}$$















-NR₂, an epoxy group, (R is a hydrogen atom or

a hydrocarbon group), $-C\equiv N$, $-OH$, $-COOH$ or $-NH_2$.







Examples of polar group-containing monomer represented by the formula (8) wherein Y is $-OR$ (R is a hydrogen atom or a hydrocarbon group) include

5 bicyclic monoethers such as








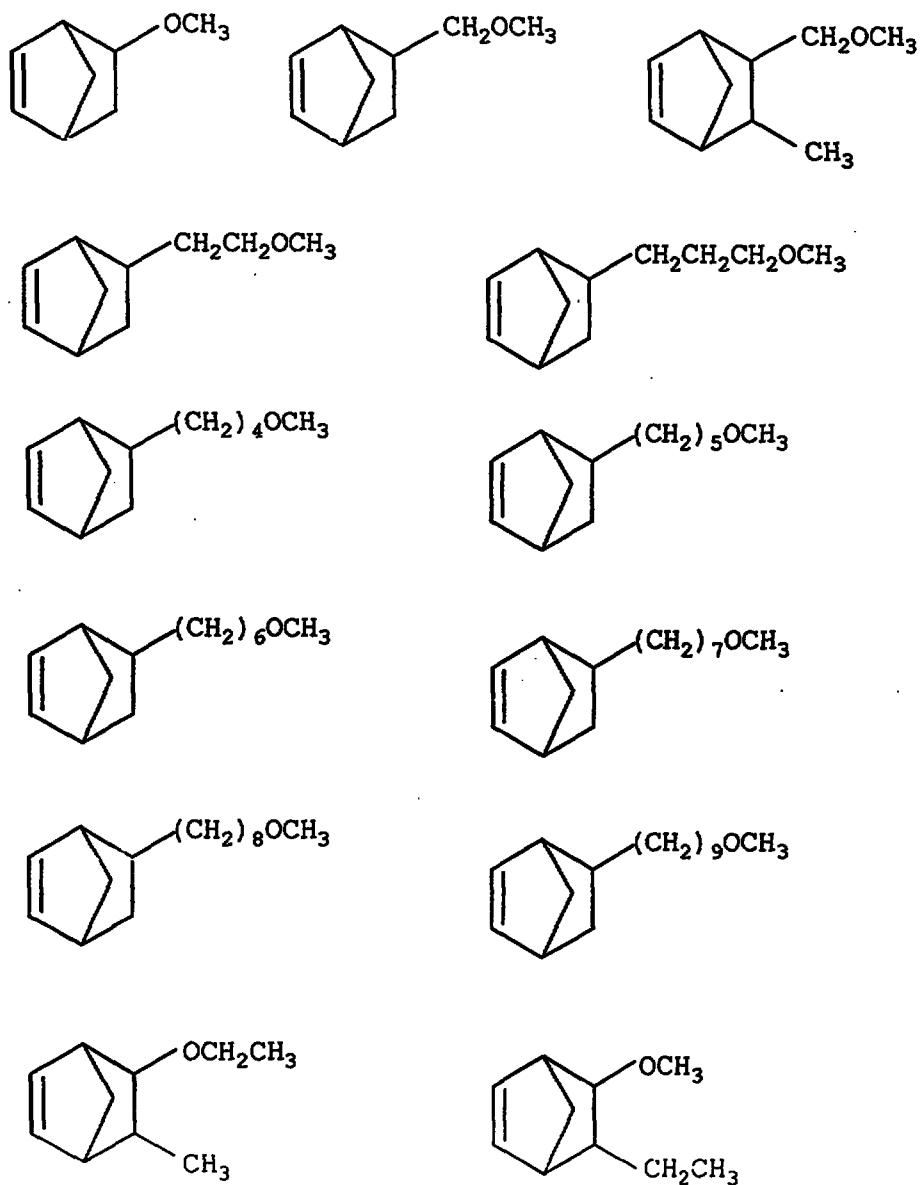


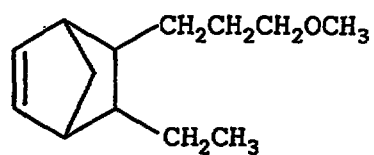

bicyclic diethers such as


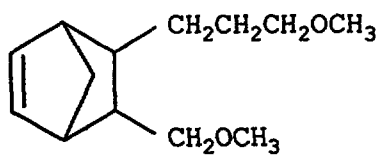




tetracyclic monoethers such as

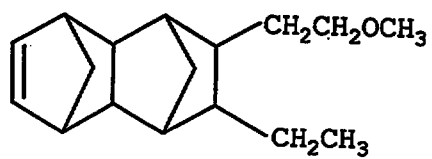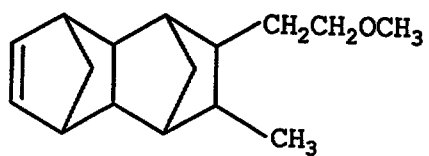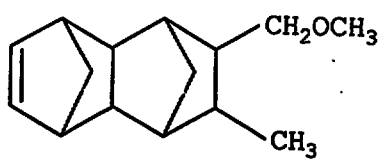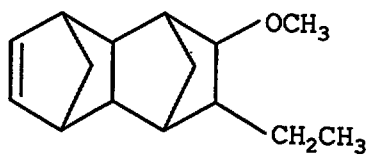


, and












tetracyclic diethers such as

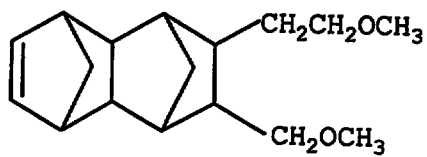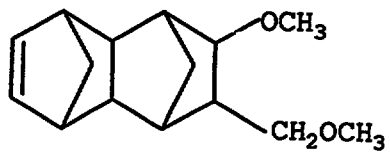







Examples of polar group-containing monomer represented by the formula (8) wherein Y is $-\text{COOR}$ (R is a hydrogen atom or a hydrocarbon group) include bicyclic carboxylic acid esters such as

5







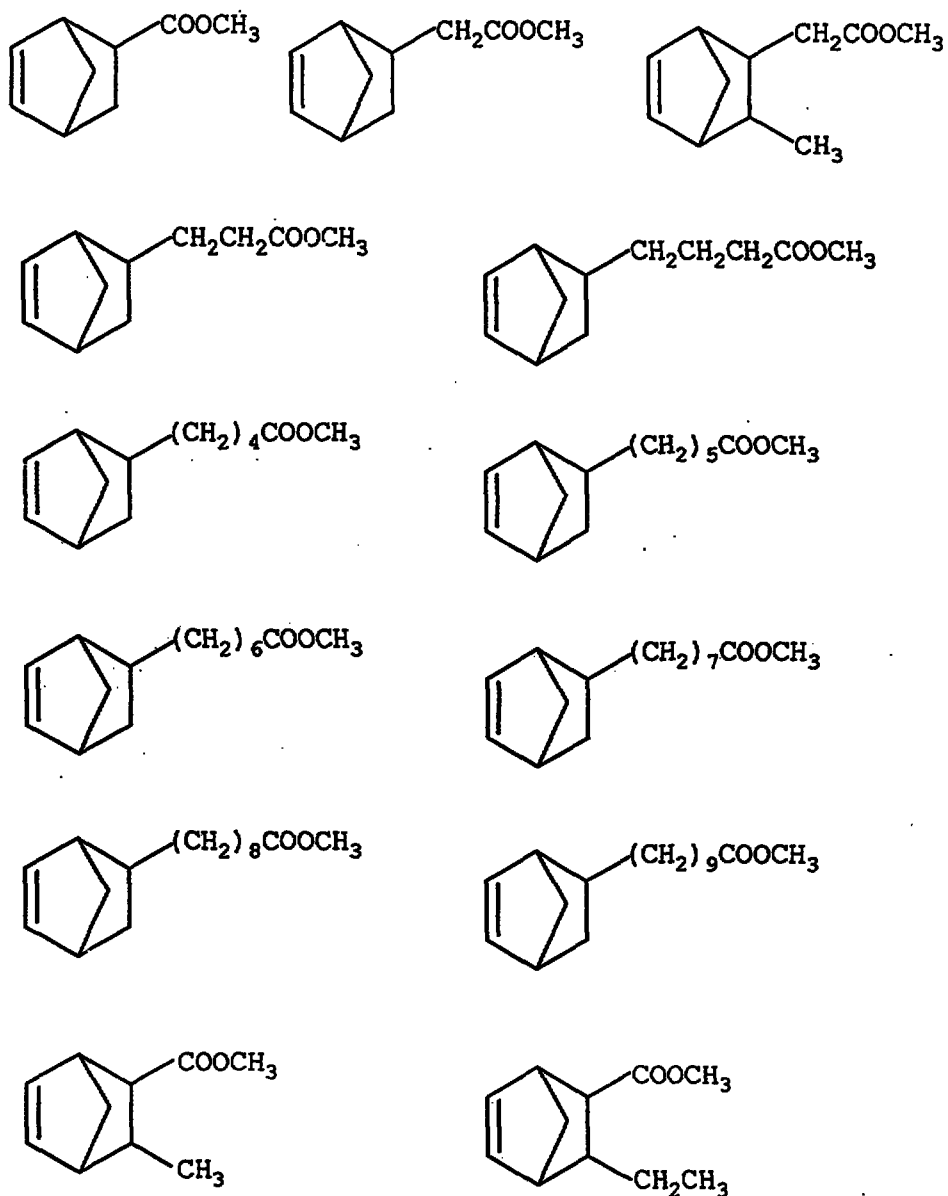


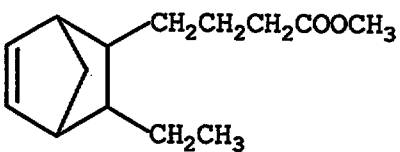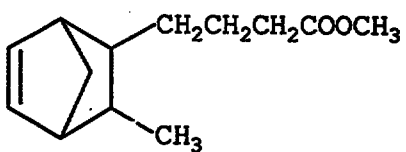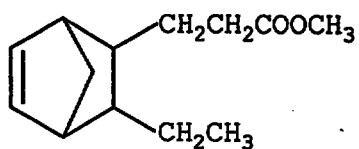





bicyclic dicarboxylic acid esters such as

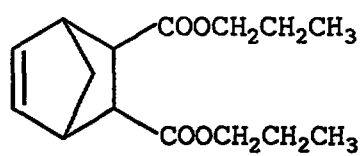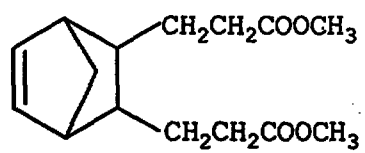

tetracyclic monocarboxylic acid esters such as

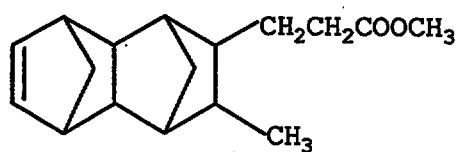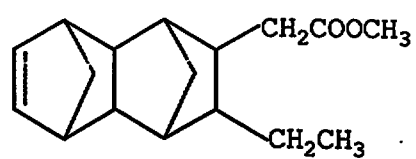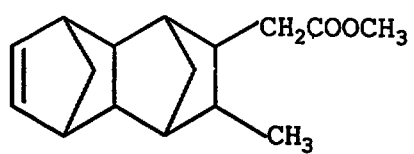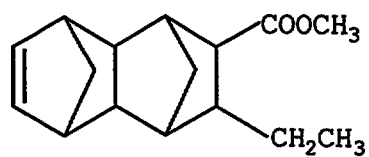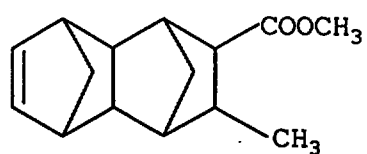


tetracyclic dicarboxylic acid esters such as

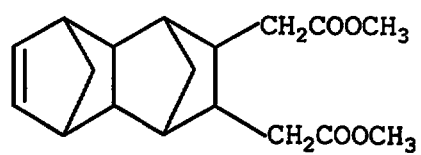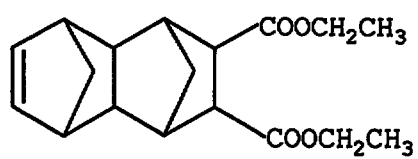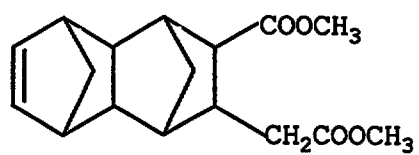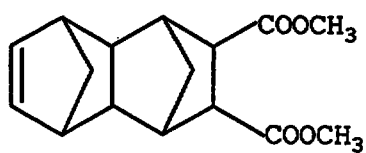

, and

acid anhydrides such as













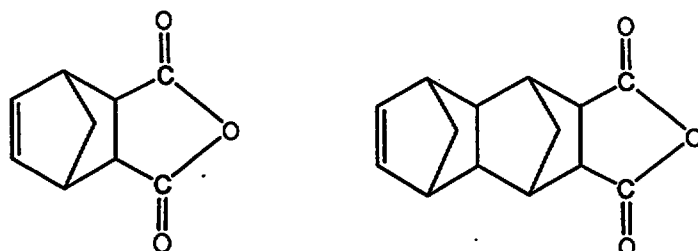
















5

Examples of polar group-containing monomer represented by the formula (8) wherein Y is -CRO (R is a hydrocarbon group) include







bicyclic ketones such as

10











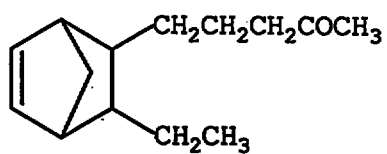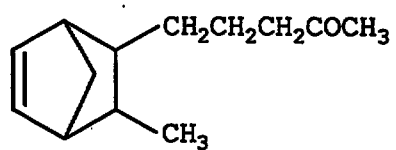

bicyclic diketones such as


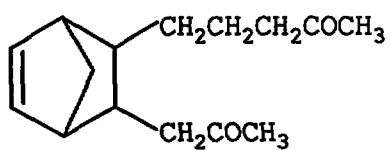




tetracyclic ketones such as

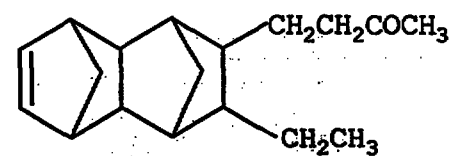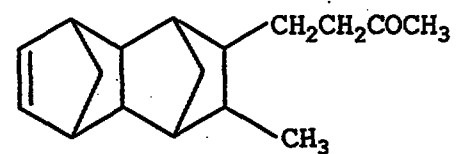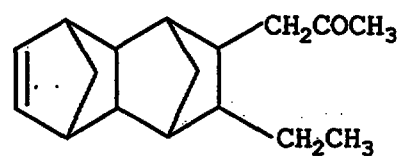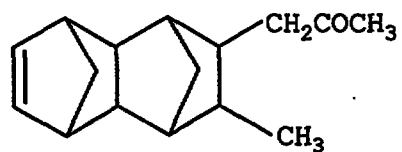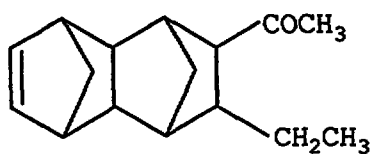


, and













tetracyclic diketones such as

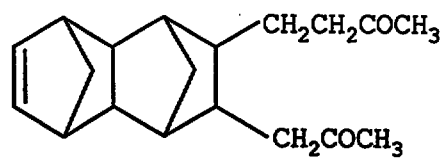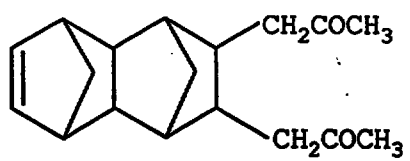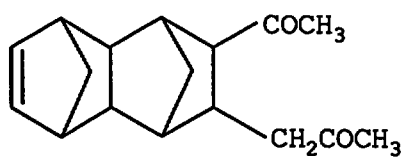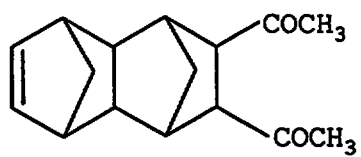







Examples of polar group-containing monomer represented by the formula (8) wherein Y is $-NR_2$ (R is a hydrogen atom or a hydrocarbon group) include bicyclic amines such as

5






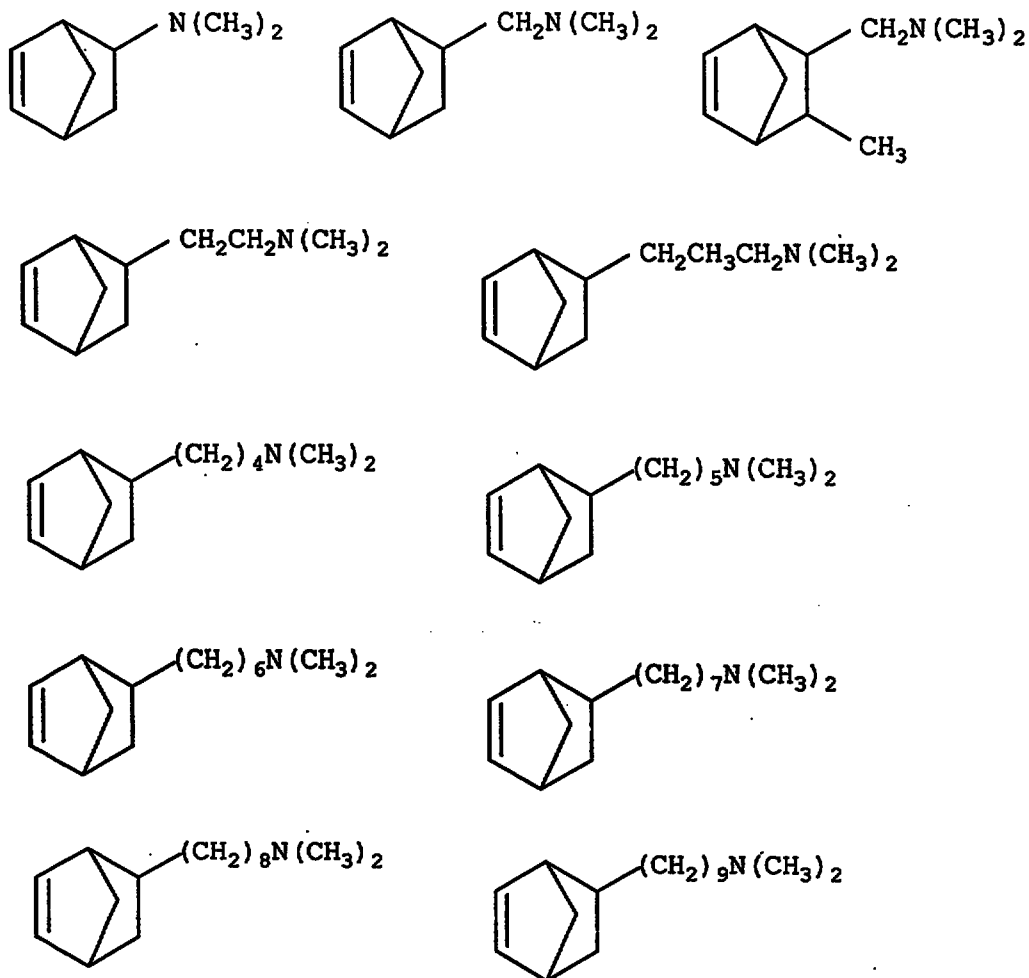


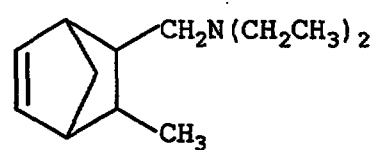

bicyclic diamines such as

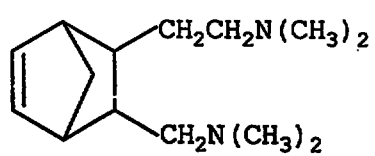


tetracyclic amines such as

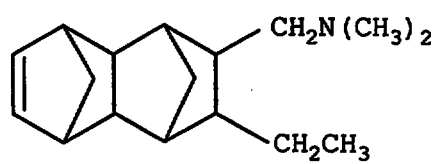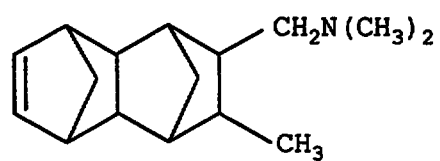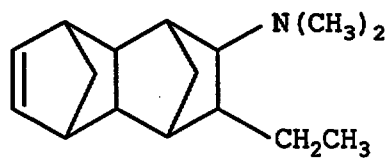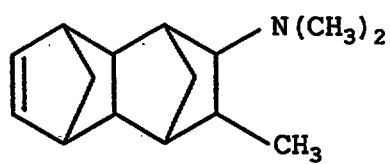

5

, and












tetracyclic diamines such as

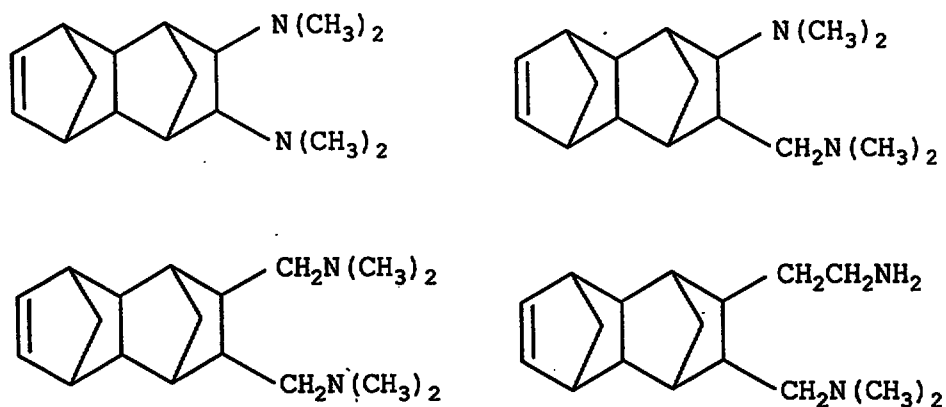


5 Examples of polar group-containing monomer







represented by the formula (8) wherein Y is $\begin{array}{c} \text{-CNR}_2 \\ || \\ \text{O} \end{array}$ (R is a hydrogen atom or a hydrocarbon group) include

bicyclic amides such as











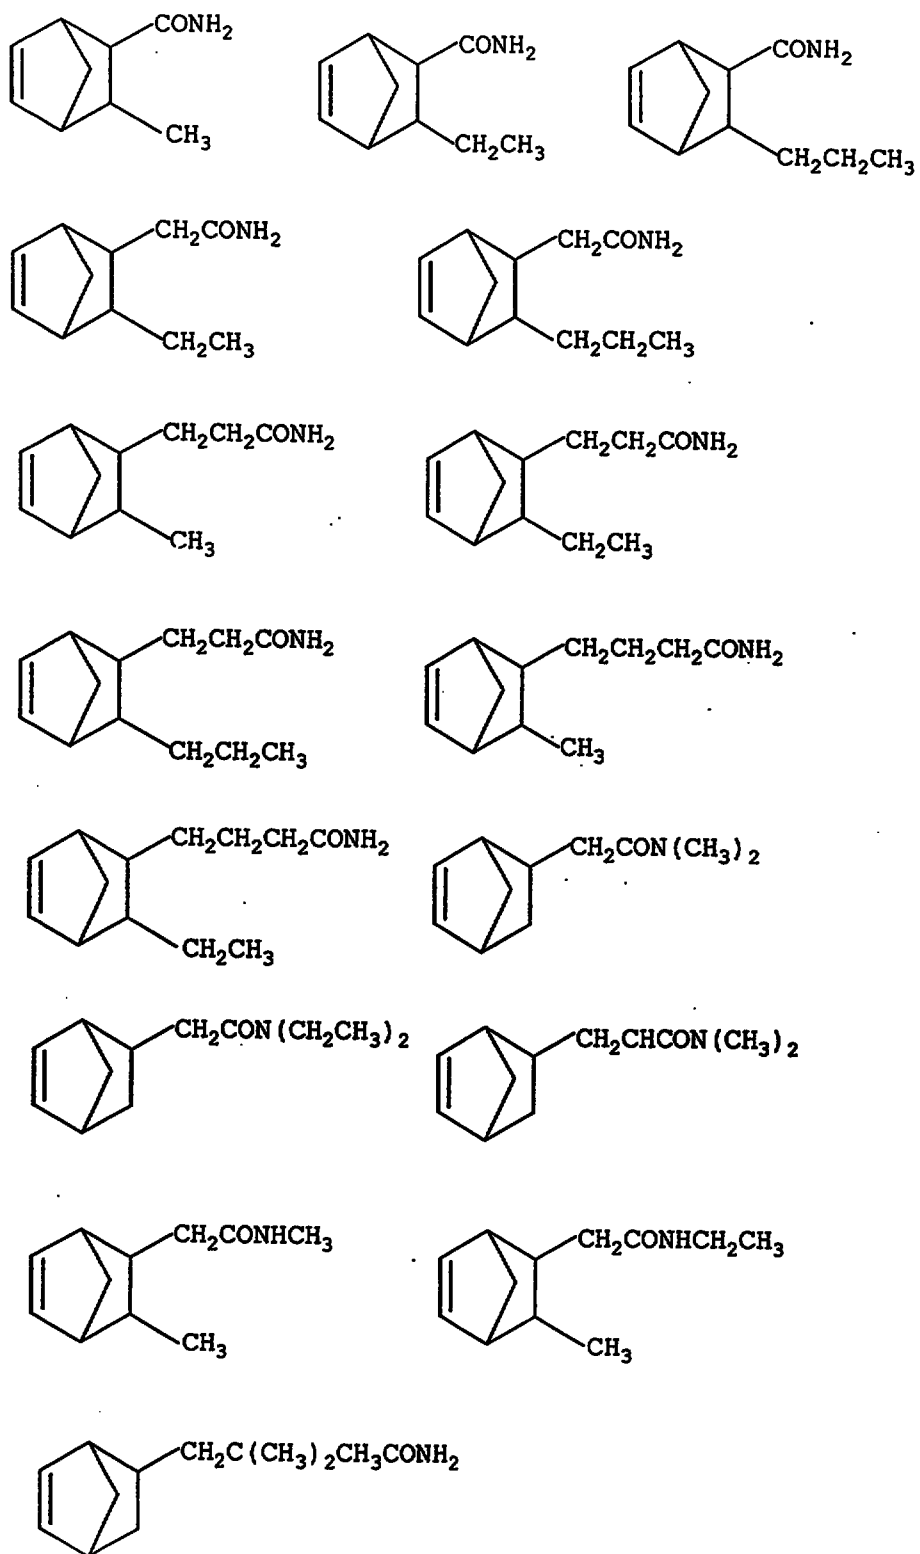

bicyclic diamides such as




tetracyclic amides such as

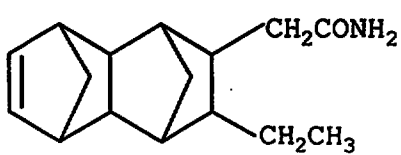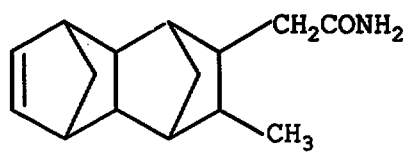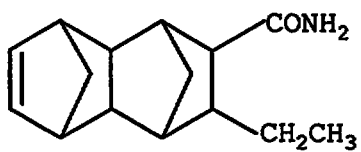

5 , and















tetracyclic diamides such as













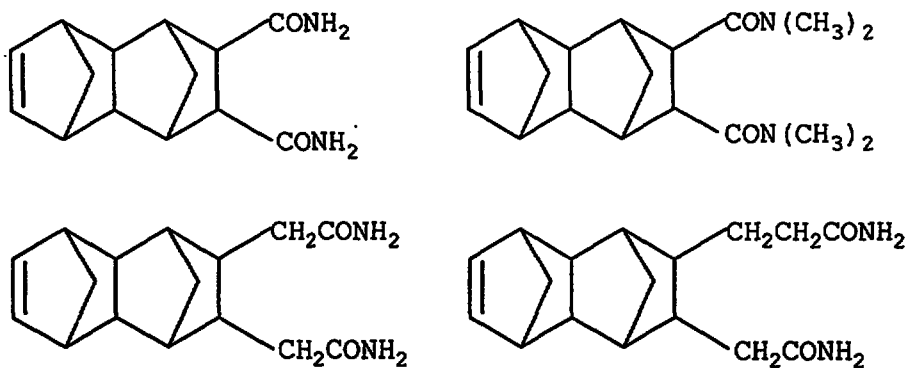


5 Examples of polar group-containing monomer







represented by the formula (8) wherein Y is $\begin{array}{c} \text{-OCR} \\ || \\ \text{O} \end{array}$ (R is a hydrogen atom or a hydrocarbon group) include

bicyclic esters such as











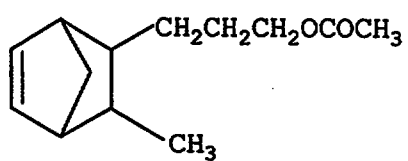

bicyclic diesters such as

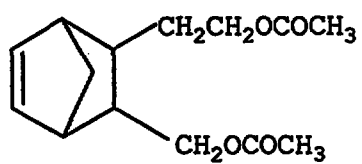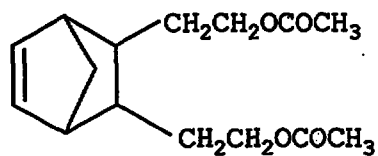
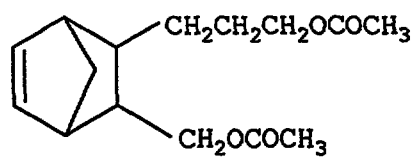




5 tetracyclic esters such as

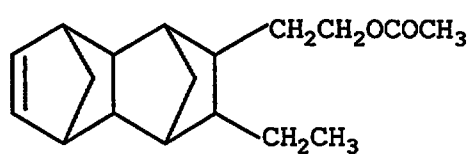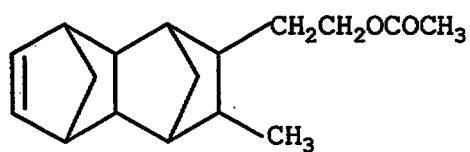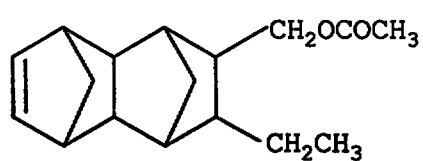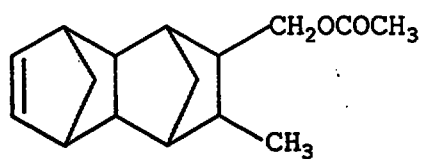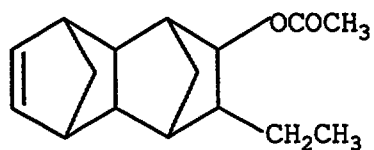















, and














tetracyclic diesters such as

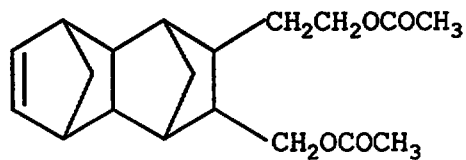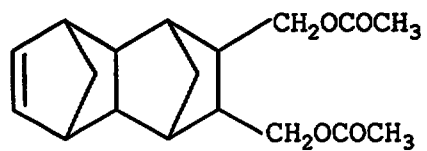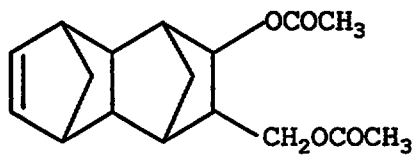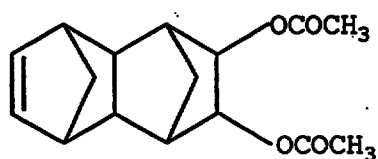







Examples of polar group-containing monomer

represented by the formula (8) wherein Y is $-C \equiv N$ include bicyclic nitriles such as













bicyclic dinitriles such as







tetracyclic nitriles such as

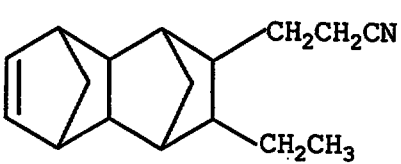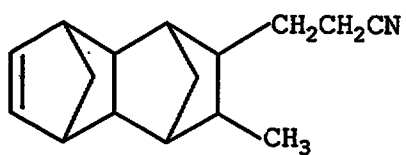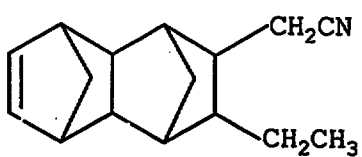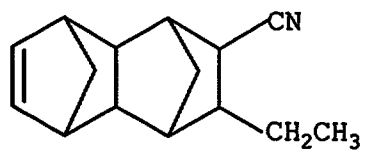

, and















tetracyclic dinitriles such as










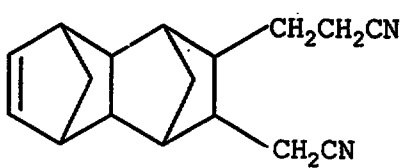
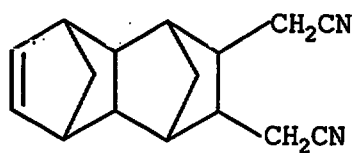




5







Examples of polar group-containing monomer

represented by the formula (8) wherein Y is -OH include
bicyclic alcohols such as














bicyclic diols such as














tetracyclic alcohols such as









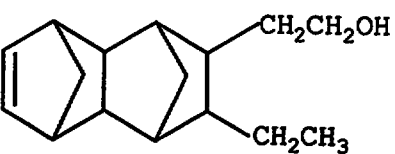
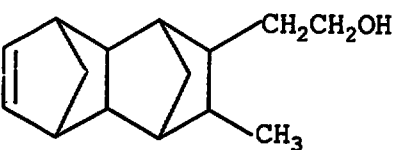



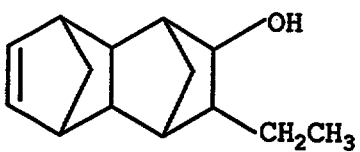




tetracyclic diols such as






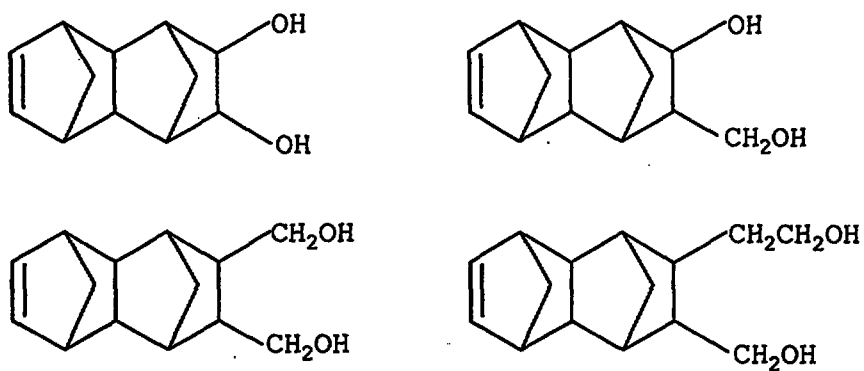


- 5 Examples of polar group-containing monomer represented by the formula (8) wherein Y is $-\text{COOH}$ include bicyclic monocarboxylic acids such as











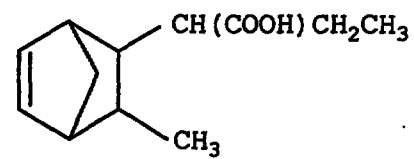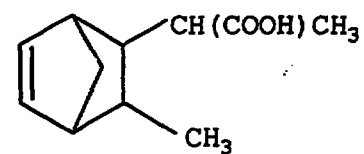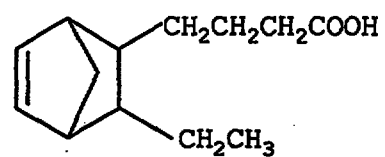

bicyclic dicarboxylic acids such as


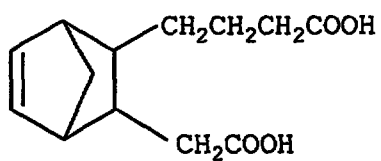




tetracyclic carboxylic acids such as

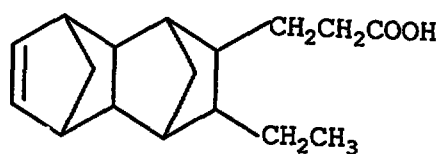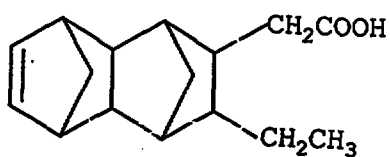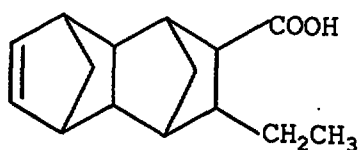

, and















tetracyclic dicarboxylic acids such as










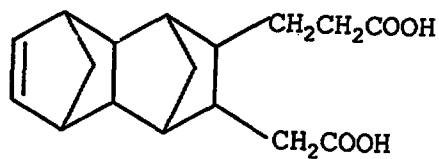
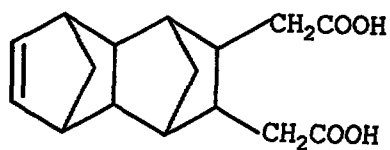
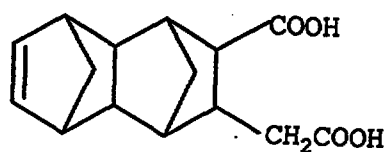



5







Examples of polar group-containing monomer represented by the formula (8) wherein Y is -CHO include

bicyclic aldehydes such as











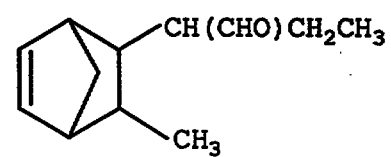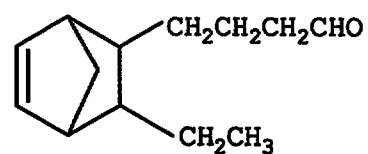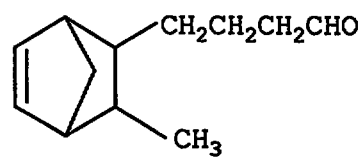

bicyclic dialdehydes such as


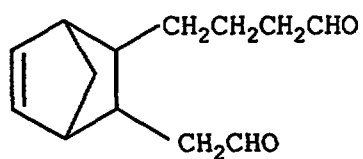




5 tetracyclic aldehydes such as

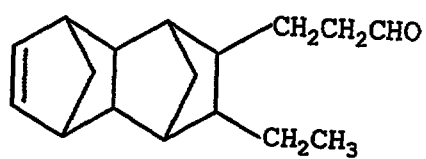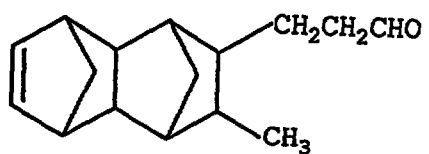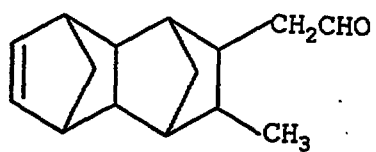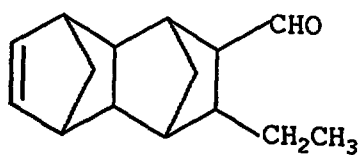

, and


tetracyclic dialdehydes such as










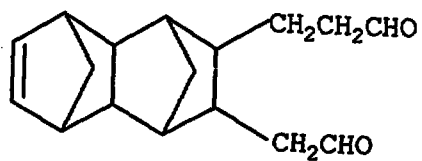
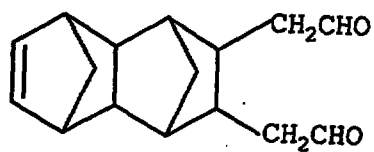
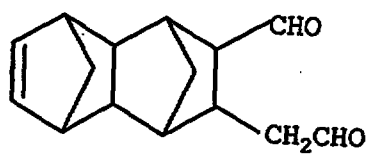




5

Examples of polar group-containing monomer









represented by the formula (8) wherein Y is -NH_2 include
bicyclic monoamines such as

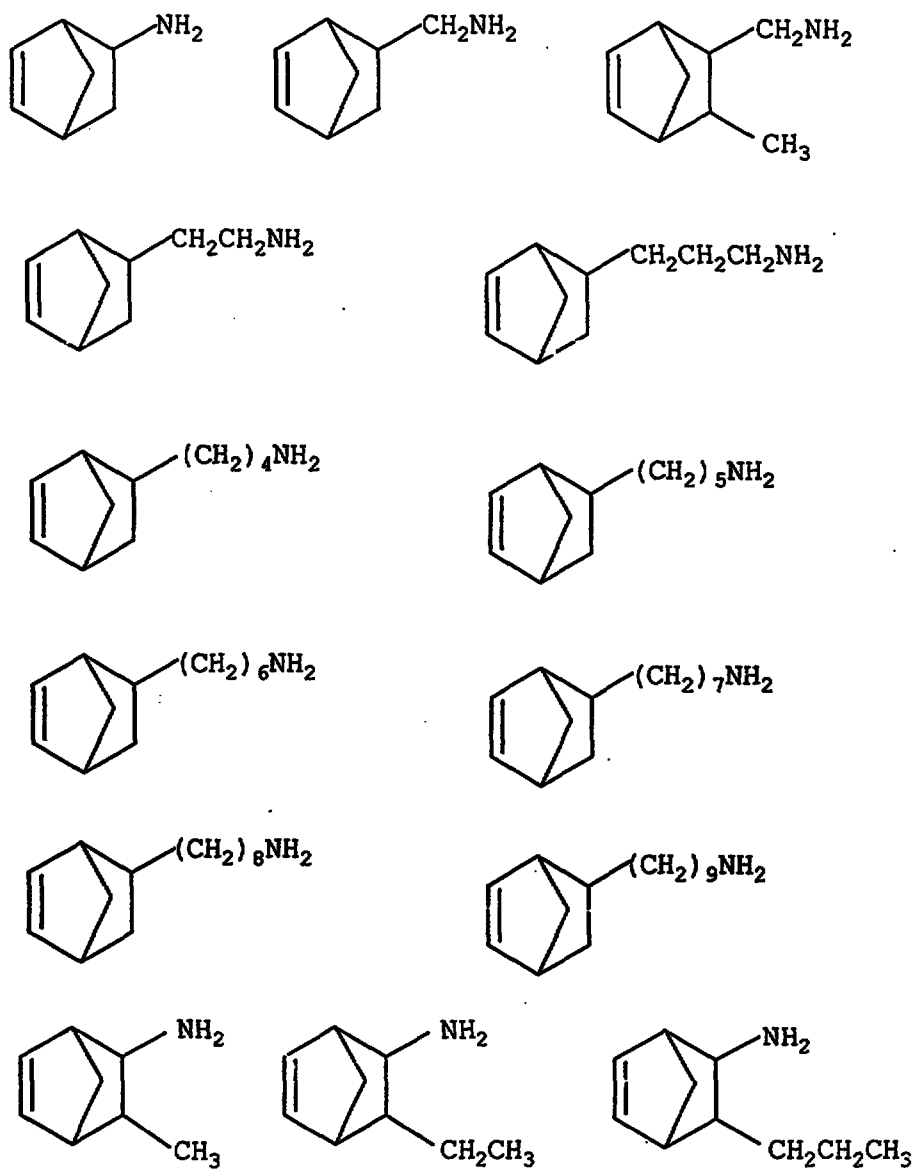

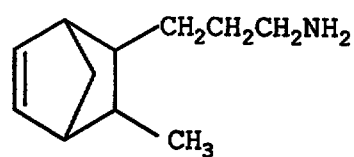




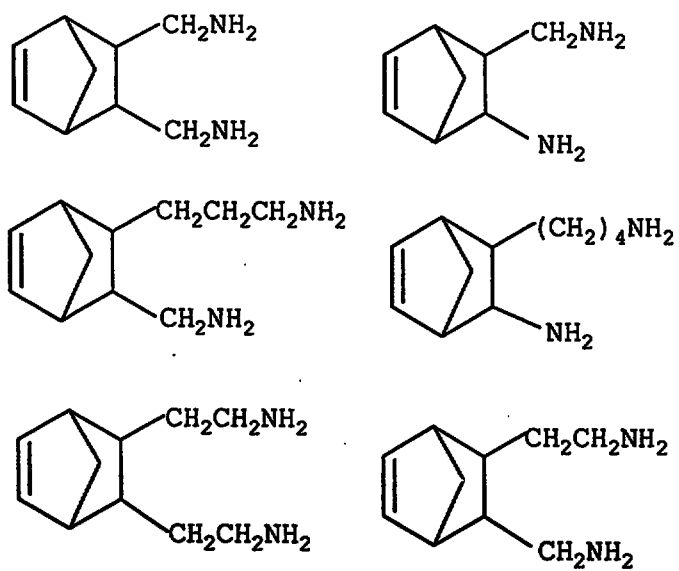


tetracyclic monoamines such as

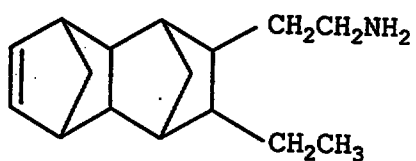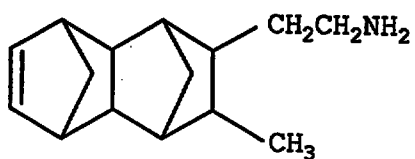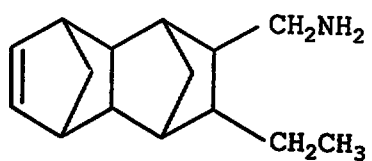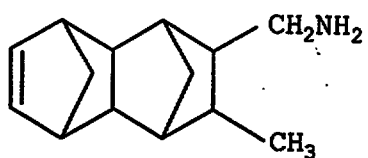

, and

tetracyclic diamines such as

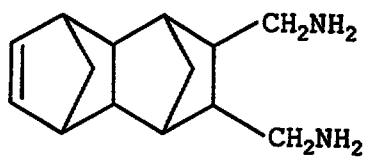

In this invention, it is also possible to copolymerize polyenes with the α -olefins and the polar group-containing monomers. Exemplified polyenes are olefins having an aliphatic ring or an aromatic ring, such as cyclopentene, cycloheptene, 2-methyl-1,4,5,8-dimethano-
5 1,2,3,4,4a,5,8,8a-octahydronaphthalene, styrene and vinylcyclohexane; chain or cyclic diene, such as butadiene, isoprene, 1,4-hexadiene, dicyclopentadiene, 5-ethylidene-2-norbornene, 7-methyl-1,6-octadiene; chain or
10 cyclic triene, such as 6,10-dimethyl-1,5,9-undecatriene and 5,9-dimethyl-1,4,8-decatriene; and chain or cyclic tetraene, such as 6,10,14-trimethyl-1,5,9,13-pentadecatetraene and 5,9,13-trimethyl-1,4,8,12-tetradecatetraene.

15 In one process for preparing a polar group-containing copolymer according to the first embodiment of the invention, at least one olefin selected from the above-mentioned α -olefin of 2 to 20 carbon atoms is polymerized with a polar group-containing monomer represented by the
20 formula (7) and/or a polar group-containing monomer represented by the formula (8) in the presence of the aforesaid olefin polymerization catalyst under the following polymerization conditions.

When the polar group-containing monomer is such a
25 monomer that X in the formula (7) is -OH and Y in the

formula (8) is -OH, it is preferable to use a transition metal compound (A) represented by any one of the formulas (11) to (16), more preferably a transition metal compound (A) represented by any one of the formulas (11) to (15).

- 5 When the polar group-containing monomer is such a monomer that X in the formula (7) is -NR'R'' (R' and R'' may be the same as or different from each other and are a hydrogen atom and an alkyl group) and Y in the formula (8) is -NR₂ (R is hydrogen or an alkyl group), it is preferable to use
- 10 a transition metal compound (A) represented by any one of the formulas (11) to (16), more preferably a transition metal compound (A) represented by any one of the formulas (11), (12), (14), (15) and (16).

- In the process for preparing a polar group-containing
- 15 copolymer according to the first embodiment of the invention, a polar group can be selectively introduced to a terminal end of a polymer chain or inside of the main chain by the selection of type of polar group and reaction conditions. Further, characteristics of the polar group-
- 20 containing polymer can be diversified by using two or more kinds of olefins at polymerization.

- Deactivation of the catalyst by the functional group-containing monomer can be made as low as possible by previously contacting the transition metal compound (A)
- 25 and/or the polar group-containing monomer with the

organoaluminum compound.

To contact the polar group-containing monomers with the organoaluminum compound, there are a method of previously contacting them prior to adding them to the polymerization system and a method of adding the two components successively to the polymerization system, and any of these methods is useful.

To contact the transition metal compounds with the organoaluminum compound, there are a method of previously contacting them prior to adding them to the polymerization system and a method of adding the two components successively to the polymerization system similarly to the above, and any of these methods is useful.

In the polymerization, the transition metal compound (A) is used in an amount of usually about 0.00005 to 0.1 mmol, preferably about 0.0001 to 0.05 mmol, in terms of the transition metal atom, based on 1 liter of the polymerization volume.

The organoaluminum oxy-compound (B-1) is used in such an amount that the amount of the aluminum atom becomes usually about 1 to 10,000 mol, preferably 10 to 5,000 mol, based on 1 mol of the transition metal atom.

The ionizing ionic compound (B-2) is used in such an amount that the amount of the boron atom becomes usually about 0.5 to 500 mol, preferably 1 to 100 mol, based on 1

mol of the transition metal atom.

The organoaluminum compound (B-3) is used in such an amount that the amount of the aluminum atom becomes usually about 10 to 500 mol, preferably about 20 to 200 mol, based
5 on 1 mol of the transition metal atom.

When the organoaluminum oxy-compound (B-1) and the organoaluminum compound (B-3) are used in combination, the organoaluminum compound (B-3) is used when needed in an amount of usually about 0 to 200 mol, preferably about 0 to
10 100 mol, based on 1 mol of the aluminum atom in the organoaluminum oxy-compound (B-1). When the ionizing ionic compound (B-2) and the organoaluminum compound (B-3) are used in combination, the organoaluminum compound (B-3) is used when needed in an amount of usually about 0 to 1000
15 mol, preferably about 0 to 500 mol, based on 1 mol of the boron atom in the ionizing ionic compound (B-2).

When the organosilicon compound (C) is used, this compound is used in an amount of 1 to 10000 mol, preferably 10 to 5000 mol, based on 1 mol of the transition metal atom.

20 When the dialkylzinc compound (D) is used, this compound is used in an amount of 1 to 10000 mol, preferably 10 to 5000 mol, based on 1 mol of the transition metal atom.

When hydrogen is used, the hydrogen is used in an amount of 10^{-5} to 1 mol, preferably 10^{-4} to 10^{-1} mol, based
25 on 1 mol of the total of the olefin and the polar group-

containing monomer used in the polymerization.

Although there is no specific limitation on the ratio between the polar group-containing monomer and the transition metal atom, the polar group-containing monomer/transition metal atom molar ratio is in the range of usually 1/100 to 10000/1, preferably 1/10 to 5000/1.

Copolymerization of an olefin and the polar group-containing monomer can be carried out by any of a liquid phase polymerization process such as suspension polymerization or solution polymerization, a gas phase polymerization process and a high-pressure process.

In the liquid phase polymerization, an inert hydrocarbon medium is used, and examples thereof include aliphatic hydrocarbons, such as propane, butane, pentane, hexane, heptane, octane, decane, dodecane and kerosine; alicyclic hydrocarbons, such as cyclopentane, cyclohexane and methylcyclopentane; aromatic hydrocarbons, such as benzene, toluene and xylene; and halogenated hydrocarbons, such as ethylene chloride, chlorobenzene and dichloromethane. The olefin itself can be used as a solvent. These solvents may be used in combination.

When the suspension polymerization is conducted, the polymerization temperature is usually in the range of -50 to 100°C, preferably 0 to 90°C; when the solution polymerization is conducted, the polymerization temperature

is usually in the range of 0 to 300°C, preferably 20 to 250°C; when the gas phase polymerization is conducted, the polymerization temperature is usually in the range of 0 to 120°C, preferably 20 to 100°C; and when the high-pressure process is conducted, the polymerization temperature is usually in the range of 50 to 1000°C, preferably 100 to 500°C. The polymerization pressure is usually in the range of atmospheric pressure to 100 kg/cm², preferably atmospheric pressure to 50 kg/cm². In case of the high-pressure process, the pressure is usually in the range of 100 to 10000 kg/cm², preferably 500 to 5000 kg/cm². The polymerization reaction can be carried out by any of batchwise, semi-continuous and continuous processes. Further, the polymerization can be carried out in two or more steps under different reaction conditions.

The molecular weight of the resulting polar group-containing olefin copolymer can be regulated by controlling the amount of hydrogen, the organosilicon compound or the dialkylzinc compound or changing the polymerization temperature or the polymerization pressure.

In the process for preparing a polar group-containing copolymer according to the first embodiment of the invention, an α -olefin of 2 to 20 carbon atoms and a polar group-containing monomer represented by the following formula (7'') and/or (8') are copolymerized in the presence

of a catalyst comprising:

(A) the transition metal compound, and

(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

5 (B-2) a compound which reacts with the compound

(A) to form an ion pair, and


(B-3) an organoaluminum compound.



10 wherein $\text{R}^{3''}$ is a hydrocarbon group of 2 or more carbon atoms, X'' is $-\text{OR}$, $-\text{COOR}$, $-\text{CRO}$, $-\text{C}(\text{O})\text{NR}_2$, $-\text{OC}(\text{O})\text{R}$ (R is a hydrogen atom or a hydrocarbon group), an epoxy group, $-\text{C}\equiv\text{N}$ or $-\text{NH}_2$, and p is a positive integer of 1 to 3.

The polar group-containing monomer represented by the
15 formula (7'') is, for example, the polar group-containing monomer represented by the aforesaid formula (7') wherein X is other group than $-\text{OH}$ and $-\text{NR}_2$.

20



$\dots (8')$

wherein R^7 is a direct bond or an aliphatic hydrocarbon
25 group of 1 or more carbon atoms, R^8 is a hydrogen atom, a

direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms, Y' is -OR, -COOR, -CRO, -C(O)NR₂, -OC(O)R (R is a hydrogen atom or a hydrocarbon group), an epoxy group, -C≡N or -NH₂, m and n are each an integer of 0 to 2, m+n is
 5 not 0, and p is 0 or 1.

The polar group-containing monomer represented by the formula (8') is, for example, the polar group-containing monomer represented by the aforesaid formula (8) wherein Y is other group than -OH and -NR₂.

10 Such polar group-containing monomers can be used singly or in combination of two or more kinds.

The polymerization conditions are the same as used above.

Next, the process for preparing a polar group-
 15 containing olefin copolymer according to the second embodiment of the invention is described.

The process for preparing a polar group-containing olefin copolymer according to the second embodiment of the invention comprises copolymerizing at least one α -olefin
 20 selected from α -olefins of 2 to 20 carbon atoms, a macromonomer represented by the following formula (9), and at least one polar group-containing monomer selected from a polar group-containing monomer represented by the above formula (7) and a polar group-containing monomer
 25 represented by the above formula (8) in the presence of the

olefin polymerization catalyst comprising:

(A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, preferably a transition metal compound
5 represented by any one of the above formulas (11) to (15),

and


(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the compound

10 (A) to form an ion pair, and

(B-3) an organoaluminum compound;



15

... (9)


wherein R^5 , R^6 , Z, W, p, q and r have the same meanings as those of R^5 , R^6 , Z, W, p, q and r in the formula (4), respectively.

20 When a polar group-containing monomer represented by the formula (7) is used as the polar group-containing monomer in the invention, the aforesaid second embodiment of the polar group-containing olefin copolymer of the invention is obtained.


25

Examples of macromonomers represented by the formula
(9) include the following macromonomers.



5




10




15

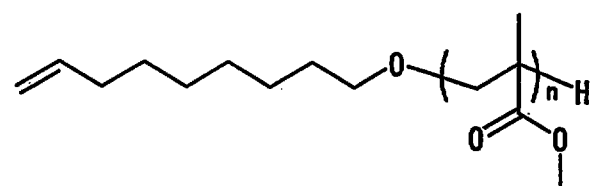


20




25



5



10

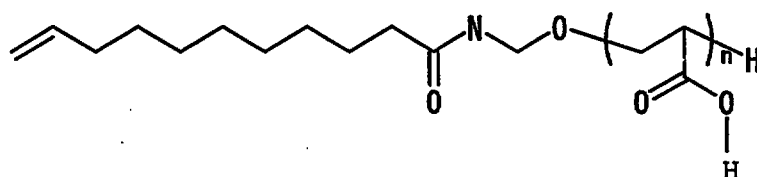

etc.

15

The macromonomer can be prepared by the use of, for example, the polar monomer (later described), and specifically, the macromonomer can be prepared by producing a polymer segment from the polar group of the polar group-
 20 containing monomer through anionic polymerization, ring-opening polymerization or polycondensation similarly to the following process (i).

The copolymerization of the α -olefin of 2 to 20
 carbon atoms and the macromonomer represented by the
 25 formula (9) is carried out using the same olefin

polymerization catalyst as used in the copolymerization of an α -olefin of 2 to 20 carbon atoms and the polar group-containing monomer represented by the formula (10) in the following process (i) under the same conditions as used in
5 the copolymerization of an α -olefin of 2 to 20 carbon atoms and the polar group-containing monomer represented by the formula (10) in the following process (i).

In the process for preparing a polar group-containing copolymer according to the second embodiment of the
10 invention, at least one olefin selected from the above-mentioned α -olefin of 2 to 20 carbon atoms, a macromonomer represented by the formula (9) and at least one polar group-containing monomer selected from the group consisting of a polar group-containing monomer represented by the
15 formula (7) and a polar group-containing monomer represented by the formula (8) are polymerized in the presence of the aforesaid olefin polymerization catalyst under the same polymerization conditions as in the process for preparing the polar group-containing olefin copolymer
20 according to the first embodiment.

The process for preparing a polar group-containing olefin copolymer according to the third embodiment of the invention comprises copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon atoms, a polar
25 group-containing monomer represented by the following

formula (10) (also referred to as a "polar group-containing monomer (10)" hereinafter), and optionally, a polar group-containing monomer represented by the above formula (8) in the presence of the catalyst comprising:

5 (A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and

(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

10 (B-2) a compound which reacts with the compound (A) to form an ion pair, and

(B-3) an organoaluminum compound,

and then conducting any one of the following steps

(i) and (ii), to prepare a branched type polar group-

15 containing olefin copolymer;



20 wherein R^5 , R^6 , m , W and n have the same meanings as those of R^5 , R^6 , m , W and n in the formula (5), respectively;

(i) from the W portion of the copolymerized polar group-containing monomer (10), a Z portion is formed by anionic polymerization, ring-opening polymerization or

25 polycondensation;

(ii) the W portion of the copolymerized polar group-containing monomer (10) is allowed to react with a terminal functional group of a polymer obtained by anionic polymerization, ring-opening polymerization and
5 polycondensation.

The process (i) is described below in more detail.

In the process (i), an α -olefin of 2 to 20 carbon atoms and the polar group-containing monomer (10), and optionally a polar group-containing monomer represented by
10 the formula (8) are copolymerized to prepare a functional group-containing olefin copolymer, and then from the polar group contained in the W portion of the copolymerized functional group-containing monomer, a polymer segment (Z) is formed by anionic polymerization, ring-opening
15 polymerization or polycondensation.

When a polymer segment is formed from the polar group contained in any one of W portions in the constituent unit of the functional group-containing olefin copolymer, said constituent unit being derived from the polar group-
20 containing monomer (10), this constituent unit becomes the constituent unit (4). When no polymer segment is formed from the polar group contained in any one of W portions in the constituent unit of the polar group-containing olefin copolymer, said constituent unit being derived from the
25 polar group-containing monomer (10), this constituent unit

becomes the constituent unit (5).

Examples of the α -olefins of 2 to 20 carbon atoms include ethylene, propylene, 1-butene, 2-butene, 1-pentene, 3-methyl-1-butene, 1-hexene, 4-methyl-1-pentene, 3-methyl-
 5 1-pentene, 3-ethyl-1-pentene, 4,4-dimethyl-1-pentene, 4-methyl-1-hexene, 4,4-dimethyl-1-hexene, 4-ethyl-1-hexene, 3-ethyl-1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene. Of these, preferable are at least two α -olefins selected from
 10 ethylene, propylene, 1-butene, 4-methyl-1-pentene, 1-hexene and 1-octene.

Examples of the polar group-containing monomer (10) include:

compounds represented by the formula (10) wherein W
 15 is a hydroxyl group, specifically
 ω -alkenylalcohols, such as
 4-pentene-1-ol, 5-hexene-1-ol, 6-heptene-1-ol, 7-octene-1-ol, 8-nonene-1-ol, 9-decene-1-ol, 10-undecene-1-ol and 11-dodecene-1-ol;

20 alcohols having straight-chain hydrocarbon groups, such as
 5-hexene-2-ol, 6-heptene-2-ol, 7-octene-2-ol,
 8-nonene-2-ol, 9-decene-2-ol, 10-undecene-2-ol,
 6-heptene-3-ol, 7-octene-3-ol, 8-nonene-3-ol,
 25 9-decene-3-ol, 10-undecene-3-ol,

11-dodecene-3-ol, 7-octene-4-ol, 8-nonene-4-ol,
 9-decene-4-ol, 10-undecene-4-ol, 8-nonene-5-ol,
 9-decene-5-ol and 10-undecene-5-ol;

alcohols having branched hydrocarbon groups,

- 5 such as 2-ethyl-5-hexene-1-ol, 3-methyl-6-heptene-1-ol,
 3-methyl-7-octene-1-ol, 4-methyl-8-nonene-1-ol,
 3-ethyl-9-decene-1-ol, 2-methyl-10-undecene-2-ol,
 2,2-dimethyl-7-octene-1-ol,
 3-ethyl-2-methyl-8-nonene-1-ol,
 10 2,2,3-trimethyl-9-decene-1-ol and
 2,3,3,4-tetramethyl-10-undecene-2-ol;

diols, such as

9-decene-1,2-diol, 10-undecene-1,2-diol,
 11-dodecene-1,2-diol and 11-dodecene-1,2-diol; and

- 15 triols, such as 10-undecene-1,2,3-triol;
 and

compounds represented by the formula (10) wherein W
 is an epoxy group, specifically

ω -alkenylepoxides, such as 5-hexene epoxide,














- 20 6-heptene epoxide, 7-octene epoxide, 8-nonene epoxide,
 9-decene epoxide, 10-undecene epoxide and 11-dodecene
 epoxide; and


ω -alkenylepoxides having branched hydrocarbon groups,
 such as

- 25 2-methyl-5-hexene epoxide, 2-methyl-6-heptene epoxide,

2-methyl-7-octene epoxide, 2-methyl-8-nonene epoxide,
2-methyl-9-decene epoxide and
2-methyl-10-undecene epoxide.

Further, examples of the polar group-containing
5 monomer (10) also include the following compounds.

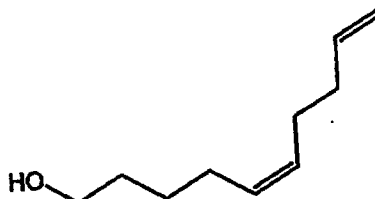

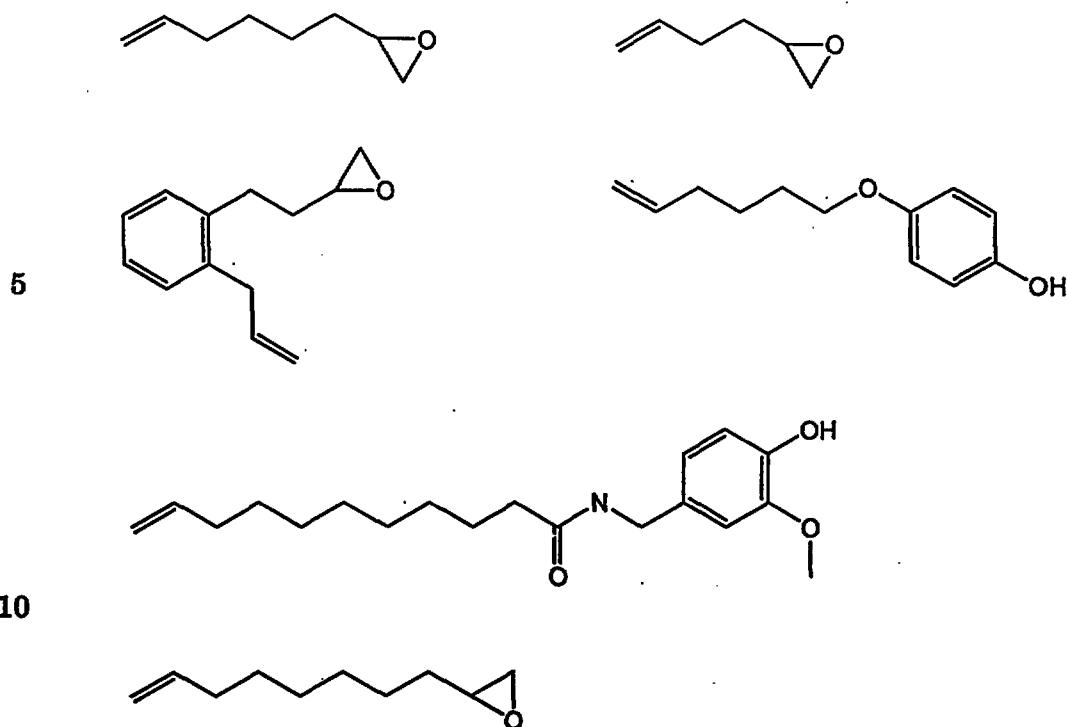

15 Also available are n-nonyl-1-ol, 1,2-epoxy-nonyl, n-undecyl-1-ol, and 4-hexenyloxyphenol.

 The copolymerization of the α -olefin of 2 to 20 carbon atoms and the polar group-containing monomer (10), and optionally a polar group-containing monomer represented
 20 by the formula (8) is carried out in the presence of, for example, the above mentioned olefin polymerization catalyst comprising:

 (A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of
 25 the periodic table, and

(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the compound (A) to form an ion pair, and

5 (B-3) an organoaluminum compound,

under the same polymerization conditions as in the process for preparing the polar group-containing olefin copolymer according to the first embodiment.

Then, from the W portion of the copolymerized polar
10 group-containing monomer (10) in the functional group-containing olefin copolymer obtained as above, a Z portion is formed by anionic polymerization, ring-opening polymerization or polycondensation.

To prepare the Z portion from the w portion of the
15 copolymerized polar group-containing monomer (10) by anionic polymerization, ring-opening polymerization or polycondensation, for example, a polar monomer is subjected to anionic polymerization in the presence of the polar group-containing olefin copolymer and a proton abstracting
20 agent or in the presence of the polar group-containing olefin copolymer, a proton abstracting agent and an active hydrogen compound.

Examples of the polar monomers include the examples at the aforesaid constituent unit (4) such as (meth)acrylic
25 esters, (meth)acrylonitriles, acrylamides, vinylpyridines,

N-substituted maleimides, vinyl ketones and styrene derivatives.

Of these polar monomers, compounds having two or more ethylenically unsaturated bonds in one molecule give highly crosslinked polymers in the polymerization of the compounds themselves, but when the compounds are copolymerized with polar group-containing ethylenically unsaturated monomers having only one ethylenically unsaturated bond, main chains of the polymers produced from the polar group-containing ethylenically unsaturated monomers having only one ethylenically unsaturated bond can be crosslinked to each other.

Of the above polar monomers, preferable are monoesters of monohydric alcohols and acrylic acid or methacrylic acid, monoesters of dihydric alcohols having one end protected by an ether bond and acrylic acid or methacrylic acid, polyesters wherein all hydroxyl groups of dihydric or higher alcohols and acrylic acid or methacrylic acid are esterified, acrylonitrile, methacrylonitrile, N,N-disubstituted monoacrylamides, vinyl or isopropenyl substituted pyridines, N-aromatic substituted maleimides and vinyl ketones.

More preferable are monoesters of monohydric alcohols and acrylic acid or methacrylic acid, monoesters of dihydric alcohols having one end protected by an ether bond

and acrylic acid or methacrylic acid, polyesters wherein all hydroxyl groups of dihydric or higher alcohols and acrylic acid or methacrylic acid are esterified, acrylonitrile, methacrylonitrile and N,N-disubstituted
5 monoacrylamides.

Examples of the polar monomers include examples at the aforesaid constituent unit (4) such as alkylene oxide compounds.

The polar monomers can be used singly or in
10 combination of two or more kinds. In the use of a combination of two or more polar monomers, a combination of the above polar monomer other than the alkylene oxide compound (such a monomer being sometimes referred to as an "ethylenically unsaturated monomer" hereinafter) and an
15 alkylene oxide compound is preferable.

In the copolymerization using plural polar monomers in combination, use of plural ethylenically unsaturated monomers, use of a single ethylenically unsaturated monomer and plural alkylene oxide compounds, use of plural
20 ethylenically unsaturated monomers and a single alkylene oxide compound, or use of plural ethylenically unsaturated monomers and plural alkylene oxide compounds is available, and for adding these components to the polymerization reactor, a method of adding at the same time, a method of
25 adding successively, or a method of repeating successive

addition is adoptable.

If plural polar monomers are used in combination and copolymerized at the same time, a polymer segment composed of a copolymer of relatively high randomness is obtained, 5 though it depends upon a difference between reactivities of the compounds used. If two or more monomers are copolymerized successively, a polymer segment composed of a block copolymer containing two or more blocks is obtained. If such successive addition is repeated, a polymer segment 10 composed of a complicated copolymer is obtained.

Above all, it is preferable to use the ethylenically unsaturated monomer and the alkylene oxide compound successively to prepare a polymer segment composed of a block copolymer formed from the plural monomers. In this 15 case, it is more preferable that the alkylene oxide compound is propylene oxide or ethylene oxide, and it is still more preferable that the alkylene oxide is propylene oxide.

The active hydrogen compound is, for example, an 20 active hydrogen compound having active hydrogen on the carbon atom, an active hydrogen compound having active hydrogen on the oxygen atom, an active hydrogen compound having active hydrogen on the nitrogen atom, or an active hydrogen compound having active hydrogen on the sulfur atom.

25 Examples of the active hydrogen compounds having

- active hydrogen on the carbon atom include hydrogen cyanide; monocarboxylic esters, such as ethyl acetate, cyclohexyl propionate, isopropyl butyrate, methyl isobutyrate, tert-butyl isobutyrate, hexyl caproate, butyl
- 5 laurate, methyl stearate, ethyl oleate, methyl phenylacetate, methyl cyclohexanecarboxylate, 1,2-bis(2-propylcarbonyloxy)ethane and 1,2,3-tris(2-propylcarbonyloxy)propane; polycarboxylic esters, such as dimethyl malonate, dimethyl methylmalonate, diethyl
- 10 succinate, butyl 2,3-dimethylsuccinate, methyl adipate, ethyl suberate, methyl butanetetracarboxylate, 1,2-bis(2-methoxycarbonylethoxy)ethane, 1,2-bis(2-ethoxycarbonylpropoxy)ethane, 1,2-bis(2-ethoxycarbonylpropylmercapto)ethane and N,N,N',N'-
- 15 tetrakis(2-butoxycarbonylpropyl)ethylenediamine; ketocarboxylic esters, such as ethyl acetoacetate, cyclopentyl acetoacetate, methyl carbamoylacetate, ethyl 2-cyclohexylcarbonylacetate and butyl benzoylacetate; nitriles, such as acetonitrile, 2-cyanopropane,
- 20 malononitrile, methyl malononitrile, 1,3-dicyanopropane and adiponitrile; and ketones, such as acetone, methyl ethyl ketone, diisopropyl ketone, dicyclohexyl ketone, acetophenone and isopropyl phenyl ketone.

Examples of the active hydrogen compounds having

- 25 active hydrogen on the oxygen atom include water;

- monohydric alcohols, such as methanol, ethanol, n-propanol, isopropanol, n-butyl alcohol, sec-butyl alcohol, tert-butyl alcohol, isopentyl alcohol, tert-pentyl alcohol, n-octyl alcohol, lauryl alcohol, cetyl alcohol, cyclopentanol,
- 5 cyclohexanol, allyl alcohol, crotyl alcohol, methylvinylcarbinol, benzyl alcohol, 1-phenylethyl alcohol, triphenylcarbinol, cinnamyl alcohol, perfluoro-tert-butyl alcohol, α -hydroxyisopropyl phenyl ketone, α -hydroxycyclohexyl phenyl ketone, α -hydroxyisopropyl
- 10 naphthyl ketone and methyl α -hydroxyisobutyrate; polyhydric alcohols, such as ethylene glycol, propylene glycol, diethylene glycol, dipropylene glycol, 1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, 1,4-cyclohexanediol, trimethylolpropane, glycerol,
- 15 diglycerol, pentaerythritol and dipentaerythritol; and aromatic hydroxy compounds, such as phenol, cresol, xylenol, 2-naphthol, 2,6-dihydroxynaphthalene and bisphenol A.

Examples of the active hydrogen compounds having active hydrogen on the nitrogen atom include aliphatic or

20 aromatic primary amines, such as methylamine, ethylamine, n-propylamine, isopropylamine, n-butylamine, isobutylamine, sec-butylamine, tert-butylamine, cyclohexylamine, benzylamine, β -phenylethylamine, aniline, o-toluidine, m-toluidine and p-toluidine; aliphatic or aromatic secondary

25 amines, such as dimethylamine, methylethylamine,

diethylamine, di-n-propylamine, ethyl-n-butylamine, methyl-
 sec-butylamine, dipentylamine, dicyclohexylamine, N-
 methylaniline and dipheylamine; polyamines having primary
 or secondary amino group, such as ethylenediamine, di(2-
 5 aminoethyl)amine, hexamethylenediamine, 4,4'-
 diaminodiphenylethane, tri(2-aminoethyl)amine, N,N'-
 dimethylethylenediamine, N,N'-diethylethylenediamine and
 di(2-methylaminoethyl)amine; saturated cyclic secondary
 amines, such as pyrrolidine, piperidine, morpholine and
 10 1,2,3,4-tetrahydroquinoline; unsaturated cyclic secondary
 amines, such as 3-pyrroline, pyrrole, indole, carbazole,
 imidazole, pyrazole and purine; cyclic polyamines having
 secondary amino group, such as piperazine, pyrazine and
 1,4,7-triazacyclononane; unsubstituted or N-monosubstituted
 15 acid amides, such as acetamide, propionamide, N-
 methylpropionamide, N-methylbenzamide and N-
 ethylstearamide; cyclic amides, such as β -propiolactam, 2-
 pyrrolidone, δ -valerolactam and ϵ -caprolactam; and imides
 of dicarboxylic acids, such as succinimide, maleimide and
 20 phthalimide.

Examples of the active hydrogen compounds having
 active hydrogen on the sulfur atom include monothiols, such
 as methanethiol, ethanethiol, n-butanethiol, tert-
 butanethiol, hexanethiol, decanethiol, cyclopentylmercaptan
 25 and cyclohexylmercaptan; polythiols, such as 1,2-

ethanedithiol, 1,3-propanedithiol, 2,3-butanedithiol, 1,6-hexanedithiol, 1,2,3-propanetrithiol and 2,3-di(mercaptomethyl)-1,4-butanedithiol; and aromatic mercapto compounds, such as thiophenol, o-thiocresol, thionaphthol
 5 and 1,2-benzenedithiol.

Also employable as the active hydrogen compounds are, for example, poly(alkylene oxides) having active hydrogen at the end, such as polyethylene oxide and polypropylene oxide; polymers obtained by anionic polymerization or other
 10 polymerization of (meth)acrylic esters, (meth)acrylonitriles, acrylamides, vinylpyridines, N-substituted maleimides, vinyl ketones and styrene derivatives; polymers obtained by ring-opening polymerization of lactones, lactams, lactides and cyclic
 15 siloxanes; polymers having active hydrogen at the end and/or in the main chain, such as poly((meth)acrylic esters), poly((meth)acrylonitriles), poly(acrylamides), poly(vinylpyridines), poly(N-substituted maleimides), poly(vinyl ketones) and poly(styrene derivatives),
 20 polyesters, polyamides, polylactides and polysiloxanes; and copolymers thereof.

Of the above active hydrogen compounds, preferable are hydrogen cyanide, monocarboxylic esters, polycarboxylic esters, water, monohydric alcohols, polyhydric alcohols,
 25 monothiols, polymers having active hydrogen at the end

and/or in the main chain, such as poly(alkylene oxides),
poly((meth)acrylic esters), poly((meth)acrylonitriles),
poly(acrylamides), poly(vinylpyridines), poly(N-substituted
maleimides), poly(vinyl ketones) and poly(styrene
5 derivatives), and copolymers thereof.

The proton abstracting agents may be used singly or
as a mixture of two or more kinds.

In the present invention, at least a polar monomer is
subjected to anionic polymerization in the presence of a
10 proton abstracting agent and an active hydrogen compound or
in the presence of a proton abstracting agent. In this
process, ring-opening polymerization can be carried out.

As the process in which the proton abstracting agent
is used or the process in which a proton is abstracted from
15 the active hydrogen compound to give an anion, the
following processes are employable:

- (1) a process using an alkali metal hydroxide or an
alkali metal carbonate,
- (2) a process using an alkali metal, an alkali metal
20 hydride, an alkali metal amide or an alkali metal alkyl,
- (3) a process using a zinc compound,
- (4) a process using ammonium hydroxide, and
- (5) a process using a phosphazanium salt.

The phosphazanium compound can be prepared by the
25 process described in EP0791600, pp. 12-13, or its analogous

process.

The process for preparing a Z portion from the W portion of the polar group-containing monomer (10) by anionic polymerization is not specifically limited, as far
5 as at least the proton abstracting agent and the polar monomer can be effectively contacted, and any of a batchwise process and a process comprising feeding the polar monomer intermittently or continuously is employable.

The polymerization reaction can be carried out when
10 the polar monomer is in a molten state or can be carried out in a liquid phase using an appropriate solvent. The liquid phase may be a homogeneous phase or a suspension phase. Examples of the solvents employable herein include aliphatic or alicyclic hydrocarbons, such as n-hexane, n-
15 heptane and cyclohexane; aromatic hydrocarbons, such as benzene, toluene and xylene; aromatic halides, such as chlorobenzene and dichlorobenzene; ethers, such as diethyl ether, diphenyl ether, tetrahydrofuran, tetrahydropyran, 1,4-dioxane, ethylene glycol dimethyl ether and diethylene
20 glycol diethyl ether; and aprotic polar solvents, such as dimethylformamide, dimethylsulfoxide, sulfolane and N,N'-dimethylimidazolidinone.

Although there is no specific limitation on the amount of the proton abstracting agent used, the amount
25 thereof is in the range of usually 1×10^{-6} to 1×10^{-1} mol,

preferably 1×10^{-4} to 3×10^{-1} mol. The polymerization reaction temperature is in the range of usually -50 to 250°C, preferably -20 to 150°C, though it varies depending upon the types and amounts of the proton abstracting agent and the polar monomer used, etc. The polymerization reaction pressure is in the range of usually not more than 3.0 MPa (absolute pressure expressed in megapascal, the same shall apply hereinafter), preferably 0.01 to 1.5 MPa, more preferably 0.1 to 1.0 MPa, though it varies depending upon the type and amount of the polar monomer used, the reaction temperature, etc.

The polymerization reaction time is usually not more than 50 hours, preferably 0.1 to 24 hours, though it varies depending upon the types and amounts of the proton abstracting agent and the polar monomer, the reaction temperature, etc.

Next, the process (ii) is described in more detail.

In the process (ii), an α -olefin of 2 to 20 carbon atoms and a polar group-containing monomer (10), and optionally the polar group-containing monomer represented by the formula (8) are copolymerized to prepare a polar group-containing olefin copolymer, and then the W portion of the copolymerized polar group-containing monomer (10) is allowed to react with a terminal functional group of the polymer obtained by anionic polymerization, ring-opening

polymerization or polycondensation.

The terminal functional group-containing olefin copolymer can be prepared in the same manner as in the process (i).

Examples of the polymers (sometimes referred to as

5 "terminal functional group-containing polymer" hereinafter) obtained by anionic polymerization, ring-opening polymerization or polycondensation include segments obtained by anionic polymerization of one or more monomers selected from methyl methacrylate, ethyl methacrylate,

10 butyl acrylate, acrylonitrile and acrylamide, segments obtained by ring-opening polymerization of lactone, lactide, siloxane, lactam, cyclic ether, oxazoline, ethylene oxide, propylene oxide, etc., and polymers obtained by polycondensation of monomers, such as polycarboxylic acid

15 and polyhydric alcohol, or polycarboxylic acid and polyamide or hydroxycarboxylic acid. Of these, preferable are segments obtained by anionic polymerization of acrylic esters or methacrylic esters and polymers obtained by ring-opening polymerization of ethylene oxide or propylene oxide.

20 Such a terminal functional group-containing polymer can be prepared by, for example, subjecting the same polar monomer as used in the process (i) to anionic polymerization, ring-opening polymerization or polycondensation in the presence of the proton abstracting

25 agent or in the presence of the proton abstracting agent

and the active hydrogen compound.

Then, the polar group-containing olefin copolymer obtained as above is copolymerized with the terminal functional group-containing polymer.

5 Thermoplastic resin composition

The thermoplastic resin composition of the invention may be formed from two or more copolymers selected from the polar group-containing olefin copolymers or may be formed from the polar group-containing olefin copolymer and a
10 thermoplastic resin other than the polar group-containing olefin copolymer.

Thermoplastic resin

The thermoplastic resin preferably used in the invention is one kind of a thermoplastic resin selected
15 from polyolefin, polyamide, polyester, polyacetal, polystyrene, acrylonitrile/butadiene/styrene copolymer (ABS), polymethacrylate, polycarbonate, polyphenylene oxide, polyvinyl chloride, polyvinylidene chloride, polyvinyl acetate, ethylene/(meth)acrylic ester copolymer and diene
20 rubber.

Examples of the polyolefins include olefin homopolymers, such as polyethylene, polypropylene, poly-1-butene, polymethylpentene and polymethylbutene; and olefin copolymers, such as an ethylene/ α -olefin random copolymer,
25 an ethylene/propylene/diene terpolymer, a

propylene/ethylene random copolymer, a propylene/ α -olefin random copolymer and a propylene/ethylene/ α -olefin terpolymer. Of these, preferable are polyethylene, polypropylene, an ethylene/ α -olefin random copolymer, an
5 ethylene/propylene/diene terpolymer, a propylene/ethylene random copolymer and a propylene/ α -olefin random copolymer. If the polyolefin is a polyolefin obtained from an olefin of 3 or more carbon atoms, this polyolefin may be an isotactic polymer or may be a syndiotactic polymer.

10 As the catalyst for the preparation of the polyolefin, any of Ziegler-Natta catalyst, a metallocene catalyst and a known catalyst may be used.

Examples of the polyamides include aliphatic polyamides, such as nylon-6, nylon-66, nylon-10, nylon-12
15 and nylon-46; and aromatic polyamides prepared from aromatic dicarboxylic acids and aliphatic diamines. Of these, nylon-6 is preferable.

Examples of the polyesters include aromatic polyesters, such as polyethylene terephthalate,
20 polyethylene naphthalate and polybutylene terephthalate; polycaprolactone; and polyhydroxybutyrate. Of these, polyethylene terephthalate is preferable.

Examples of the polyacetals include polyformaldehyde (polyoxymethylene), polyacetaldehyde, polypropionaldehyde
25 and polybutylaldehyde. Of these, polyformaldehyde is

preferable.

The polystyrene may be a homopolymer of styrene or may be a copolymer of styrene and acrylonitrile, methyl methacrylate, α -methylstyrene or the like, such as an
5 acrylonitrile/styrene copolymer.

As the ABS, preferably used is ABS comprising constituent units derived from acrylonitrile in amounts of 20 to 35 mol %, constituent units derived from butadiene in amounts of 20 to 30 mol % and constituent units derived
10 from styrene in amounts of 40 to 60 mol %.

As the polymethacrylate, polymethyl methacrylate (PMMA) is preferable.

Examples of the polycarbonates include those obtained from bis(4-hydroxyphenyl)methane, 1,1-bis(4-
15 hydroxyphenyl)ethane, 2,2-bis(4-hydroxyphenyl)propane and 2,2-bis(4-hydroxyphenyl)butane. Of these, polycarbonate obtained from 2,2-bis(4-hydroxyphenyl)propane is preferable.

As the polyphenylene oxide, poly(2,6-dimethyl-1,4-phenylene oxide) is preferable.

20 The polyvinyl chloride may be a homopolymer of vinyl chloride or may be a copolymer of vinyl chloride and vinylidene chloride, acrylic ester, acrylonitrile, propylene or the like.

As the polyvinylidene chloride, a copolymer
25 comprising vinylidene chloride and vinyl chloride,

acrylonitrile, (meth)acrylic ester, allyl ester, unsaturated ether, styrene or the like and generally containing vinylidene chloride units in amounts of not less than 85 % is used.

- 5 The polyvinyl acetate may be a homopolymer of vinyl acetate or may be a copolymer of vinyl acetate and ethylene or vinyl chloride. Of these, an ethylene/vinyl acetate copolymer is preferable.

- As the ethylene/(meth)acrylic ester copolymer,
10 preferable is an ethylene/methyl acrylate copolymer, an ethylene/ethyl acrylate copolymer, an ethylene/methyl methacrylate copolymer or an ethylene/ethyl methacrylate copolymer.

- Examples of the diene rubbers include conjugated
15 polydienes such as polybutadiene, polyisoprene, an elastomer type styrene/butadiene copolymer that is known as SBR (styrene/butadiene rubber). In the diene rubbers, at least a part of double bonds in the molecule may be hydrogenated.

- 20 The thermoplastic resins mentioned above can be used singly or in combination of two or more kinds.

 Of the thermoplastic resins, polyolefin, polyester, polyamide or polystyrene is preferably used.

- The thermoplastic resin composition of the invention
25 can be prepared by blending the polar group-containing

olefin copolymer with the thermoplastic resin using, for example, a ribbon blender, a tumbling blender or a Henschel blender.

The thermoplastic resin composition of the invention
5 can be prepared also by melt kneading the polar group-containing olefin copolymer and the thermoplastic resin by the use of a melt kneading device, for example, a kneader such as a co-kneader, a Banbury mixer, a Brabender, a single-screw extruder or a twin-screw extruder, a
10 horizontal stirrer such as a twin-screw surface replacement machine or a twin-screw multi-disc device, or a vertical stirrer such as a double helical ribbon stirrer.

Additives

To the polar group-containing olefin copolymer and
15 the thermoplastic resin composition according to the invention, additives, such as inorganic filler, organic filler, nucleating agent, heat stabilizer, weathering stabilizer, antistatic agent, colorant, lubricant, flame retardant and blooming inhibitor, may be added within
20 limits not detrimental to the objects of the invention.

Inorganic Filler

Examples of the inorganic fillers include silica, diatomaceous earth, alumina, titanium oxide, magnesium oxide, pumice powder, pumice balloon, aluminum hydroxide,
25 magnesium hydroxide, basic magnesium carbonate, dolomite,

calcium sulfate, calcium titanate, barium sulfate, calcium sulfite, talc, clay, mica, asbestos, glass fiber, glass flake, glass bead, calcium silicate, montmorillonite, bentonite, graphite, aluminum powder and molybdenum sulfide.

5 Among these, layered compounds are preferred, and clay minerals having swelling and cleavage properties in dispersion media are particularly preferred for use. The clay minerals are generally classified into a type of two-layer structure consisting of a tetrahedral layer of silica
10 and an octahedral layer containing aluminum or magnesium as a central metal provided on the tetrahedral layer, and a type of three-layer structure consisting of tetrahedral layers of silica and an octahedral layer containing aluminum or magnesium as a central metal sandwiched between
15 the tetrahedral layers. The two-layer structure type (former type) is, for example, a kaolinite group or an antigorite group, and the three-layer structure type (latter type) is, for example, a smectite group, a vermiculite group or a mica group that are grouped
20 according to the number of interlaminar cations.

Specific examples of the clay minerals include kaolinite, dickite, nacrite, halloysite, antigorite, chrysotile, pyrophyllite, montmorillonite, beidellite, nontronite, saponite, sauconite, stevensite, hectorite,
25 tetrasilicic mica, sodium taeniorite, muscovite, margarite,

talca, vermiculite, phlogopite, xanthophyllite and chlorite.

Clay minerals having been treated with organic materials (sometimes referred to as "organically-modified clay minerals") are also employable as the inorganic
 5 layered compounds. (On the clay minerals having been treated with organic materials, see "Dictionary of Clay" by Asakura Shoten.)

Of the above clay minerals, preferable are a smectite group, a vermiculite group and a mica group, and more
 10 preferable is a smectite group, from the viewpoints of swelling properties or cleavage properties. Examples of the smectite group clay minerals include montmorillonite, beidellite, nontronite, saponite, sauconite, stevensite and hectorite.

15 Examples of the dispersion media to swell or cleave the inorganic layered compounds in the case of natural swelling clay minerals are water; alcohols, such as methanol, ethanol, propanol, isopropanol, ethylene glycol and diethylene glycol;
 20 Dimethylformamide; dimethyl sulfoxide and acetone. Of these, water and an alcohol such as methanol are preferable.


In the case of the organically-modified clay minerals, there can be mentioned aromatic hydrocarbons, such as benzene, toluene and xylene; ethers, such as ethyl ether
 25 and tetrahydrofuran; ketones, such as acetone, methyl ethyl

ketone and methyl isobutyl ketone; aliphatic hydrocarbons, such as n-pentane, n-hexane and n-octane; halogenated hydrocarbons, such as chlorobenzene, carbon tetrachloride, chloroform, dichloromethane, 1,2-dichloroethane and perchloroethylene; ethyl acetate; methyl methacrylate (MMA); dioctyl phthalate (DOP); dimethylformamide; dimethyl sulfoxide; methyl cellosolve and silicone oil.

Nucleating agent

As the nucleating agents, various nucleating agents hitherto known are used without specific limitation. Examples of the nucleating agents include the following aromatic phosphoric ester salt, benzylidenesorbitol, aromatic carboxylic acid and rosin nucleating agent.

Examples of aromatic phosphoric ester salt are compounds represented by the following formula (A).

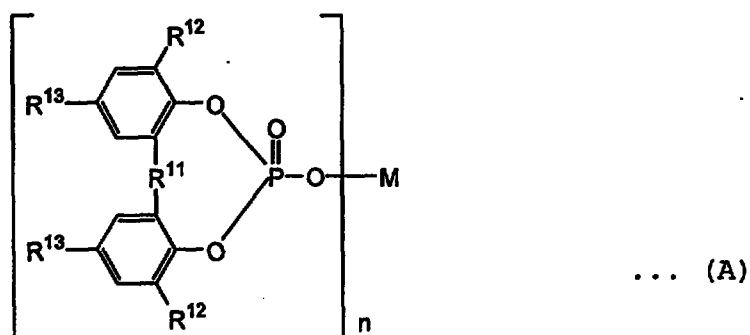

In the above formula, R^{11} is an oxygen atom, a sulfur atom or a hydrocarbon group of 1 to 10 carbon atoms; R^{12} and R^{13} are each hydrogen or a hydrocarbon group of 1 to 10 carbon atoms and may be the same or different, and R^{12} s,
 5 R^{13} s or R^{12} and R^{13} may be bonded to each other to form a ring; M is a metal atom having a valency of 1 to 3; and n is an integer of 1 to 3.

Concrete examples of the compounds represented by the above formula (A) include


- 10 sodium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate,
 sodium-2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate,
 lithium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate,
 lithium-2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate,
 sodium-2,2'-ethylidene-bis(4-i-propyl-6-t-butylphenyl)
 15 phosphate,
 lithium-2,2'-methylene-bis(4-methyl-6-t-butylphenyl)phosphate,
 lithium-2,2'-methylene-bis(4-ethyl-6-t-butylphenyl)phosphate,
 20 calcium-bis[2,2'-thiobis(4-methyl-6-t-butylphenyl)phosphate],
 calcium-bis[2,2'-thiobis(4-ethyl-6-t-butylphenyl)phosphate],
 calcium-bis[2,2'-thiobis(4,6-di-t-butylphenyl)phosphate],
 magnesium-bis[2,2'-thiobis(4,6-di-t-butylphenyl)phosphate],
 25 magnesium-bis[2,2'-thiobis(4-t-octylphenyl)phosphate],

- sodium-2,2'-butylidene-bis(4,6-di-methylphenyl)phosphate,
sodium-2,2'-butylidene-bis(4,6-di-t-butylphenyl)phosphate,
sodium-2,2'-t-octylmethylene-bis(4,6-di-methylphenyl)phosphate,
- 5 sodium-2,2'-t-octylmethylene-bis(4,6-di-t-butylphenyl)phosphate,
calcium-bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate],
magnesium-bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate],
- 10 barium-bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate],
sodium-2,2'-methylene-bis(4-methyl-6-t-butylphenyl)phosphate,
- 15 sodium-2,2'-methylene-bis(4-ethyl-6-t-butylphenyl)phosphate,
sodium-(4,4'-dimethyl-5,6'-di-t-butyl-2,2'-biphenyl)phosphate,
calcium-bis-[(4,4'-dimethyl-6,6'-di-t-butyl-2,2'-biphenyl)phosphate],
- 20 sodium-2,2'-ethylidene-bis(4-m-butyl-6-t-butylphenyl)phosphate,
sodium-2,2'-methylene-bis(4,6-di-methylphenyl)phosphate,
sodium-2,2'-methylene-bis(4,6-di-ethylphenyl)phosphate,
potassium-2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate,
- 25

- calcium-bis[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate],
 magnesium-bis[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate],
 5 barium-bis[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)phosphate],
 aluminium-tris[2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate] and aluminium-tris[2,2'-ethylidene-bis
 4,6-di-t-butylphenyl)phosphate], and mixtures of two or
 10 more thereof. Particularly preferable is sodium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate.

Examples of aromatic phosphoric ester salt are compounds represented by the following formula (B).

15




- 20 In the above formula, R^{14} denotes hydrogen or a hydrocarbon group of 1 to 10 carbon atoms; M is a metal atom having a valency of 1 to 3; and n is an integer of 1 to 3.

- Concrete examples of the compounds represented by the
 25 above formula (B) include

- sodium-bis(4-t-butylphenyl)phosphate,
 sodium-bis(4-methylphenyl)phosphate,
 sodium-bis(4-ethylphenyl)phosphate,
 sodium-bis(4-i-propylphenyl)phosphate,
 5 sodium-bis(4-t-octylphenyl)phosphate,
 potassium-bis(4-t-butylphenyl)phosphate,
 calcium-bis(4-t-butylphenyl)phosphate,
 magnesium-bis(4-t-butylphenyl)phosphate,
 lithium-bis(4-t-butylphenyl)phosphate,
 10 aluminum-bis(4-t-butylphenyl)phosphate, and
 mixtures of two or more thereof. Particularly preferable
 is sodium-bis(4-t-butylphenyl)phosphate.

Exemplary benzylidenesorbitol is a compound
 represented by the following formula (C).

15

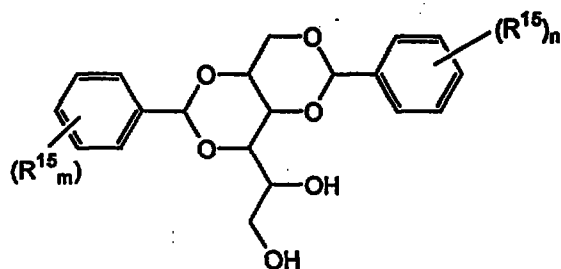

20

... (C)

In the formula, each R^{15} may be the same or different
 and denotes a hydrogen atom or a hydrocarbon group of 1 to
 10 carbon atoms, and m and n are each an integer of 0 to 5.

25

Examples of the compounds represented by the formula


(C) include

- 1,3,2,4-dibenzylidenesorbitol, 1,3-benzylidene-2,4-p-
- methylbenzylidenesorbitol, 1,3-benzylidene-2,4-p-
- ethylbenzylidenesorbitol, 1,3-p-methylbenzylidene-2,4-
- 5 benzylidenesorbitol, 1,3-p-ethylbenzylidene-2,4-
- benzylidenesorbitol, 1,3-p-methylbenzylidene-2,4-p-
- ethylbenzylidenesorbitol, 1,3-p-ethylbenzylidene-2,4-p-
- methylbenzylidenesorbitol, 1,3,2,4-di (p-
- methylbenzylidene) sorbitol, 1,3,2,4-di (p-
- 10 ethylbenzylidene) sorbitol, 1,3,2,4-di (p-n-
- propylbenzylidene) sorbitol, 1,3,2,4-di (p-i-
- propylbenzylidene) sorbitol, 1,3,2,4-di (p-n-
- butylbenzylidene) sorbitol, 1,3,2,4-di (p-s-
- butylbenzylidene) sorbitol, 1,3,2,4-di (p-t-
- 15 butylbenzylidene) sorbitol, 1,3,2,4-di (2',4'-
- dimethylbenzylidene) sorbitol, 1,3,2,4-di (p-
- methoxybenzylidene) sorbitol, 1,3,2,4-di (p-
- ethoxybenzylidene) sorbitol, 1,3-benzylidene-2-4-p-
- chlorobenzylidenesorbitol, 1,3-p-chlorobenzylidene-2-4-
- 20 benzylidenesorbitol, 1,3-p-chlorobenzylidene-2-4-p-
- methylbenzylidenesorbitol, 1,3-p-chlorobenzylidene-2-4-p-
- ethylbenzylidenesorbitol, 1,3-p-methylbenzylidene-2-4-p-
- chlorobenzylidenesorbitol, 1,3-p-ethylbenzylidene-2-4-p-
- chlorobenzylidenesorbitol, 1,3,2,4-di (p-
- 25 chlorobenzylidene) sorbitol, and mixtures of two or more of

these compounds. Of these, preferable are
 1,3,2,4-dibenzylidenesorbitol, 1,3,2,4-di(p-
 methylbenzylidene)sorbitol, 1,3,2,4-di(p-
 ethylbenzylidene)sorbitol, 1,3-p-chlorobenzylidene-2-4-p-
 5 methylbenzylidenesorbitol, 1,3,2,4-di(p-
 chlorobenzylidene)sorbitol, and mixtures of two or more of
 these compounds.

Of the above benzylidenesorbitols, preferable is a
 compound represented by the following formula (D).

10

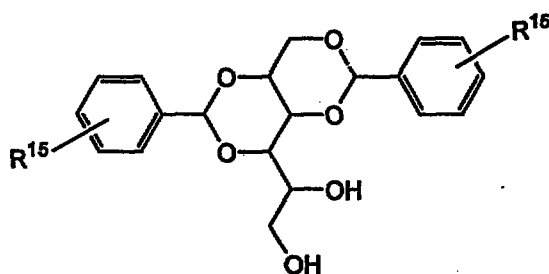


15

... (D)

In the formula, each R^{15} may be the same or different
 and denotes a methyl group or an ethyl group.

20 The aromatic carboxylic acid is, for example,
 aluminumhydroxydipara-t-butyl benzoate represented by the
 following formula (E).



25

... (E)

The rosin type nucleating agent is, for example, a metallic salt of a rosin acid, and the metallic salt of a rosin acid is a reaction product of a rosin acid and a metallic compound. Examples of the rosin acids include

5 natural rosins, such as gum rosin, tall oil rosin and wood rosin; various modified rosins, such as disproportionated rosin, hydrogenated rosin, dehydrogenated rosin, polymerized rosin and α,β -ethylenically unsaturated carboxylic acid-modified rosin; purified products of the

10 natural rosins; and purified products of the modified rosins. Examples of unsaturated carboxylic acids used to prepare the α,β -ethylenically unsaturated carboxylic acid-modified rosins include maleic acid, maleic anhydride, fumaric acid, itaconic acid, itaconic anhydride, citraconic

15 acid, acrylic acid and methacrylic acid. Of the above rosins, preferable is at least one rosin acid selected from the group consisting of a natural rosin, a modified rosin, a purified product of a natural rosin and a purified product of a modified rosin. The rosin acid comprises

20 plural resin acids selected from pimaric acid, sandarachpimaric acid, parastric acid, isopimaric acid, abietic acid, dehydroabietic acid, neoabietic acid, dihydropimaric acid, dihydroabietic acid and tetrahydroabietic acid.

The metallic compound which reacts with the rosin acid to form a metallic salt is, for example, a compound which comprises a metallic element, such as sodium, potassium and magnesium, and forms a salt together with the rosin acid. Examples of the metallic salts include chlorides, nitrates, acetates, sulfates, carbonates, oxides and hydroxides of the above metals.

Other examples of the nucleating agents include high-melting point polymers, metallic salts of aromatic carboxylic acids or aliphatic carboxylic acids, and inorganic compounds.

Examples of the high-melting point polymers include polyvinylcycloalkanes, such as polyvinylcyclohexane and Polyvinylcyclopentane; poly-3-methyl-1-pentene, poly-3-methyl-1-butene, and polyalkenylsilanes.

Examples of the metallic salts of aromatic carboxylic acids or aliphatic carboxylic acids include aluminum benzoate, aluminum p-t-butylbenzoate, sodium adipate, sodium thiophenecarboxylate and sodium pyrrolicarboxylate.

20 Molding method

The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be produced by various molding methods such as calendering extrusion molding, injection molding, blow molding, press molding and stamping.

The polar group-containing olefin copolymer and the thermoplastic resin composition can be molded into sheets or films (unstretched) by extrusion molding.

5 Stretched films can be obtained by stretching the extruded sheets or extruded films (unstretched) through tentering (lengthwise-crosswise stretching, crosswise-lengthwise stretching), simultaneous biaxial orientation or monoaxial stretching. From the polar group-containing olefin
10 copolymer or the thermoplastic resin composition of the invention, inflation films can also be produced.

Filaments can be produced by, for example, extruding a molten composition through spinneret. The filaments may be produced by a melt blown method.

15 Injection molded products can be produced by injection molding the composition into various shapes by the use of hitherto known injection molding machines under the known conditions. The injection molded products obtained from the polar group-containing olefin copolymer
20 or the thermoplastic resin composition of the invention are hardly electrostatically charged and have excellent rigidity, heat resistance, impact resistance, surface gloss, chemical resistance and abrasion resistance, so that they can be broadly used as automobile interior trim, automobile
25 exterior trim, housings of electric appliances, containers

and the likes.

Blow molded products can be produced by the use of hitherto known blow molding machines under the known conditions.

- 5 In the injection blow molding method, the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention is injected into a parison mold at a resin temperature of 100 to 300°C to form a parison, then the parison is held in a mold of desired
10 shape, and air is blown into the parison to fit the parison into the mold, whereby a blow molded product can be produced.

The press molded product is, for example, a mold stamping product.

15 Uses

The polar group-containing olefin copolymer and the thermoplastic resin composition according to the invention can be applied to various uses, for example, the following uses.

20 (1) Film and sheet

A film and a sheet comprising the polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention is excellent in flexibility, transparency, adhesion properties, anti-

fogging properties, heat resistance and separating properties.

(2) Laminate

A laminate containing at least one layer comprising
5 the polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention is, for example, agricultural film, wrapping film, shrink film, protective film, separating film such as blood plasma separating film or water permselective vaporization film,
10 or selective separating film such as ion exchange membrane, battery separator or optical resolution film.

(3) The polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention can be used for microcapsule, PTP packaging, chemical bulb
15 and drug delivery system.

(4) Modifier

When the polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention is used as a resin modifier, modifying effects in
20 impact resistance, flowability, coating properties, crystallizability, adhesion properties, transparency, etc. can be obtained.

When the polar group-containing olefin copolymer or the thermoplastic resin composition according to the
25 invention is used as a rubber modifier, modifying effects in weathering resistance, heat resistance, adhesion

properties, oil resistance, etc. can be obtained.

Examples of the rubbers include crosslinked rubbers, such as natural rubber (NR), isoprene rubber (IR), butadiene rubber (BR), styrene/butadiene rubber (SBR),
5 chloroprene rubber (CR), acrylonitrile/butadiene rubber (NBR), butyl rubber (IIR), ethylene/propylene rubber (EPM, EPDM), chlorosulfonated polyethylene (CSM), acrylic rubber (ACM, ANM, etc.), epichlorohydrin rubber (CO, ECO, etc.), silicone rubber (Q) and fluororubber (FKM, etc.); and
10 thermoplastic rubbers, such as rubbers of styrene type, olefin type, urethane type, ester type, amide type and vinyl chloride type.

The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be
15 used as a modifier for lubricating oils, such as gasoline engine oil, diesel engine oil, marine engine oil, gear oil, metal working oil, motor oil, machine oil, spindle oil and insulating oil. They may also be used as a viscosity modifier or a freezing point depressant of these
20 lubricating oils.

When the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention is used as a modifier for waxes, improvement may be achieved in adhesiveness, flowability and hardness. Examples of the
25 waxes include mineral waxes, such as montan wax, peat wax,

ozokerite/ceresin wax and petroleum wax; synthetic waxes, such as polyethylene, Fischer-Tropsch wax, chemically modified hydrocarbon wax and substituted amide wax; vegetable waxes; and animal waxes.

- 5 When the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention is used as a modifier for cement, improvement may be achieved in moldability and hardness.

 Examples of the cement include air setting cement,
10 such as lime, gypsum and magnesia cement; water setting cement, such as Roman cement, natural cement, Portland cement, alumina cement and high sulfuric salt slag cement; and special cements, such as acid proof cement, refractory cement, water glass cement and dental cement.

- 15 (5) Viscosity modifier, Moldability improver

 The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be used as a viscosity modifier or a moldability improver for inks and paints, such as letterpress printing ink,
20 lithographic printing ink, flexo graphic ink, gravure ink, oil paint, cellulose derivative paint, synthetic resin paint, water baking paint, powdery water paint and Japanese lacquer.

- (6) Building material, Civil engineering material

- 25 The polar group-containing olefin copolymer and the

thermoplastic resin composition of the invention can be used for building/civil engineering resins and building/civil engineering molded products, such as flooring, floor tile, floor sheet, sound insulating sheet, 5 heat insulating panel, damping material, decorative sheet, baseboard, asphalt modifier, gasket, sealing material, roofing sheet and cut-off sheet.

(7) Automobile interior or exterior trim, Gasoline tank

Automobile interior or exterior trims and gasoline 10 tanks comprising the polar group-containing copolymer or the thermoplastic resin composition of the present invention are excellent in rigidity, shock resistance, oil resistance and heat resistance.

(8) Electric or electronic parts

15 The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be used for electric or electronic parts. Examples of the electric or electronic parts include electrical insulating materials, electronic part treating instruments, magnetic 20 recording media, binders of magnetic recording media, sealing materials of electric circuits, materials of electric home appliances, base materials of containers such as electronic oven containers, films for electronic ovens, polymer electrolyte base materials and conductive alloy 25 base materials.

Also exemplified are electric or electronic parts, such as connector, socket, resistor, relay case switch coil bobbin, condenser, variable condenser case, optical pickup, optical connector, vibrator, various terminal assemblies, transformer, plug, printed wiring board, tuner, speaker, microphone, headphone, small motor, magnetic head base, power module, housing, semiconductor, liquid crystal display parts, FDD carriage, FDD chassis, HDD parts, motor blush holder, parabola antenna and computer associated parts; VTR parts, TV parts, iron, hair dryer, rice cooker parts, electronic oven parts, acoustic instrument parts, audio machine parts such as audio laser disc and compact disc, domestic or office electric appliance parts, such as light fitment parts, refrigerator parts, air conditioner parts, typewriter parts and word processor parts; office computer associated parts, telephone associated parts, facsimile associated parts, copy machine associated parts, electromagnetic shielding material, speaker cone material, and vibrating element for speaker.

20 (9) Aqueous emulsion

An aqueous emulsion comprising the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention can be used as an adhesive for polyolefins of excellent heat sealing properties.

(10) Coating base

A solvent dispersion containing the polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention has excellent
5 dispersing stability in a solvent and exhibits excellent adhesion properties when metals or polar resins are bonded to polyolefins.

(11) Medical or hygienic material

The polar group-containing olefin copolymer and the
10 thermoplastic resin composition of the invention can be used for medical goods, such as nonwoven fabric, nonwoven fabric laminate, electret, medical tube, medical container, transfusion bag, prefill syringe and syringe, medical materials, artificial organs, artificial muscles, filter
15 films, food sanitation/health goods, retort bags, and freshness keeping films.

(12) Miscellaneous goods

The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be
20 used for stationery, such as desk mat, cutting mat, ruler, pen holder, pen grip, pen cap, scissors grip, cutter grip, magnet sheet, pen case, paper holder, binder, label seal, tape and white board; daily use miscellaneous goods, such as clothing, curtain, sheet, carpet, entrance hall mat,
25 bath mat, bucket, hose, bag, planter, air conditioner

filter, exhaust fan filter, tableware, tray, cup, lunch box, coffee maker funnel, eyeglass frame, container, storage case, hanger, rope and washing net; sporting goods, such as shoes, goggles, skis, racket, ball, tent, swimming goggles, swim fin, fishing rod, cooler box, leisure sheet and sporting net; toys, such as block and cards; containers, such as kerosine can, drum, detergent bottle and shampoo bottle; and display goods, such as signboard, pylon and plastic chain.

10 (13) Filler modifier

The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be favorably used as an additive to prepare a filler dispersibility improver or a dispersibility-improved filler.

15 (14) Compatibilizing agent

The polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention can be used as a compatibilizing agent. When the polar group-containing olefin copolymer of the invention is used, a polyolefin and a thermoplastic resin containing a polar group can be mixed in an arbitrary mixing ratio. The polar group-containing olefin copolymer of the invention has a main chain of a polyolefin and a side chain having a polar group, so that by the use thereof, components which are inherently incompatible can be compatibilized. Hence,

elongation at break can be remarkably improved as compared with the case where the polar group-containing olefin copolymer or the thermoplastic resin composition is not used.

- 5 Next, uses of the polar group-containing olefin copolymer and the thermoplastic resin composition according to the invention are described in more detail.

Adhesive resin

- 10 When the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention is used as an adhesive resin, X in the formula (3) is preferably an acid anhydride group, an epoxy group, an amino group or a hydroxyl group, and Y in the formula (6) is preferably an epoxy group, an amino group or a hydroxyl group.

- 15 If X is a hydroxyl group and R^3 in the formula (3) is a straight-chain or branched aliphatic hydrocarbon group of 9 or less carbon atoms, an adhesive resin having an excellent balance between flowability and adhesion properties can be obtained.

20 If X is a hydroxyl group and R^3 in the formula (3) is a straight-chain or branched aliphatic hydrocarbon group of 11 or more carbon atoms, an adhesive resin having particularly excellent adhesion properties can be obtained.

- 25 The adhesive resin of the invention comprises the

polar group-containing olefin copolymer or the thermoplastic resin composition, so that it shows excellent adhesion properties to metals, such as iron and aluminum, and polar group-containing polymers, such as polyamide, polyester, polyacetal, polystyrene, acrylonitrile/butadiene/styrene copolymer (ABS), polymethacrylate, polycarbonate, polyphenylene oxide, polyvinyl chloride, polyvinylidene chloride, polyvinyl acetate, polyvinyl alcohol, complete or partial saponification product of ethylene/vinyl acetate copolymer, and ethylene/(meth)acrylic acid ester copolymer. Further, because the main structure is a structure of polyolefin, the adhesive resin of the invention has excellent adhesion properties also to polyolefins and can be used as an adhesive resin between the polar materials or the polar material and a polyolefin.

Compatibilizing agent

When the polar group-containing olefin copolymer or the thermoplastic resin composition of the invention is used as a compatibilizing agent, a polyolefin and a thermoplastic resin containing a polar group can be mixed in an arbitrary mixing ratio. The polar group-containing olefin copolymer or the thermoplastic resin composition of the invention has a main chain of a polyolefin and a side chain having a polar group, and therefore, components which

are inherently incompatible can be compatibilized with each other. Hence, elongation at break can be remarkably improved as compared with the case where the polar group-containing olefin copolymer or the thermoplastic resin composition is not used.

In the use as the compatibilizing agent, X in the formula (3) is preferably an acid anhydride group, an epoxy group, an amino group, a carboxylic acid group, a carboxylic acid ester group or a hydroxyl group, particularly preferably an acid anhydride group, an epoxy group, an amino group or a carboxylic acid ester group, and Y in the formula (6) is preferably an epoxy group, an amino group or a hydroxyl group.

If X is a hydroxyl group and R³ is a hydrocarbon group of 9 or less carbon atoms, preferably 8 or less carbon atoms, more preferably 7 or less carbon atoms, in the formula (3), the compatibilizing agent shows an excellent balance between flowability and compatibility.

If X is a hydroxyl group and R³ is a hydrocarbon group of 11 or more carbon atoms, preferably 12 or more carbon atoms, more preferably 13 or more carbon atoms, in the formula (3), effects of improvement in compatibility can be particularly enhanced.

Resin modifier

When the polar group-containing olefin copolymer or

the thermoplastic resin composition of the invention is used as a resin modifier, effects of modification in hydrophilic nature, antistatic properties, coating properties, printability, etc. can be obtained.

5 In the use as a hydrophilic nature improver or an antistatic property improver, X in the formula (3) is preferably a hydroxyl group, a carboxylic acid group, an amide group, an amino group, an acid anhydride group or a carboxylic ester group.

10 In the use as a coating property improver or a printability improver, X in the formula (3) is preferably a hydroxyl group, a carboxylic acid group, an amide group, an amino group, an epoxy group or an acid anhydride group, and Y in the formula (6) is preferably an epoxy group, an amino
15 group or a hydroxyl group.

When the polar group-containing olefin copolymer or the thermoplastic resin composition is used as the coating property improver or the printability improver and when X is a hydroxyl group and R³ is an aliphatic hydrocarbon
20 group of 9 or less carbon atoms, preferably 8 or less carbon atoms, more preferably 7 or less carbon atoms, in the formula (3), the improver shows an excellent balance between flowability and coating properties or printability. When X is a hydroxyl group and R³ is an aliphatic
25 hydrocarbon group of 11 or more carbon atoms, preferably 12

or more carbon atoms, more preferably 13 or more carbon atoms, in the formula (3), effects of improvement in coating properties and printability can be further enhanced.

Filler dispersant

5 The polar group-containing olefin copolymer and the thermoplastic resin composition of the invention can be favorably used as a filler dispersant for improving dispersibility of a filler or an additive for preparing a filler having improved dispersibility.

10 For example, the filler dispersant is used when a thermoplastic resin is mixed with a filler. Examples of the thermoplastic resins include the aforesaid thermoplastic resins, and preferable are polyolefins.

 Examples of the fillers used in the invention include
15 fibers, such as all aromatic polyamide fibers, aliphatic polyamide fibers, polyester fibers and cellulose fibers; organic fillers, such as fine dispersion of liquid polyester or polyamide, and the aforesaid inorganic fillers.

 There is no specific limitation on the amount of the
20 filler used, and for example, the filler is used in an amount of 0.01 to 100 parts by weight, preferably 0.1 to 20 parts by weight, based on 100 parts by weight of the thermoplastic resin.

 The filler dispersant of the invention has high
25 affinity with a filler and is capable of improving

dispersibility of a filler. When such a filler dispersibility improver is used, a thermoplastic resin composition containing a filler can be improved in mechanical properties such as rigidity, hardness, heat
5 resistance, impact resistance and elongation.

The filler dispersant can be used for a thermoplastic resin or a thermosetting resin using a filler, and is preferably used for a polyolefin.

The polar group-containing olefin copolymer and the
10 thermoplastic resin composition containing the filler dispersant of the invention can be molded by any of known processes, for example, the aforesaid processes.

The molded products obtained by such processes are applied to wide uses such as domestic articles to
15 industrial goods. Examples of the molded products obtained by such processes include electrical parts, electronic parts, automobile parts, mechanical mechanism parts, food containers, films, sheets and fibers. More specifically, there can be mentioned office and OA supplies, such as
20 printer, personal computer, word processor, keyboard, PDA (portable data terminal), telephone, facsimile, copy machine, ECR (electronic cash register), electronic calculator, electronic notebook, electronic dictionary, card, holder and stationary; electric appliances, such as washing
25 machine, refrigerator, cleaner, electronic oven, lighting

fixture, game machine, iron and foot warmer; AV equipments, such as TV, VTR, video camera, radio cassette recorder, taper recorder, mini disc, CD player, speaker and liquid crystal display; and electric or electronic parts and

5 communications equipments, such as connector, relay, condenser, switch, printed board, coil bobbin, semiconductor sealing material, electric wire, cable, transformer, deflecting yoke, cabinet panel and timepiece.

Other examples include materials for automobiles,

10 ships or air crafts and building materials, such as seats (stuffing, cover), belt, roof foam lining, convertible top, arm rest, door trim, rear package tray, carpet, mat, sun visor, wheel cover, mattress cover, air bag, insulating material, hanger, hand strap, wire coating material,

15 electrical insulating material, coating, coating material, facing material, floor material, corner wall, deck panel, coverings, plywood, ceiling board, partition board, side wall, carpet, wall paper, wall trim material, exterior trim material, interior trim material, roofing material,

20 soundproof material, heat insulating material and window material; and daily or sporting goods, such as clothing, curtain, sheeting, plywood, synthetic fiber board, rug, entrance mat, sheet, bucket, hose, container, eyeglasses, bag, case, goggle, skis, racket, tent and musical

25 instrument.

Also mentioned are bottles of shampoo and detergent, bottles of seasonings such as cooking oil and soy source, bottles of beverages such as mineral water and juice, heat-resistant food containers such as lunch box and cooking bowl, tableware such as plate and chopsticks, other various food containers, packaging films, and packaging bags.

Dispersion

The polar group-containing olefin copolymer or the thermoplastic resin composition of the invention can be used as an aqueous resin dispersion by dispersing it in water or can be used as a solvent dispersion by dispersing it in a solvent.

Aqueous resin dispersion

The aqueous resin dispersion of the invention comprises water and the polar group-containing olefin copolymer or the thermoplastic resin composition dispersed therein.

The aqueous resin dispersion of the invention may contain a modified polyolefin and/or a surface active agent when needed, within limits not detrimental to the objects of the invention.

The modified polyolefin is a polyolefin obtained by graft modifying a polymer of an α -olefin of 2 to 20 carbon atoms with an ethylenically unsaturated carboxylic acid compound.

The viscosity-average molecular weight of the polyolefin (starting polyolefin) that is a material of the modified polyolefin is in the range of usually 1,000 to 50,000, preferably 2,000 to 30,000, more preferably 5,000 to 10,000. To obtain excellent emulsion properties, the melt viscosity thereof, as measured at 180°C, is in the range of usually 10 to 5,000 cps, preferably 20 to 2,000 cps, more preferably 30 to 1,000 cps.

To prepare the starting polyolefin, various processes hitherto known are adoptable. For example, a process wherein an α -olefin is polymerized so as to obtain a desired molecular weight using a transition metal catalyst such as a known metallocene catalyst and a process wherein a high-molecular weight polyolefin prepared by the use of a transition metal catalyst is heated to perform degradation are available.

Examples of the ethylenically unsaturated carboxylic acid compounds for use in the graft modification of a starting polyolefin include compounds having an ethylenically unsaturated bond in its molecule and containing a carboxylic acid or a carboxylic anhydride, and their derivatives.

Specifically, there can be mentioned ethylenically unsaturated carboxylic acids, such as acrylic acid, methacrylic acid, α -ethylacrylic acid, maleic acid,

fumaric acid, itaconic acid, citraconic acid, tetrahydrophthalic acid, methyltetrahydrophthalic acid, endocis-bicyclo[2.2.1]hept-5-ene-2,3-dicarboxylic acid (nadic acid[™]) and methyl-endocis-bicyclo[2.2.1]hept-5-ene-
 5 2,3-dicarboxylic acid (methylnadic acid[™]); and ethylenically unsaturated carboxylic acid derivatives, such as acid halides, amides, imides, acid anhydrides and esters of the above acids. Specific examples of the ethylenically unsaturated carboxylic acid derivatives include malenyl
 10 chloride, maleimide, maleic anhydride, citraconic anhydride, monomethyl maleate and dimethyl maleate.

Of these, preferable are acrylic acid, methacrylic acid, maleic anhydride, methyl acrylate, ethyl acrylate, methyl methacrylate and ethyl methacrylate.

15 The ethylenically unsaturated carboxylic acid compounds can be used singly or in combination of two or more kinds, or they can be used in combination with other monomers within limits not detrimental to the effects of the present invention.

20 Examples of the monomers employable in combination with the ethylenically unsaturated carboxylic acid compound include amino group-containing ethylenically unsaturated compounds, such as dimethylaminoethyl acrylate, acrylamine, aminoethyl methacrylate, dimethylaminoethyl methacrylate,
 25 aminopropyl methacrylate, N,N-dimethylaminopropylacrylamide

and aminostyrene; hydroxyl group-containing ethylenically unsaturated compounds, such as 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate and allyl alcohol; and styrene type hydrocarbon compounds, such as styrene, α -methylstyrene, o-methylstyrene, m-methylstyrene, p-methylstyrene, m-ethylstyrene, p-ethylstyrene, o-isopropylstyrene, m-isopropylstyrene and p-isopropylstyrene. The proportion of the ethylenically unsaturated carboxylic acid compound contained in the all graft monomer components is preferably not less than 50.

The modified polyolefin can be prepared in accordance with a known process, for example, a process described in Japanese Patent Publication No. 22988/1977. Specifically, the starting polyolefin is heated at a temperature higher than the melting point to be molten, and thereto are added the ethylenically unsaturated carboxylic acid compound and a peroxide at the same time or successively with stirring to perform graft copolymerization reaction.

The viscosity-average molecular weight of the modified polyolefin is in the range of usually 1,000 to 50,000, preferably 2,000 to 20,000, more preferably 5,000 to 10,000.

The amount of the ethylenically unsaturated carboxylic acid compound contained in the modified polyolefin is in the range of usually 1.0×10^{-3} to 0.2 mol

equivalent, preferably 5.0×10^{-3} to 0.15 mol equivalent, more preferably 0.01 to 0.1 mol equivalent, based on 100 g of the modified polyolefin.

The modified polyolefins can be used singly or in
5 combination of two or more kinds.

Examples of the surface active agents include sulfonic acid or carboxylic acid type anionic surface active agents, such as alkyl naphthalenesulfonic acid salt, Na salt of naphthalenesulfonic acid formaldehyde condensate,
10 Na salt of cresol Shaffer's acid formaldehyde condensate, alkyl diphenyl ether disulfonic acid Na salt, ligninsulfonic acid Ca salt, melanin resin sulfonic acid Na salt, special polyacrylic acid salt, gluconic acid salt, olefin/maleic acid salt copolymer, carboxymethyl cellulose Na salt,
15 metallic soap (Zn, Al, Na or K salt), oleic acid K salt, oleic acid Na salt, stearic acid K salt, stearic acid Na salt, beef tallow acid K salt, beef tallow acid Na salt and triethanol stearate amine salt; nonionic surface active agents, such as fatty acid monoglyceride, sorbitan fatty
20 acid ester, sugar fatty acid partial ester, polyglycerin fatty acid partial ester, polyoxyethylene alkyl ether, polyoxyethylene alkylphenyl ether, polyoxyethylene sorbitan fatty acid partial ester, polyoxyethylene sorbitol fatty acid partial ester, polyoxyethylene glycerin fatty acid
25 partial ester, polyoxyethylene fatty amine, polyoxyethylene

(hardened) castor oil, polyoxyethylene glycol fatty acid ester, polyoxyethylene polyoxypropylene block polymer, hydroxyethyl cellulose, polyvinyl alcohol, polyvinyl pyrrolidone and methyl cellulose; cationic surface active
5 agents, such as alkylammonium chloride, trimethylalkylammonium bromide and alkylpyridinium chloride; and amphoteric surface active agents, such as dimethylalkylbetaine and alkylglycine.

Of these, anionic surface active agents are
10 preferably used because more stable aqueous resin dispersion is obtained. Of these, more preferable are higher fatty acids, still more preferable are salts of saturated or unsaturated higher fatty acids of 1 to 20 carbon atoms, and particularly preferable are alkali metal
15 salts thereof.

More specifically, there can be mentioned alkali metal salts of capric acid, undecanoic acid, lauric acid, myristic acid, palmitic acid, margarine acid, stearic acid, arachic acid, lindane acid, thujic acid, petroselinic acid,
20 oleic acid, linoleic acid, linolenic acid, arachidonic acid and beef tallow acid.

The surface active agents can be used singly or in combination of two or more kinds.

The aqueous resin dispersion of the invention can be
25 prepared by, for example, dispersing the polar group-

containing olefin copolymer or the thermoplastic resin composition, and optionally, the modified polyolefin, the surface active agent and various additives in an aqueous dispersing medium. Specifically, the following processes
5 (1) and (2) are available.

(1) The polar group-containing olefin copolymer or the thermoplastic resin composition is dissolved in an organic solvent such as toluene or xylene to prepare a solution having a concentration of 10 to 50 weight %. Then,
10 the solution is added to water together with a hydrophilic solvent, such as methyl alcohol, ethyl alcohol or isopropyl alcohol, and an emulsifying agent, and they are stirred by a homomixer or the like to obtain an emulsion. Then, from the emulsion, the organic solvent and the emulsifying agent
15 are removed by an evaporator or the like.

(2) The polar group-containing olefin copolymer or the thermoplastic resin composition is melt kneaded, and to the molten kneadate is added water. Then, a step of kneading the resin and water in a state where the resin is
20 still molten and a step of adding a basic substance if the modified polyolefin is unneutralized are carried out at the same time or successively.

Of the above processes, the process (2) is preferably used to prepare the aqueous resin dispersion. The process
25 (2) is described below in more detail.

First, the polar group-containing olefin copolymer or the thermoplastic resin composition is melt kneaded. The temperature in the melt kneading is higher than the melting point of the polar group-containing olefin copolymer or
5 higher than the melting point of a resin having the highest melting point among the resins contained in the thermoplastic resin composition, preferably such a temperature that the melt viscosity becomes not more than 10^5 poise.

10 Then, to the molten kneadate is added water, and the resin and water are kneaded in a state wherein the resin is still molten so that the resin solids become dispersed particles. If an unneutralized and/or unsaponified polyolefin is used, a basic substance can be added in this
15 step to neutralize the polyolefin.

Examples of the basic substances include substances functioning as base in water, such as alkali metals, alkaline earth metals, ammonia and amines; substances functioning as base in water, such as oxides, hydroxides,
20 weak acid salts or hydrides of alkali metals, and oxides, hydroxides, weak acid salts or hydrides of alkaline earth metals; and alkoxides of these metals. Specific examples of such substances are given below.

Examples of the alkali metals include sodium and
25 potassium; examples of the alkaline earth metals include

calcium, strontium and barium; examples of amines include inorganic amines such as hydroxylamine and hydrazine, methylamine, ethylamine, ethanolamine and cyclohexylamine; examples of the oxides, hydroxides and hydrides of alkali
5 metals and alkaline earth metals include sodium oxide, sodium peroxide, potassium oxide, potassium peroxide, calcium oxide, strontium oxide, barium oxide, sodium hydroxide, potassium hydroxide, calcium hydroxide, strontium hydroxide, barium hydroxide, sodium hydroxide,
10 potassium hydroxide and calcium hydride; examples of the weak acid salts of alkali metals and alkaline earth metals include sodium carbonate, potassium carbonate, sodium hydrogencarbonate, potassium hydrogencarbonate, calcium hydrogencarbonate, sodium acetate, potassium acetate and
15 calcium acetate; and examples of ammonia and amine compounds include quaternary ammonium compounds such as ammonium hydroxide and tetramethylammonium hydroxide.

Although the basic substance may be added as such, it is preferably added as an aqueous solution.

20 The step of forming dispersed particles from the resin solids and the step of neutralizing the unneutralized and/or unsaponified modified polyolefin may be carried out successively or at the same time.

Although the melt kneading may be carried out by any
25 known means, preferred examples of the melt kneading means

include a kneader, a Banbury mixer and a multi-screw extruder.

The aqueous dispersion, which is obtained by successively adding water and melt kneading and in which
5 the molten resin is dispersed, is then cooled to room temperature naturally or artificially. At this time, the dispersed particles are hardened to obtain a stable aqueous resin dispersion.

It is a matter of course that, in the preparation of
10 the aqueous resin dispersion of the invention, various side materials usually employable for aqueous resin dispersions, such as stabilizer, wetting agent, foaming agent, anti-foaming agent, coagulating agent, gelatinizer, anti-aging agent, plasticizer, filler, colorant, aromatizing agent,
15 anti-blocking agent and release agent, may be used in combination.

The dispersed particle contained in the aqueous resin dispersion of the invention obtained as above is generally spherical, but they do not always need to be spherical.
20 The mean diameter of the dispersed particles is not specifically limited, but it is in the range of usually 1 to 20 μm , preferably 5 to 15 μm . The particle concentration (solids concentration) of the aqueous resin dispersion is not specifically limited, but it is in the
25 range of usually 5 to 40 % by weight.

The aqueous resin dispersion of the invention is suitable for bonding of polyolefins which have been difficult to bond, such as polyethylene and polypropylene, and the dispersion is useful for bonding a polyolefin to a
5 polyolefin or a polyolefin to other material.

As the other material, an arbitrary material such as cloth, fiber, plastic, paper or metal is employable.

Examples of the cloths or the fibers include natural fibers such as cotton and hemp; inorganic fibers, such as
10 glass fiber, carbon fiber, asbestos fiber and metallic fiber; regenerated fibers, such as viscose rayon and cupra; semi-synthetic fibers, such as di- or tri-acetate fiber; nylon-6, nylon-66 and polyester (polyethylene terephthalate) fibers; and aromatic polyamide fiber,
15 acrylic fiber, polyvinyl chloride fiber, polyolefin fiber, and insolubilized or sparingly solubilized polyvinyl alcohol fiber. Short fibers are applicable to adhesion bonding through flocking.

As the plastics, not only polyolefins but also other
20 arbitrary plastics, such as polyvinyl chloride, ABS, polyester, polyamide, polycarbonate and an epoxy resin, are available. The plastic molded product to be bonded may be in any shape such as sheet, film or other shape.

The adhesion bonding can be carried out by applying
25 the aqueous resin dispersion of the invention to an

adherend surface similarly to a conventional aqueous dispersion type adhesive and then heating the dispersion to dryness when needed.

Solvent dispersion

- 5 The solvent dispersion of the invention comprises an organic medium and the polar group-containing olefin copolymer or the thermoplastic resin composition dispersed therein in a solid state.

Examples of the organic media which are good solvents
10 to polyolefins include aromatic hydrocarbons, such as benzene, toluene and xylene; aliphatic hydrocarbons, such as hexane, heptane, octane and decane; alicyclic hydrocarbons, such as cyclohexane, cyclohexene and methylcyclohexane; aliphatic alcohols, such as ethanol and
15 isopropanol; ketone solvents, such as acetone, methyl isobutyl ketone and methyl ethyl ketone; and halogenated hydrocarbons, such as trichloroethylene, dichloroethylene and chlorobenzene.

Examples of the organic media which are poor solvents
20 to polyolefins include alcohols, ketones, ethers, esters and cellosolves. Specifically, there can be mentioned methanol, ethanol, propanol, butanol, pentanol, hexanol, propanediol, phenol, diethyl ether, dipropyl ether, dibutyl ether, anisole, dioxane, tetrahydrofuran, acetone, methyl
25 ethyl ketone, methyl isobutyl ketone, pentanone, hexanone,

isophorone, acetophenone, anhydrous acetic acid, methyl acetate, ethyl acetate, butyl acetate, methyl propionate, butyl formate, ethyl cellosolve and methyl cellosolve.

The organic media can be used singly or in
5 combination of two or more kinds, and it is preferable to use a mixture of a good solvent and a poor solvent from the viewpoints of low-temperature flowability and dispersion stability. There is no specific limitation on the ratio between a good solvent and a poor solvent.

10 To the solvent dispersion of the invention, known additives, such as pigment, filler and stabilizer, can be added when needed, within limits not detrimental to the objects of the invention.

In the preparation of the solvent dispersion of the
15 invention, for example, the polar group-containing olefin copolymer or the thermoplastic resin composition is mixed with the organic medium and heated to be completely dissolved. The temperature for the melting is in the range of usually 100 to 150°C. Then, the solution is cooled to
20 precipitate the polar group-containing olefin copolymer or the thermoplastic resin composition. In order to precipitate the copolymer or the composition in the temperature range of 60 to 100°C, it is preferable to previously set composition of the organic medium and to
25 adjust the average cooling rate to 1 to 20°C/hr, preferably

2 to 10°C/hr. It is possible to dissolve the polar group-containing olefin copolymer or the thermoplastic resin composition in an organic medium composed of only a good solvent, adding a poor solvent after completion of
5 precipitation and then conducting further precipitation.

The dispersed particles contained in the solvent dispersion of the invention obtained as above are generally spherical, but they do not always need to be spherical. The mean diameter of the dispersed particles is not
10 specifically limited, but it is in the range of usually 1 to 20 μm , preferably 5 to 15 μm . The particle concentration (solids concentration) of the solvent dispersion is not specifically limited, but it is in the range of usually 5 to 40 % by weight.

15 The resin dispersion used as an adhesive for bonding metal to metal, polyolefin to polyolefin or metal to polyolefin exhibits excellent adhesion properties, and hence it is effectively used as an adhesive for PTP packaging of medicines, an adhesive for lamination, a
20 coating material or a primer.

Film and sheet

The film and the sheet comprising the polar group-containing olefin copolymer or the thermoplastic resin composition may be a stretched one or an unstretched one,
25 and can be produced by an appropriate known method.

Examples of the methods to produce the film and the sheet of the invention include extrusion molding, injection molding, inflation molding, blow molding, extrusion blow molding, injection blow molding, press molding, vacuum
5 molding, calendering and expansion molding.

When the film and the sheet comprising the polar group-containing olefin copolymer or the thermoplastic resin composition are produced by extrusion molding, an extrusion molding device and molding conditions hitherto
10 known are adoptable. For example, using a single-screw extruder, a kneading extruder, a ram extruder, a gear extruder or the like, the molten polar group-containing olefin copolymer or the molten thermoplastic resin composition is extruded from a T-die, whereby an
15 unstretched film or sheet can be produced.

The film and the sheet of the invention may be those produced by inflation molding. When the film and the sheet of the invention comprising the polar group-containing olefin copolymer or the thermoplastic resin composition are
20 produced by inflation molding, drawdown is hardly brought about.

When the film and the sheet of the invention comprising the polar group-containing olefin copolymer or the thermoplastic resin composition are produced by
25 injection molding, an injection molding device and molding

conditions hitherto known are adoptable. The polar group-containing olefin copolymer or the thermoplastic resin composition can be injection molded into a film or a sheet having desired shape and thickness. The film and the sheet
5 obtained by injection molding may be stretched.

The stretched film or sheet can be obtained by stretching an unstretched film or sheet such as the above-mentioned extruded film or sheet through a known stretching method such as tentering (lengthwise-crosswise stretching,
10 crosswise-lengthwise stretching), simultaneous biaxial orientation or monoaxial stretching.

In the stretching of the unstretched film or sheet, the stretch ratio is desired to be in the range of usually 20 to 70 times in case of biaxial orientation and usually 2
15 to 10 times in case of monoaxial stretching, though it depends upon the thickness of the unstretched film or sheet. The thickness of the stretched film or sheet is preferably in the range of 5 to 200 μm , though it depends upon use of the film or sheet.

20 Next, the film and the sheet of the invention having two or more layers of different compositions (sometimes referred to as "laminate(s)" hereinafter) are described below.

The film or the sheet of a multi-layer structure
25 according to the invention is a film or a sheet of a multi-

layer structure consisting of two or more layers having different compositions, and at least one layer of those layers may be formed from the polar group-containing olefin copolymer. The film or the sheet of the invention is a
5 film or a sheet of a multi-layer structure consisting of two or more layers having different compositions, and at least one layer of those layers may be formed from the thermoplastic resin composition.

The film or the sheet of a multi-layer structure
10 according to the invention also preferably consists of (a) a layer comprising the polar group-containing olefin copolymer and (b) a thermoplastic resin layer, or also preferably consists of (b) a thermoplastic resin layer and (c) a layer comprising the thermoplastic resin composition.

15 The laminate of the invention is a film or a sheet of a multi-layer structure consisting of two or more layers having different compositions, and at least one layer of those layers may be formed from the polar group-containing olefin copolymer or the thermoplastic resin composition.

20 The laminate desirably consists of:

(a) a layer comprising the polar group-containing olefin copolymer, and

(b) a thermoplastic resin layer,

or

25 (b) a thermoplastic resin layer, and

(c) a layer comprising the thermoplastic resin composition.

Examples of the thermoplastic resins for forming the thermoplastic resin layer (b) in the film or the sheet of a multi-layer structure include resins used for the aforesaid thermoplastic resin composition, such as polyolefin, polyamide, polyester, polyacetal, polystyrene, acrylonitrile/butadiene/styrene copolymer (ABS), polycarbonate, polyphenylene oxide, polyacrylate and polyvinyl chloride. These thermoplastic resins can be used singly or in combination.

The thermoplastic resin layer (b) preferably comprises a thermoplastic resin containing at least one resin selected from polyolefin, polyamide, polyester, polyacetal, polyvinyl chloride, polystyrene, acrylonitrile/butadiene/styrene copolymer (ABS) and polycarbonate, and more preferably comprises a thermoplastic resin selected from polyolefin, ethylene/polar group-containing vinyl copolymer, polyester, polycarbonate and polyamide.

The polyester resin is a polyester formed from dihydroxy compound units and dicarboxylic acid units. The dihydroxy compound units are derived from aliphatic glycols, such as ethylene glycol, propylene glycol, 1,4-butanediol, neopentyl glycol and hexamethylene glycol, alicyclic

glycols, such as cyclohexanedimethanol, aromatic dihydroxy compounds, such as bisphenol, or derived from two or more dihydroxy compounds selected from these compounds. The dicarboxylic acid units are derived from aromatic

5 dicarboxylic acids, such as terephthalic acid, isophthalic acid and 2,6-naphthalenedicarboxylic acid, aliphatic dicarboxylic acids, such as oxalic acid, succinic acid, adipic acid, sebacic acid and undecadicarboxylic acid, alicyclic dicarboxylic acids, such as hexahydroterephthalic

10 acid, or derived from two or more dicarboxylic acids selected from these acids. The polyester resin may be modified with a small amount of a trivalent or higher polyhydroxy compound or a polycarboxylic acid, such as triol or tricarboxylic acid.

15 As the thermoplastic polyester resin, polyethylene terephthalate, polybutylene terephthalate, a polyethylene isophthalate/terephthalate copolymer or the like is preferably used.

As the polycarbonate resin, any of various

20 polycarbonates and copolycarbonates obtained by allowing dihydroxy compounds to react with phosgene or diphenyl carbonate by known processes is employable.

Examples of the dihydroxy compounds include

hydroquinone, resorcinol, 4,4'-dihydroxydiphenylmethane,

25 4,4'-dihydroxydiphenylethane, 4,4'-dihydroxydiphenyl-n-

butane, 4,4'-dihydroxydiphenylheptane, 4,4'-
 dihydroxydiphenylphenylmethane, 4,4'-dihydroxydiphenyl-2,2-
 propane (bisphenol A), 4,4'-dihydroxy-3,3'-
 dimethyldiphenyl-2,2-propane, 4,4'-dihydroxy-3,3'-

- 5 diphenyldiphenyl-2,2-propane, 4,4'-
 dihydroxydichlorodiphenyl-2,2-propane, 4,4'-
 dihydroxydiphenyl-1,1-cyclopentane, 4,4'-dihydroxydiphenyl-
 1,1-cyclohexane, 4,4'-dihydroxydiphenylmethylphenylmethane,
 4,4'-dihydroxydiphenylethylphenylmethane, 4,4'-
- 10 dihydroxydiphenyl-2,2,2-trichloro-1,1-ethane, 2,2'-
 dihydroxydiphenyl, 2,6-dihydroxynaphthalene, 4,4'-
 dihydroxydiphenyl ether, 4,4'-dihydroxy-, 3,3'-
 dichlorodiphenyl ether and 4,4'-dihydroxy-2,5-
 diethoxylphenyl ether.

- 15 Polycarbonate using 4,4'-dihydroxydiphenyl-2,2-
 propane (bisphenol A) out of the above compounds is
 preferable because of its excellent mechanical properties
 and transparency.

- As the polyamide resin, any of various polyamides and
- 20 copolyamides obtained by ring-opening polymerization of
 caprolactam or polycondensation reaction of diamines with
 dicarboxylic acids by known processes is employable. Of
 these, nylon-6, nylon-6,6 or a m-xylenediamine/adipic acid
 condensation polymer is preferably used.

- 25 Examples of the polyolefins include an ethylene

(co)polymer, a propylene (co)polymer, a butene (co)polymer, a 4-methyl-1-pentene (co)polymer, a 3-methyl-1-butene (co)polymer and a hexene (co)polymer. Of these, an ethylene (co)polymer, a propylene (co)polymer or a 4-methyl-1-pentene (co)polymer is preferable. As the ethylene (co)polymer, an ethylene/vinyl acetate copolymer or an ethylene/vinyl acetate copolymer saponification product is more preferable.

The ethylene content of the ethylene/vinyl acetate copolymer is desired to be in the range of 15 to 60 % by mol, preferably 25 to 50 % by mol. The melt flow rate of the ethylene/vinyl acetate copolymer, as measured at 190°C, is in the range of 0.1 to 500 g/10 min, preferably 0.1 to 400 g/10 min, more preferably 0.1 to 300 g/10 min.

As the ethylene/vinyl acetate copolymer saponification product, preferably used is one obtained by saponifying an ethylene/vinyl acetate copolymer having an ethylene content of 15 to 60 % by mol, preferably 25 to 50 % by mol, in such a manner that the degree of saponification should become not less than 50 %, preferably not less than 90 %. When the ethylene content is in the above range, the saponification product is hardly thermally decomposed, easily melt molded and has excellent extensibility, water resistance and gas permeation resistance. When the degree of saponification is not less

than 50 %, the saponification product has excellent gas permeation resistance and is preferable.

In the laminate of the invention, between the thermoplastic resin layer (b) and the polar group olefin copolymer layer (a) or the thermoplastic resin composition layer (c) can be interposed, for example, an ethylene (co)polymer or a propylene polymer having been graft copolymerized with maleic anhydride.

The film and the sheet of a multi-layer structure (laminate) according to the invention may be produced by any process. For example, materials for forming layers are subjected to integral molding such as co-extrusion to form a film or a sheet, or a material for forming one layer of the multi-layer structure to form a film or a sheet, followed by molding a material for forming another layer thereon to form a sheet or a film, or materials for forming layers are each molded to films or sheets, followed by laminating them by contact bonding, fusion bonding, adhesion bonding or the like.

The laminate of the invention desirably consists of the polar group-containing olefin copolymer layer (a) or the thermoplastic resin composition layer (c), and the thermoplastic resin layer (b). To produce such a laminate, there is employable a co-extrusion molding process wherein a thermoplastic resin for forming the thermoplastic resin

layer (b) and the polar group-containing olefin copolymer or the thermoplastic resin composition are independently melted by different extruders, then fed to a die of two-layer or three-layer structure and co-extruded so that the
5 polar group-containing olefin copolymer or the adhesive resin composition forms an intermediate layer, or a sandwich laminating process wherein the thermoplastic resin layer (b), and the polar group-containing olefin copolymer layer (a) or the thermoplastic resin composition layer (c)
10 are each previously formed and between those layers an adhesive resin composition is melt extruded.

Of the above processes, the co-extrusion molding process is preferable from the viewpoint of interlaminar strength. The co-extrusion molding process includes a T-
15 die process using a flat die and an inflation process using a circular die. As the flat die, any of single-manifold type using black box and multi-manifold type is employable. As the die for the inflation process, any of known dies is employable.

20 The thickness of each layer of the laminate can be properly determined according to the use of the laminate. When the laminate is obtained as a sheet or a film, the thermoplastic resin layer (b) has a thickness of usually 0.01 to 1 mm, the adhesive layer functioning as an adhesive
25 has a thickness of usually 0.005 to 1 mm, and the polar

group-containing olefin copolymer layer (a) or the thermoplastic resin composition layer (c) is usually 0.01 to 5 mm.

When the laminate of the invention comprises, for example, the polar group-containing olefin copolymer layer (a) and the thermoplastic resin layer (b), the structure of the laminate may be a two-layer structure, i.e., (a)/(b), a structure wherein the layer (a) is arranged on each side, i.e., (a)/(b)/(a), or a structure wherein another layer (x) such as a polyolefin layer is added, i.e., (a)/(b)/(x)/(b)/(a), (x)/(a)/(b) or (x)/(b)/(a).

The film or the sheet of the invention wherein at least one layer is the polar group-containing olefin copolymer layer (a) or the thermoplastic resin composition layer (c) is favorably used as agricultural, wrapping, shrink or protective film or sheet. Further, the film or the sheet of the invention can be favorably used as selective separating film, such as blood plasma separating film, water permselective vaporization film, ion exchange membrane, battery separator or optical resolution film.

The sheet or the film of the invention can be applied to various uses such as microcapsule, PTP packaging, chemical bulb and drug delivery system.

EFFECT OF THE INVENTION

The polar group-containing olefin copolymer or the thermoplastic resin composition according to the invention is excellent in adhesion properties to polar materials such as metals and polar resins, compatibility and flexibility.

EXAMPLE

The present invention is further described with reference to the following examples, but it should be construed that the invention is in no way limited to those examples.

In the examples, various properties were measured in the following manner.

Adhesion properties15 Production of film

On a press plate, an aluminum sheet having a thickness of 0.1 mm, a polyimide sheet and an aluminum sheet having a thickness of 100 μ m from the center of which a square of 20 cm $\times$ 20 cm had been cut away were superposed in this order, and on the center (cut portion) was placed 4.0 g of a sample (polar group-containing olefin copolymer). Then, a polyimide sheet, an aluminum sheet and a press plate were further superposed thereon in this order.

The sample interposed between the press plates were placed in a hot press at 190°C and preheated for about 5

- minutes. In order to remove bubbles from the sample, operations of pressurizing ($50 \text{ kg/cm}^2\text{-G}$) and pressure release were repeated several times. Subsequently, the pressure was increased to $100 \text{ kg/cm}^2\text{-G}$, and the sample was
- 5 heated for 5 minutes under pressure. After pressure release, the press plates were taken out of the pressing machine and transferred into a different pressing machine with a compression section kept at 20°C , followed by cooling for 5 minutes under a pressure of $100 \text{ kg/cm}^2\text{-G}$.
- 10 After pressure release, the sample was taken out. Of the resulting film (polar group-containing olefin copolymer film), a portion having a uniform thickness of about 150 to $170 \mu\text{m}$ was used to measure adhesion strength.

Measurement of adhesion strength to Al

- 15 The polar group-containing olefin copolymer film was sandwiched between two square aluminum sheets of $20 \text{ cm} \times 20 \text{ cm}$ (thickness: $50 \mu\text{m}$), and the aluminum sheets and the polar group-containing olefin copolymer film were laminated under the same pressing conditions as in the above
- 20 "Production of film". The resulting laminate was cut to give a strip having a width of 15 mm, and the aluminum sheet and the polar group-containing olefin copolymer film were peeled from each other at the adhesive interface at a peel angle of 180° , to measure peel strength.

Measurement of adhesion strength to PET

The polar group-containing olefin copolymer film was sandwiched between two square homopolyethylene terephthalate (PET) films of 20 cm x 20 cm (thickness: 100 μ m), and the PET films and the polar group-containing olefin copolymer film were laminated under the same pressing conditions as in the above "Production of film" except that the press temperature was changed to 280°C and the preset temperature of the cooling press was changed to -8°C. The resulting laminate was cut to give a strip having a width of 15 mm, and the PET film and the polar group-containing olefin copolymer film were peeled from each other at the adhesive interface at a peel angle of 180°, to measure peel strength.

Measurement of adhesion strength to Ny

The polar group-containing olefin copolymer film was sandwiched between two square nylon 6 films of 20 cm x 20 cm (thickness: 100 μ m), and the nylon 6 films and the polar group-containing olefin copolymer film were laminated under the same pressing conditions as in the above "Production of film" except that the press temperature was changed to 250°C. The resulting laminate was cut to give a strip having a width of 15 mm, and the nylon 6 film and the polar group-containing olefin copolymer film were peeled from each other at the adhesive interface at a peel angle of

180°, to measure peel strength.

Measurement of adhesion strength to EVOH

The polar group-containing olefin copolymer film was sandwiched between two square ethylene/vinyl alcohol copolymer films of 20 cm × 20 cm (thickness: 100 μm), and the ethylene/vinyl alcohol copolymer films and the polar group-containing olefin copolymer film were laminated under the same pressing conditions as in the above "Production of film" except that the press temperature was changed to 200°C. The resulting laminate was cut to give a strip having a width of 15 mm, and the ethylene/vinyl alcohol copolymer film and the polar group-containing olefin copolymer film were peeled from each other at the adhesive interface at a peel angle of 180°, to measure peel strength.

Impact resistance test, tensile test

Izod impact strength (notched)

The impact strength was measured at 23°C in accordance with ASTM D 256.

Tensile test

A dumbbell specimen punched out of a pressed sheet was subjected to a tensile test under the conditions of a temperature of 23°C, a span of 30 mm and a pulling rate of 30 mm/min in accordance with ASTM D 638, to measure tensile strength and elongation at break.

Anti-fogging propertiesProduction of film

On a press plate, a PET sheet and an aluminum sheet having a thickness of 100 μm from the center of which a square of 20 cm $\times$ 20 cm had been cut away were superposed in this order, and on the center (cut portion) was placed 3.3 g of a sample (polar group-containing olefin copolymer). Then, a PET sheet, an aluminum sheet and a press plate were further superposed thereon in this order.

10 The sample interposed between the press plates were placed in a hot press at 200°C and preheated for about 7 minutes. In order to remove bubbles from the sample, operations of pressurizing (50 kg/cm²-G) and pressure release were repeated several times. Subsequently, the pressure was increased to 100 kg/cm²-G, and the sample was heated for 2 minutes under pressure. After pressure release, the press plates were taken out of the pressing machine and transferred into a different pressing machine with a compression section kept at 0°C, followed by cooling for 4 minutes under a pressure of 100 kg/cm²-G. After pressure release, the sample was taken out. The resulting polar group-containing olefin copolymer film was used to evaluate initial anti-fogging properties.

Evaluation of initial anti-fogging properties

25 In a 100 cc beaker, 70 cc of water was placed, and

the upper part of the beaker was covered with the sample film. Then, the beaker was placed in a constant temperature water bath at 50°C, and the water bath was allowed to stand in a constant temperature room at 20°C.

- 5 After 24 hours, the degree of fogging on the inside surface of the sample film was observed.

Evaluation criteria:

AA: Droplets run on the film surface and no droplet sticking to the film surface is observed.

- 10 BB: Large droplets are sticking to some parts of the film surface.

CC: Fine droplets are sticking to almost all surface of the film.

Coating properties

- 15 Cross-cut adhesion test

A specimen provided with cross cuts in accordance with the cross-cut adhesion test described in JIS K5400 was prepared. To the specimen, Cellotape (trade name, available from Nichiban Co., Ltd.) was attached. Then, the
20 Cellotape was rapidly pulled up at an angle of 90° and thereby separated from the specimen. The number of cross cuts with the coating film remaining thereon was counted and taken as an indication of adhesion properties.

Filler dispersibility

- 25 Preparation of organicity-imparted montmorillonite

In 1000 ml of distilled water at 70°C, 40 g of Na type montmorillonite was dispersed. Into the resulting suspension, a solution obtained by mixing 20 g of 12-aminododecanoic acid and 2 ml of hydrochloric acid in 100
5 ml of distilled water was introduced, and they were stirred at 70°C for 2 hours to exchange metal ions present between montmorillonite layers with organic cations. Then, the precipitate obtained was filtered, sufficiently washed with warm water to perform purification, then freeze-dried and
10 pulverized to obtain 27 g of organicity-imparted montmorillonite.

Preparation of sample for property evaluation

To a mixture of 92 parts by weight of a propylene/ethylene block copolymer (ethylene content: 5.6
15 mol %, MFR: 25 g/10 min), 5 parts by weight of the organicity-imparted montmorillonite obtained above and 3 parts by weight of the polar group-containing olefin copolymer obtained in each example, Irganox 1010[™], Irgaphos 168[™] and calcium stearate were each added in an amount of
20 0.1 part by weight, and the resulting resin was melt mixed by a twin-screw extruder with a diameter of 20 mm at a cylinder temperature of 200°C in a nitrogen atmosphere to prepare pellets. The pellets were injection molded under the conditions of a cylinder temperature of 200°C, a mold
25 temperature of 40°C and an injection pressure of 1000

kg/cm² to obtain specimens for various property evaluation. The specimens were maintained at 23°C for 168 hours and then subjected to tests.

Flexural modulus (FM)

- 5 Using an injection molded specimen having a length of 5 inches, a width of 1/2 inch and a thickness of 1/8 inch, flexural modulus was measured in accordance with ASTM D 638.

Izod impact strength (IZ)

- 10 Using a specimen (rear notched) having a thickness of 1/4 inch, Izod impact strength was measured at 23°C in accordance with ASTM D 258.

Heat distortion temperature (HDT)

- 15 Using an injection molded specimen having a length of 5 inches, a width of 1/4 inch and a thickness of 1/2 inch, heat distortion temperature was measured in accordance with ASTM D 648.

Dispersibility in water

Preparation of water dispersion

- 20 With 40 g of the polar group-containing olefin copolymer obtained, 4 g of maleic anhydride graft polypropylene (propylene/ethylene: 98/2 by mol, maleic anhydride content: 4.0 weight %, viscosity-average molecular weight: 17,000, density: 0.919 g/cm³, melting point: 136°C, softening point: 143°C, melt viscosity
- 25 (180°C): 500 cps) as modified polyolefin and 1.2 g of

potassium oleate as a surface active agent were mixed at room temperature. Then, the mixture was melt kneaded for 5 minutes by a labo-plastomill (preset temperature: 200°C). To the kneadate was then added 1.4 g of a 18.7 % aqueous solution of potassium hydroxide, followed by melt kneading for another 5 minutes. Subsequently, the contents were taken out of the mill, and the resulting viscous emulsion was dispersed in hot water of 60°C to obtain an aqueous resin dispersion.

10 Measurement of dispersed particle diameter

The dispersed particle diameter was measured using a microtrack manufactured by Honeywell Co.

Dispersing stability

15 The aqueous resin dispersion obtained in each example was placed in a glass bottle capable of being closed, and allowed to stand still at room temperature. After one month, separation between the aqueous phase and the resin phase was observed.

Heat-sealing strength to Al

20 Each dispersion was coated on an aluminum foil (50 µm) by a bar coater, air dried and then heated for 10 seconds in an air oven preset at 200°C to obtain a coated foil having a uniform coating film. The coated foil and a LLDPE sheet (available from Akосу Kogyo K.K., thickness: 25 300 µm) were heat bonded at a temperature of 180°C for 1

second under a pressure of 1 kg/cm² by the method in accordance with JIS Z1707, and then cut to give a specimen having a width of 15 mm. The specimen was subjected to a 180° peel test at a measuring temperature of 23°C to
5 measure adhesion strength (pulling rate: 300 mm/min).

Dispersibility in solvent

Preparation of solvent dispersion

In a 1-liter glass autoclave equipped with a stirrer, 55 g of the polar group-containing olefin copolymer
10 obtained and 495 g of toluene were placed, and they were heated to 130°C to completely dissolve the resin. Thereafter, the solution was cooled down to 85°C over a period of 1 hours, then cooled from 85°C down to 40°C over a period of 4.5 hours and then cooled from 40°C down to
15 30°C over a period of 30 minutes, to obtain a resin dispersion.

Measurement of dispersed particle diameter

The dispersed particle diameter was measured using a microtrack manufactured by Honeywell Co.

20 Dispersing stability


The solvent dispersion obtained in each example was placed in a glass bottle capable of being closed, and allowed to stand still at room temperature. After one month, separation between the solvent phase and the resin
25 phase was observed.

Heat-sealing strength to Al

Each dispersion was coated on an aluminum foil (50 μm) by a bar coater, air dried and then heated for 10 seconds in an air oven preset at 200°C to obtain a coated foil having a uniform coating film. The coated foil and a LLDPE sheet (available from Akосу Kogyo K.K., thickness: 300 μm) were heat bonded at a temperature of 180°C for 1 second under a pressure of 1 kg/cm^2 by the method in accordance with JIS Z1707, and then cut to give a specimen having a width of 15 mm. The specimen was subjected to a 180° peel test at a measuring temperature of 23°C to measure adhesion strength (pulling rate: 300 mm/min).

Example 1

In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of n-decane was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 130°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of undecen-1-ol (having been dried over activated alumina) represented by the following formula.



undecen-1-ol

Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by passing ethylene at a rate of 12.5 l/hr. Finally, a toluene slurry solution in which 0.002 mmol of

5 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at

10 130°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere.

15 The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.73 g of a polymer was obtained.

Properties of the resulting polar group-containing


20 olefin copolymer are set forth in Table 8.

The polar group-containing olefin copolymer was measured on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 9.

Example 2

In a 1000 ml glass polymerization reactor thoroughly
 purged with nitrogen, 400 ml of toluene was placed, then
 nitrogen was passed through at a rate of 20 l/hr, and the
 5 contents were maintained at 90°C for 10 minutes. Then, 0.6
 mmol of triisobutylaluminum was added, followed by further
 adding 0.48 mmol of 1,2-epoxy-9-decene (having been dried
 over silica alumina) represented by the following formula.

10



1,2-epoxy-9-decene

Then, 1.100 mmol of methylaluminoxane was further
 added, and passing of nitrogen was stopped, followed by
 passing ethylene at a rate of 12.5 l/hr. Finally, a
 15 toluene slurry solution in which 0.002 mmol of
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-
 indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride
 and 0.500 mmol of methylaluminoxane had been contacted at
 room temperature for 10 minutes was added to initiate
 20 polymerization. After the polymerization was conducted at
 90°C for 1 hour at atmospheric pressure, a small amount of
 isobutyl alcohol was added to terminate the polymerization.
 Then, 100 ml of an isobutyl alcohol solution containing 1
 ml of a concentrated hydrochloric acid aqueous solution was
 25 added, followed by heating at 75°C in a nitrogen atmosphere.

The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.64 g of a polymer was obtained.

5 Properties of the resulting polar group-containing olefin copolymer are set forth in Table 8.


The polar group-containing olefin copolymer was measured on the adhesion strength (to PET) by the aforesaid method. The result is set forth in Table 9.

10

Example 3

In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of n-decane was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 90°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of (2,7-octadien-1-yl)succinic anhydride (having been dried over activated alumina) represented by the following formula.

20

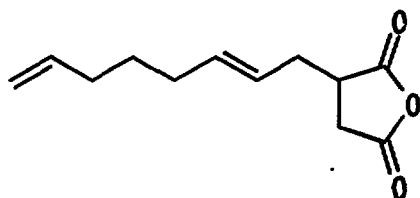

(2,7-octadien-1-yl)succinic anhydride

25

Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by passing ethylene at a rate of 12.5 l/hr. Finally, a toluene slurry solution in which 0.002 mmol of

5 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at

10 130°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere.

15 The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.18 g of a polymer was obtained.

Properties of the resulting polar group-containing


20 olefin copolymer are set forth in Table 8.

The polar group-containing olefin copolymer was measured on the adhesion strength (to Ny) by the aforesaid method. The result is set forth in Table 9.

Example 4

Copolymerization of propylene and a polar group-containing monomer was carried out in the same manner as in Example 1, except that 0.00075 mmol of dimethylsilylene(2-methyl-4-phenanthryl-1-indenyl)zirconium dichloride was used instead of dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium dichloride, pentapropenyl succinic anhydride represented by the following formula was used as the polar group-containing monomer, and polymerization was conducted at 60°C for 30 minutes with passing propylene instead of ethylene.

15

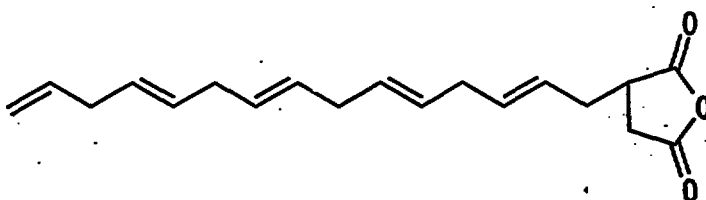

Pentapropenyl succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 8.

The polar group-containing olefin copolymer was measured on the adhesion strength (to EVOH) by the aforesaid method. The result is set forth in Table 9.

25

Example 5

Polymerization was carried out in the same manner as in Example 4, except that 1,2-epoxy-9-decene was used instead of pentapropenyl succinic anhydride. Properties of the resulting polar group-containing olefin copolymer are set forth in Table 8.

To 20 weight % of the polar group-containing olefin copolymer obtained above, 80 weight % of nylon 6 (relative viscosity: 2.35 dl/g) was added, and the mixture was melt kneaded by a twin-screw extruder with a diameter of 20 mm at 250°C to prepare a thermoplastic resin composition. The thermoplastic resin composition was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 9.

15

Example 6

To 10 weight % of the polar group-containing olefin copolymer obtained in Example 4, 30 weight % of nylon 6 (relative viscosity: 2.35 dl/g) and 60 weight % of a propylene homopolymer (MFR (230°C, load of 2.16 kg): 2.2 g/10 min) were added, and the mixture was melt kneaded by a twin-screw extruder with a diameter of 20 mm at 250°C to prepare a thermoplastic resin composition. The thermoplastic resin composition was subjected to an impact resistance test and a tensile test by the aforesaid methods.

25

The results are set forth in Table 9.

Comparative Example 1


To 70 weight % of a propylene homopolymer (MFR (230°C,
5 load of 2.16 kg): 2.2 g/10 min), 30 weight % of nylon 6
(relative viscosity: 2.35 dl/g) was added, and the mixture
was melt kneaded by a twin-screw extruder with a diameter
of 20 mm at 250°C to prepare a thermoplastic resin
composition. The thermoplastic resin composition was
10 subjected to an impact resistance test and a tensile test
by the aforesaid methods. The results are set forth in
Table 9.

Example 7

15 From the polar group-containing olefin copolymer
obtained in Example 1, a film was produced in the aforesaid
manner. Using the film, anti-fogging properties were
evaluated. The result is set forth in Table 9.

20 Example 8

Polymerization was carried out in the same manner as
in Example 1, except that delta 12-tridecenol represented
by the following formula was used instead of undecen-1-ol
and propylene was used instead of ethylene.



delta 12-tridecenol

Properties of the resulting polar group-containing
 5 olefin copolymer are set forth in Table 8.

The polar group-containing olefin copolymer was
 evaluated on the coating properties by the aforesaid method.
 The result is set forth in Table 9.

10 Example 9

Using the polar group-containing olefin copolymer
 obtained in Example 4, filler dispersibility was evaluated
 by the aforesaid method. The result is set forth in Table
 9.

15

Comparative Example 2

Filler dispersibility was evaluated in the same
 manner as in Example 9, except that no polar group-
 containing olefin copolymer was used. The result is set
 20 forth in Table 9.

Example 10


Using the polar group-containing olefin copolymer
 obtained in Example 1, a water dispersion was prepared in
 25 the aforesaid manner, and dispersibility in water was

evaluated by the aforesaid method. The result is set forth in Table 9.

Example 11

5 Copolymerization of ethylene and a polar group-containing monomer was carried out in the same manner as in Example 1, except that undecylenic acid represented by the following formula was used instead of undecen-1-ol.

10



undecylenic acid

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 8.

Using the polar group-containing olefin copolymer thus obtained, a water dispersion was prepared in the aforesaid manner, and dispersibility in water was evaluated by the aforesaid method. The result is set forth in Table 9.

Example 12

Using the polar group-containing olefin copolymer obtained in Example 3, a solvent dispersion was prepared in the aforesaid manner, and dispersibility in solvent was

evaluated by the aforesaid method. The result is set forth in Table 9.

Table 8

Table 8

	Constituent unit (1) R^1	Constituent unit (3) R^3 R^4 X			Composition (molar ratio) (1)/(3)	Mw	MFR (g/10分)	Mw/Mn	$T_{\alpha\beta}$ $(T_{\alpha\alpha} + T_{\alpha\beta})$
Ex.1	H	C ₉ H ₁₈	—	OH	99.5/0.5	100,000	0.7 *1	2.7	0
Ex.2	H	C ₆ H ₁₂	—	epoxy group	99.5/0.5	72,000	2.5 *1	2.8	0
Ex.3	H	C ₆ H ₁₀	—	acid anhydride group	99.5/0.5	70,000	2.5 *1	2.2	0
Ex.4	CH ₃	C ₁₃ H ₁₈	—	acid anhydride group	99.5/0.5	250,000	14.6 *2	2.5	0.13
Ex.5	CH ₃	C ₆ H ₁₂	—	epoxy group	99.5/0.5	250,000	14.6 *2	2.3	0.15
Ex.8	CH ₃	C ₁₁ H ₂₂	—	OH	99.5/0.5	250,000	14.6 *2	2.6	0.20
Ex.11	H	C ₈ H ₁₆	—	COOH	99.5/0.5	70,000	2.5 *1	2.6	0.01

*1: measured at 190°C under a load of 2.16 kg

*2: measured at 230°C under a load of 2.16 kg

Table 9


	Property items	Property value	Unit
Ex. 1	Adhesion strength (to Al)	2	Kgf/15mm
Ex. 2	Adhesion strength (to PET)	broken substrate	Kgf/15mm
Ex. 3	Adhesion strength (to Ny)	6.2	Kgf/15mm
Ex. 4	Adhesion strength (to EVOH)	6.5	Kgf/15mm
Ex. 5	IZ	32	J/m
	Tensile strength	41	MPa
	Elongation at break	11	%
Ex. 6	IZ	28	J/m
	Tensile strength	40	MPa
	Elongation at break	13	%
Comp Ex.1	IZ	15	J/m
	Tensile strength	22	MPa
	Elongation at break	4	%
Ex. 7	Anti-fogging properties (visual observation)	AA	—
Ex. 8	Cross-cut adhesion test	100/100	number of cuts/ number of cuts
Ex. 9	FM	1900	MPa
	IZ	55	J/m
	HDT	129	°C
Comp Ex. 2	FM	1250	MPa
	IZ	52	J/m
	HDT	115	°C
Ex. 10	Dispersed particle diameter	0.7	μm
	Dispersion stability	not separated	
	Heat-sealing strength to Al	2	Kgf/15mm
Ex. 11	Dispersed particle diameter	0.6	μm
	Dispersion stability	not separated	
	Heat-sealing strength to Al	2.5	Kgf/15mm
Ex. 12	Dispersed particle diameter	10	μm
	Dispersion stability	not separated	
	Heat-sealing strength to Al	3	Kgf/15mm

Example 13

In a 2-liter stainless steel (SUS) autoclave thoroughly purged with nitrogen, 120 g of 1-butene, 880 ml of Mitsui hexane and 1.50 mmol of

5 triisobutylaluminum were placed. The SUS autoclave was heated up to 150°C, and 1.140 mmol of methylaluminoxane was added, followed by further adding 1.350 mmol of undecen-1-ol (having been dried over activated alumina and then vacuum distilled) represented by the following

10 formula. With keeping the temperature at 150°C, the autoclave was pressurized with ethylene so that the total pressure became 30 kg/cm²-G.



15

Separately, into a 20 ml glass flask thoroughly purged with nitrogen, a toluene slurry solution in which 0.00075 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium

20 dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was injected with nitrogen, and 600 Nml of hydrogen was further injected. For the period of 10 minutes after the injection, the temperature in the autoclave was

maintained at 150°C and the pressure therein was maintained at that immediately after the injection by pressurizing with ethylene. Then, a small amount of isobutyl alcohol was added to terminate the

5 polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 10.40 g of a polymer was obtained. The polymerization activity was 83

10 kg/mmol·Zr·hr.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 10.


The polar group-containing olefin copolymer was evaluated on the coating properties by the aforesaid

15 method. The result is set forth in Table 11.

Example 14

Ethylene, 1-butene and a polar group-containing monomer were polymerized in the same manner as in

20 Example 13, except that undecylenic acid represented by the following formula was used instead of undecen-1-ol.




Properties of the resulting polar group-containing olefin copolymer are set forth in Table 10.

The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the
5 aforesaid method. The result is set forth in Table 11.

Example 15

Ethylene, 1-butene and a polar group-containing monomer were polymerized in the same manner as in
10 Example 13, except that 1,2-epoxy-9-decene represented by the following formula was used instead of undecen-1-ol and 550 Nml of hydrogen was used.

15



1,2-epoxy-9-decene


Properties of the resulting polar group-containing olefin copolymer are set forth in Table 10.

To 20 weight % of the polar group-containing
20 olefin copolymer obtained above, 80 weight % of nylon 6 (relative viscosity: 2.35 dl/g) was added, and the mixture was melt kneaded by a twin-screw extruder with a diameter of 20 mm at 250°C to prepare a thermoplastic resin composition. The thermoplastic resin composition

was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 11.

5 Example 16

Ethylene, 1-butene and a polar group-containing monomer were polymerized in the same manner as in Example 13, except that (2,7-octadien-1-yl)succinic anhydride represented by the following formula was used instead of undecen-1-ol and 550 Nml of hydrogen was used.

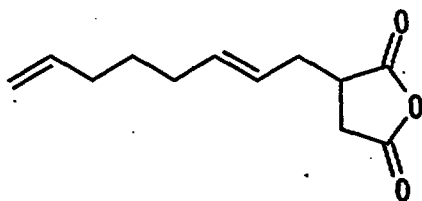

15

(2,7-octadien-1-yl)succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 10.

20 To 20 weight % of the polar group-containing olefin copolymer obtained above, 80 weight % of nylon 6 (relative viscosity: 2.35 dl/g) was added, and the mixture was melt kneaded by a twin-screw extruder with a diameter of 20 mm at 250°C to prepare a thermoplastic

resin composition. The thermoplastic resin composition was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 11.

5

Example 17

Ethylene, propylene and a polar group-containing monomer were polymerized in the same manner as in Example 16, except that propylene was injected at an
10 initial partial pressure of 3 kg/cm² instead of 1-butene, hydrogen was not added, and polymerization was conducted at a polymerization temperature of 80°C.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 10.

15 To 20 weight % of the polar group-containing olefin copolymer obtained above, 80 weight % of nylon 6 (relative viscosity: 2.35 dl/g) was added, and the mixture was melt kneaded by a twin-screw extruder with a diameter of 20 mm at 250°C to prepare a thermoplastic
20 resin composition. The thermoplastic resin composition was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 11.

Table 10

	Constitu ent unit	Constitu ent unit	Constitu ent unit			Composition (molar ratio)	Mw	MFR (g/10 min)	Mw/Mn	$\frac{T_{\alpha\beta}}{T_{\alpha\alpha} + T_{\alpha\beta}}$
	(1) R ¹	(2) R ²	(3) R ³	R ⁴	X	(1)/(2)/(3)				
Ex. 13	H	ethyl	C ₉ H ₁₈	—	—OH	88/11.5/0.5	110,000	4.2	2.8	0
Ex. 14	H	ethyl	C ₈ H ₁₆	—	—COOH	88/11.75/0.25	100,000	5.9	2.2	0
Ex. 15	H	ethyl	C ₆ H ₁₂	—	Epoxy group	88/11.75/0.25	130,000	2.3	2.3	0.05
Ex. 16	H	ethyl	C ₆ H ₁₀	—	acid anhydride group	88/11.75/0.25	122,000	2.9	2.2	0.03
Ex. 17	H	methyl	C ₆ H ₁₀	—	acid anhydride group	80/19.75/0.25	131,000	2.3	2.5	0.02


Table 11

	Property items	Property value	Unit
Ex. 13	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 14	Adhesion strength (to Al)	3.6	Kgf/15mm
Ex. 15	IZ	490	J/m
	Tensile strength	40	MPa
	Elongation at break	40	%
Ex. 16	IZ	260	J/m
	Tensile strength	45	MPa
	Elongation at break	120	%
Ex. 17	IZ	265	J/m
	Tensile strength	46	MPa
	Elongation at break	122	%

Example 18

- 5 In a 1000 ml glass polymerization reactor
- thoroughly purged with nitrogen, 400 ml of n-decane was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 130°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was
- 10 added, followed by further adding 0.48 mmol of delta 12-tridecenol (having been dried over activated alumina

and then vacuum distilled) represented by the following formula.



5

delta 12-tridecenol

Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by passing ethylene at a rate of 12.5 l/hr. Finally, a

10 toluene slurry solution in which 0.002 mmol of dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-tert-butylfluorenyl) zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added

15 to initiate polymerization. After the polymerization was conducted at 130°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a

20 concentrated hydrochloric acid aqueous solution was added. followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for

12 hours. As a result, 3.44 g of a polymer was obtained.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 12.

- 5 The polar group-containing olefin copolymer was evaluated on the coating properties by the aforesaid method. The result is set forth in Table 13.

Example 19

- 10 Propylene and a polar group-containing monomer were copolymerized in the same manner as in Example 18, except that 0.00075 mmol of dimethylsilylene(2-methyl-4-phenanthryl-1-indenyl)zirconium dichloride was used instead of dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-
15 benzo)-1-indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride and polymerization was conducted at 60°C for 30 minutes with passing propylene instead of ethylene.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 12.

- 20 The polar group-containing olefin copolymer was evaluated on the coating properties by the aforesaid method. The result is set forth in Table 13.

Example 20

In a 2-liter stainless steel (SUS) autoclave thoroughly purged with nitrogen, 120 g of 1-butene, 950 ml of Mitsui hexane and 1.50 mmol of triisobutylaluminum were placed. The SUS autoclave was heated up to 150°C, and 1.140 mmol of methylaluminoxane was added, followed by further adding 1.350 mmol of delta 12-tridecenol (having been dried over silica alumina and then vacuum distilled) represented by the above formula. With keeping the temperature at 150°C, the autoclave was pressurized with ethylene so that the total pressure became 30 kg/cm²-G. Separately, into a 20 ml glass flask thoroughly purged with nitrogen, a toluene slurry solution in which 0.00075 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was injected with nitrogen, and 600 Nml of hydrogen was further injected. For the period of 10 minutes after the injection, the temperature in the autoclave was maintained at 150°C and the pressure therein was maintained at that immediately after the injection by pressurizing with ethylene. Then, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer


solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 10.40 g of a polymer was obtained. The polymerization activity was 5 83 kg/mmol·Zr·hr.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 12.

The polar group-containing olefin copolymer was evaluated on the coating properties by the aforesaid 10 method. The result is set forth in Table 13.

Example 21

Ethylene and a polar group-containing monomer were copolymerized in the same manner as in Example 18, 15 except that pentadec-14-enoic acid represented by the following formula was used instead of delta 12-tridecenol.




pentadec-14-enoic acid

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 12.

The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 13.

5 Example 22

Propylene and a polar group-containing monomer were copolymerized in the same manner as in Example 19, except that pentapropenyl succinic anhydride represented by the following formula was used instead
10 of delta 12-tridecenol.

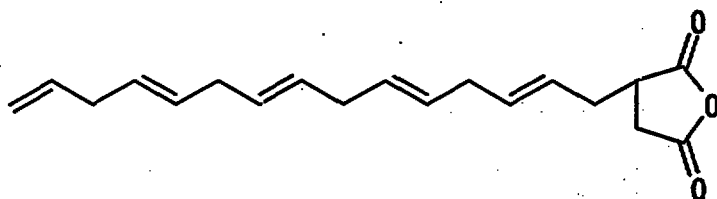

15 Pentapropenyl succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 12.

The polar group-containing olefin copolymer was
20 evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 13.

Table 12

	Constituent unit (1), (2) R^1	Constituent unit (3) R^3 R^4 X			Composition (molar ratio) (1) + (2) / (3)	Mw	MFR (g/10 min)	Mw/Mn	$T_{\alpha\beta}$ ($T_{\alpha\alpha} + T_{\alpha\beta}$)
Ex. 18	H	$C_{11}H_{22}$	—	—OH	99.5/0.5	70,000	2.5 *1	2.7	0
Ex. 19	methyl	$C_{11}H_{22}$	—	—OH	99.5/0.5	250,000	14.6 *2	2.3	0.16
Ex. 20	H, ethyl	$C_{11}H_{22}$	—	—OH	88/11.5/0.5	110,000	4.2 *1	2.8	0
Ex. 21	H	$C_{12}H_{24}$	—	—COOH	99.75/0.25	71,000	2.4 *1	2.5	0
Ex. 22	methyl	$C_{13}H_{18}$	—	acid anhydride group	99.75/0.25	249,000	14.7 *2	2.2	0.18

*1 Measuring conditions: 190°C, load of 2.16 kg

5 *2 Measuring conditions: 230°C, load of 2.16 kg

Table 13


	Evaluation items	Property value	Unit
Ex. 18	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 19	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 20	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 21	Adhesion strength (to Al)	3	Kgf/15mm
Ex. 22	Adhesion strength (to Al)	3.5	Kgf/15mm

5

Example 23

In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 10 20 l/hr, and the contents were maintained at 60°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of (2,7-octadien-1-yl)succinic anhydride represented by the

following formula.

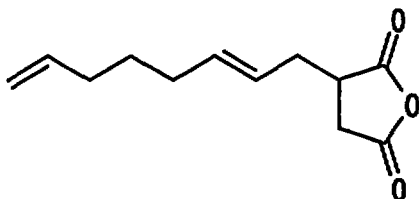

5

(2,7-octadien-1-yl)succinic anhydride

Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by
 10 passing propylene at a rate of 12.5 l/hr. Finally, a toluene slurry solution in which 0.0075 mmol of dimethylsilylene(2-methyl-4-phenanthryl-1-indenyl)zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room
 15 temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 60°C for 30 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol
 20 solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C

for 12 hours. As a result, 1.75 g of a polymer was obtained.


Properties of the resulting polar group-containing olefin copolymer are set forth in Table 14.

- 5 The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 15.

Example 24

- 10 In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 90°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was
15 added, followed by further adding 0.48 mmol of 1,2-epoxy-9-decene (having been dried over silica alumina) represented by the following formula.

20



1,2-epoxy-9-decene

Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by passing ethylene at a rate of 12.5 l/hr. Finally, a


toluene slurry solution in which 0.002 mmol of dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl) (2,7-di-tert-butylfluorenyl) zirconium dichloride and 0.500 mmol of methylaluminoxane had been
5 contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 90°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an
10 isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to
15 precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.08 g of a polymer was obtained.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 14.

20 The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 15.

Example 25

Ethylene and a polar group-containing monomer were copolymerized in the same manner as in Example 24, except that 4-hex-5-enyloxy-phenol represented by the following formula was used instead of 1,2-epoxy-9-decene.



4-hex-5-enyloxy-phenol

10

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 14.

The polar group-containing olefin copolymer was evaluated on the adhesion strength (to PET) by the aforesaid method. The result is set forth in Table 15.

Table 14

	Constituent unit (1) R^1	Constituent unit (3) R^4 R^5 X			Composition (molar ratio) (1) / (3)	Mw	MFR (g/10 min)	Mw/Mn	$T_{\alpha\beta}$ ($T_{\alpha\alpha} + T_{\alpha\beta}$)
Ex. 23	methyl	C_6H_{10}	—	acid anhydride	99.75/0.25	250,000	14.6 *1	0.23	0.13
Ex. 24	H	C_6H_{12}	—	epoxy	99.75/0.25	68,000	2.8 *2	0.25	0
Ex. 25	H	C_4H_8	O	phenol	99.5 / 0.5	70,000	2.5 *2	0.25	0

5

*1 Measuring conditions: 230°C, load of 2.16 kg


*2 Measuring conditions: 190°C, load of 2.16 kg

Table 15

	Evaluation items	Property value	Unit
Ex. 23	Adhesion strength (to Al)	3.6	Kgf/15mm
Ex. 24	Adhesion strength (to PET)	broken substrate	Kgf/15mm
Ex. 25	Adhesion strength (to PET)	3	Kgf/15mm

5 Example 26

In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 0°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of undecen-1-ol represented by the following formula.



Then, 1.100 mmol of methylaluminoxane was further added, and passing of nitrogen was stopped, followed by passing 1-butene at a rate of 12.5 l/hr. Finally, a

toluene slurry solution in which 0.0020 mmol of dimethylsilylene(2-methyl-4-phenanthryl-1-indenyl)zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room

5 temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 0°C for 60 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol

10 solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C

15 for 12 hours. As a result, 0.25 g of a polymer was obtained.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 16.

The polar group-containing olefin copolymer was


20 evaluated on the coating properties by the aforesaid method. The result is set forth in Table 17.

Example 27

1-Butene and a polar group-containing monomer

were polymerized in the same manner as in Example 26, except that 1,2-epoxy-9-decene represented by the following formula was used instead of undecen-1-ol.

5



1,2-epoxy-9-decene

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 16.

10


The polar group-containing olefin copolymer was evaluated on the adhesion strength (to PET) by the aforesaid method. The result is set forth in Table 17.

Example 28

15

1-Butene and a polar group-containing monomer were polymerized in the same manner as in Example 26, except that 1.35 mmol of undecylenic acid represented by the following formula was used instead of undecen-1-ol and 1.5 mmol of triisobutylaluminum was used.

20



undecylenic acid

Properties of the resulting polar group-

containing olefin copolymer are set forth in Table 16.


The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 17.

5

Example 29

1-Butene and a polar group-containing monomer were polymerized in the same manner as in Example 26, except that (2,7-octadien-1-yl)succinic anhydride represented by the following formula was used instead of undecen-1-ol.

15

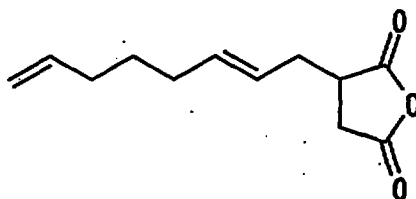

(2,7-octadien-1-yl)succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 16.

20 The polar group-containing olefin copolymer was evaluated on the adhesion strength (to Al) by the aforesaid method. The result is set forth in Table 17.

Table 16

	Constitu ent unit (1) R^1	Constitu ent unit (3)			Composition (molar ratio) (1)/(3)	Mw	MFR *1 (g/10 min)	Mw/Mn	$T_{\alpha\beta}$ ($T_{\alpha\alpha}+T_{\alpha\beta}$)	Crystall inity (%)
		R^3	R^4	X						
Ex. 26	ethyl	C_9H_{18}	—	—OH	99.5 /0.5	770,000	2.60	2.2	0	46
Ex. 27	ethyl	C_6H_{12}	—	epoxy group	99.75/0.25	720,000	2.72	2.3	0	48
Ex. 28	ethyl	C_8H_{16}	—	—COOH	99.75/0.25	680,000	3.10	2.3	0.01	48
Ex. 29	ethyl	C_6H_{10}	—	acid anhydride group	99.75/0.25	710,000	2.81	2.5	0	47

5 *1 Measuring conditions: 190°C, load of 2.16 kg

Table 17

	Evaluation items	Property value	Unit
Ex. 26	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 27	Adhesion strength 23°C (to PET) 80°C	broken substrate broken substrate	— —
Ex. 28	Adhesion strength 23°C (to Al) 80°C	2.8 2.8	Kgf/15mm Kgf/15mm
Ex. 29	Adhesion strength 23°C (to Al) 80°C	3.5 3.5	Kgf/15mm Kgf/15mm

5 Example 30

In a 300 ml glass polymerization reactor thoroughly purged with nitrogen, 40 ml of 1-octene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 60°C for 10 minutes. Then, 0.6 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of undecen-1-ol represented by the following formula.



15

Then, 1.100 mmol of methylaluminoxane and 40 ml of 1-octene were further added. Finally, a toluene

slurry solution in which 0.002 mmol of dimethylsilylene(2-methyl-4-phenanthryl-1-indenyl)zirconium dichloride and 0.500 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 20°C for 60 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 0.25 g of a polymer was obtained.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 18.


The polar group-containing olefin copolymer was evaluated on the coating properties by the aforesaid method. The result is set forth in Table 19.

Example 31

1-Octene and a polar group-containing monomer

were polymerized in the same manner as in Example 30, except that 1,2-epoxy-9-decene represented by the following formula was used instead of undecen-1-ol.

5



1,2-epoxy-9-decene

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 18.


10

The polar group-containing olefin copolymer was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 19.

15 Example 32

1-Octene and a polar group-containing monomer were polymerized in the same manner as in Example 30, except that 1.35 mmol of undecylenic acid represented by the following formula was used instead of undecen-1-ol and 1.5 mmol of triisobutylaluminum was used.

20



undecylenic acid


Properties of the resulting polar group-containing olefin copolymer are set forth in Table 18.

The polar group-containing olefin copolymer was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 19.

Example 33

1-Octene and a polar group-containing monomer were polymerized in the same manner as in Example 30, except that (2,7-octadien-1-yl)succinic anhydride represented by the following formula was used instead of undecen-1-ol.

15

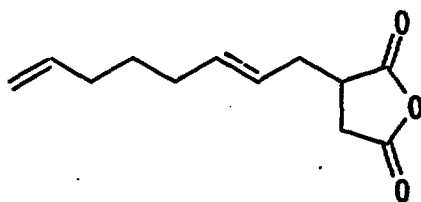

(2,7-octadien-1-yl)succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 18.

The polar group-containing olefin copolymer was subjected to an impact resistance test and a tensile test by the aforesaid methods. The results are set forth in Table 19.

Table 18

	Constituent unit (1) R ¹	Constituent unit (3) R ³ R ⁴ X			Composition (molar ratio) (1)/(3)	[η] (dl/g)	MFR *1 (g/10 min)	Mw/Mn	T _{0.5} (T _{0.5} +T _{0.5})	Crystallinity (%)
Ex. 30	heptyl	C ₉ H ₁₈	—	OH	99.5 / 0.5	2.5	70.00	2.3	0.12	0
Ex. 31	heptyl	C ₈ H ₁₆	—	epoxy group	99.75/0.25	2.4	67.05	2.2	0.15	0
Ex. 32	heptyl	C ₆ H ₁₂	—	COOH	99.75/0.25	2.3	62.13	2.4	0.10	0
Ex. 33	heptyl	C ₆ H ₁₀	—	acid anhydride group	99.75/0.25	2.5	70.00	2.2	0.05	0

5 *1 Measuring conditions: 190°C, load of 2.16 kg

Table 19

	Evaluation items	Property value	Unit
Ex. 30	Cross-cut adhesion test	100/100	number of cuts/number of cuts
Ex. 31	IZ	260	J/m
	Tensile strength	42	MPa
	Elongation at break	125	%
Ex. 32	IZ	505	J/m
	Tensile strength	35	MPa
	Elongation at break	42	%
Ex. 33	Adhesion strength (to Al)	2	Kgf/15mm

- 5 In the following Examples 34 to 39, preparation of specimens and measurements of mechanical properties were made as follows.

Preparation of specimen

- 10 A graft copolymer obtained in the example was molded by a 55-ton injection molding machine (IS55EPN manufactured by Toshiba Machine Co., Ltd.) at a cylinder temperature of 200°C and a mold temperature of 40°C.

In the following Examples 34 to 39, measurements of flexural modulus, Rockwell hardness and pencil hardness, and calculation of (4)/(5) by ^1H -NMR were made as follows.

5 Flexural modulus

The flexural modulus was measured using a specimen having a thickness of 1/8 inch under the conditions of a span of 51 mm and a flexural rate of 20 mm/min in accordance with ASTM C790.

10 Rockwell hardness (HR)

The Rockwell hardness was measured using a square plate of 2 mm (thickness) $\times$ 120 mm (length) $\times$ 130 mm (width) in accordance with ASTM D785.

Pencil hardness

15 The pencil hardness was measured using a specimen having a thickness of 1/8 inch under the conditions of a temperature of 23°C in accordance with JIS K5401.

Calculation of (4)/(5) by ^1H -NMR

Device: JOEL GFX400 type nuclear magnetic

20 resonance device

Observation nucleus: ^1H

Observation frequency: 400 MHz

Pulse width: 45°

Repetition time: 5.0 seconds

Number of integration times: 8000


Measuring temperature: 115°C

Measuring solvent: orthodichlorobenzene

Measurement: The resulting polymer of 25 to 40 mg
 5 was dissolved in orthodichlorobenzene, and NMR was
 measured under the above measuring conditions.

Example 34

In a 1000 ml glass polymerization reactor
 10 thoroughly purged with nitrogen, 400 ml of toluene was
 placed, then nitrogen was passed through at a rate of
 20 l/hr, and the contents were maintained at 90°C for
 10 minutes. Then, 2.0 mmol of triisobutylaluminum was
 added, followed by further adding 1.88 mmol of undecen-
 15 1-ol (having been dried over activated alumina and then
 vacuum distilled) represented by the following formula.



20 Then, 1.100 mmol of methylaluminoxane was further
 added, and passing of nitrogen was stopped, followed by
 passing ethylene at a rate of 5 l/hr. Finally, a
 toluene slurry solution in which 0.008 mmol of
 dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-
 25 indenyl) (2,7-di-tert-butylfluorenyl) zirconium

dichloride and 2.00 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 90°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 12.21 g of a polymer having an ethylene/side chain monomer molar ratio of 99.2/0.8 was obtained.

A 1500 ml autoclave equipped with a thermometry tube, a manometer, a stirrer and an alkylene oxide feed pipe was charged with 12.0 g of the ethylene/side chain monomer copolymer (ethylene/side chain monomer = 99.2/0.8 by mol), 31.0 mg of tetrakis[tris(dimethylamino)-phosphoranylideneamino]phosphonium hydroxide ($[(\text{Me}_2\text{N})_3\text{P}=\text{N}]_4\text{P}^+\text{OH}^-$) synthesized in the same manner as described in EP0791600, p. 32, and 800 g of tetralin. Then, the contents were heated to 125°C and allowed to

undergo reaction at the same temperature for 12 hours with intermittently feeding 3.1 g of ethylene oxide so as to maintain the pressure at 0.9 MPa (absolute pressure). Subsequently, the unreacted ethylene oxide
5 remaining in the autoclave was distilled off at the same temperature under reduced pressure. Then, the contents were cooled to room temperature and poured into 800 ml of methanol. The white solid precipitated was separated by filtration, and to the solid was
10 further added 20 ml of methanol, followed by heating under reflux for 30 minutes. The mixture was subjected to hot filtration, and the resulting solid was dried at 60°C under reduced pressure, to obtain 10.1 g of a graft copolymer in which about 13 ethylene oxide units
15 were graft polymerized based on one hydroxyl group.

Properties of the resulting polar group-containing branched olefin copolymer are set forth in Table 20.

Further, anti-fogging properties of a film
20 obtained from the polar group-containing branched olefin copolymer were evaluated by the aforesaid method. The result is set forth in Table 21. Measurement of the (4)/(5) ratio of the polymer by ^1H -NMR resulted in 100/0.

Example 35

In a 1000 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 90°C for 10 minutes. Then, 1.08 mmol of triisobutylaluminum was added, followed by further adding 0.90 mmol of undecen-1-ol (having been dried over activated alumina and then vacuum distilled). Further, 1.100 mmol of methylaluminoxane was added, and passing of nitrogen was stopped, followed by passing ethylene at a rate of 100 l/hr. Finally, a toluene slurry solution in which 0.008 mmol of dimethylsilylene(2,7-dimethyl-4,5-(2-methyl-benzo)-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium dichloride and 2.00 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 90°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. Then, 100 ml of an isobutyl alcohol solution containing 1 ml of a concentrated hydrochloric acid aqueous solution was added, followed by heating at 75°C in a nitrogen atmosphere. The polymer solution

obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 14.83 g of a polymer having an ethylene/side chain monomer molar ratio of

5 99.75/0.25 was obtained.

Then, polymerization was carried out in the same manner as in Example 34, except that 12.0 g of the polymer obtained above and 15.1 g of ethylene oxide was used. As a result, 11.8 g of a graft copolymer in
10 which about 65 ethylene oxide units were graft polymerized based on one hydroxyl group was obtained.

Properties of the resulting polar group-containing branched olefin copolymer are set forth in Table 20.

15 Further, anti-fogging properties of a film obtained from the polar group-containing branched olefin copolymer were evaluated by the aforesaid method. The result is set forth in Table 21.

20 Example 36

The procedure of Example 34 was repeated, except that 5.0 g of propylene oxide was used instead of ethylene oxide. As a result, 10.3 g of a graft copolymer in which about 10 propylene oxide units were

graft polymerized based on one hydroxyl group was obtained.

Properties of the resulting polar group-containing branched olefin copolymer are set forth in
5 Table 20.

Further, anti-fogging properties of a film obtained from the polar group-containing branched olefin copolymer were evaluated by the aforesaid method. The result is set forth in Table 21. Measurement of
10 the (4)/(5) ratio of the polymer by ^1H -NMR resulted in 99/1.

Example 37

Using the ethylene/side chain monomer polymer
15 (ethylene/side chain monomer = 99.75/0.25 by mol) prepared in Example 35, polymerization was carried out with intermittently feeding 3.1 g of ethylene oxide. As a result, 11.8 g of a graft copolymer in which about 13 ethylene oxide units were graft polymerized based on
20 one hydroxyl group was obtained.

Properties of the resulting polar group-containing branched olefin copolymer are set forth in Table 20.

Further, anti-fogging properties of a film

obtained from the polar group-containing branched olefin copolymer were evaluated by the aforesaid method. The result is set forth in Table 21.

5 Example 38

 The procedure of Example 34 was repeated, except that 7.75 g of α -hydroxyisopropyl phenyl ketone was further charged in addition to the starting materials, the pressure was changed to 0.2 MPa from 0.9 MPa, 5.8 g
10 of methyl methacrylate was used instead of ethylene oxide, and tetrahydrofuran was used instead of methanol. As a result, 11.3 g of a graft copolymer in which about 20 methyl methacrylate units were graft polymerized based on one hydroxyl group was obtained.

15 Properties of the resulting polar group-containing branched olefin copolymer are set forth in Table 20.

 Further, mechanical properties of the polar group-containing branched olefin copolymer were
20 evaluated by the aforesaid method. The result is set forth in Table 21.

Example 39

 In a 2-liter stainless steel (SUS) autoclave

thoroughly purged with nitrogen, 105 g of 1-octene, 895 ml of Mitsui hexane and 1.50 mmol of triisobutylaluminum were placed. The SUS autoclave was heated up to 150°C, and 1.140 mmol of methylaluminoxane was added, followed by further adding 1.350 mmol of undecen-1-ol (having been dried over activated alumina and then vacuum distilled). With keeping the temperature at 150°C, the autoclave was pressurized with ethylene so that the total pressure became 30 kg/cm²-G. Separately, into a 20 ml glass flask thoroughly purged with nitrogen, a toluene slurry solution in which 0.00075 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was injected with nitrogen, and 600 Nml of hydrogen was further injected. For the period of 10 minutes after the injection, the temperature in the autoclave was maintained at 150°C and the pressure therein was maintained at that immediately after the injection by pressurizing with ethylene. Then, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of

methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 8.45 g of a polymer was obtained.

Using 8 g of this polymer, polymerization was
5 carried out with intermittently feeding 3.1 g of ethylene oxide similarly to Example 34. As a result, 11.8 g of a graft copolymer in which about 13 ethylene oxide units were graft polymerized based on one hydroxyl group was obtained.


10 Properties of the resulting polar group-containing branched olefin copolymer are set forth in Table 20.

Further, dispersibility of the polar group-containing branched olefin copolymer in water was
15 evaluated by the aforesaid method. The result is set forth in Table 21.


Table 20

	Constituent unit (1)	Constituent unit (4)					Composition (molar ratio)	Mw	Mw/Mn	$\frac{T_{\alpha\beta}}{(T_{\alpha\alpha}+T_{\alpha\beta})}$
	R ¹	R ⁵	R ⁶	Z	p	structure	(1)/(4)+(5)			
Ex. 34	H	C ₉ H ₁₈	—	—(CH ₂ CH ₂ O) ₁₃ -H	1	①	99.2 / 0.8	70,000	2.8	0
Ex. 35	H	C ₉ H ₁₈	—	—(CH ₂ CH ₂ O) ₆₅ -H	1	①	99.75 / 0.25	70,000	2.6	0
Ex. 36	H	C ₉ H ₁₈	—	—(CH ₂ CH(CH ₃)O) ₁₃ -H	1	②	99.2 / 0.8	65,000	2.5	0
Ex. 37	H	C ₆ H ₁₀	—	—(CH ₂ CH ₂ O) ₁₃ -H	2	③	99.75 / 0.25	70,000	2.3	0
Ex. 38	CH ₃	C ₉ H ₁₈	—	—(CH ₂ CH(COOCH ₃)) ₂₀ -H	1	④	99.2 / 0.8	250,000	2.7	0.08
Ex. 39	H, C ₆ H ₁₃	C ₉ H ₁₈	—	—(CH ₂ CH ₂ O) ₁₃ -H	1	①	89.5 / 10 / 0.5 *1	130,000	2.5	0.12


①




②



③

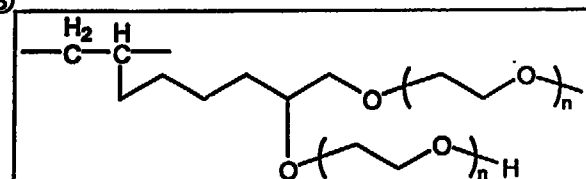

④

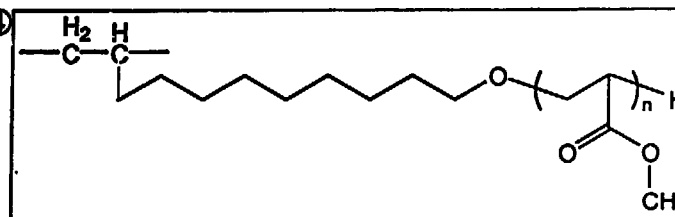

5

*1 Molar ratio of H/C₆H₁₃/(4)+(5)

Table 21

	Evaluation items	Property value	Unit
Ex. 34	Anti-fogging properties (visual observation)	AA	—
Ex. 35	Anti-fogging properties (visual observation)	AA	—
Ex. 36	Anti-fogging properties (visual observation)	AA	—
Ex. 37	Anti-fogging properties (visual observation)	AA	—
Ex. 38	FM	2500	MPa
	Rockwell hardness	115	
	Pencil hardness	2H	
	HDT	130	°C
Ex. 39	Dispersed particle diameter	0.4	μm
	Dispersion stability	not separated	

5

Example 40

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 0.8000 mmol of methylaluminoxane was added, followed by further adding 0.1000 mmol of undecen-1-ol (having been dried over silica alumina and

then vacuum distilled). Then, passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

Finally, 0.0008 mmol of

5 isopropylidene(cyclopentadienyl) (2,7-di-t-butylfluorenyl)zirconium dichloride was added to initiate polymerization. After the polymerization was conducted at 75°C for 15 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added

10 to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 0.90 g of a polymer was obtained. The polymerization activity was 4.5

15 kg/mmol·Zr·hr, and the melting point of the polymer was 129.0°C.

Example 41

In a 500 ml glass polymerization reactor

20 thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 1.1000 mmol of methylaluminoxane was added, followed by further adding 0.15 mmol of undecen-

1-ol (having been dried over silica alumina and then vacuum distilled). Then, passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

5 Finally, a toluene slurry solution in which 0.0160 mmol of diphenylmethylene(cyclopentadienyl)-(fluorenyl)zirconium dichloride and 1.1000 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate
10 polymerization. After the polymerization was conducted at 75°C for 30 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to
15 precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 6.67 g of a polymer was obtained. The polymerization activity was 0.83 kg/mmol·Zr·hr, and $[\eta]$ of the polymer was 3.82 dl/g.

20 Example 42

 In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for

10 minutes. Then, 1.1000 mmol of methylaluminoxane was added, followed by further adding 0.20 mmol of undecen-1-ol (having been dried over silica alumina and then vacuum distilled). Then, passing of nitrogen was
5 stopped, and ethylene was passed through at a rate of 100 l/hr. Finally, a toluene slurry solution in which 0.0160 mmol of (tert-butylamido)dimethyl-(tetramethylcyclopentadienyl)silanetitanium dichloride and 1.1000 mmol of methylaluminoxane had been contacted
10 at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 75°C for 1 hour at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was
15 introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 2.54 g of a polymer was obtained. The polymerization activity was 0.03 kg/mmol·Zr·hr, $[\eta]$ of the polymer was 3.55 dl/g, the
20 melting point thereof was 129°C, and the polar group introduction ratio thereof, as measured by $^1\text{H-NMR}$, was 0.25 mol %.

Example 43

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 1.1400 mmol of methylaluminoxane was added, followed by further adding 0.20 mmol of undecen-1-ol (having been dried over silica alumina and then vacuum distilled). Then, passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

Finally, a toluene slurry solution in which 0.0008 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 75°C for 5 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.23 g of a polymer was obtained. The polymerization activity was 48.45 kg/mmol·Zr·hr, and $[\eta]$ of the polymer was

9.37 dl/g.

Example 44

In a 500 ml glass polymerization reactor
5 thoroughly purged with nitrogen, 400 ml of toluene was
placed, then nitrogen was passed through at a rate of
20 l/hr, and the contents were maintained at 75°C for
10 minutes. Then, 1.1400 mmol of methylaluminoxane was
added, followed by further adding 0.30 mmol of undecen-
10 1-ol (having been dried over silica alumina and then
vacuum distilled). Then, passing of nitrogen was
stopped, and ethylene was passed through at a rate of
100 l/hr.

Finally, a toluene slurry solution in which
15 0.0016 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-
indenyl)(2,7-di-tert-butylfluorenyl)zirconium
dichloride and 0.4300 mmol of methylaluminoxane had
been contacted at room temperature for 10 minutes was
added to initiate polymerization. After the
20 polymerization was conducted at 75°C for 5 minutes at
atmospheric pressure, a small amount of isobutyl
alcohol was added to terminate the polymerization. The
polymer solution obtained was introduced into a large
excess of methanol to precipitate a polymer and then

vacuum dried at 80°C for 12 hours. As a result, 2.46 g of a polymer was obtained. The polymerization activity was 18.45 kg/mmol·Zr·hr, and $[\eta]$ of the polymer was 7.89 dl/g.

5

Example 45

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of
10 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, a toluene solution of 0.480 mmol of triethylaluminum and 0.480 mmol of undecen-1-ol (having been dried over silica alumina and then vacuum distilled) having been pretreated at room temperature
15 for 10 minutes was added, followed by further adding 1.1400 mmol of methylaluminoxane. Then, passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

Finally, a toluene slurry solution in which
20 0.0020 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the

polymerization was conducted at 75°C for 2 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large
5 excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 3.63 g of a polymer was obtained. The polymerization activity was 36.3 kg/mmol·Zr·hr, and $[\eta]$ of the polymer was 4.97 dl/g.

10

Example 46

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of
15 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 0.480 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of undecen-1-ol (having been dried over silica alumina and then vacuum distilled). After stirring for 3 minutes,
20 1.1400 mmol of methylaluminumoxane was added, then passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

Finally, a toluene slurry solution in which 0.0017 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-

indenyl) (2,7-di-tert-butylfluorenyl) zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the

5 polymerization was conducted at 75°C for 2.5 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then

10 vacuum dried at 80°C for 12 hours. As a result, 3.00 g of a polymer was obtained. The polymerization activity was 42.3 kg/mmol·Zr·hr.

Example 47

15 In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 0.750 mmol of triisobutylaluminum

20 was added, followed by further adding 0.48 mmol of undecen-1-aldehyde (having been dried over silica alumina and then vacuum distilled). After stirring for 3 minutes, 1.1400 mmol of methylaluminoxane was added, then passing of nitrogen was stopped, and ethylene was

passed through at a rate of 100 l/hr.

Finally, a toluene slurry solution in which 0.0017 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (2,7-di-tert-butylfluorenyl) zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 75°C for 2.5 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 4.50 g of a polymer was obtained. The polymerization activity was 63.5 kg/mmol·Zr·hr.

Example 48

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 0.480 mmol of triisobutylaluminum was added, followed by further adding 0.48 mmol of decene-1-amine (having been dried over silica alumina

and then vacuum distilled). After stirring for 3 minutes, 1.1400 mmol of methylaluminoxane was added, then passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.

5 Finally, a toluene slurry solution in which 0.0017 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl) (2,7-di-tert-butylfluorenyl)zirconium dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was
10 added to initiate polymerization. After the polymerization was conducted at 75°C for 2.5 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large
15 excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 0.80 g of a polymer was obtained. The polymerization activity was 11.3 kg/mmol·Zr·hr.

20 Examples 49, 50, 51, 52, 53, 54, 55, 56, 57 and 58

Polar group-containing olefin copolymers were prepared under the same conditions as in Example 40, except that the types and the amounts of the α -olefin and the polar group-containing monomer, the type and

the amount of the trialkylaluminum compound, and the polymerization temperature and the polymerization time were changed as shown in Table 22. The results are set forth in Table 22.

Table 22

Ex.	Metallo- cene *1 (μmol)	Monomer		Comonomer		MAO (mmol)	Alkylaluminum		Temp ($^{\circ}\text{C}$)	Time (min)	Yield (g)	[η] (dl/g)	Co monomer (mol%)	Polymeri- zation activity *2
		Type	Feed rate (mmol)	Type	Amount (mmol)		Type	Amount (mmol)						
49	25	ethylene	2	allyl alcohol	40	1.57	TEA	48	50	105	5.05	0.41	0.33	0.12
50	25	ethylene	2	allyl alcohol	40	1.57	TIBA	48	50	25	0.95	1.55	1.20	0.09
51	25	ethylene	2	allylamine	40	1.57	TEA	48	50	75	1.52	1.68	0.47	0.05
52	25	ethylene	2	allylamine	40	1.57	TIBA	48	50	75	1.26	1.96	0.22	0.04
53	2.5	ethylene	50	undecen-1- ol	40	1.57	TEA	48	80	5	5.25	0.54	6.56	22.5
54	25	ethylene	50	norbornene methanol	40	1.57	TEA	48	50	8	6.25	0.55	0.53	1.50
55	25	ethylene	20	norbornene methylamine	40	1.57	TEA	48	50	8	3.27	0.55	0.10	0.98
56	25	ethylene	50	Tetracyclo dodecene methanol	40	1.57	TEA	48	50	8	5.10	0.62	5.13	1.37
57	25	ethylene	20	Tetracyclo dodecene methylamine	40	1.57	TEA	48	50	8	3.91	0.58	0.11	1.05
58	25	propylene	100	undecen-1- ol	4	1.57	TEA	4.8	50	15	2.20	0.68	0.93	0.88

*1: dimethylsilylene (2-methyl-4,5-benzo-1-indenyl) (2,7-di-tert-butylfluorenyl) zirconium dichloride

*2: unit: kg/mmol-Zr·hr

5 MAO: methylaluminoxane, TEA: triethylaluminum, TIBA: triisobutylaluminum

Comparative Example 3

In a 500 ml glass polymerization reactor thoroughly purged with nitrogen, 400 ml of toluene was placed, then nitrogen was passed through at a rate of 20 l/hr, and the contents were maintained at 75°C for 10 minutes. Then, 0.480 mmol of ethylaluminum sesquichloride was added, followed by further adding 0.48 mmol of decene-1-amine (having been dried over silica alumina and then vacuum distilled). After stirring for 3 minutes, 1.1400 mmol of ethylaluminum sesquichloride was added, then passing of nitrogen was stopped, and ethylene was passed through at a rate of 100 l/hr.


Finally, a toluene slurry solution in which 20.0017 mmol of $\text{VO}(\text{OC}_2\text{H}_5)\text{Cl}$ and 0.4300 mmol of ethylaluminum sesquichloride had been contacted at room temperature for 10 minutes was added to initiate polymerization. After the polymerization was conducted at 75°C for 2.5 minutes at atmospheric pressure, a small amount of isobutyl alcohol was added to terminate the polymerization. The polymer solution obtained was introduced into a large excess of methanol to attempt precipitation of a polymer, however, any polymer was not obtained.

Example 59

In a 2-liter stainless steel (SUS) autoclave thoroughly purged with nitrogen, 120 g of 1-butene, 880 ml of Mitsui hexane and 1.50 mmol of

5 triisobutylaluminum were placed. The SUS autoclave was heated up to 150°C, and 1.140 mmol of methylaluminoxane was added, followed by further adding 1.350 mmol of undecen-1-ol (having been dried over activated alumina and then vacuum distilled) represented by the following

10 formula. With keeping the temperature at 150°C, the autoclave was pressurized with ethylene so that the total pressure became 2.9 MPa-G (30 kg/cm²-G).



15

Separately, into a 20 ml glass flask thoroughly purged with nitrogen, a toluene slurry solution in which 0.00075 mmol of dimethylsilylene(2-methyl-4,5-benzo-1-indenyl)(2,7-di-tert-butylfluorenyl)zirconium

20 dichloride and 0.4300 mmol of methylaluminoxane had been contacted at room temperature for 10 minutes was injected with nitrogen, and 600 Nml of hydrogen was further injected. For the period of 10 minutes after the injection, the temperature in the autoclave was

maintained at 150°C and the pressure therein was maintained at that immediately after the injection by pressurizing with ethylene. Then, a small amount of isobutyl alcohol was added to terminate the

5 polymerization. The polymer solution obtained was introduced into a large excess of methanol to precipitate a polymer and then vacuum dried at 80°C for 12 hours. As a result, 10.40 g of a polymer was obtained. The polymerization activity was 83


10 kg/mmol·Zr·hr.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 23.

Example 60

15 Ethylene, 1-butene and a polar group-containing monomer were polymerized in the same manner as in Example 59, except that undecylenic acid represented by the following formula was used instead of undecen-1-ol.

20




undecylenic acid

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 23.

Example 61

Ethylene, 1-butene and a polar group-containing monomer were polymerized in the same manner as in Example 59, except that 1,2-epoxy-9-decene represented
 5 by the following formula was used instead of undecen-1-ol and 550 Nml of hydrogen was used.




1,2-epoxy-9-decene

10 Properties of the resulting polar group-containing olefin copolymer are set forth in Table 23.

Example 62

Ethylene, 1-butene and a polar group-containing
 15 monomer were polymerized in the same manner as in Example 59, except that (2,7-octadien-1-yl)succinic anhydride represented by the following formula was used instead of undecen-1-ol and 550 Nml of hydrogen was used.

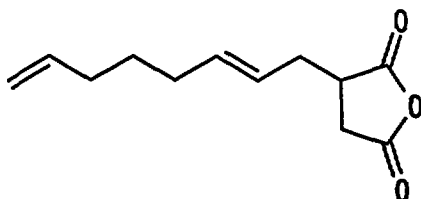

5 (2,7-octadien-1-yl)succinic anhydride

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 23.

10 Example 63

Ethylene, propylene and a polar group-containing monomer were polymerized in the same manner as in Example 62, except that propylene was injected at an initial partial pressure of 3 kg/cm² instead of 1-butene, hydrogen was not added, and the polymerization was conducted at a polymerization temperature of 80°C.

Properties of the resulting polar group-containing olefin copolymer are set forth in Table 23.


Table 23

	Constituent unit (1)	Constituent unit (1)	Constituent unit (3)		Composition (molar ratio) (1)*1/(1)/(3)	Mw	MFR (g/10 min)	Mw/Mn	T _{αβ}
			R ³	X _p					T _{αα} +T _{αβ}
Ex. 59	ethylene	1-butene	C ₉ H ₁₈	-OH	88/11.5/0.5	110,000	4.2	2.8	0
Ex. 60	ethylene	1-butene	C ₉ H ₁₆	-COOH	88/11.75/0.25	100,000	5.9	2.2	0
Ex. 61	ethylene	1-butene	C ₆ H ₁₂	epoxy group	88/11.75/0.25	130,000	2.3	2.3	0.05
Ex. 62	ethylene	1-butene	C ₆ H ₁₀	acid anhydride group	88/11.75/0.25	122,000	2.9	2.2	0.03
Ex. 63	ethylene	propylene	C ₆ H ₁₀	acid anhydride group	80/19.75/0.25	131,000	2.3	2.5	0.02

*1 : ethylene

What is claimed is:

1. A polar group-containing olefin copolymer comprising a constituent unit represented by the following formula (1), a constituent unit represented by the following formula (2) and a constituent unit represented by the following formula (3), having a molecular weight distribution (Mw/Mn) of not more than 3, and having an intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum of said copolymer, of not more than 1.0:

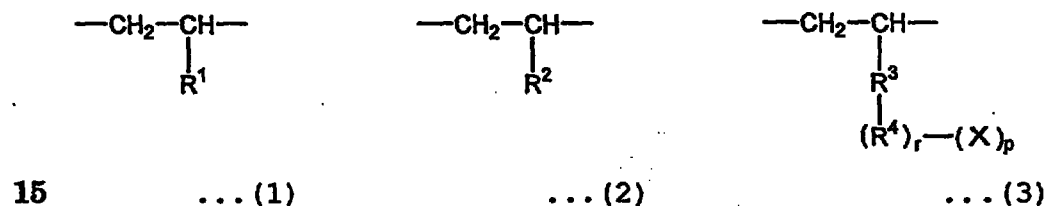

wherein R^1 and R^2 may be the same or different and are each a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group of 1 to 18 carbon atoms; R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; r is 0 or 1; X is a polar group selected from an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic acid group, a carboxylic acid ester group, an acid anhydride group,



an amino group, an amide group, an epoxy group and a mercapto group; p is an integer of 1 to 3; and when p is 2 or 3, each X may be the same or different, and in this case, if r is 0, X may be bonded to the same or
5 different atom of R^3 , and if r is 1, X may be bonded to the same or different atom of R^4 .

2. The polar group-containing olefin copolymer as claimed in claim 1, wherein R^3 in the constituent
10 unit represented by the formula (3) is a hydrocarbon group of 11 or more carbon atoms.

3. The polar group-containing olefin copolymer as claimed in claim 1, wherein X in the constituent
15 unit represented by the formula (3) is a polar group selected from a phenolic hydroxyl group, a carboxylic acid ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group.

20

4. The polar group-containing olefin copolymer as claimed in claim 1, wherein R^1 in the constituent unit represented by the formula (1) and R^2 in the constituent unit represented by the formula (2) are




each a hydrocarbon group of 2 or more carbon atoms and the crystallinity of said copolymer, as determined by X-ray diffractometry, is not less than 10 %.

5 5. The polar group-containing olefin copolymer as claimed in claim 1, wherein R^1 in the constituent unit represented by the formula (1) and R^2 in the constituent unit represented by the formula (2) are each a hydrocarbon group of 2 or more carbon atoms and
10 the crystallinity of said copolymer, as determined by X-ray diffractometry, is less than 10 %.

6. A branched type polar group-containing olefin copolymer comprising a constituent unit
15 represented by the following formula (1) and a constituent unit represented by the following formula (4), and optionally a constituent unit represented by the following formula (5), having a molecular weight distribution (M_w/M_n) of not more than 3, and having an
20 intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum of said copolymer, of not more than 1.0:



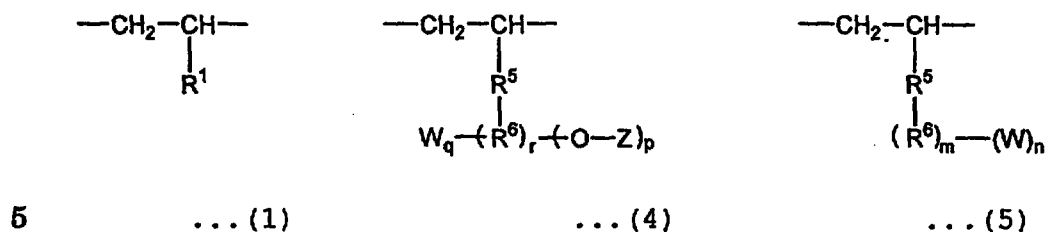

wherein R^1 is a hydrogen atom or a straight-chain or
 branched aliphatic hydrocarbon group of 1 to 18 carbon
 atoms; R^5 is a hydrocarbon group; R^6 is a hetero atom
 10 or a group containing a hetero atom; r is 0 or 1; Z is
 a polymer segment obtained by any one of anionic
 polymerization, ring-opening polymerization and
 polycondensation; W is a hydroxyl group or an epoxy
 group; p is an integer of 1 to 3, q is 0, 1 or 2, and
 15 $p+q \leq 3$; when p is 2 or 3, each ---O---Z may be the same or
 different, and in this case, if r is 0, ---O---Z may be
 bonded to the same or different atom of R^5 , and if r is
 1, ---O---Z may be bonded to the same or different atom of
 20 R^6 ; when q is 2, each W may be the same or different,
 and in this case, if r is 0, W may be bonded to the
 same or different atom of R^5 , and if r is 1, W may be
 bonded to the same or different atom of R^6 ; in case of
 $p \geq 1$ and $q \geq 1$, if r is 0, W and ---O---Z may be bonded to the
 same or different atom of R^5 , and if r is 1, W and ---O---Z



may be bonded to the same or different atom of R^6 ; m is 0 or 1; n is an integer of 1 to 3; and when n is 2 or 3, each W may be the same or different, and in this case, if m is 0, W may be bonded to the same or different
5 atom of R^6 , and if m is 1, W may be bonded to the same or different atom of R^7 .


7. The branched type polar group-containing olefin copolymer as claimed in claim 6, wherein, in the
10 formula (4), r is 0 and Z is a polymer segment obtained by anionic polymerization.

8. The branched type polar group-containing olefin copolymer as claimed in claim 6, wherein, in the
15 formula (4), Z is a polymer segment obtained by ring-opening polymerization or polycondensation.

9. A polar group-containing olefin copolymer comprising a constituent unit represented by the
20 following formula (1) and a constituent unit represented by the following formula (6) and, optionally a constituent unit represented by the following formula (3), having a molecular weight distribution (M_w/M_n) of not more than



3, and having an intensity ratio of $T_{\alpha\beta}$ to $T_{\alpha\alpha}+T_{\alpha\beta}$ ($T_{\alpha\beta}/(T_{\alpha\alpha}+T_{\alpha\beta})$), as determined from a ^{13}C -NMR spectrum of said copolymer, of not more than 1.0:

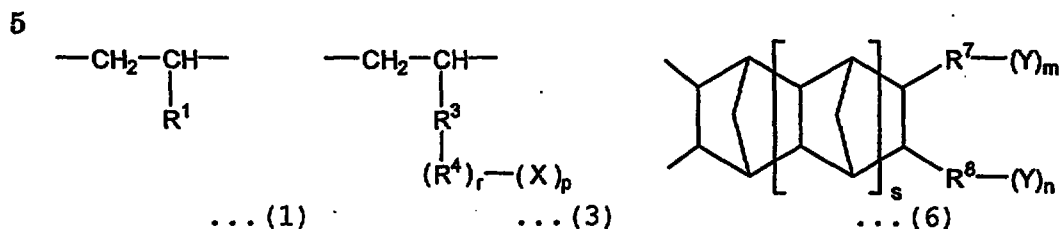

- 10 wherein R^1 is a hydrogen atom or a straight-chain or branched aliphatic hydrocarbon group of 1 to 18 carbon atoms; R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more
- 15 carbon atoms; R^8 is a hydrogen atom, a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; Y is a polar group containing O and/or N; m and n are each an integer of 0 to 2, and $m+n$ is not 0; s is 0 or 1; r is 0 or 1; X is a polar group selected from
- 20 an alcoholic hydroxyl group, a phenolic hydroxyl group, a carboxylic acid group, a carboxylic acid ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group; p is an integer of 1 to 3; when p is 2 or 3, each X may be the same or



different, and in this case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X may be bonded to the same or different atom of R^4 .

- 5 10. A process for preparing a polar group containing olefin copolymer, comprising copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon atoms and at least one polar group-containing monomer selected from a polar group-containing monomer represented by the following formula (7) and a polar group-containing monomer represented by the following formula (8) in the presence of a catalyst comprising:


- 15 (A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and

- (B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,


(B-2) a compound which reacts with the compound (A) to form an ion pair, and

- 20 (B-3) an organoaluminum compound;

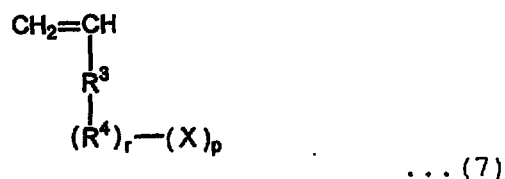

wherein R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; r is 0 or 1; X is a polar group selected from an alcoholic hydroxyl group,
 5 a phenolic hydroxyl group, a carboxylic acid group, a carboxylic acid ester group, an acid anhydride group, an amino group, an amide group, an epoxy group and a mercapto group; p is an integer of 1 to 3; when p is 2 or 3, each X may be the same or different, and in this
 10 case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X may be bonded to the same or different atom of R^4 ;

15

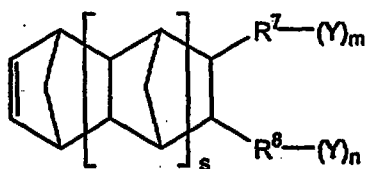


... (8)

wherein R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; R^8 is a hydrogen atom,
 20 a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; Y is a polar group containing O and/or N; m and n are each an integer of 0 to 2, and $m+n$ is not 0; and s is 0 or 1.



11. The process for preparing a polar group-containing olefin copolymer as claimed in claim 10, wherein the transition metal compound (A) is represented by any one of the following formulas (11),
 5 (12), (13), (14), (15) and (16) and the polar group-containing monomer is a polar group-containing monomer of the formula (7) wherein X is -OH;

10

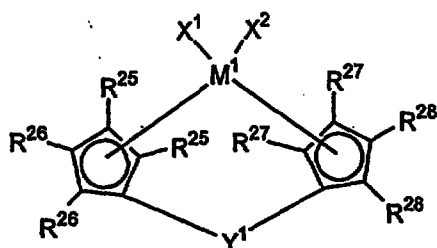

... (11)

wherein M^1 is a transition metal atom of Group 4 of the periodic table; R^{25} , R^{26} , R^{27} and R^{28} may be the same
 15 or different and are each a hydrogen atom, a nitrogen-containing group, a phosphorus-containing group, a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group,
 20 a silicon-containing group or a halogen atom; of the groups indicated by R^{25} , R^{26} , R^{27} and R^{28} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or




different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a

5 hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing

10 group, $-O-$, $-CO-$, $-S-$, $-SO-$, $-SO_2-$, $-Ge-$, $-Sn-$, $-NR^{21}-$, $-P(R^{21})-$, $-P(O)(R^{21})-$, $-BR^{21}-$ or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen

15 atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

20



... (12)

wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; Cp is a cyclopentadienyl




group or its derivative that is π -bonded to M^1 ; Z^1 is a ligand containing an oxygen atom, a sulfur atom, a boron atom or an element of Group 14 of the periodic table; Y^1 is a ligand containing an atom selected from

5 a nitrogen atom, a phosphorus atom, an oxygen atom and a sulfur atom; and each X^1 may be the same or different and is a hydrogen atom, a halogen atom, a hydrocarbon group which has 20 or less carbon atoms and may contain

10 1 or more double bonds, a silyl group containing 20 or less silicon atoms, a germyl group containing 20 or less germanium atoms or a boronyl group containing 20 or less boron atoms;

15

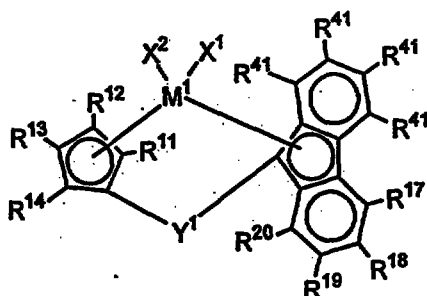

... (13)

wherein M^1 is a transition metal atom selected from

20 Group 4 of the periodic table; R^{11} to R^{14} , R^{17} to R^{20} , and R^{41} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group,



a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R¹¹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴¹, a part of the groups neighboring with each other may be bonded to form a

5 ring together with carbon atoms to which those groups are bonded (except a case where all of R¹¹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴¹ are hydrogen atoms and a case where R¹² or R¹³ is a tert-butyl group and the residual R¹¹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R⁴¹

10 are hydrogen atoms); X¹ and X² may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a


15 hydrogen atom or a halogen atom; and Y¹ is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing

20 group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen



atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

5

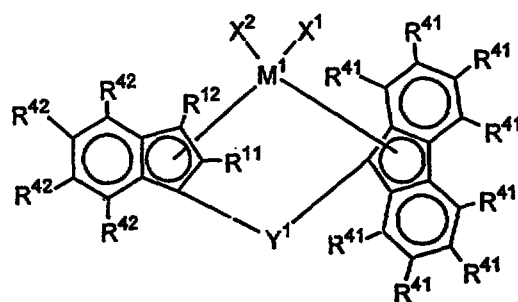

10


... (14)

wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{11} , R^{12} , R^{41} and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-



containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R^{11} , R^{12} , R^{41} and R^{42} are hydrogen atoms, Y^1 is not ethylene), a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

20

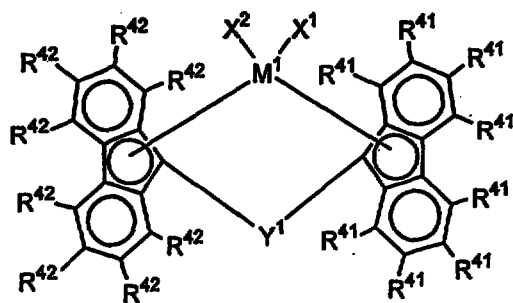

... (15)


wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{41} and R^{42} may be the



same or different and are each a hydrocarbon group of 1
 to 40 carbon atoms, a halogenated hydrocarbon group of
 1 to 40 carbon atoms, an oxygen-containing group, a
 sulfur-containing group, a silicon-containing group, a
 5 halogen atom or a hydrogen atom; of the groups
 indicated by R^{41} and R^{42} , a part of the groups
 neighboring with each other may be bonded to form a
 ring together with carbon atoms to which those groups
 are bonded; X^1 and X^2 may be the same or different and
 10 are each a hydrocarbon group of 1 to 20 carbon atoms, a
 halogenated hydrocarbon group of 1 to 20 carbon atoms,
 an oxygen-containing group, a sulfur-containing group,
 a silicon-containing group, a hydrogen atom or a
 halogen atom; and Y^1 is a divalent hydrocarbon group of
 15 1 to 20 carbon atoms, a divalent halogenated
 hydrocarbon group of 1 to 20 carbon atoms, a divalent
 silicon-containing group, a divalent germanium-
 containing group, a divalent tin-containing group, -O-,
 -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -
 20 P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same
 or different and is a hydrocarbon group of 1 to 20
 carbon atoms, a halogenated hydrocarbon group of 1 to
 20 carbon atoms, a hydrogen atom, a halogen atom or a
 nitrogen compound residue in which one or two



hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

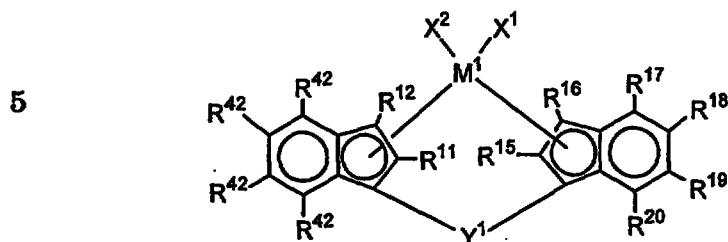

... (16)

wherein M^1 is a transition metal atom selected from
 10 Group 4 of the periodic table; R^{11} , R^{12} , R^{15} to R^{20} ,
 and R^{42} may be the same or different and are each a
 hydrocarbon group of 1 to 40 carbon atoms, a
 halogenated hydrocarbon group of 1 to 40 carbon atoms,
 an oxygen-containing group, a sulfur-containing group,
 15 a silicon-containing group, a halogen atom or a
 hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{15} ,
 R^{16} , R^{17} , R^{18} , R^{19} , R^{20} and R^{42} , a part of the groups
 neighboring with each other may be bonded to form a
 ring together with carbon atoms to which those groups
 20 are bonded; X^1 and X^2 may be the same or different and
 are each a hydrocarbon group of 1 to 20 carbon atoms, a
 halogenated hydrocarbon group of 1 to 20 carbon atoms,
 an oxygen-containing group, a sulfur-containing group,
 a silicon-containing group, a hydrogen atom or a




halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R^{11} , R^{12} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} and R^{42} are hydrogen atoms, Y^1 is not ethylene), a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom).

15

12. The process for preparing a polar group-containing olefin copolymer as claimed in claim 10, wherein the transition metal compound (A) is represented by any one of the following formulas (11), (12), (13), (14), (15) and (16) and the polar group-containing monomer is a polar group-containing monomer of the formula (7) wherein X is -NR'R" (R' and R" may be the same or different and are each a hydrogen atom or an alkyl group);

20



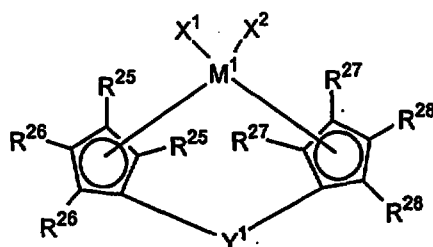


5

... (11)

wherein M^1 is a transition metal atom of Group 4 of the periodic table; R^{25} , R^{26} , R^{27} and R^{28} may be the same or different and are each a hydrogen atom, a nitrogen-containing group, a phosphorus-containing group, a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group or a halogen atom; of the groups indicated by R^{25} , R^{26} , R^{27} and R^{28} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms,



- a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may
- 5 be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded
- 10 to the nitrogen atom);




... (12)

- 15 wherein M¹ is a transition metal atom selected from Group 4 of the periodic table; Cp is a cyclopentadienyl group or its derivative that is π -bonded to M¹; Z¹ is a ligand containing an oxygen atom, a sulfur atom, a boron atom or an element of Group 14 of the periodic
- 20 table; Y¹ is a ligand containing an atom selected from a nitrogen atom, a phosphorus atom, an oxygen atom and a sulfur atom; and each X¹ may be the same or different and is a hydrogen atom, a halogen atom, a hydrocarbon group which has 20 or less carbon atoms and may contain



1 or more double bonds, a silyl group containing 20 or less silicon atoms, a germyl group containing 20 or less germanium atoms or a boronyl group containing 20 or less boron atoms;

5

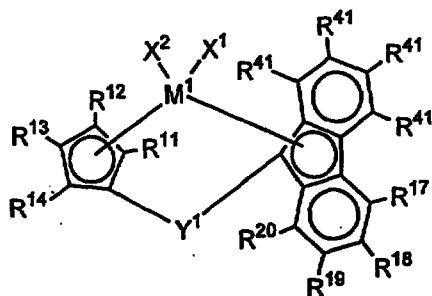

10

... (13)


wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{11} to R^{14} , R^{17} to R^{20} , and R^{41} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a

- 15 halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} , a part of the groups
- 20 neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded (except a case where all of R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} are hydrogen atoms and a case where R^{12} or R^{13} is a tert-butyl group and the



residual R^{11} , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} , R^{20} and R^{41} are hydrogen atoms); X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, $-O-$, $-CO-$, $-S-$, $-SO-$, $-SO_2-$, $-Ge-$, $-Sn-$, $-NR^{21}-$, $-P(R^{21})-$, $-P(O)(R^{21})-$, $-BR^{21}-$ or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

20

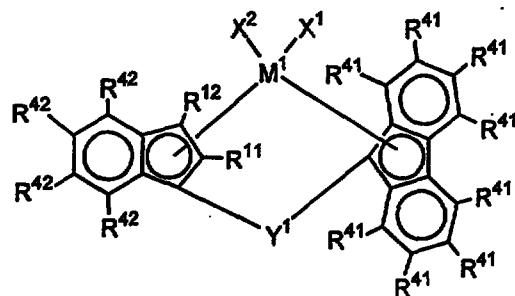

... (14)



wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{11} , R^{12} , R^{41} and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated

5 hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded

10 to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-


15 containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R^{11} , R^{12} , R^{41} and R^{42} are hydrogen atoms, Y^1 is not ethylene), a divalent halogenated hydrocarbon group of

20 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹-



or $-AlR^{21}-$ (each R^{21} may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

10

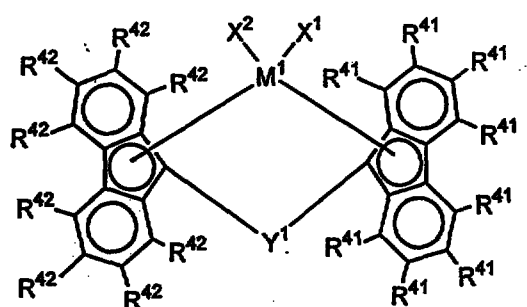


... (15)

wherein M^1 is a transition metal atom selected from Group 4 of the periodic table; R^{41} and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{41} and R^{42} , a part of the groups neighboring with each other may be bonded to form a ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and



are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms, a divalent halogenated hydrocarbon group of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom);

20

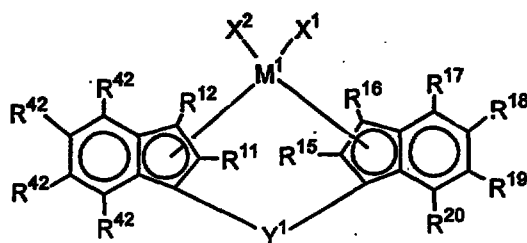

...(16)

wherein M^1 is a transition metal atom selected from



* C L M S *

Group 4 of the periodic table; R^{11} , R^{12} , R^{15} to R^{20} , and R^{42} may be the same or different and are each a hydrocarbon group of 1 to 40 carbon atoms, a halogenated hydrocarbon group of 1 to 40 carbon atoms, a

5 an oxygen-containing group, a sulfur-containing group, a silicon-containing group, a halogen atom or a hydrogen atom; of the groups indicated by R^{11} , R^{12} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} and R^{42} , a part of the groups neighboring with each other may be bonded to form a

10 ring together with carbon atoms to which those groups are bonded; X^1 and X^2 may be the same or different and are each a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, an oxygen-containing group, a sulfur-containing group,

15 a silicon-containing group, a hydrogen atom or a halogen atom; and Y^1 is a divalent hydrocarbon group of 1 to 20 carbon atoms (when all of R^{11} , R^{12} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} , R^{20} and R^{42} are hydrogen atoms, Y^1 is not ethylene), a divalent halogenated hydrocarbon group

20 of 1 to 20 carbon atoms, a divalent silicon-containing group, a divalent germanium-containing group, a divalent tin-containing group, -O-, -CO-, -S-, -SO-, -SO₂-, -Ge-, -Sn-, -NR²¹-, -P(R²¹)-, -P(O)(R²¹)-, -BR²¹- or -AlR²¹- (each R²¹ may be the same or different and



is a hydrocarbon group of 1 to 20 carbon atoms, a halogenated hydrocarbon group of 1 to 20 carbon atoms, a hydrogen atom, a halogen atom or a nitrogen compound residue in which one or two hydrocarbon groups of 1 to 20 carbon atoms are bonded to the nitrogen atom).

13. A process for preparing a polar group-containing olefin copolymer, comprising copolymerizing at least one α -olefin selected from α -olefins of 2 to 20 carbon atoms and at least one polar group-containing monomer selected from a polar group-containing monomer represented by the following formula (7), a polar group-containing monomer represented by the following formula (8) and a macromonomer represented by the following formula (9) in the presence of a catalyst comprising:

(A) a compound of a transition metal selected from Group 3 (including lanthanoid and actinoid) to Group 10 of the periodic table, and


(B) at least one compound selected from:

(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the compound (A) to form an ion pair, and


(B-3) an organoaluminum compound;





... (7)

- 5 wherein R^3 is a hydrocarbon group; R^4 is a hetero atom or a group containing a hetero atom; r is 0 or 1; X is $-\text{OR}$, $-\text{COOR}$, $-\text{CRO}$, $-\text{C}(\text{O})\text{NR}_2$, $-\text{C}(\text{O})\text{R}$ (R is a hydrogen atom or a hydrocarbon group), an epoxy group, $-\text{C}\equiv\text{N}$ or $-\text{NR}'\text{R}''$ (R' and R'' may be the same or different and are
- 10 each a hydrogen atom or an alkyl group); p is an integer of 1 to 3; and when p is 2 or 3, each X may be the same or different, and in this case, if r is 0, X may be bonded to the same or different atom of R^3 , and if r is 1, X may be bonded to the same or different
- 15 atom of R^4 ;

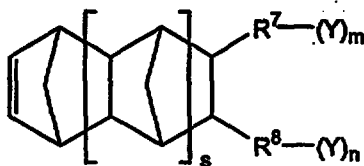


... (8)

20

wherein R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; R^8 is a hydrogen atom, a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; Y is $-\text{OR}$, $-\text{COOR}$, $-\text{CRO}$, $-\text{C}(\text{O})\text{NR}_2$, $-$



C(O)R (R is a hydrogen atom or a hydrocarbon group), an epoxy group, $-C\equiv N$ or $-NR'R''$ (R' and R'' may be the same or different and are each a hydrogen atom or an alkyl group); m and n are each an integer of 0 to 2, and m+n is not 0; and s is 0 or 1;



... (9)

- 10 wherein R^5 is a hydrocarbon group; R^6 is a hetero atom or a group containing a hetero atom; r is 0 or 1; Z is a polymer segment obtained by any one of anionic polymerization, ring-opening polymerization and polycondensation; W is a hydroxyl group or an epoxy group; p is an integer of 1 to 3, q is 0, 1 or 2, and $p+q \leq 3$; when p is 2 or 3, each -O-Z may be the same or different, and in this case, if r is 0, -O-Z may be bonded to the same or different atom of R^5 , and if r is 1, -O-Z may be bonded to the same or different atom of R^6 ; when q is 2, each W may be the same or different, and in this case, if r is 0, W may be bonded to the same or different atom of R^5 , and if r is 1, W may be bonded to the same or different atom of R^6 ; and in case of $p \geq 1$ and $q \geq 1$, if r is 0, W and -O-Z may be each



bonded to the same or different atom of R^5 , and if r is 1, W and $-O-Z$ may be each bonded to the same or different atom of R^6 .

5 14. A process for preparing a branched type
polar group-containing olefin copolymer, comprising
copolymerizing at least one α -olefin selected from α -
olefins of 2 to 20 carbon atoms, a polar group-
containing monomer represented by the following formula
10 (10), and optionally, a polar group-containing monomer
represented by the following formula (8) in the
presence of a catalyst comprising:

(A) a compound of a transition metal selected
from Group 3 (including lanthanoid and actinoid) to
15 Group 10 of the periodic table, and

(B) at least one compound selected from:


(B-1) an organoaluminum oxy-compound,

(B-2) a compound which reacts with the
compound (A) to form an ion pair, and

20 (B-3) an organoaluminum compound,


and then conducting any one of the following
steps (i) and (ii);





- 5 wherein R^5 is a hydrocarbon group; R^6 is a hetero atom or a group containing a hetero atom; m is 0 or 1; W is a hydroxyl group or an epoxy group; n is an integer of 1 to 3; and when n is 2 or 3, each W may be the same or different, and in this case, if m is 0, W may be bonded
- 10 to the same or different atom of R^5 , and if m is 1, W may be bonded to the same or different atom of R^6 ;

15

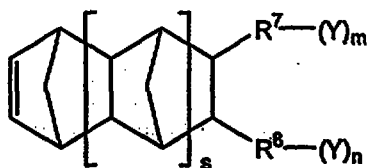

... (8)

- wherein R^7 is a direct bond or an aliphatic hydrocarbon group of 1 or more carbon atoms; R^8 is a hydrogen atom, a direct bond or an aliphatic hydrocarbon group of 1 or
- 20 more carbon atoms; Y is $-\text{OR}$, $-\text{COOR}$, $-\text{CRO}$, $-\text{C}(\text{O})\text{NR}_2$, $-\text{C}(\text{O})\text{R}$ (R is a hydrogen atom or a hydrocarbon group), an epoxy group, $-\text{C}\equiv\text{N}$ or $-\text{NR}'\text{R}''$ (R' and R'' may be the same or different and are each a hydrogen atom or an alkyl group); m and n are each an integer of 0 to 2, and $m+n$



is not 0; and s is 0 or 1;

(i) from the W portion of the copolymerized polar group-containing monomer, a Z portion is formed by anionic polymerization, ring-opening polymerization or
5 polycondensation;

(ii) the W portion of the copolymerized polar group-containing monomer is reacted with a terminal functional group of a polymer obtained by anionic polymerization, ring-opening polymerization and
10 polycondensation.

15 15. A thermoplastic resin composition containing the polar group-containing olefin copolymer of any one of claims 1 to 9.

16. An adhesive resin comprising the polar group-containing olefin copolymer of any one of claims 1 to 9.

20 17. A compatibilizing agent comprising the polar group-containing olefin copolymer of any one of claims 1 to 9.

18. A resin modifier comprising the polar



group-containing olefin copolymer of any one of claims
1 to 9.

19. A filler dispersant comprising the polar
5 group-containing olefin copolymer of any one of claims
1 to 9.

20. A dispersion comprising the polar group-
containing olefin copolymer of any one of claims 1 to 9.
10

21. A film or a sheet comprising the polar
group-containing olefin copolymer of any one of claims
1 to 9.

15 22. An adhesive resin comprising the
thermoplastic resin composition of claim 15.

23. A compatibilizing agent comprising the
thermoplastic resin composition of claim 15.
20

24. A resin modifier comprising the
thermoplastic resin composition of claim 15.

25. A filler dispersant comprising the



thermoplastic resin composition of claim 15.

26. A dispersion comprising the thermoplastic resin composition of claim 15.

5

27. A film or a sheet comprising the thermoplastic resin composition of claim 15.

