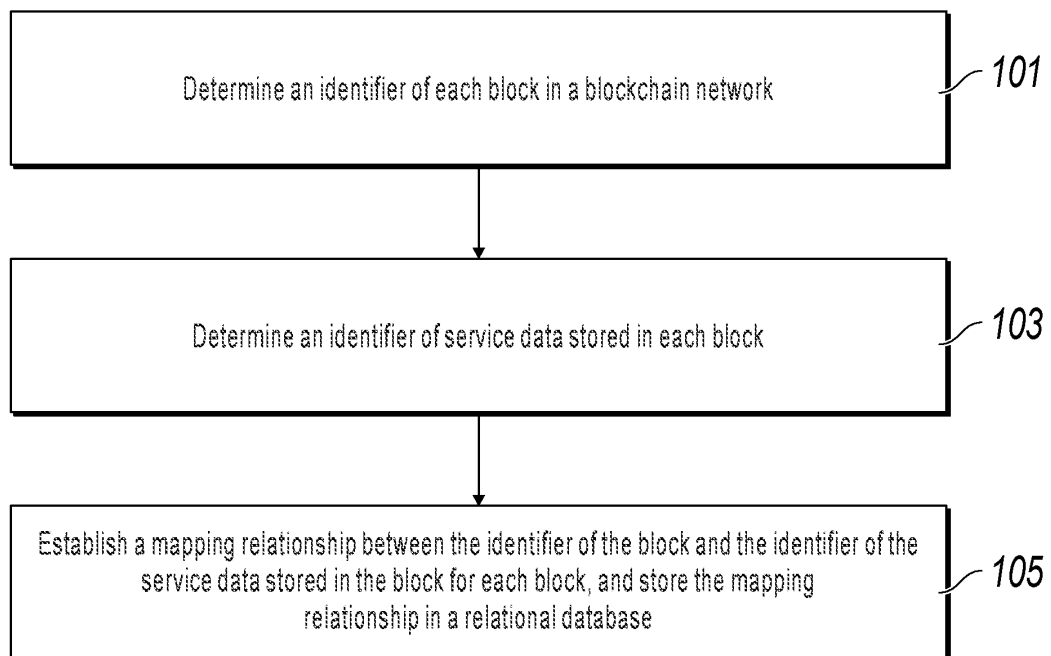


1 / 7

**FIG. 1**

|              |                                       |
|--------------|---------------------------------------|
| hash         | Block identifier                      |
| pre_hash     | Identifier of a pervious block        |
| version      | Version number                        |
| height       | Height of a block in the entire chain |
| timestamp    | Generation time of the block          |
| tx_root_hash | State value of the block              |

FIG. 2

|           |                                     |
|-----------|-------------------------------------|
| hash      | Identifier of service data          |
| version   | Data version number of service data |
| type      | Service type                        |
| pubkey    | Public key of an initiator          |
| timestamp | Initiation time                     |
| signature | Digital signature of the initiator  |
| payload   | Data content                        |
| tx_status | Storage status                      |
| block     | Identifier of a storage block       |

FIG. 3

4 / 7

|              |                                                |
|--------------|------------------------------------------------|
| block_hash   | Identifier of a block                          |
| tx_root_hash | State value of the block                       |
| tx_hash_list | Identifier of service data stored in the block |

**FIG. 4**

5 / 7

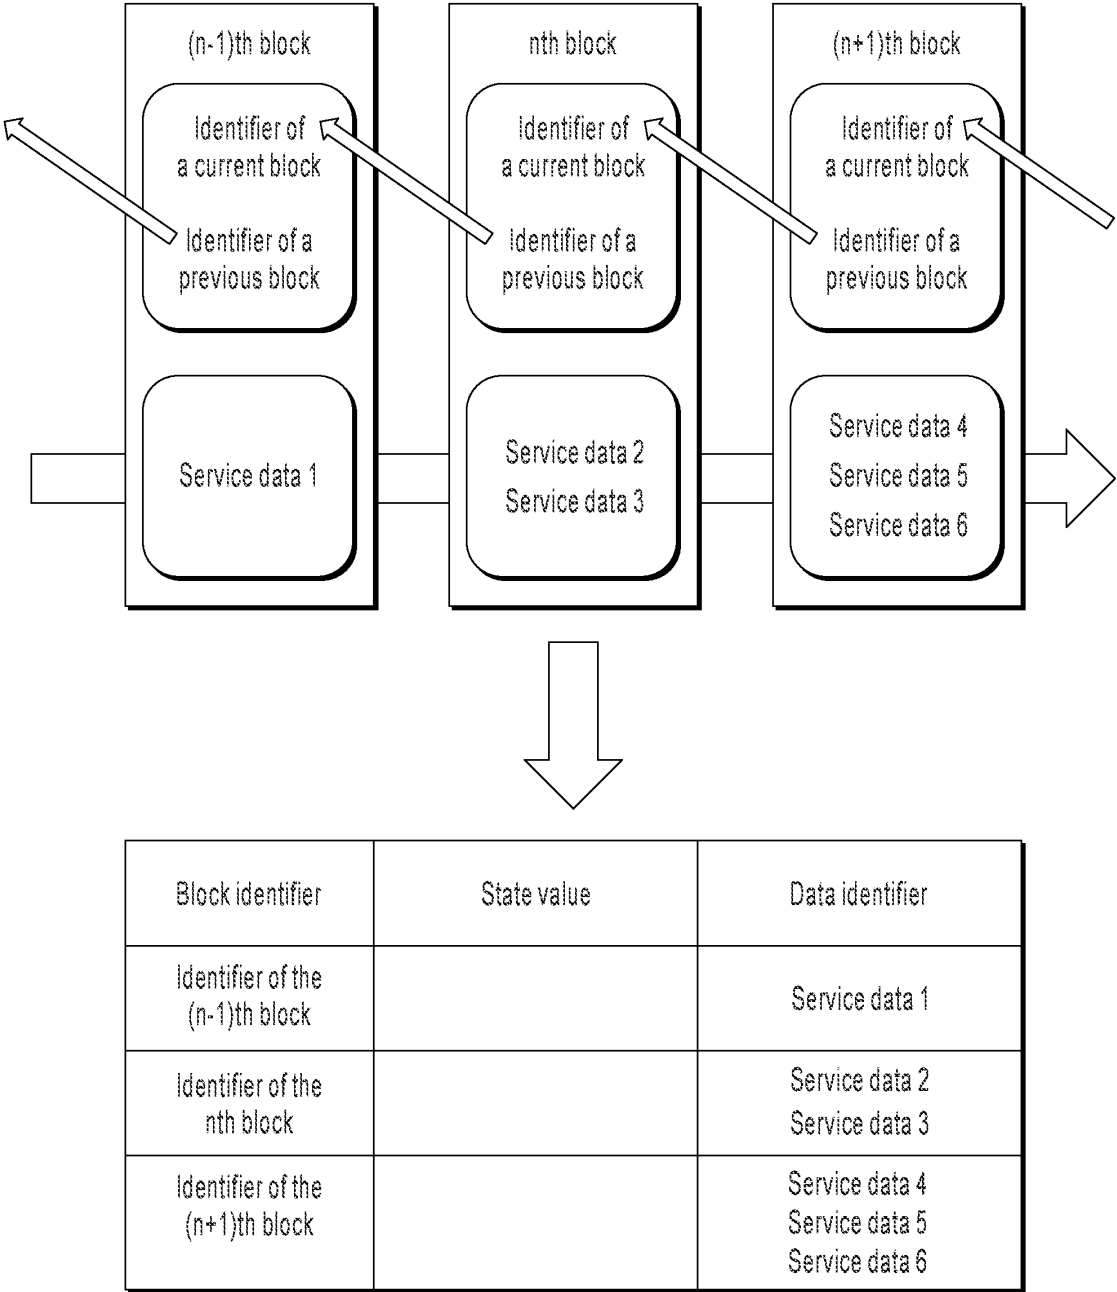


FIG. 5

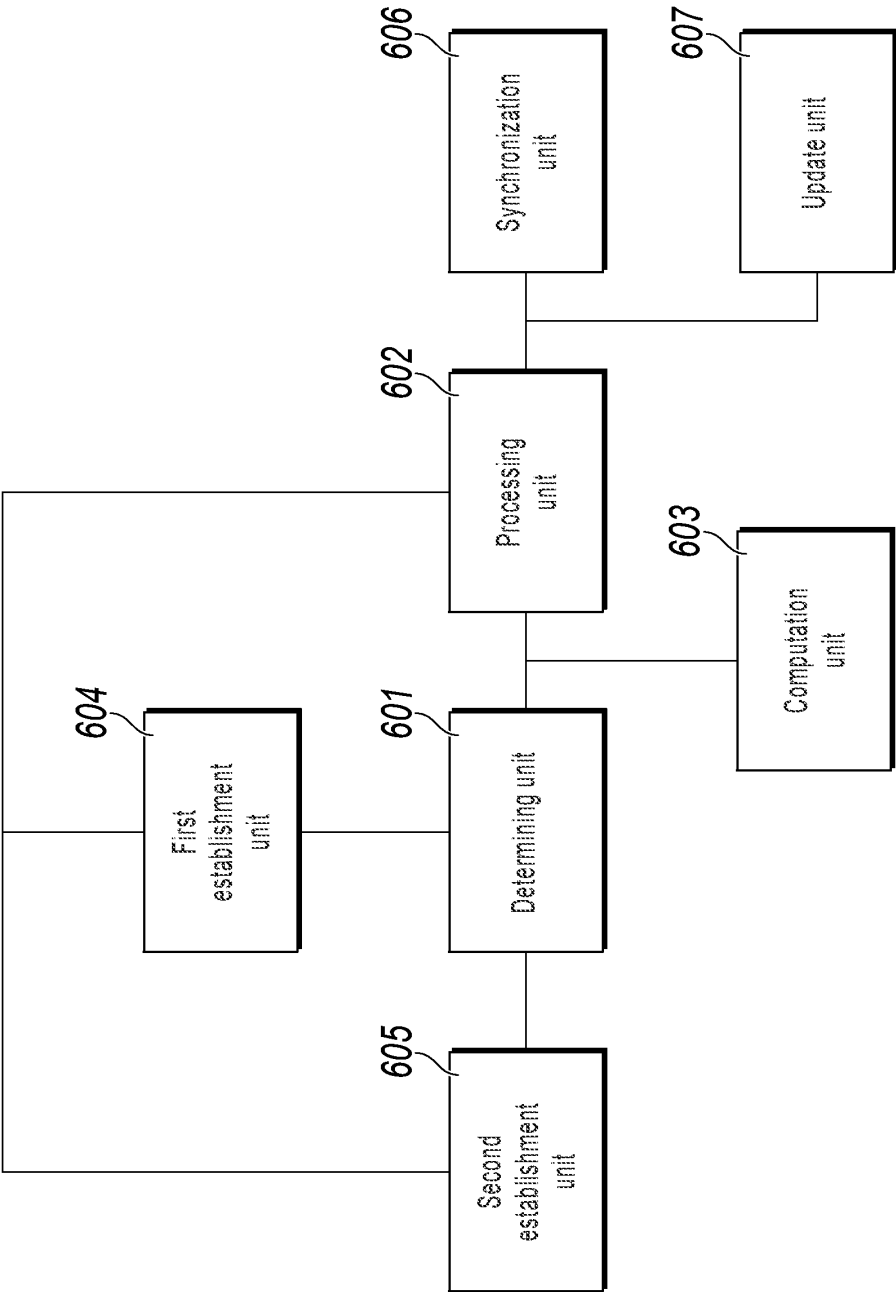


FIG. 6

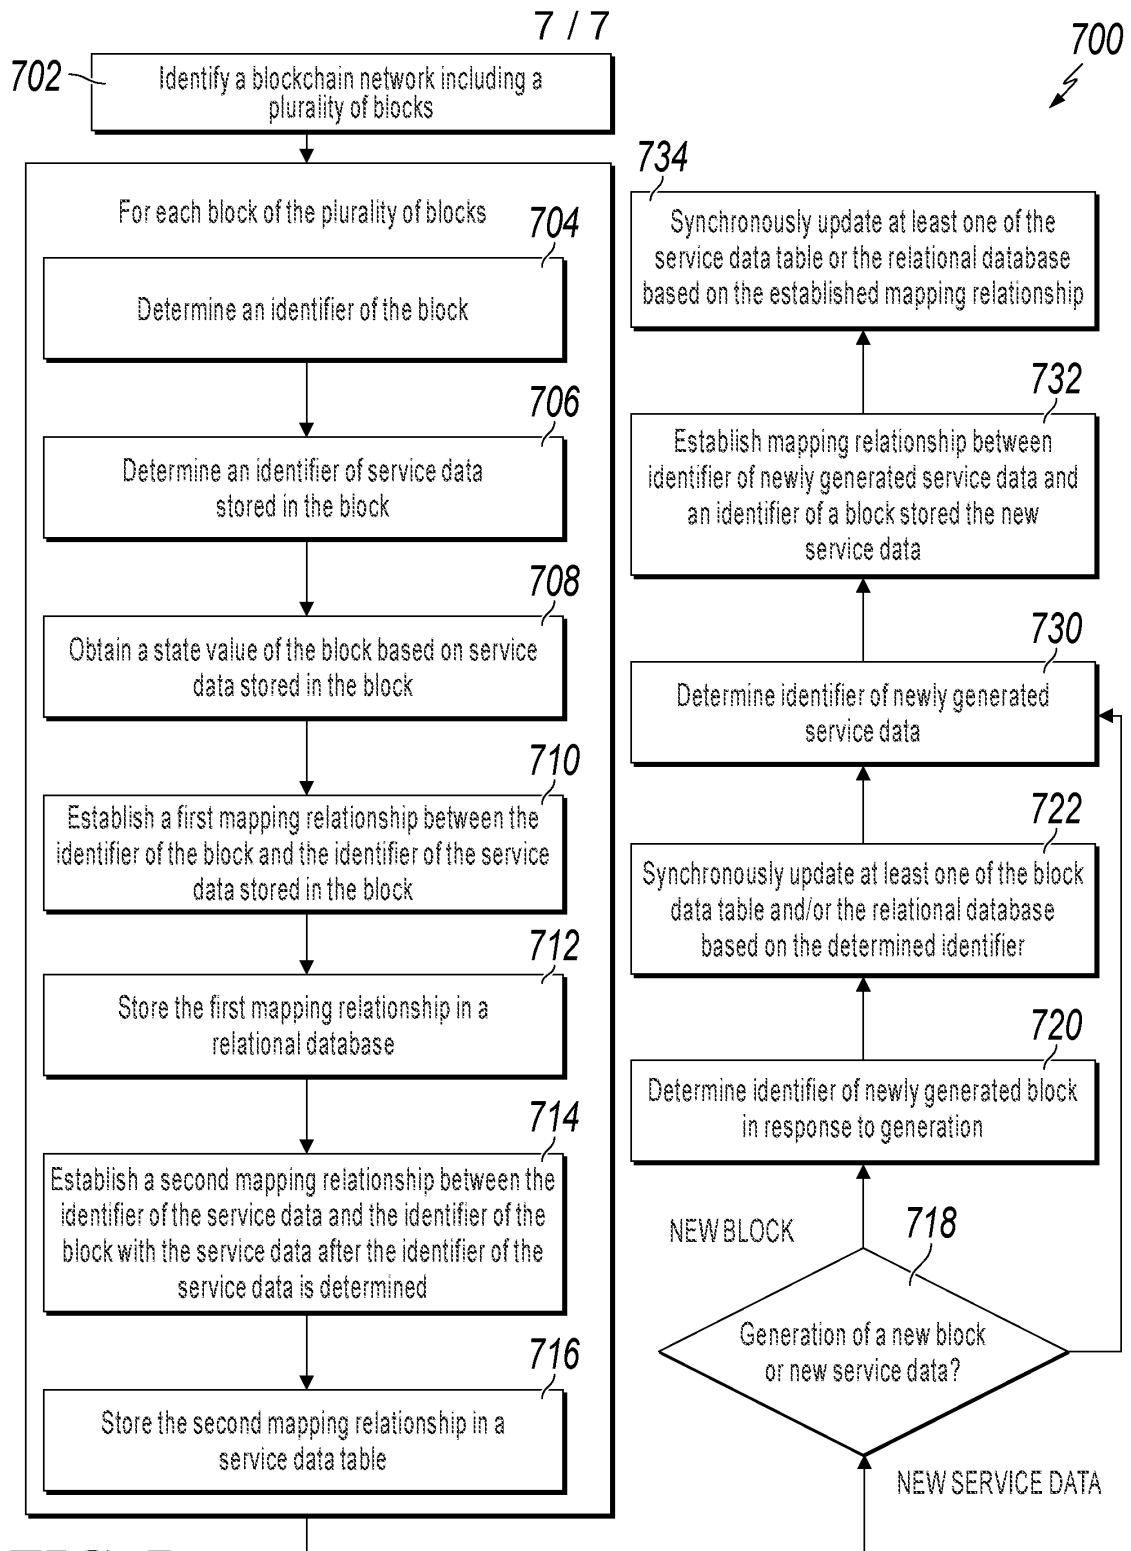


FIG. 7