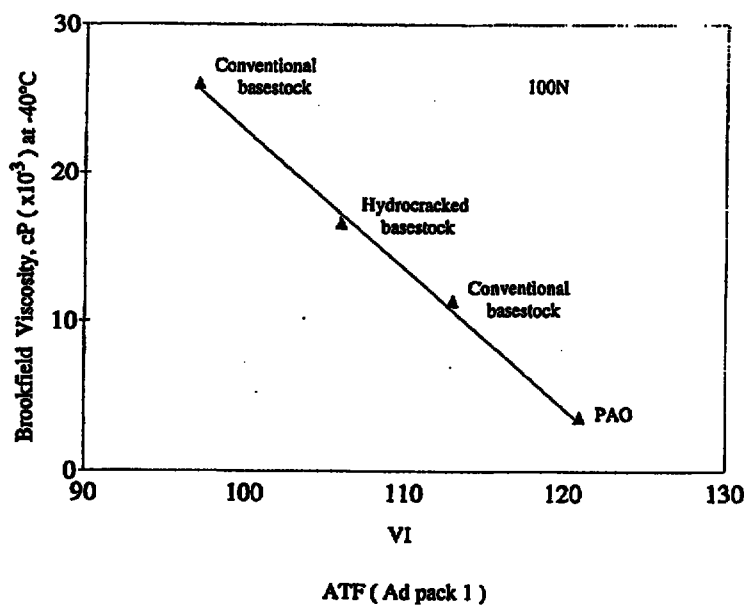


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10G 69/02, 73/36, C10M 101/02	A1	(11) International Publication Number: WO 99/41332 (43) International Publication Date: 19 August 1999 (19.08.99)
(21) International Application Number: PCT/US99/03172 (22) International Filing Date: 12 February 1999 (12.02.99) (30) Priority Data: 09/023,434 13 February 1998 (13.02.98) US (71) Applicant: EXXON RESEARCH AND ENGINEERING COMPANY [US/US]; P.O. Box 390, 180 Park Avenue, Florham Park, NJ 07932-0390 (US). (72) Inventors: CODY, Ian, Alfred; 7942C Wrenwood Boulevard, Baton Rouge, LA 70809 (US). MURPHY, William, John; 16445 Coliseum Avenue, Baton Rouge, LA 70816 (US). DUMFRIES, David, Harold; 7372D North Jefferson Place Circle, Baton Rouge, LA 70809 (US). (74) Agents: OTT, Roy, J. et al.; Exxon Research and Engineering Company, P.O. Box 390, Florham Park, NJ 07932-0390 (US).		(81) Designated States: AU, CA, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: LOW VISCOSITY LUBE BASESTOCK**(57) Abstract**

The present invention is directed to an easily biodegradable low viscosity, low Noack volatility lube oil material having a viscosity index (VI) in the range of about 110-145, >98 % saturates useful as lube oil basestock, automatic transmission fluid (ATF) basestock or blending stock. The lube oil material is produced by the isomerization of a wax feed having a viscosity of from 4 to 10 cSt at 100 °C and containing less than about 25 % oil in wax.