

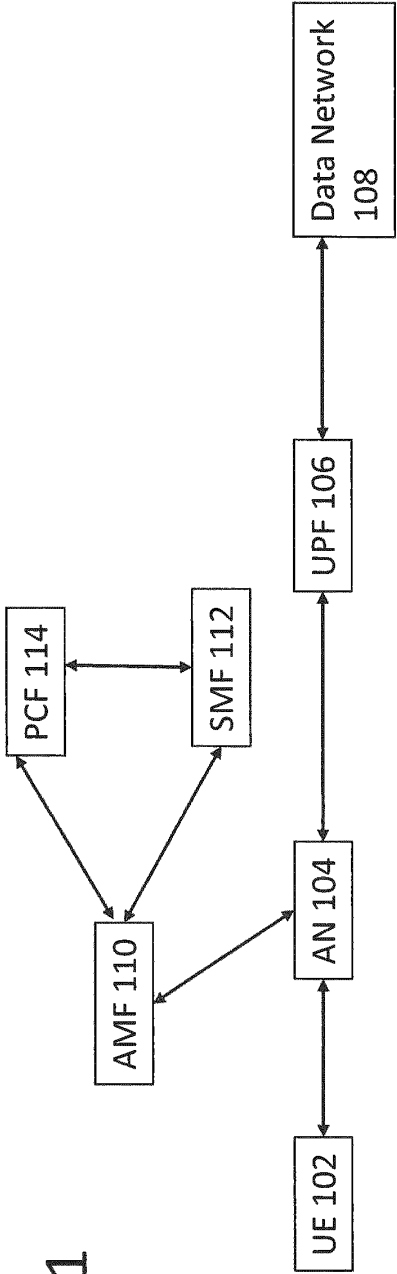


Fig. 1

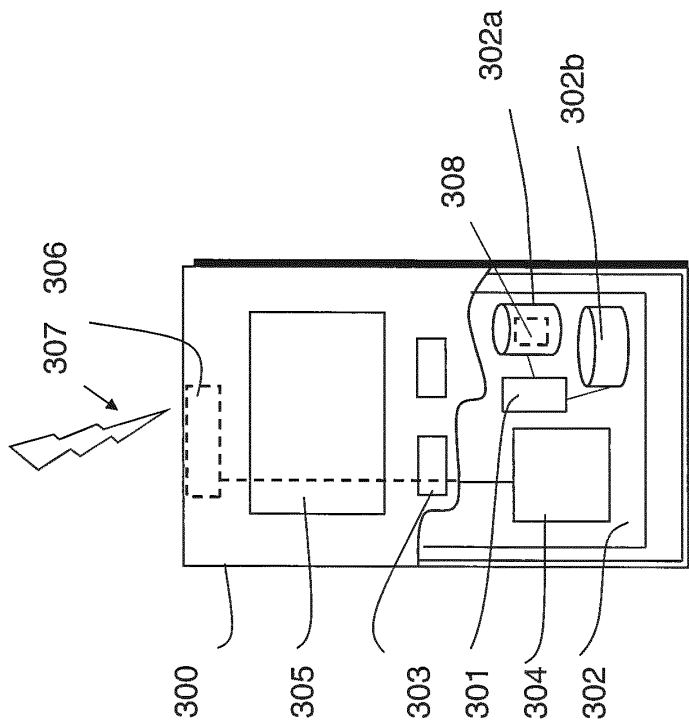


Fig. 2

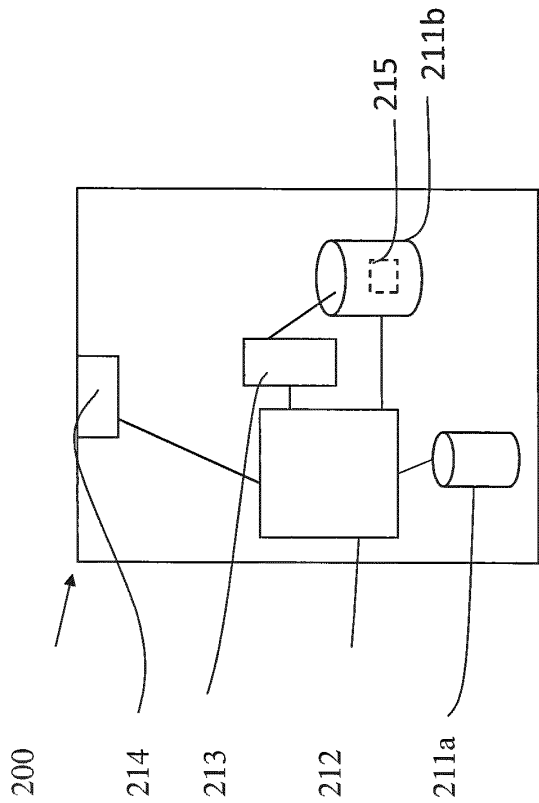


Fig. 3

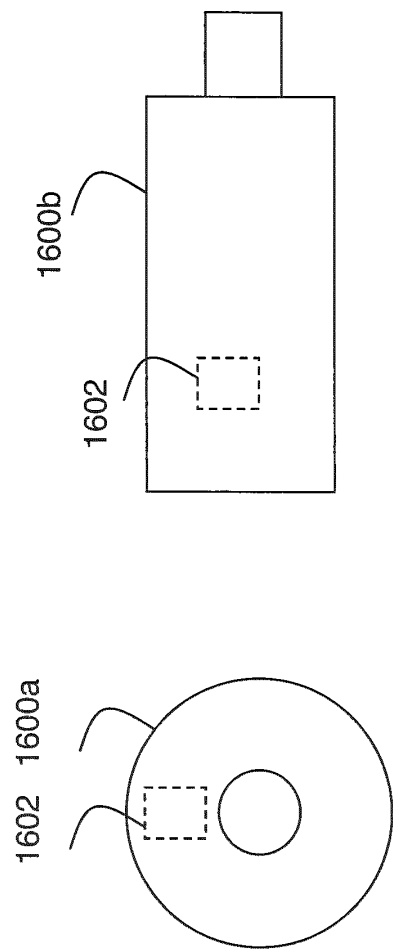


Fig. 4

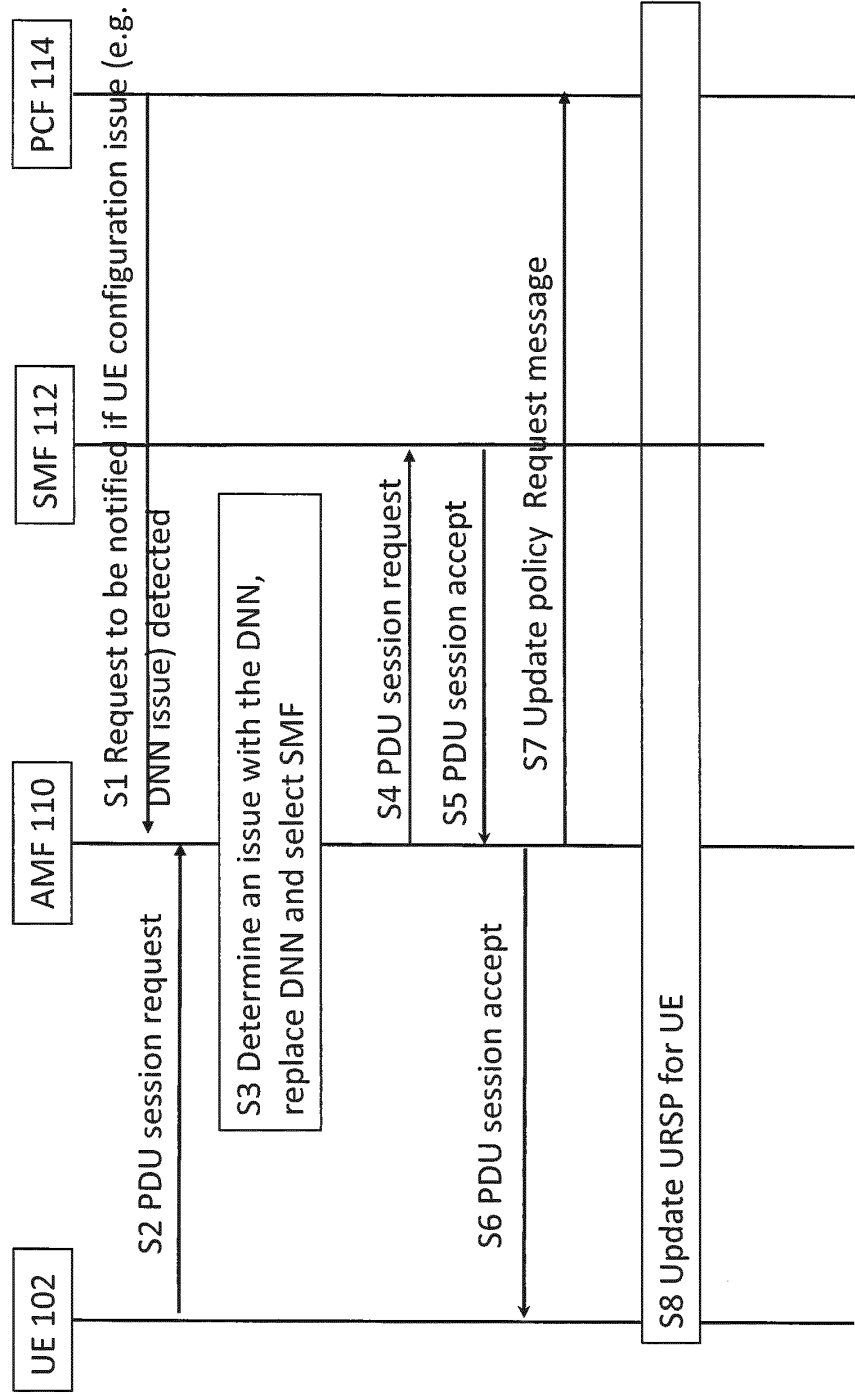


Fig. 5

Fig. 6

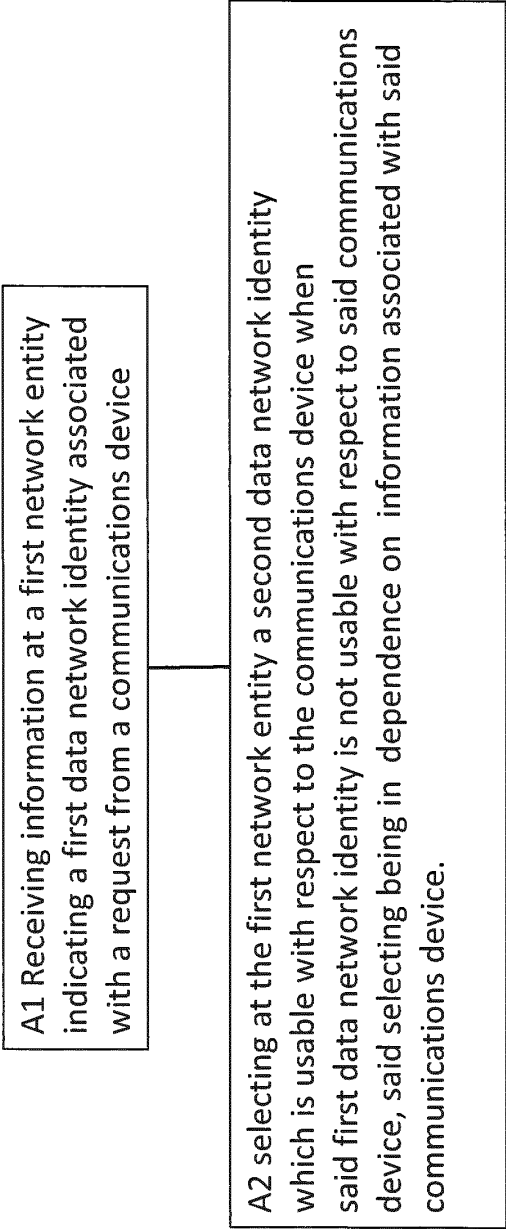


Fig. 7

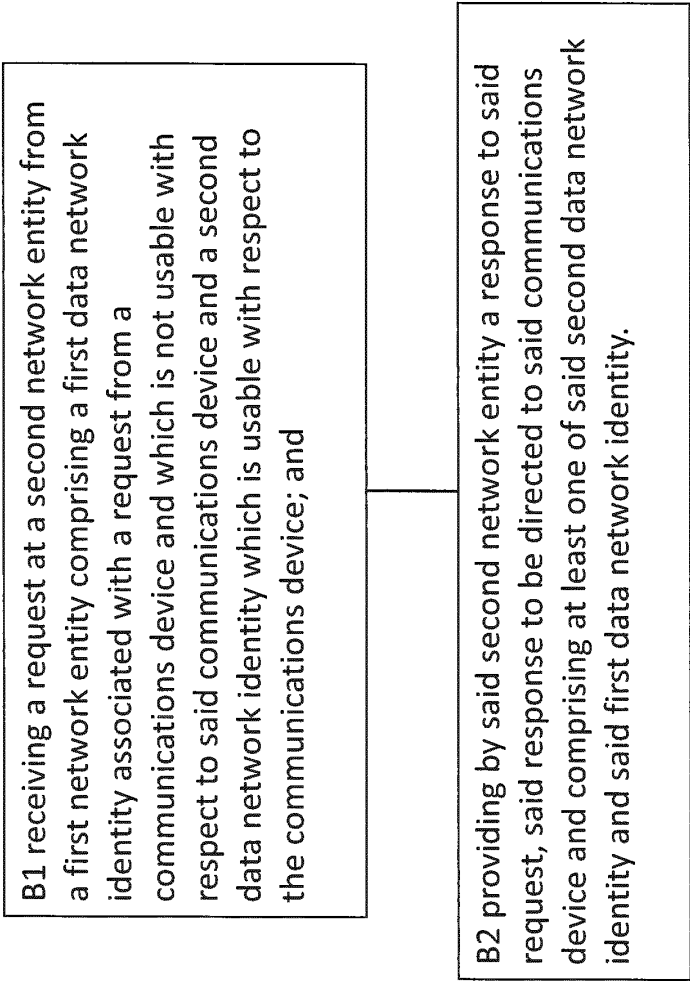


Fig. 8

C1 causing by a third network entity, a request to be sent to a first network entity that said first entity notify said third network entity when said first network entity selects a second data network identity which is usable with respect to a communications device when a first data network identity is not usable with respect to said communications device, said first data network identity being associated with a request from the communications device

C2 - receiving at the third network entity a notification from said first network entity when said first network entity selects the second data network identity, said notification comprising said second data network identity and optionally said first data network identity.

Fig. 9

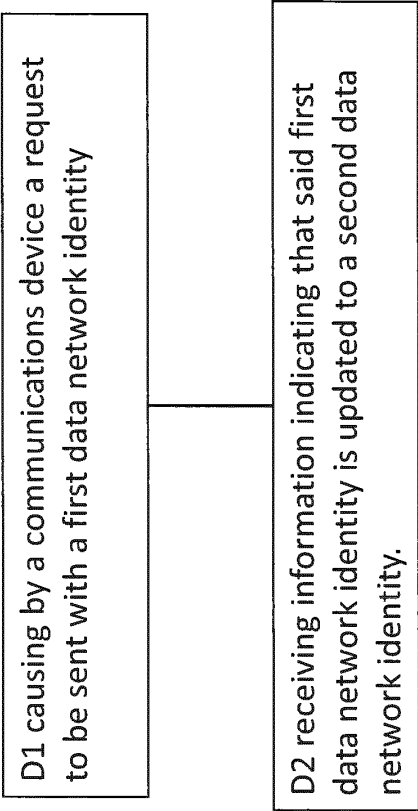


Fig. 10

