(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 May 2013 (16.05.2013)

WIPO | PCT

(10) International Publication Number
WO 2013/070235 A1

(51) International Patent Classification:
E21B 43/12 (2006.01) *E21B 34/08* (2006.01)

(21) International Application Number:
PCT/US2011/060331

(22) International Filing Date:
11 November 2011 (11.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Blvd., Houston, TX 77072 (US).

(72) Inventors; and
(71) Applicants : **FRIPP, Michael, L.** [US/US]; 3826 Cemetery Hill Road, Carrollton, TX 75007 (US). **DYKSTRA, Jason, D.** [US/US]; 3405 Hillpark Lane, Carrollton, TX 75007 (US). **DEJESUS, Jason, D.** [US/US]; 9146 Commonwealth Drive, Frisco, TX 75033 (US).

(74) Agent: **SCHROEDER, Peter, V.**; Booth Albanesi Schroeder LLC, 1601 Elm Street, Suite 1950, Dallas, TX 75201 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: AUTONOMOUS FLUID CONTROL ASSEMBLY HAVING A MOVABLE, DENSITY-DRIVEN DIVERTER FOR DIRECTING FLUID FLOW IN A FLUID CONTROL SYSTEM

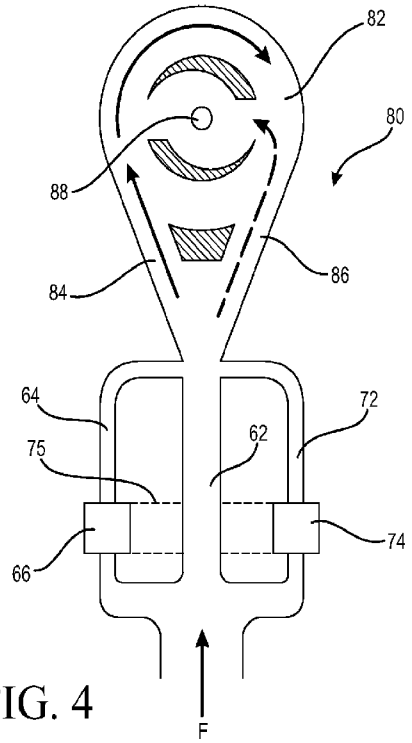


FIG. 4

(57) Abstract: An apparatus is presented for autonomously controlling fluid flow in a subterranean well, the fluid having a density which changes over time. An embodiment of the apparatus has a vortex chamber, a vortex outlet, and first and second inlets into the vortex chamber. Flow into the inlets is directed by a fluid control system which has a control passageway for directing fluid flow as it exits a primary passageway. A movable fluid diverter positioned in the control passageway moves in response to change in fluid density to restrict fluid flow through the control passageway. When fluid flow through the control passageway is unrestricted, fluid from the control passageway directs fluid exiting the primary passageway toward a selected vortex inlet. When flow through the control passageway is unrestricted, flow from the primary passageway is directed into the other vortex inlet.

WO 2013/070235 A1

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*