

METHOD FOR TAGGING THERMOPLASTIC MATERIALS WITH
NEAR INFRARED FLUOROPHORES

Field of the Invention

5

The present invention belongs to the field of polymer chemistry. More particularly, this invention relates to a method for tagging thermoplastic polymers in order to allow for their differentiation and physical sorting.

Background of the Invention

15

Billions of pounds of thermoplastic polymers are used annually in the world for producing fibers, films, shaped articles, bottles, etc. Disposal of these polymeric materials by incineration or by placing them in land fills is becoming unacceptable due largely to the ever-increasing environmental impact. Recycling offers many advantages from an environmental standpoint; however, efforts so far have been hampered by the lack of fast, convenient, and economically attractive methods for identification and separation (sorting) of the various thermoplastic polymers currently available in the marketplace, and hence ending up in landfills. It has been estimated that plastics comprise 7.3 percent by weight of all municipal solid waste, of which only about 1 percent is currently recycled (U.S. Congress, Office of Technology Assessment "Facing America's Trash: What Next for Municipal Solid Waste", OTA-0-424 (Washington, D.C.; U.S. Government Printing Office, October, 1989)). Visual identification and manual separation techniques presently used for sorting and separation of plastics are labor intensive and expensive in addition to being subject to human error. Efforts to use some inherent physical property of the plastics such as density for

20

25

30


35



2-72

identification and separation have thus far not proven to be attractive. To allow plastics to become truly recyclable, plastic compositions which have unique properties which allow them to be separated from each other by automated methods, as opposed to manual separation, are thus very desirable.

It is known (U.S. Patent 4,540,595) that one may mark documents such as bank checks by the use of inks that fluoresce in the near infrared region, i.e., generally between 650 and 800 nm, for automatic identification. Fluorescent phenoxazine dyes of the formula



wherein R_1 and R are alkyl and X is an anion are shown to be effective near-infrared fluorescing compounds for this purpose. Attempts to use these compounds for adding to thermoplastics to impart fluorescence in the near infrared have failed because the high temperatures necessary for the preparation and processing of thermoplastics cause decomposition of the phenoxazine compounds.

A method for separation of magnesium bearing ore particles based on the presence of a fluorescent compound, i.e., 8-hydroxyquinoline, is known (U.S. Patent 4,423,814). The conditioned ore is irradiated with UV light to induce fluorescence and the magnesium-rich mineral separated from the lean ore particles by detecting the difference of the fluorescence intensity. This method of identification and sorting, based on the use of compounds which fluoresce in the UV light range is not appropriate for thermoplastics in general because

many absorb UV light themselves as well as the absorbance by residual products packaged therein. U.S. Patent 4,321,133 discloses a similar process for sorting limestone ores.

5 A method for sorting agricultural materials based on irradiation with near-infrared light has also been disclosed (U.S. Patent 4,915,827). Absorption in the infrared region is measured and compared to pre-determined infrared absorption criteria, which criteria
10 distinguish the desired material from undesired material. This method does not relate to plastic materials and does not involve near infrared fluorescence as a distinguishing part of the method.

 Near infrared absorbing compounds such as carbon
15 black (U.S. Patents 4,408,004; 4,476,272; 4,535,118) and iron oxide (Fe_2O_3) (U.S. Patents 4,250,078; 4,420,581) have been added to thermoplastic polyesters in small quantities to improve heat-up rates during molding operations. These near infrared light absorbing
20 compounds are not fluorescent and thus cannot be used as near infrared fluorescing "tags".

 Further, it has been proposed that one may separate polyvinyl chloride bottles from polyester bottles based on an x-ray method (R&D Magazine, July 1990, p. 102).
25 The x-ray detector is sensitive to the chlorine found in polyvinyl chloride plastics, but not sensitive to the polyester plastics since they contain no chlorine. Obviously, this separation method is very limited in applicability and involves the use of hazardous x-ray
30 radiation.

 Near infrared fluorescing compounds have also been used in immunoassay procedures for identifying cancerous tissue in the human body (U.S. Patent 4,541,438).

 Finally, it has been proposed (G. Patonay,
35 Analytical Chemistry, Vol. 63, No. 6, 1991, pp 321-327)

to use near infrared fluorescent compounds for fluorogenic labels for biomolecules; however, the disclosed fluorescent compounds have poor thermal stability and are not suitable for tagging or marking thermoplastic compositions.

Summary of the Invention

This invention relates to a method for "marking" or "tagging" a thermoplastic polymeric material by incorporating one or more thermally stable, near infrared fluorescing compounds therein by admixing or copolymerizing or by blending with certain condensation polymers containing one or more near infrared fluorescing compounds copolymerized or admixed therein and a method for separating or sorting a mixture of thermoplastic containers such as bottles. Also provided are thermoplastic polymer compositions tagged with such compounds or residues.

Brief Description of the Drawings

Figure 1 depicts an apparatus useful for practicing the present invention for identification of the near infrared (NIR) marker in the polymer described herein. This arrangement will be understood to be an application of commercially available fluorometers. As may be seen from Figure 1, there is present a light source (1) capable of emitting radiation in the visible and NIR region which illuminates the polymer sample (2) through a wavelength selector (3) e.g., monochromator or interference filter. A wavelength selector (4) and a NIR sensitive photodetector (5) is placed at 90° or less angle. It may be seen from Figure 1 that light source (1), wavelength selector (3 & 4) and photodetector(5)



are all arranged on two sides of a triangle to minimize scattered light entering the detector. The light source (1) in Figure 1 may be replaced with lasers, preferably semiconductor lasers. The output of photodetector (5) is provided to level adjustment amplifier (6), the output of which is provided to an integrated circuit digital multimeter(7). The output of the digital multimeter is connected to a computer display so as to provide a numeral and graphical indication of the amount of luminous flux at the predetermined wavelength (preferably at the emission maxima) emitted by the substance contained in polymer.

Figure 2 shows a preferred apparatus useful for practice of the present invention which will be understood to be a specialized arrangement for performing the tests of the present invention. As may be seen from Figure 2, there is present a laser diode light source (1) capable of emitting radiation in the NIR region which is collimated through a collimating lens (2), and illuminates the container (4) through an optical filter (3). A focusing lens (5) and a beam compressor are placed at 30 degrees or less angle. It may be seen from Figure 2 that the laser diode light source and the collimating lens are arranged to minimize scattered light from entering the detector. An optical filter (6) is placed between the compressor lenses (7 & 8) to select the wavelength of fluorescence of the tagging molecule which is focused on the photodetector. A current-to-voltage converter is connected to the photodetector (9) to amplify the detector signal. The arrangement and the electronic circuitry of the current-to-voltage amplifier (10) is widely known and the routines of amplifying and processing the photodetector signal are also well-known. The signal from the current-to-voltage converter circuit is detected by a

threshold detector (11). The threshold level of the threshold detector is set at the level required to minimize any interference from untagged containers. The presence of tagged containers in front of the preferred apparatus is indicated by the light-emitting diode (LED) indicator (12).

Figures 1 and 2 are more fully described below.


Detailed Description of the Invention

10

This invention provides a method for "tagging" for identification purposes one or a mixture of thermoplastic polymers comprising contacting said polymers with one or a mixture of thermally stable, near infrared fluorescent tagging compounds, wherein said tagging compound has substantial near infrared radiation absorbance and is added in sufficient quantity to impart fluorescence capable of detection by a near infrared radiation detector when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.

Another embodiment of the invention relates to a method for "tagging" a condensation polymer such as a polyester or polycarbonate material comprising copolymerizing one or a mixture of thermally stable, near infrared fluorescent tagging compounds therein during said polymer preparation, wherein the tagging compound(s) has (have) substantial near infrared radiation absorbance and is added in sufficient quantity to impart fluorescence capable of detection by a near infrared radiation detector when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.

A further embodiment of the invention relates to a method for "tagging" a thermoplastic polymer material comprising having the same with a condensation polymer



selected from polyesters, polycarbonates and polyurethanes containing at least 10 ppm of one or more thermally stable, near infrared fluorescent compounds copolymerized therein, said "tagging" compound being
5 present in the final thermoplastic polymeric composition in sufficient quantity to impart fluorescence capable of detection by a near infrared radiation detector when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.

10 This invention also relates to a method for detecting and separating thermoplastic containers by polymer type, said containers comprising a thermoplastic material containing a compound or residue having detectible fluorescence when exposed to near infrared
15 radiation, which comprises the following steps:

(a) exposure of a mixture of thermoplastic containers to near infrared radiation having wavelengths of about 670-2500 nm, with the provision that at least
20 one of said thermoplastic container compositions contain one or more near infrared tagging compounds or residues having near infrared absorbance and which is (are) present in sufficient quantity to impart fluorescence when exposed to radiation
25 having wavelengths of about 670-2500 nm, provided by light sources;

(b) detection of the emitted (fluorescent) light via near infrared light detection means; and
30

(c) separating the fluorescing containers from the non-fluorescing containers or containers fluorescing at a detectibly different wavelength or wavelengths by mechanical means.
35

In the above method, it will be appreciated that near infrared detection means denotes any apparatus capable of detecting fluorescence in the range described herein. Such detection means are the devices for
5 detecting photons emitted by the fluorescent containers at wavelengths of about 670 to 2500nm such as photomultiplier tubes, solid state detectors, semiconductor based detectors, or any such device. The preferred means of detection has an optimum sensitivity
10 at the preferred wavelength region. Examples include the silicon photodiodes or germanium detectors.

The term "light sources" refers to devices used to irradiate the samples with near infrared radiation having wavelength outputs from 670 to 2500nm such as
15 laser diodes, solid state lasers, dye lasers, incandescent, or any other known light source. Such light sources can be used in conjunction with wavelength selectors such as filters, monochromators, etc. The preferred light sources are those that have a maximum
20 signal at the maximum of the absorbance of the tagging fluorophore. Examples include the laser diodes, light emitting diodes, or solid state lasers.

In the above method, the phrase "detectibly different wavelength or wavelengths" refers to
25 phenomenon that fluorescence by one or more of the near infrared fluorophores will occur at a different wavelength (or wavelengths in the case of >1 fluorophores) and such difference will, by necessity be one that is capable of detection. Using state of the art detection
30 equipment it is believed that such differences in absorption/fluorescence of as little as 20nm in wavelength can be discerned. Of course, this limitation is not critical and will decrease as detection methodology improves.

35 The presence of a near infrared fluorophore (NIRF)

provides highly effective tags for identification of thermoplastics. Since most polymers themselves absorb UV light, and if they are colored also absorb visible light, "tagging" or "marking" components based on
5 fluorescent UV and/or visible light absorbing compounds are not practical; however, interference from the thermoplastics themselves or from typical additives present therein or from typical contamination present thereon is minimal in the near infrared region of the
10 electromagnetic spectrum, thus allowing the NIRF "tag" to be detected in the presence of a complex matrix, while being largely "invisible". This permits design of an automated separation system which operates with zero or few false positive identifications and at very high
15 speeds, e.g., greater than 3000 lb./hour.

Ideally, for the practice of this invention the NIRF "tag" should have excellent thermal stability and little light absorption in the visible region; that is, they should impart little or no color to the thermo-
20 plastic polymer to which the NIRF is copolymerized or admixed with. Also, they should have strong absorption of near infrared light (high molar extinction coefficients, e.g. $> 20,000$) and have strong fluorescence in the near infrared over the wavelengths of about 670-
25 2500 nm. Suitable stability to sunlight and fluorescent light and low extractability or sublimation from the thermoplastic compositions are also preferred. To produce essentially "invisible" tags the near infrared fluorescent compounds must absorb little if any light
30 having wavelengths in the 400-700 nm range; however, since the compounds are present in extremely low concentrations, a small amount of absorption may be tolerated without imparting significant color.

It is within the scope of this invention to mark
35 one or more different thermoplastic compositions with

one or more near infrared fluorescing compounds and to identify and separate containers derived therefrom based on the fact that the near infrared fluorescing compounds can be selected such that they absorb infrared light and reemit fluorescent light at wavelengths different enough from each other as not to interfere with individual detection.

Thus, the present invention also provides a thermoplastic polymer composition which comprises a thermoplastic polymer having admixed therein one or more near-infrared fluorescing compounds, provided that said near-infrared fluorescing compounds do not substantially absorb light in the visible spectrum, wherein said compounds are present in a concentration sufficient to impart fluorescence capable of detection by near infrared detection means when exposed to electromagnetic radiation having a wavelength of about 670 to 2500 nm.

As a further aspect of the present invention, there is provided a thermoplastic polymer composition which comprises a thermoplastic condensation polymer having copolymerized therein at least 0.01 ppm (parts per million) of one or more near infrared fluorescing compounds.

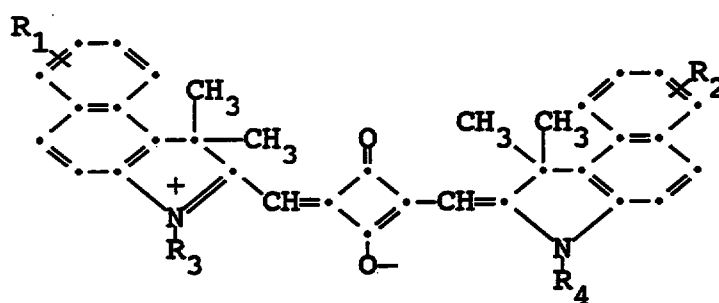


As a further aspect of the present invention, there is provided a shaped or formed article comprised of the tagged thermoplastic polymer compositions disclosed herein. It is within the scope of this invention for said compositions to have NIRF compounds admixed therein, coated thereon, or copolymerized therein.

Some of the compounds useful in the practice of this invention are known (U.S. Patent Nos. 4,606,859; 4,904,567; 5,034,309; and 5,039,600, incorporated herein by reference; UK Pat. 1,537,375; UK Pat. Appl. GB 2,168,372; JACS, 1984, 106, pp 7404-7410; Jap. Pat. 61,215,663 (CA Vol. 106: 86223s); Jap. Pat. 02,276,676



(CA Vol. 114: 196445p); Jap. Pat. 02,187,391 (CA Vol. 114: 196418g); however, such compounds are taught to be useful for infrared inks, liquid crystal displays, optical recording devices, electrochemical chemiluminescence and as colorants. No mention is made of the use of these compounds as NIR(near infrared) fluorescent (or NIRF) "tags" for marking thermoplastics for identification and separation.

The preferred near infrared fluorescent compounds useful in the practice of the invention are selected from the classes of phthalocyanines, naphthalocyanines and squaraines (derivatives of squaric acid) and correspond to Formulae II, III and IV:




IV


wherein Pc and Nc represent the phthalocyanine and naphthalocyanine moieties of Formulae IIa and IIIa,

Phthalocyanine

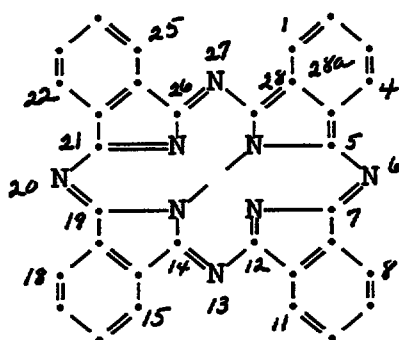2,3-Naphthalocyanine




IIa

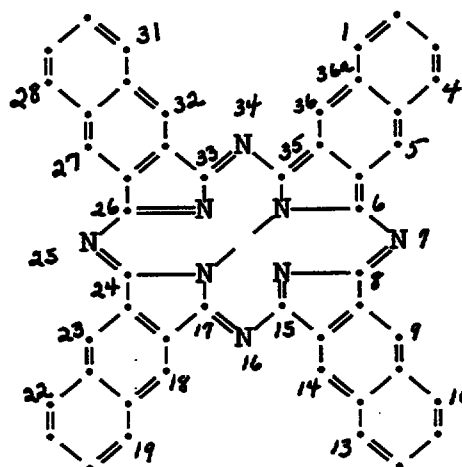

IIIa

respectively, covalently bonded to hydrogen or to various metals, halometals, organometallic groups, and oxymetals including AlCl , AlBr , AlF , AlOH , AlOR_5 , AlSR_5 , Ca , Co , CrF , Fe , Ge , $\text{Ge}(\text{OR}_6)$, Ga , InCl , Mg , Mn , Ni , Pb , Pt , Pd , SiCl_2 , SiF_2 , SnCl_2 , $\text{Sn}(\text{OR}_6)_2$, $\text{Si}(\text{OR}_6)_2$, $\text{Sn}(\text{SR}_6)_2$, $\text{Si}(\text{SR}_6)_2$, Sn , TiO , VO or Zn ,

wherein R_5 and R_6 are selected from hydrogen, alkyl, aryl, heteroaryl, lower alkanoyl, trifluoroacetyl, groups of the formulae



R_7 , R_8 and R_9 are independently selected from alkyl, phenyl or phenyl substituted with lower alkyl, lower alkoxy or halogen;

X is selected from oxygen, sulfur, selenium, tellurium or a group of the formula $\text{N}-\text{R}_{10}$, wherein R_{10} is hydrogen,

cycloalkyl, alkyl, acyl, alkylsulfonyl, or aryl or R_{10} and R taken together form an aliphatic or aromatic ring with the nitrogen atom to which they are attached;

5 Y is selected from alkyl, halogen or hydrogen;

R is selected from unsubstituted or substituted alkyl, alkenyl, alkynyl,

10 C_3-C_8 cycloalkyl, aryl, heteroaryl, alkylene $\begin{array}{c} R_7 \\ | \\ -Si-R \\ | \\ R_8 \end{array}$ or

15
20 alkylene $\begin{array}{c} OR_7 \\ | \\ -Si-OR_8 \\ | \\ OR_9 \end{array}$; or

25
30 $-(X-R)_m$ is alkylsulfonylamino, arylsulfonylamino, or a group selected from the formulae $-X(C_2H_4O)_zR^1$,

35 $\begin{array}{c} R_7 \\ | \\ -Sn-R_8 \\ | \\ R_9 \end{array}$, $\begin{array}{c} OR_7 \\ | \\ -Sn-OR_8 \\ | \\ OR_9 \end{array}$, $\begin{array}{c} R_7 \\ | \\ -Si-R_8 \\ | \\ R_9 \end{array}$, or $\begin{array}{c} OR_7 \\ | \\ -Si-OR_8 \\ | \\ OR_9 \end{array}$,

40
45 wherein R^1 is hydrogen or R as defined above; Z is an integer of from 1-4;
or two $-(X-R)_m$ groups can be taken together to form divalent substituents of the formula



55
60 wherein each X^1 is independently selected from $-O-$, $-S-$, or $-N-R_{10}$ and A is selected from ethylene; propylene;


trimethylene; and such groups substituted with C₁-C₄ alkyl, C₁-C₄ alkoxy, aryl and cycloalkyl; 1,2-phenylene and 1,2-phenylene containing 1-3 substituents selected from C₁-C₄ alkyl, C₁-C₄ alkoxy or halogen;

5

R₁ and R₂ are independently selected from hydrogen, lower alkyl, lower alkoxy, halogen, aryloxy, lower alkylthio, arylthio, lower alkylsulfonyl; arylsulfonyl; lower alkylsulfonylamino, arylsulfonylamino, cycloalkyl-sulfonylamino, carboxy, unsubstituted and substituted carbamoyl and sulfamoyl, lower alkoxycarbonyl, hydroxy, lower alkanoyloxy,

15

20



25

R₃ and R₄ are independently selected from hydrogen, lower alkyl, alkenyl or aryl; n is an integer from 0-12; n₁ is an integer from 0-16, m is an integer from 4-16; m₁ is an integer from 0-16; provided that the sums of n+m and n₁+m₁ are 16 and 24, respectively.

30

In a preferred embodiment of this aspect of the present invention m is from 4 to 12; m₁ is from 0-8; provided that in the definitions of the substituents (Y)_n, (Y)_{n₁} and (-X-R)_{m₁} that these substituents are not present when n, n₁ and m₁ are zero, respectively.

35

Substituents (X-R)_m and (Y)_n are present in compounds IIa on the peripheral carbon atoms, i.e. in positions 1, 2, 3, 4, 8, 9, 10, 11, 15, 16, 17, 18, 22, 23, 24, 25 and substituents (X-R)_{m₁} and (Y)_{n₁} are present on the peripheral carbon atoms of III, i.e. in positions 1, 2,

40



3, 4, 5, 9, 10, 11, 12, 13, 14, 18, 19, 20, 21, 22, 23, 27, 28, 29, 30, 31, 32 and 36.

In the above definitions, the term alkyl is used to designate a straight or branched chained hydrocarbon radical containing 1-20 carbons, preferably 1-12 carbons.

In the terms lower alkyl, lower alkoxy, lower alkylthio, lower alkoxy carbonyl, lower alkanoyl and lower alkanoyloxy the alkyl portion of the groups contains 1-6 carbons and may contain a straight or branched chain.


The term "cycloalkyl" is used to represent a cyclic aliphatic hydrocarbon radical containing 3-8 carbons, preferably 5 to 7 carbons.

The alkyl and lower alkyl portions of the previously defined groups may contain as further substituents one or more groups selected from hydroxy, halogen, carboxy, cyano, C₁-C₄-alkoxy, aryl, C₁-C₄-alkylthio, arylthio, aryloxy, C₁-C₄-alkoxy carbonyl or C₁-C₄-alkanoyloxy.

The term "aryl" includes carbocyclic aromatic radicals containing 6-18 carbons, preferably phenyl and naphthyl, and such radicals substituted with one or more substituents selected from lower alkyl, lower alkoxy, halogen, lower alkylthio, N(lower alkyl), trifluoromethyl, carboxy, lower alkoxy carbonyl, hydroxy, lower alkanoylamino, lower alkylsulfonylamino, arylsulfonylamino, cycloalkylsulfonylamino, lower alkanoyloxy, cyano, phenyl, phenylthio and phenoxy.

The term "heteroaryl" is used to represent mono or bicyclic hetero aromatic radicals containing at least one "hetero" atom selected from oxygen, sulfur and nitrogen or a combination of these atoms. Examples of suitable heteroaryl groups include: thiazolyl, benzothiazolyl, pyrazolyl, pyrrolyl, thienyl, furyl, thia-

diazolyl, oxadiazolyl, benzoxazolyl, benzimidazolyl, pyridyl, pyrimidinyl and triazolyl. These heteroaryl radicals may contain the same substituents listed above as possible substituents for the aryl radicals. The
5 term triazolyl also includes structure V and mixed isomers thereof,



wherein R_{11} is hydrogen or selected from lower alkyl and lower alkyl substituted with one or two groups selected from hydroxy, halogen, carboxy, lower alkoxy, aryl,
25 cyano, cycloalkyl, lower alkanoyloxy or lower alkoxy-carbonyl.

The terms "alkenyl and alkynyl" are used to denote aliphatic hydrocarbon moiety having 3-8 carbons and containing at least one carbon-carbon double bond and
30 one carbon-carbon triple bond, respectively.

The term halogen is used to include bromine, chlorine, fluorine and iodine.

The term "substituted alkyl" is used to denote a straight or branched chain hydrocarbon radical contain-
35 ing 1-12 carbon atoms and containing as substituents 1 or 2 groups selected from hydroxy, halogen, carboxy, cyano, C_1-C_4 alkoxy, aryl, C_1-C_4 alkylthio, arylthio, aryloxy, C_1-C_4 alkoxycarbonyl, or C_1-C_4 alkanoyloxy.

The term "substituted carbamoyl" is used to denote a radical having the formula $-CONR_{12}R_{13}$, wherein R_{12} and R_{13}
40 are selected from unsubstituted or substituted alkyl, alkenyl, alkynyl, cycloalkyl, aryl, or heteroaryl.

The term "substituted sulfamoyl" is used to denote a radical having the formula $-SO_2NR_{12}R_{13}$, wherein R_{12} and
45 R_{13} are as defined above.

The term "alkylene" refers to a divalent C_1-C_{12} aliphatic hydrocarbon moiety, either straight or branched-chain, and either unsubstituted or substituted with one or more groups selected from lower alkoxy, halogen, aryl, or aryloxy.

The term "acyl" refers to a group of the formula $R^oC(O)-O-$, wherein R^o is preferably a C_1-C_{10} alkyl moiety. The term "alkyl sulfonyl" refers to a group of the formula R^oSO_2- , wherein R^o is as defined for acyl.

Preferred $-X-R$ groups include those listed in Table I.

As noted above, the near infrared fluorescing compounds having reactive groups present may be copolymerized to produce thermoplastic compositions such as polyesters or polycarbonates containing the fluorophore covalently bound so that they will not be leachable, sublimable, extractable, or be exuded from the polymer composition. This feature is particularly desirable for thermoplastic polymers used for containers for comestibles such as beverages and food.

Thus, in a preferred embodiment of the invention there is provided a molding grade polyester, polyurethane, or polycarbonate condensation polymer having copolymerized therein a total of from about 0.1 ppm to 100 ppm of at least one thermally stable, near infrared fluorescing compound of Formulae II, III or IV above containing at least one reactive functional group, said group selected from hydroxy, carboxy or an ester radical having the formulae



wherein R_{14} is selected from unsubstituted or substituted alkyl, cycloalkyl or aryl radicals. R_{14} preferably is unsubstituted alkyl, e.g., alkyl of up to about 8



carbons, or phenyl, and most preferably lower alkyl, e.g., methyl and ethyl. The reactive group preferably is hydroxy, carboxy, carbomethoxy, carbethoxy or acetoxymethyl. The compounds normally contain 1 to about 8 reactive groups, preferably 2. Of course, when only one reactive group is present, chain termination may occur during reaction and when more than 2 reactive groups are present cross-linking occurs; however, when the near infrared fluorescing compounds are added at the extremely low levels needed to impart a detectable amount of fluorescence they do not significantly interfere with the polycondensation reaction.

In a further aspect of the invention, there is provided amorphous and partially crystalline polyesters containing at least one thermally stable, near infrared fluorescing compound, preferably a compound having the Formulae II, III or IV above, and containing two reactive groups copolymerized therein at a level of greater than 10 ppm to about 30.0 weight percent. The preferred level of the fluorophore percent is about 0.1 to about 10.0 weight percent. This "concentrate" composition containing the copolymerized "tagging" compound can be obtained as a powder or in pellet form and can be admixed with polyester or another thermoplastic polymer to provide a suitably "tagged" composition mentioned earlier. Such blends represent a further embodiment of the present invention.

The useful types of polyesters of this invention are linear, thermoplastic, crystalline or amorphous and have one or more near infrared fluorescing compounds, preferably of Formulae II, III or IV above copolymerized therein.

The diol components of the polyester may be comprised of, for example, ethylene glycol, 1,4-cyclohexanedimethanol, 1,2-propanediol, 1,3-propanediol, 2-



methyl-1,3-propanediol, 1,6-hexanediol, 1,2-cyclohexane-
diol, 1,4-cyclohexanediol, 1,10-decanediol, 1,2-cyclo-
hexanedimethanol, 1,3-cyclohexanedimethanol, X,8-bis-
(hydroxymethyl)-tricyclo- [5.2.1.0]-decane wherein X
5 represents 3, 4, or 5; and diols containing one or more
oxygen atoms in the chain, e.g., diethylene glycol,
triethylene glycol, dipropylene glycol, or tripropylene
glycol and the like. In general, these diols contain 2
to 18, preferably 2 to 12 carbon atoms. Cycloaliphatic
10 diols can be employed in their cis or trans configura-
tion or as a mixture of both forms.

The acid components (aliphatic, alicyclic, or
aromatic dicarboxylic acids) of the polyester may
consist of, for example, terephthalic acid, naphthalene-
15 2,6-dicarboxylic acid, isophthalic acid, 1,4-cyclo-
hexanedicarboxylic acid, 1,3-cyclohexane dicarboxylic
acid, succinic acid, glutaric acid, adipic acid, sebacic
acid, 1,12-dodecanedioic acid, and the like. In place
of the dicarboxylic acids themselves, it is possible and
20 often preferable to use a functional acid derivative
thereof such as the dimethyl, diethyl, or dipropyl ester
of the dicarboxylic acid. The anhydrides of the
dicarboxylic acids can likewise be employed.

The polyesters can be produced using typical
25 polycondensation techniques well known in the art.

Typical polycarbonates useful in the practice of
the invention are disclosed in Kirk-Othmer Encyclopedia
of Chemical Technology, third edition, Vol. 18, pp
479-494.

30 A wide range of thermoplastic polymers suitable for
blending with the above condensation polymers (which
contain the NIRF(s)) is known in the art and includes
polyesters e.g., poly(ethylene terephthalate) and
poly(butylene terephthalate); polyolefins, e.g.,
35 polypropylene, polyethylene, linear low density

polyethylene, polybutylene and copolymers made from ethylene, propylene and/or butylene; polyamides, e.g., nylon 6 and nylon 66; polyvinyl chloride; polyvinylidene chloride; polycarbonates; cellulose esters, e.g.,
5 cellulose acetate, propionate, butyrate or mixed esters; polyacrylates, e.g., poly(methyl methacrylate); polyimides; polyester-amides; polystyrene; ABS (acrylonitrile-butadiene-styrene) type polymers, and (TPO) thermoplastic oligomers, etc.


10 In the practice of one aspect of the invention the NIR fluorophores are incorporated into the thermoplastic resins using conventional techniques such as those employed to incorporate other additives in such resins (see R. Gächter and H. Müeller, Editors, *Plastics*
15 *Additives Handbook*, Hansu Publishers, New York, 1985, pp 507-533; 729-741). For example, the NIR fluorophores may be dry blended in the form of powders with the thermoplastic materials in the form of pellets or powders, with or without an adhesion promoter or a
20 dispersing agent. This premix can be subsequently processed on extruders or molding machines. In some cases, solution blending may also be preferable. Of course, other conventional additives such as plasticizers, antioxidants, stabilizers, nucleating
25 agents, etc., may also be present in the thermoplastic compositions of the invention.

The levels of the NIRF present in the final "tagged" thermoplastic composition may vary considerably depending upon the molar extinction coefficient and the
30 fluorescing efficiency of the added fluorophore. It is generally desirable that the fluorophore be present at the lowest practical level needed to produce a satisfactory fluorescence detection level to avoid minimizing any color problems resulting from the
35 presence of the fluorophore in the thermoplastic and to

minimize cost. Normally, with suitable fluorescence efficiency the NIRF is added in the amount of from about 0.5 ppm to about 100 ppm, with about 1 ppm to about 10 ppm being preferred.


- 5 Two general routes are available for the synthesis of NIRF compounds of Formula II. Route I involves the reaction of substituted phthalonitriles VI containing one or more leaving groups Z with one or more nucleophiles VII (A. W. Snow and J. R. Griffith,
- 10 Macromolecules, 1984, 17 (1614-1624), in the presence of a high boiling polar solvent such as N,N-dimethylformamide, N,N-dimethylacetamide, N-methyl-2-pyrrolidinone, tetramethylurea, and hexamethylphosphotriamide to give intermediates VIII, which are
- 15 further reacted by known procedures to give compounds II directly in a one-pot process or to give the isoindoline derivatives IX, which are converted into the desired phthalocyanines II by known processes.

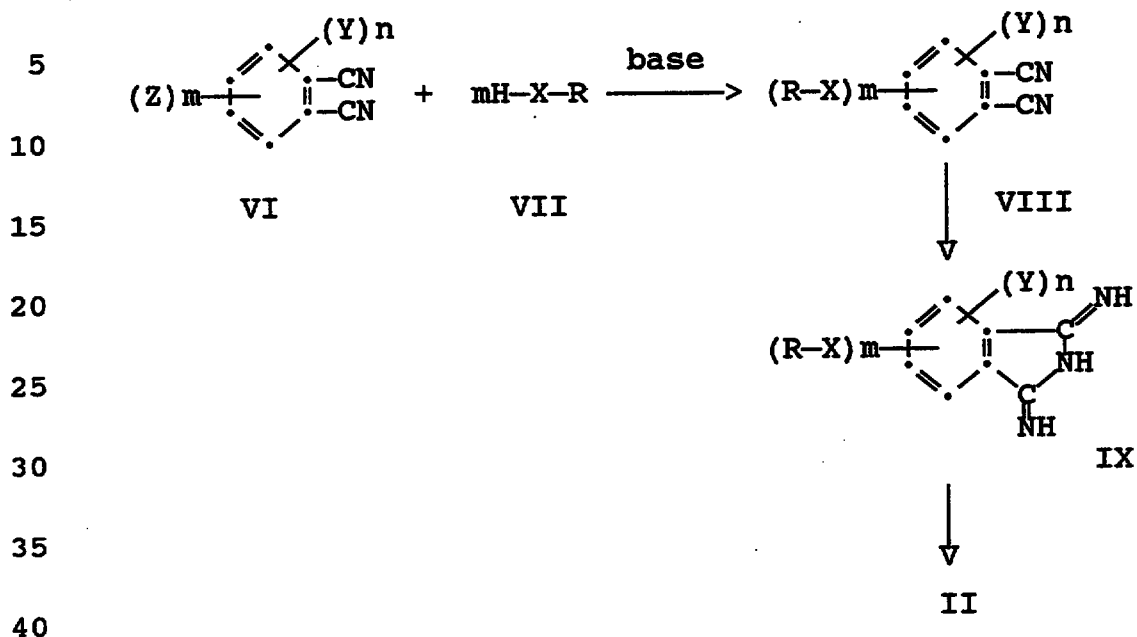Route 1



Of course, the starting compounds VI may contain further
45 substituents which are not replaced by reaction with
the nucleophile. Route 2 employs similar reaction
conditions, as involved in initial step of Route 1, and
makes use of the reactivity of the halogen atoms in
polyhalo phthalocyanines X, containing 4-16 halogen
50 atoms attached at peripheral carbon atoms, with nucleo-
philes VII (UK 1,537,375 and U.S. 4,606,859) to give
NIRF compounds II.


Route 2




65 In the above nucleophilic reactions utilized in Routes 1 and 2, the base, or acid binding agent, may be an alkali metal hydroxide, an alkali metal bicarbonate or an alkali metal carbonate. For example, sodium

carbonate, potassium carbonate, lithium hydroxide, sodium hydroxide, sodium bicarbonate are suitable bases.

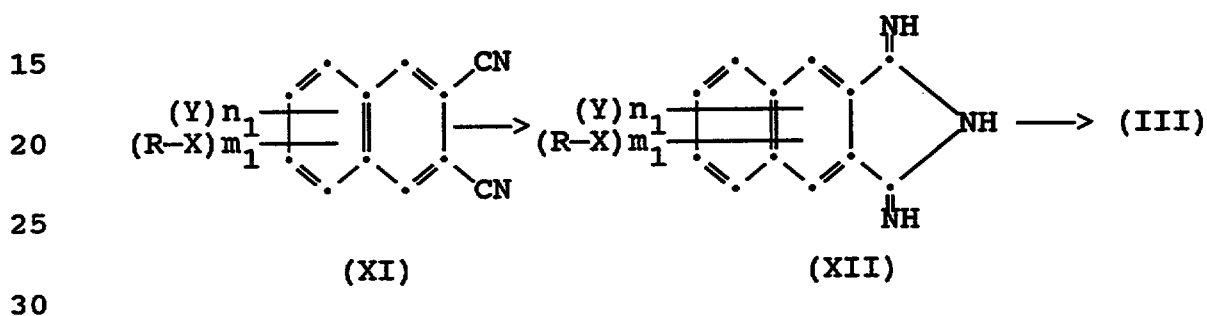The 2,3-naphthalocyanines of Formula III can be prepared by reacting 2,3-naphthalene-dicarbonitrile compounds XI to give 1,3-diiminobenz[f]-isoindolines XII, which are then converted to the naphthalocyanines of Formulae III by known procedures [J.A.C.S. 1984, 106, 7404-7410; U.S. Patent No. 5,039,600, incorporated herein by reference; Zn. Obshch. Khim, 1972, 42(3), 696-9 (CA 77: 141469m); Jap. Pat. 61,215,663 (CA 106: 86223s)].




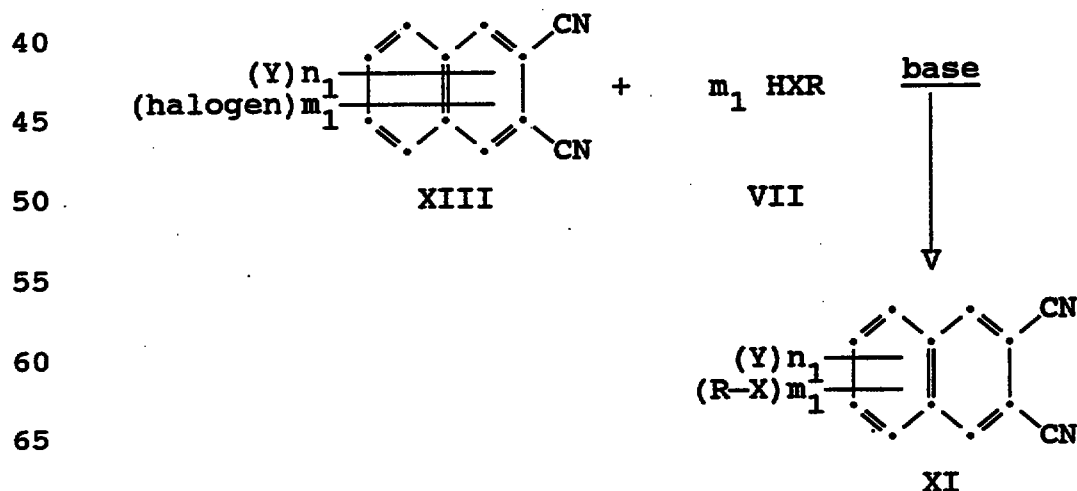Intermediate compounds XI which contain one or more electron donating groups (-X-R) are conveniently prepared by reacting intermediate 2,3-naphthalene-carbonitriles XIII




containing replaceable halogens with one or more nucleophiles under reaction conditions which favor nucleophilic displacements (J. Heterocyclic Chem. 1990, Vol. 27, Iss. 7, pp 2219-20).

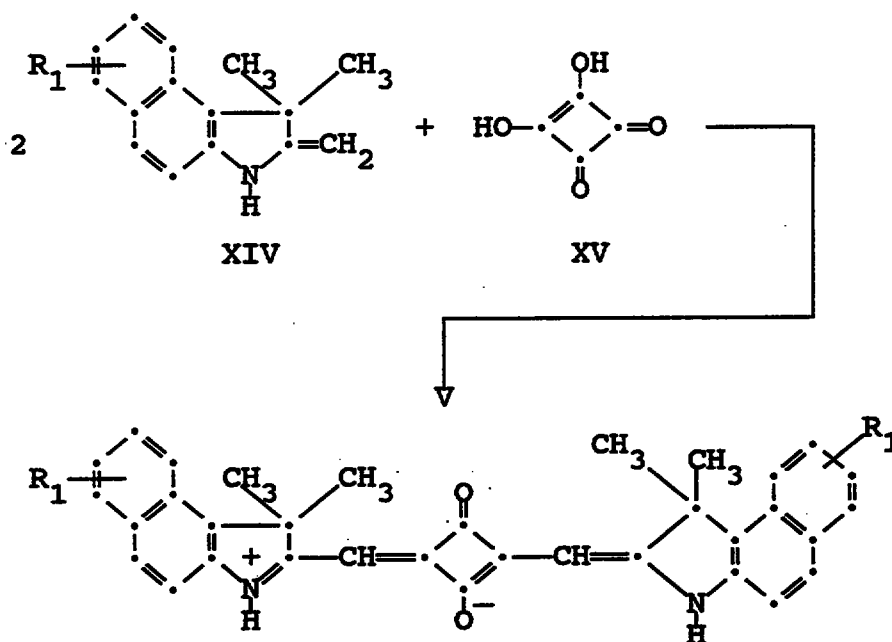5 The squaraines of Formula IV can be prepared by reacting the corresponding unsubstituted and substituted 1,3-dihydro-2-methylene-1,1-dimethyl-1H-benz[e]indoles with squaric acid [S. Cohen, et al., JACS, 81, 3480 (1959)]. The reactions of squaric acid are well known
10 in the art [R. West, editor, OXOCARBONS, Academic Press, New York, 1980, pp 185-231; G. Maahs and P. Hagenberg, Angew. Chem. internat. Edit., Vol. 5 (1966), No. 10, p 888; A. H. Schmidt, Synthesis, December 1980, p, 961]. The intermediate 1,3-dihydro-2-methylene-1,1-
15 dimethyl-1H- benz[e]indoles XIV can be synthesized by known procedures [U.S. Pat. 5,030,708, incorporated herein by reference]. The synthetic route is illustrated as follows:




Intermediate 1,3-dihydro-2-methylene-1,1-dimethyl-1H-benz[e] indoles XIV are reacted with squaric acid XV as shown to produce the squaraines. Of course, an unsymmetrical derivative is obtained as one of the components of the mixture prepared by reacting a mixture of two or more different intermediate benz[e]indole compounds XIV with squaric acid.


Thus, as a further aspect of the present invention, there is provide a compound of Formulae II, III, or IV:



(II)



(III)

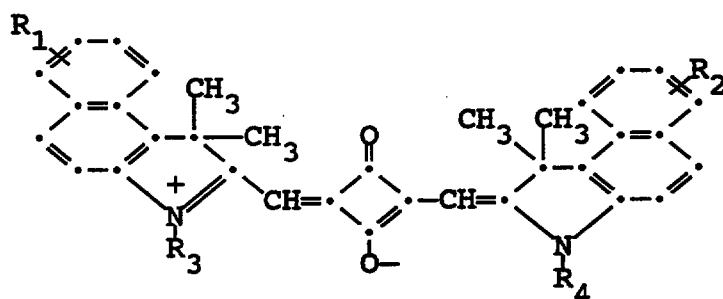


IV




wherein Pc and Nc represent the phthalocyanine and 2,3-naphthalocyanine moieties of Formulae IIa and IIIa,

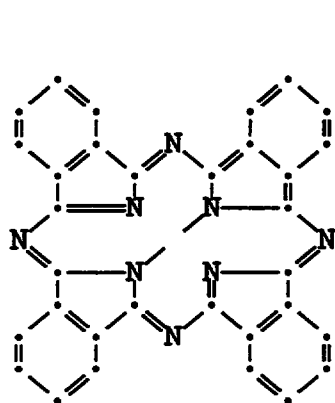5
10
15
20
25
30
35
40



IIa

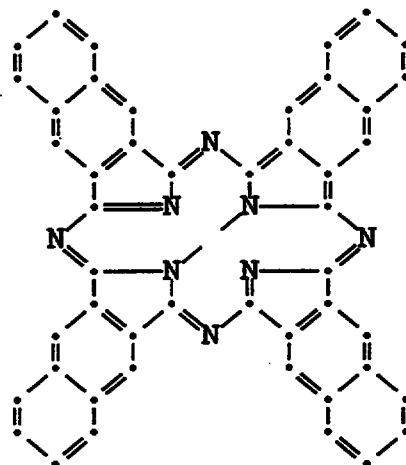

IIIa

respectively, covalently bonded to various organometallic groups selected from a list consisting of $AlOR_3$, $AlSR_3$, $Si(OR_6)_2$, $Si(SR_6)_2$, or $Sn(SR_6)_2$,

45

wherein R_3 and R_6 are aryl or heteroaryl;

X is selected from oxygen, sulfur, selenium, tellurium or $N-R_{10}$, wherein R_{10} is hydrogen, cycloalkyl, alkyl, acyl, alkylsulfonyl, or aryl or R_{10} and R taken together form an aliphatic or aromatic ring with the nitrogen atom to which they are attached;

50


55

Y is selected from alkyl, halogen or hydrogen;


R is selected from unsubstituted or substituted alkyl, acyl, alkenyl, alkynyl,



C₃-C₈ cycloalkyl, aryl, heteroaryl, alkylene



15 $-(X-R)_m$ is alkylsulfonylamino,
 arylsulfonylamino, or a group selected from
 the formulae $-X(C_2H_4O)_xR^1$,



30 wherein R¹ is hydrogen or R as defined above; Z is
an integer of from 1-4;
or two -(X-R)_m groups can be taken together to form
divalent substituents of the formula



wherein each X^1 is independently selected from -O-,
-S-, or -N-R₁₀ and A is selected from ethylene;
propylene; trimethylene; and such groups
50 substituted with C₁-C₄ alkyl, C₁-C₄ alkoxy, aryl and
cycloalkyl; 1,2-phenylene and 1,2-phenylene
containing 1-3 substituents selected from C₁-C₄
alkyl, C₁-C₄ alkoxy or halogen;

55 R_1 and R_2 are polyester reactive groups;

R_3 and R_4 are independently selected from hydrogen,



lower alkyl, alkenyl or aryl; n is an integer from 0-12; n_1 is an integer from 0-16, m is an integer from 4-16; m_1 is an integer from 0-16; provided that the sums of $n+m$ and n_1+m_1 are 16 and 24, respectively, further provided that at least one polyester reactive groups is present.

As a preferred embodiment of this aspect of the present invention, there is provided the above compounds substituted by at least two polyester reactive groups.

As noted above, one apparatus useful for practicing the present invention for identification of the NIRF marker in the polymer described hereinabove is shown in the drawing Figure 1 wherein like numerals reference like parts. Figure 1 is a pictorial diagram of the first preferred embodiment of the apparatus useful in the present invention. This arrangement will be understood to be an application of commercially available fluorometers for example currently manufactured by SLM Aminco of Urbana, IL. This arrangement is for performing the tests of the present invention one at a time. It will be apparent that in using this apparatus, it will be necessary to perform calculations for the concentration ratio of the markers externally. As may be seen from Figure 1, there is present a light source (1) capable of emitting radiation in the visible and NIR region which illuminates the polymer sample (2) through a wavelength selector (3) e.g., monochromator or interference filter. A wavelength selector (4) and a NIR sensitive photodetector (5) is placed at 90° or less angle. It may be seen from Figure 1 that light source (1), wavelength selectors (3 & 4) and photodetector (5) are all arranged on two sides of a triangle to minimize scattered light entering the detector. The arrangement of the light source, wavelength selector and detector to



minimize scattered light entering the detector is known to those skilled in the art and the routines of obtaining fluorescence signal are not considered novel per se. The light source (1) in Figure 1 may be replaced with lasers, preferably semiconductor lasers. The output of photodetector (5) is provided to level adjustment amplifier (6), the output of which is provided to an integrated circuit digital multimeter. In the preferred embodiment, digital multimeter (7) is embodied by a computerized unit currently manufactured by SLM Aminco of Urbana, IL. The output of the digital multimeter is connected to a computer display so as to provide a numeral and graphical indication of the amount of luminous flux at the predetermined wavelength (preferably at the emission maxima) emitted by the substance contained in polymer. It is of course apparent that level adjustment amplifier (6) should be adjusted to provide an output appropriately scaled to suit digital multimeter (7).

Figure 2 shows a preferred embodiment of the apparatus useful for practice of the present invention which will be understood to be a specialized arrangement for performing the tests of the present invention. As may be seen from Figure 2, there is present a laser diode light source (1) capable of emitting radiation in the NIR region which is collimated through a collimating lense (2), and illuminates the container (4) through an optical filter (3). A focusing lens (5) and a beam compressor are placed at 30 degrees or less angle. It may be seen from Figure 2 that the laser diode light source and the collimating lens are arranged to minimize scattered light from entering the detector. An optical filter (6) is placed between the compressor lenses (7 & 8) to select the wavelength of fluorescence of the tagging molecule which is focused on the photodetector.



A current-to-voltage converter is connected to the photodetector (9) to amplify the detector signal. The arrangement and the electronic circuitry of the current-to-voltage amplifier (10) is widely known and the routines of amplifying and processing the photodetector signal are also well-known. The signal from the current-to-voltage converter circuit is detected by a threshold detector (11). The threshold level of the threshold detector is set at the level required to minimize any interference from untagged containers. The presence of tagged containers in front of the preferred apparatus is indicated by the LED indicator (12). The LED indicator may be replaced with appropriate mechanical or electronic actuators for physical sorting of the containers such as air jets for moving indicated containers from one conveyor to another.

For identification of more than one type of polymer, the use of more than one marker is necessary. In other words, one fluorophore can be used to mark polyesters, another to mark high density polypropylene, another to mark polycarbonates, etc. In these instances, the use of more than one unit of the preferred apparatus as shown in Figure 2 is necessary. The choice of markers is dependent on their spectral properties, wherein the absorption and fluorescence maxima are sufficiently separated from each other to allow for identification of the individual markers (e.g., about 20nm or more). The multiplexing and computing apparatus which is programmed to calculate ratios of fluorescence signal of the markers present in the polymer is within the ability of one of ordinary skill in the art.


The following examples illustrate further the practice of the invention.



Experimental Section

Example 1

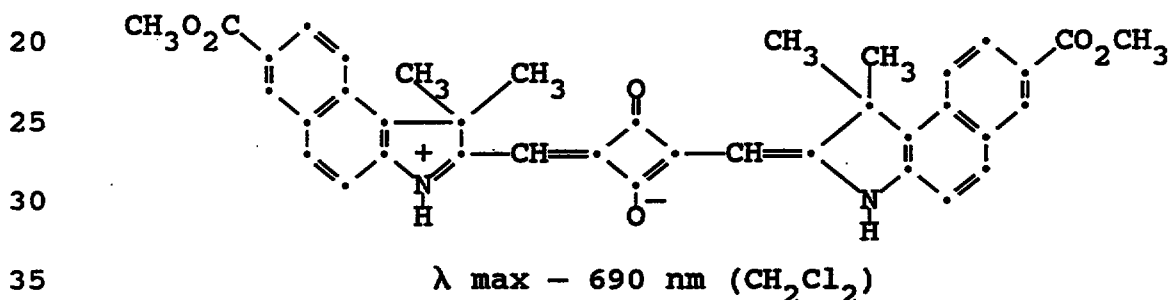A mixture of methyl 1,1,2-trimethyl-1H-benz[e]-
5 indole-7-carboxylate (tautomer is methyl 1,3-dihydro-2-methylene-1,1-dimethyl-1H-benz [e] indole-7-carboxylate), 2.67 g (0.01 M) (see U.S. Pat. 5,030,708), squaric acid (0.57 g, 0.005 M) and 2-ethoxyethanol (40 g) was heated at reflux under nitrogen for 16 hours.
10 The reaction mixture was cooled with an ice bath and the green solid collected by filtration, washed with isopropanol and dried in air. Recrystallization from 2-ethoxyethanol (20 mL), collection of the solid by filtration, washing of the solid with isopropanol and
15 drying gave the pure product. Mass spectrometry indicated mostly the following structure plus a small amount



40 of the mono 2-ethoxyethyl ester which had been produced by transesterification. In methylene chloride an absorption maximum (λ max) was observed in the visible-near infrared absorption spectrum at 690 nm (ϵ -214,287).

45

Example 2

The following materials were placed in a 500 mL three-necked, round-bottom flask:



116.3 g (0.60 mole) dimethyl terephthalate

81.0 g (0.90 mole) 1,4-butanediol

0.0132 g Ti from a n-butanol solution of titanium
tetraisopropoxide

5 0.132 g (2.16×10^{-4} mole) near infrared fluoro-
phore of Example 1

The flask was equipped with a nitrogen inlet,
stirrer, vacuum outlet, and condensing flask. The flask
10 and contents were heated in a Belmont metal bath with a
nitrogen sweep over the reaction mixture as the tempera-
ture was increased to 200°C and then to 215°C over 2
hours. Over the next 1.0 hour the temperature was
increased to about 230°C. Vacuum was applied until the
15 pressure was reduced to 0.5 mm Hg. The polycondensation
was completed by heating the flask and contents at about
230°C for about 1.0 hour under a pressure of 0.1 to 0.5
mm Hg. The flask was removed from the metal bath and
was allowed to cool while the polymer solidified. The
20 resulting pale green polyester, containing about 1000
ppm of the squaraine near infrared fluorophore residue,
has an inherent viscosity of 0.44, a weight average
molecular weight of 23,367, a number average molecular
weight of 15,482, a polydispersity value of 1.51 and a
25 melting temperature of 226°C.

Example 3

TENITE® brand polypropylene P5-029 (Eastman Kodak
30 Company) (9,900 g) was dry blended with 100 g of polymer
of Example 2 which had been ground using a Wiley mill.

The materials were compounded and extruded using a
Sterling 1.25 inch single-screw extruder at a maximum
temperature of about 220°C to produce pellets, which
35 were then molded into a thin-walled container having a



5 wall thickness of 20-25 mils. The polymer sample, which contains about 10 ppm of the near infrared fluorophore, exhibits strong fluorescence when exposed to light generated by a laser diode source at 672 nm. A maximum at about 712 nm is observed in the emission spectrum.

Example 4

10 A 300 mL 3-neck round-bottom flask was equipped with a magnetic stirrer, thermometer and gas inlet tube. Methanol (50 mL) was added followed by sodium metal (0.66 g, 0.029 mole) with stirring to facilitate reaction and solution, with a slow nitrogen purge applied. To this solution was added 12.54 g (0.058
15 mole) of 4-phenoxyphthalonitrile (A. W. Snow and J. R. Griffith, Macromolecules, 1984, 17, 1614-24), followed by additional methanol (50 mL). Anhydrous ammonia was bubbled in under the surface, giving an exotherm to 45°C and total solution. The ammonia addition was continued
20 until no more starting material was evident by thin-layer chromatography. The solution was clarified by filtering through a pad of Dicalite filter aid which had a small layer of charcoal on it and the filtrate drowned into water. The oily product layer thus produced was
25 washed by decantation with 500 mL portions of water (4-5 times or until pH reached about 7-8). After the final wash water was decanted off, methanol was added to dissolve the product, which crystallized upon stirring overnight at room temperature. After being collected by
30 filtration, the greenish-yellow solid was washed with methylene chloride and dried in air. The yield was 13.75 g, 91.1% of the theoretical yield. Mass spectrometry showed the product to consist largely of the desired 5-phenoxy-1,3-diiminoisoindoline.

35



Example 5

A mixture of 5-phenoxy-1,3-diiminoisoindoline (3.68 g, 0.016 m) (from Example 4), 1,2,3,4-tetrahydro-
5 naphthalene (20 mL) and tri-n-butylamine (10 mL) was stirred under a nitrogen sweep. Aluminum chloride (3.19 g, 0.024 m) was added to give a slurry. After the reaction mixture was heated at about 180°C for 4 hours, it was allowed to cool to room temperature and diluted
10 with methanol to enhance solubility to facilitate transfer into about 500 mL of ice-water mixture containing 10 mL HCl. The somewhat "greasy" solid product was collected by filtration and washed with dilute HCl. The filter cake was washed on the filter
15 with cyclohexane and finally washed thoroughly with ethyl acetate and dried in air. Mass spectrometry indicated good quality 2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-Al-Cl (Pc = phthalocyanine moiety) having the desired molecular weight of 942 (1.56 g, 41.4
20 % of the theoretical yield).

Example 6

A portion (110 mg) of the tetraphenoxy-chloro-
25 aluminumphthalocyanine of Example 5 was dissolved in trifluoroacetic acid (10 mL) and allowed to evaporate at room temperature. As evidenced by mass spectrometry, the residual product was mostly 2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-AlOCOCF₃, molecular weight 1020.
30 In methylene chloride, absorption maxima were observed at 696 nm (ϵ - 126,170), 629 nm (ϵ - 26,697), 341 nm (ϵ - 58,872) and 292 nm (ϵ - 30,600) in the ultraviolet, visible, near-infrared absorption spectra.



Example 7

The following compounds were placed in a 500 mL, single-necked, round-bottom flask:

5

129.98 g (0.67 mol) dimethyl terephthalate

83.08 g (1.34 mol) ethylene glycol

1.04 mL of a n-butanol solution of acetyl-
triisopropyl titanate which contained

10

0.0128 g Ti

0.0013 g (1.27×10^{-6} mol) near infrared fluoro-
phore of Example 6

15 The flask was equipped with a nitrogen inlet, stirrer, vacuum outlet, and condensing flask. The flask and contents were heated at 200°C in a Belmont metal bath for 60 minutes, at 210°C for 75 minutes, and at 230°C for 50 minutes with a nitrogen sweep over the reaction mixture. The temperature of the bath was
20 increased to 270°C. With a stream of nitrogen bleeding in the system, vacuum was applied slowly at 270°C over a 10 minute period until the pressure was reduced to 100 mm Hg. The flask and contents were heated at 270°C under a pressure of 100 mm Hg for 30 minutes. The metal
25 bath temperature was increased to 285°C and the pressure was reduced to 4.5 mm Hg over a 10 minute period. The flask and contents were heated at 285°C under a pressure of 4.5 mm Hg for 25 minutes. Then the pressure was reduced to 0.3 mm Hg and polycondensation was continued
30 at 285°C for 16 minutes. The flask was removed from the metal bath and was allowed to cool while the polymer crystallized. The resulting polymer has an inherent viscosity of 0.55 measured in a 60/40 ratio by weight of phenol/tetrachloroethane at a concentration of 0.5 g per
35 100 mL. The resulting polymer contains about 10 ppm of



the phthalocyanine near infrared fluorescent compound and has a weight average molecular weight of 38,051, a number average molecular weight of 21,078, a polydispersity of 1.80 and a melting temperature of 255°C.

5 The sample was ground in a Wiley mill and a film sample prepared by compression molding of approximately 1 g granules to form a 13-mil thick film using a 2-inch diameter, circular mold at 285°C and 4500 pounds ram force (4 inch ram) in a Pasadena Hydraulic, Inc. press.
10 The film had a very slight yellowish-green color and when exposed to 672 nm wavelength light from a laser diode source exhibited a strong fluorescence with a maximum intensity of emitted light at wavelength of approximately 700 nm.

15

Example 8

A reaction mixture of tetraphenoxy-chloroaluminum phthalocyanine (0.94 g) of Example 5, dimethyl-3-hydroxyisophthalate (0.24 g) and pyridine (20 g) was
20 heated at reflux for 24 hours and allowed to cool to room temperature. Added isopropanol (20 mL) and then precipitated, by the addition of water, the phthalocyanine product, which was collected by filtration,
25 washed with water and dried in air (yield - 0.90 g). In methylene chloride, absorption maxima were observed at 696 nm (104,585), 626 nm (32,882) and 343 nm (64,090) in the ultraviolet, visible and near infrared absorption spectra.

30

Example 9

The near infrared fluorophore (0.0013 g) of Example 8 was added to dimethyl terephthalate (129.98 g), 0.67
35 mole) and ethylene glycol (83.08 g, 1.34 mole).



Titanium catalyst (1.04 mL of a n-butanol containing 0.0128 g of Ti as acetyl triisopropyl titanate) was added and the polymerization reaction carried out under the conditions described in Example 7. The resulting very pale green polymer contains approximately 10 ppm of the near infrared fluorophore and has an inherent viscosity of 0.50, a weight average molecular weight of 34,310, a number average molecular weight of 22,247, a polydispersity of 1.54 and a melting temperature of 253°C. A 13-mil thick film was prepared as in Example 7. When exposed to 672 nm light from a laser diode source the film exhibited a strong fluorescence with a maximum intensity of emitted light at approximately 700 nm.

Example 10

The following compounds were placed in a 500 mL three-neck, round bottom flask:

116.38 g (0.60 mole) dimethyl terephthalate
81.00 g (0.90 mole) 2-methyl-1,3-propanediol
0.0128 g Ti from a n-butanol solution of titanium tetraisopropoxide

The flask was equipped with a nitrogen inlet, stirrer, vacuum outlet and condensing flask. The flask and contents were heated in a Belmont metal bath with a nitrogen sweep over the reaction mixture as the temperature was increased to 200°C and then to 230°C over 1.5 hours. The reaction temperature was increased to about 250°C over 1 hour and the near infrared fluorophore of Example 1 (0.0396 g, 6.47×10^{-5} mole) was added. A vacuum was applied until the pressure was reduced to about 0.5 mm Hg and heating continued at 250°C and at



0.1-0.5 mm Hg for about 10 minutes. The flask was removed from the metal bath and allowed to cool while the polymer solidified. The very light green polymer which contained about 300 ppm of the NIRF has an inherent viscosity of 0.21, a weight average molecular weight of 12,437, a number average molecular weight of 7,993, a polydispersity of 1.55 and no melting temperature by differential scanning calorimetry (DSC) analysis.

Example 11

TENITE® brand polypropylene P5-029 (Eastman Kodak Company) (9,900 g) was dry blended with 100 g of polymer of Example 9, which had been previously ground using a Wiley mill, and the mixture compounded and extruded at a maximum temperature of about 220°C to produce pellets, which were then molded into a thin-walled container having a wall thickness of about 20-25 mils. The polymer sample, which contains about 3 ppm of the NIRF, exhibits strong fluorescence when exposed to light generated by a laser diode source at 672 nm. A maximum at about 708 nm was observed in the emission spectrum.

Example 12

A mixture of 5-phenoxy-1,3-diiminoisoindoline (3.68 g, 0.016 mole), silicon tetrachloride (4.0 g, 0.024 mole) 1,2,3,4-tetrahydronaphthalene (20 mL) and tri-n-butylamine (10 mL) was heated under nitrogen at about 200°C for 40 minutes, allowed to stir overnight at room temperature and reheated to 180°C and held for about 2.0 hours. After cooling to room temperature, the reaction mixture was diluted with 30 mL of methanol, filtered, and the collected solid washed with methanol and dried



in air (yield - 2.71 g, 69.3% of the theoretical yield). Mass spectrometry supported the structure: 2(3), 9(10), 16(17), 23(24)-tetraphenoxy -Pc-Si-(Cl)₂.

5 Example 13

 A mixture of the tetraphenoxy-dichlorosilicon-phthalocyanine (0.49 g) of Example 12, methyl 4-hydroxybenzoate (0.16 g) and pyridine (5 g) was heated
10 at reflux for 3 hours under nitrogen. To the cooled reaction mixture were added isopropanol (20 mL) and then water (20 mL) with stirring. The product was collected by filtration, washed with water and dried in air. Mass spectrometry supports the structure: 2(3), 9(10),
15 16(17), 23(24)-tetraphenoxy- Pc-Si-(OC₆H₄-4-CO₂CH₃)₂.

Example 14

 The near infrared fluorophore (0.0013 g, 1.07×10^{-6}
20 mole) of Example 13 was added to ethylene glycol (83.08 g, 1.34 mole) and dimethyl terephthalate (129.98 g, 0.67 mole) and the polymerization reaction carried out as described in Example 7 in the presence of 0.0128 g titanium catalyst. The resulting pale green polymer
25 contains approximately 10 ppm of the NIRF and has an inherent viscosity of 0.82, a melting temperature of 252°C by DSC, a weight average molecular weight of 59,274, a number average molecular weight of 31,578 and a polydispersity of 1.88. The polymer was ground in a
30 Wiley mill and a film having a thickness of about 13 mils was prepared as in Example 7. When the film was exposed to 672 nm wavelength light from a laser diode source, significant fluorescence with a maximum intensity of emitted light at wavelength of
35 approximately 698 nm was observed.



Example 15

A mixture of silicon phthalocyanine dichloride (0.2 g) was dissolved in trifluoroacetic acid (10 mL) and the reaction mixture allowed to stand in a hood in an evaporating dish until all the the excess trifluoroacetic acid had evaporated. Absorption maxima were observed at 691 nm (ϵ - 168,645), 659 nm (ϵ - 21,596), 622 nm (ϵ - 24,789), 356 (ϵ - 50,090) and 334 nm (44,608) in the ultraviolet-visible-near infrared absorption spectra. The product was assumed to be silicon phthalocyanine trifluoroacetate ($\text{Pc-Si}(\text{OCOCF}_3)_2$).

Example 16

15

The NIRF compound of Example 15 (0.0013 g, 1.70×10^{-6} mole) was added to dimethyl terephthalate (129.98 g) and ethylene glycol (83.08 g, 1.34 mole) and the polymerization reaction carried out as in Example 7 in the presence of 0.0128 g Ti (from a n-butanol solution of acetyl-triisopropyl titanate). The pale blue green polymer contains approximately 10 ppm of the NIRF and has an inherent viscosity of 0.52, a weight average molecular weight of 35,646, a number average molecular weight of 19,737, a polydispersity of 1.81 and a melting temperature of 256°C. The polymer was ground in a Wiley mill and a film having a thickness of about 13 mils was prepared as in Example 7. When the film was exposed to 672 nm wavelength light from a laser diode source, significant fluorescence over the wavelength range of about 675 to about 780 nm was emitted with apparent emission maxima at about 687 nm and 755 nm.



Example 17

The following compounds were placed in a 500 mL three-neck, round bottom flask:

- 5 116.40 g (0.60 mole) dimethyl terephthalate
 81.00 g (0.90 mole) 2-methyl-1,3-propanediol
 0.0133 g Ti from a n-butanol solution of titanium
 tetraisopropoxide
- 10 1.60 g (2.07×10^{-3} mole) Nc-Si-(OH)₂
 (B. L. Wheeler, et al., J.A.C.S. 1984,
 106, 7404-7410; Nc represents
 naphthaholocyanine)
- 15 The flask was equipped with a nitrogen inlet,
 stirrer, vacuum outlet and condensing flask. The flask
 and contents were heated in a Belmont metal bath with a
 nitrogen sweep over the reaction mixture and the
 temperature was increased to about 200°C and then to
- 20 230°C over about 1.5 hour. The reaction temperature was
 increased to about 250°C over 1 hour and then vacuum was
 applied and heating continued at about 250°C for about
 1.0 hour at 0.1 to 0.5 mm Hg. The flask was removed
 from the metal bath and allowed to cool while the
- 25 polymer solidified. The very pale yellowish-green
 polymer contains about 1.0% by weight of the NIRF and
 has an inherent viscosity of 0.44, a weight average
 molecular weight of 25,053, a number average molecular
 weight of 13,710, a polydispersity of 1.83 and a melting
- 30 temperature of about 157°C. The polymer was ground in a
 Wiley mill.



Example 18

Poly(ethylene terephthalate) (6,000 g) having an inherent viscosity of about 0.71, which had been ground using a Wiley mill to a particle size of about 2 mm, was blended with 1.0 g of the polymer containing the NIRF of Example 17. This blend was vacuum dried at about 110°C for 16 hours and then compounded and extruded using a Sterling 1.25 inch single-screw extruder at a maximum temperature of 270°C to produce pellets, which were molded into a thin-walled container having a wall thickness of about 13 mils. The polymer sample contains about 1-2 ppm of the near infrared fluorophore. When a sample of the side wall is exposed to infrared light in a near infrared spectrophotometer set on a wavelength of 780 nm, a broad band fluorescence is observed with a peak at about 795 nm.

Example 19

A reaction mixture of Nc-Si(OH)_2 (1.5 g) (J.A.C.S. 1984, 106, 7404-7410), pyridine (150 mL) and chloro dimethylphenylsilane (10 mL) was heated at reflux for 5 hours and then allowed to cool. Some insolubles were filtered off and the filtrate stripped on a rotary evaporator under vacuum. Pentane (300 mL) was added to the residue to produce a solid upon stirring which was collected by filtration, washed with 50/50 acetone/water, then with pentane and dried in air. The solid (1.9 g) was reslurried in hot pentane (300 mL) and filtered hot. The solid thus obtained was washed with pentane and air dried (yield - 1.5 g). Mass spectrometry supported the following structure $\text{Nc-Si[O-Si(CH}_3)_2\text{C}_6\text{H}_5]_2$.



Example 20

The following materials were placed in a 500-mL three-necked, round-bottom flask:

- 5
116.40 g (0.60 mole) dimethyl terephthalate
81.00 g (0.90 mole) 1,4-butanediol
0.0132 g Ti from a n-butanol solution of titanium tetraisopropoxide
10 0.132 g (1.27×10^{-4} mole) NIRF of Example 19

The flask was equipped with a nitrogen inlet, stirrer, vacuum outlet, and condensing flask. The flask and contents were heated in a Belmont metal bath with a
15 nitrogen sweep over the reaction mixture as the temperature was increased to 200°C and then to 230°C over 2 hours. Over the next 1.0 hour the temperature was increased to about 250°C. Vacuum was applied until the pressure was reduced to 0.5 mm Hg. The polycondensation
20 was completed by heating the flask and contents at about 250°C for about 1.0 hour under a pressure of 0.1 to 0.5 mm Hg. The flask was removed from the metal bath and was allowed to cool while the polymer solidified. The resulting polyester, containing about 1,000 ppm of the
25 NIRF of Example 19, has an inherent viscosity of 0.79, a weight average molecular weight of 43,573, a number average molecular weight of 25,230, a polydispersity value of 1.73 and a melting temperature of 228°C. The sample was ground in a Wiley mill.

30

Example 21

Poly(ethylene terephthalate) (6,000 g) having an inherent viscosity of about 0.71, which had been ground
35 using a Wiley mill to a particle size of about 2 mm, was



dry blended with 10.0 g of the polymer composition of Example 20, which contained about 1,000 ppm of the NIRF. This blend was dried in a vacuum oven at 110°C for 16 hours and then compounded and extruded into pellets using a Sterling 1.25 inch compounding single-screw extruder at about 280°C. The pellets were molded into a thin-walled bottle having a side wall thickness of about 13 mils and containing about 1-2 ppm of the NIRF. When a sample of the side wall is exposed to infrared light in a near infrared spectrophotometer set on a wavelength of 780 nm, a broad band fluorescence is observed with a peak at about 800 nm.

Example 22

Tolylene 2,4-diisocyanate (8.7 g, 0.05 M) was added dropwise to a solution of N,N-dimethylformamide (100 mL) which contained 4.50 g (0.05 M) and 13.4 mg (1.0×10^{-5} M) of Nc-Si(OH)_2 (B. Wheeler, et al., J.A.C.S. 1984, 106, 7404-7410). After the addition was completed the reaction mixture was heated at 80-85°C with stirring for 0.5 hours and then allowed to cool to room temperature.

Methanol (5.0 mL) was added and the solution was then drowned into water containing 5 mL of saturated salt solution. The essentially white polyurethane polymer was collected by filtration, washed with 2.0 L of water and then dried in air. The yield was 12.2 g of polymer which contains about 0.1% by weight of the NIRF and which has an inherent viscosity of 0.14, a weight average molecular weight of 8,253, a number average molecular weight of 6,083 and a polydispersity of 1.35. A sample of the polymer when dissolved in N,N-dimethylformamide showed a maximum absorption (λ_{max}) at 775 nm in the near infrared absorption spectrum, with another less intense absorption band having a maximum absorption



at about 690 nm.

Additional examples of compounds having Formulae II, III and IV are presented in Tables 3, 4 and 2, respectively.

5



TABLE 1

EXEMPLARY -X-R Groups








5	<u>-X-R</u>	<u>-X-R</u>
10	$-\text{OCH}_3$	
15		
20	$-\text{OC}_4\text{H}_9-n$	
25		
30	$-\text{OC}(\text{CH}_3)_3$	
35		
40	$-\text{OC}_{12}\text{H}_{25}-n$	
45		
50	$-\text{SCH}_3$	
55		
60	$-\text{SC}_2\text{H}_4\text{OH}$	
65		
70		
75	$-\text{SC}_8\text{H}_{17}-n$	
80		



TABLE 1
(Continued)

EXEMPLARY -X-R Groups

5	<u>-X-R</u>	<u>-X-R</u>
10	$-\text{OCH}_2\text{CH}(\text{C}_2\text{H}_5)\text{C}_4\text{H}_9-n$	$-\text{S}-\text{N}=\text{N}-\text{CO}_2\text{CH}_3$
15		
20	$-\text{OCH}_2\text{CH}=\text{CH}_2$	$-\text{S}-\text{C}_6\text{H}_4-\text{OCH}_3$
25		
30	$-\text{OCH}_2\text{CH}=\text{CH}-\text{CH}_3$	$-\text{Te}-\text{C}_6\text{H}_4-\text{CH}_3$
35		
40	$-\text{SCH}_2\text{C}_6\text{H}_5$	$-\text{Se}-\text{C}_6\text{H}_4-$
45	$-\text{SCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OH}$	$-\text{OCH}_2\text{C}_6\text{H}_4-4-\text{COOH}$
50	$-\text{OCH}_2\text{C}\equiv\text{CH}$	$-\text{OC}_6\text{H}_4-4-\text{CH}_2\text{COOH}$
55	$-\text{N}(\text{C}_2\text{H}_5)_2$	$-\text{OCH}_2\text{CH}_2\text{CO}_2\text{CH}_3$
60	$-\text{NHC}_6\text{H}_5$	$-\text{OCH}_2\text{CH}_2\text{OCOCH}_3$
65	$-\text{N}(\text{CH}_3)\text{C}_6\text{H}_5$	$-\text{O}-\text{C}_6\text{F}_5$
70		
75	$-\text{N}(\text{C}_2\text{H}_4\text{OH})_2$	$-\text{OC}_6\text{H}_4-4-\text{Cl}$



TABLE 1
(Continued)



EXEMPLARY -X-R Groups

5

-X-R

-X-R



10



15



20

25





30



35



40





45




50



55




60




65



70



75



80



TABLE 1
(Continued)

EXEMPLARY -X-R Groups

5

-X-R

-X-R

10






TABLE 2

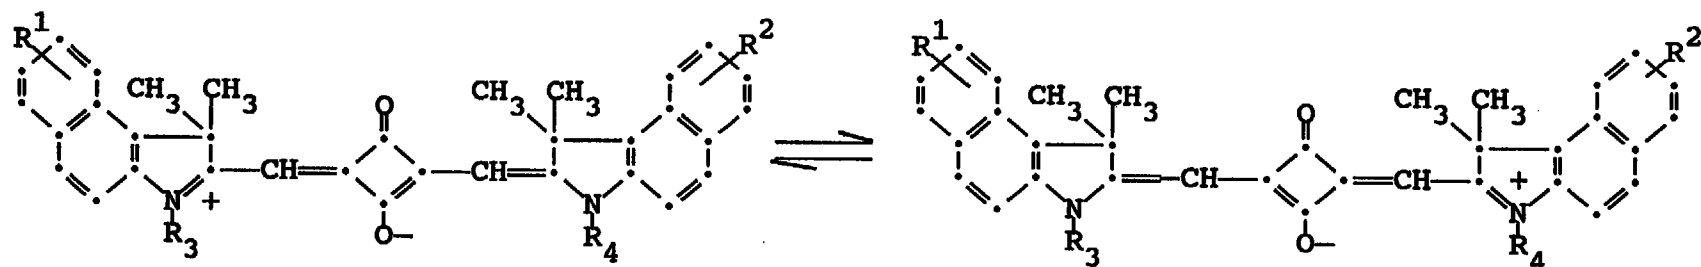


Ex. No.	R_1	R_2	R_3	R_4
23	7-CO ₂ CH ₃	7-CO ₂ CH ₃	CH ₃	CH ₃
24	7-CO ₂ C ₂ H ₅	7-CO ₂ C ₂ H ₅	C ₆ H ₅	C ₆ H ₅
25	7-CO ₂ C ₆ H ₅	7-CO ₂ C ₆ H ₅	C ₆ H ₄ -4-CH ₃	C ₆ H ₄ -4-CH ₃
26	7-CONH ₂	7-CONH ₂	H	H
27	7-CONHC ₂ H ₄ OH	7-CONHC ₂ H ₄ OH	H	H
28	7-CON(CH ₃)C ₂ H ₄ OH	7-CON(CH ₃)C ₂ H ₄ OH	CH ₃	CH ₃
29	7-CON(C ₂ H ₄ OH) ₂	7-CON(C ₂ H ₄ OH) ₂	H	H

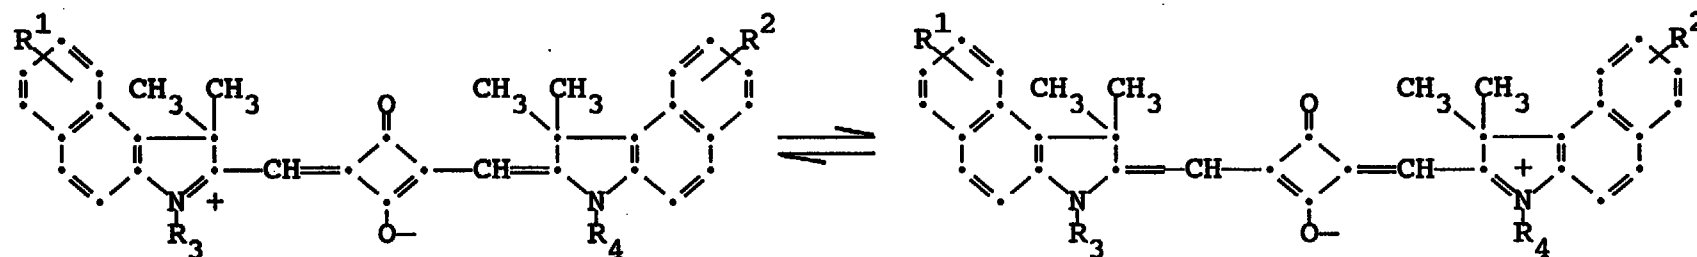TABLE 2
(Continued)




Ex. No.	R ₁	R ₂	R ₃	R ₄
30	7-CONHC ₆ H ₁₁	7-CONHC ₆ H ₁₁	C ₄ H ₉ -n	C ₄ H ₉ -n
31	7-CONHC ₆ H ₅	7-CONHC ₆ H ₅	H	H
32	7-CONHCH ₂ C ₆ H ₁₀ -4-CH ₂ OH	7-CONHCH ₂ C ₆ H ₁₀ -4-CH ₂ OH	CH ₃	CH ₃
33	7-CONHC ₆ H ₄ -4-CO ₂ CH ₃	7-CONHC ₆ H ₄ -4-CO ₂ CH ₃	H	H
34	7-SO ₂ NH ₂	7-SO ₂ NH ₂	H	H
35	7-SO ₂ N(C ₂ H ₅) ₂	7-SO ₂ N(C ₂ H ₅) ₂	CH ₃	CH ₃
36	7-SO ₂ N(CH ₃)C ₆ H ₁₁	7-SO ₂ N(CH ₃)C ₆ H ₁₁	CH ₃	CH ₃

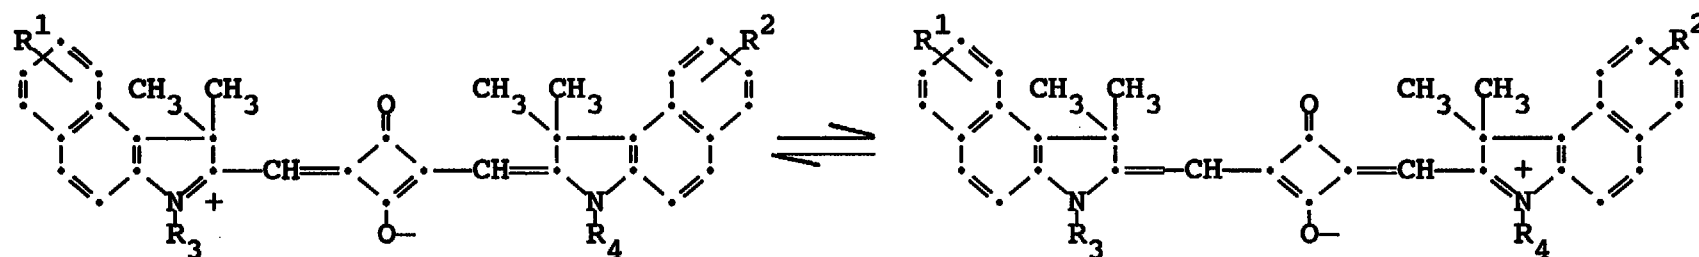TABLE 2
(Continued)




Ex. No.	R_1	R_2	R_3	R_4
37			H	H
38			H	H
39			H	H
40	$7\text{-SO}_2\text{NHC}_2\text{H}_4\text{OH}$	$7\text{-SO}_2\text{NHC}_2\text{H}_4\text{OH}$	C_6H_5	C_6H_5
41	$7\text{-SO}_2\text{N}(\text{CH}_3)\text{C}_2\text{H}_4\text{OH}$	$7\text{-SO}_2\text{N}(\text{CH}_3)\text{C}_2\text{H}_4\text{OH}$	H	H

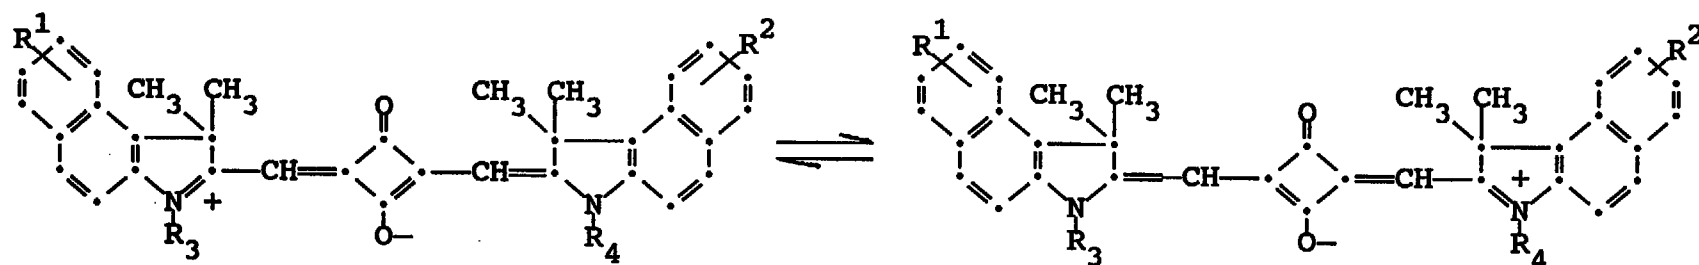TABLE 2
(Continued)




Ex. No.	R ₁	R ₂	R ₃	R ₄
42	7-SO ₂ NHC ₆ H ₄ -3-CO ₂ CH ₃	7-SO ₂ NHC ₆ H ₄ -3-CO ₂ CH ₄	H	H
43	7-SO ₂ NHC ₆ H ₄ -4-C ₂ H ₄ OH	7-SO ₂ NHC ₆ H ₄ -4-C ₂ H ₄ OH	H	H
44	7-SO ₂ NHC ₆ H ₄ -3-CH ₂ OH	7-SO ₂ NHC ₆ H ₄ -3-CH ₂ OH	CH ₃	CH ₃
45	7-SO ₂ NHC ₆ H ₁₁	7-SO ₂ NHC ₆ H ₁₁	CH ₂ CH=CH ₂	CH ₂ CH=CH ₂
46	7-CH ₃	7-CH ₃	H	H
47	7-OC ₆ H ₅	7-OC ₆ H ₅	H	H
48	7-OC ₂ H ₄ OH	7-OC ₂ H ₄ OH	H	H

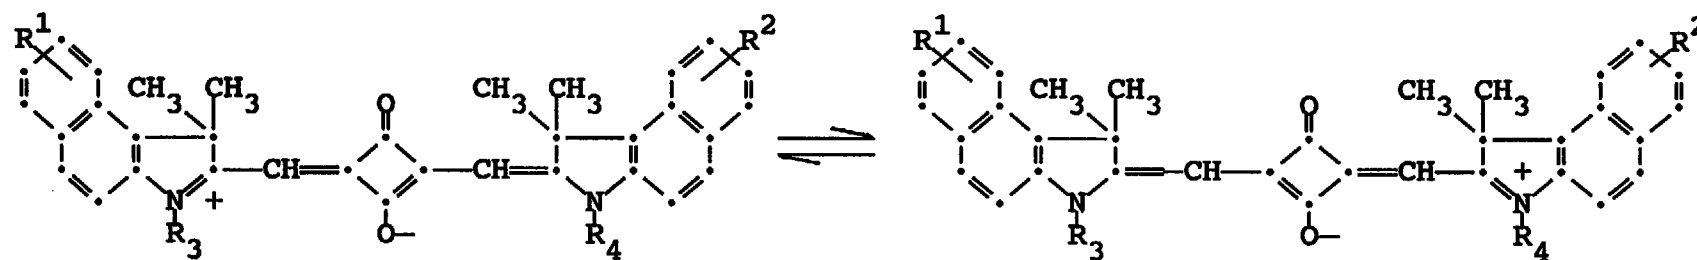TABLE 2
(Continued)




Ex. No.	R ₁	R ₂	R ₃	R ₄
49	7-SC ₂ H ₅	7-SC ₂ H ₅	H	H
50	7-SC ₆ H ₅	7-S-C ₆ H ₅	H	H
51	7-Br	7-Br	CH ₃	CH ₃
52	8-OH	8-OH	H	H
53	8-OCH ₃	8-OCH ₃	H	H
54	8-OCOCH ₃	8-OCOCH ₃	H	H
55	H	H	H	H

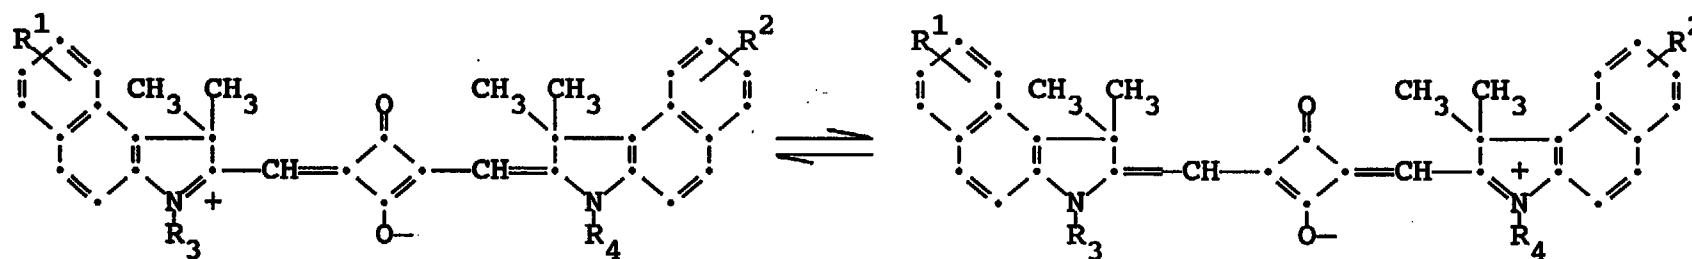TABLE 2
(Continued)



Ex. No.	R ₁	R ₂	R ₃	R ₄
56	7-COOH	7-COOH	H	H
57	7-CO ₂ CH ₃	H	H	CH ₃
58	7-CO ₂ CH ₃	7-SO ₂ NHC ₂ H ₄ OH	H	H
59	H	7-SO ₂ N(C ₂ H ₄ OH) ₂	H	H
60	7-CO ₂ CH ₃	7-CO ₂ CH ₃	C ₆ H ₅	CH ₃
61	7-SO ₂ C ₆ H ₅	7-SO ₂ C ₆ H ₅	H	H
62	7-SO ₂ CH ₃	7-SO ₂ CH ₃	H	H

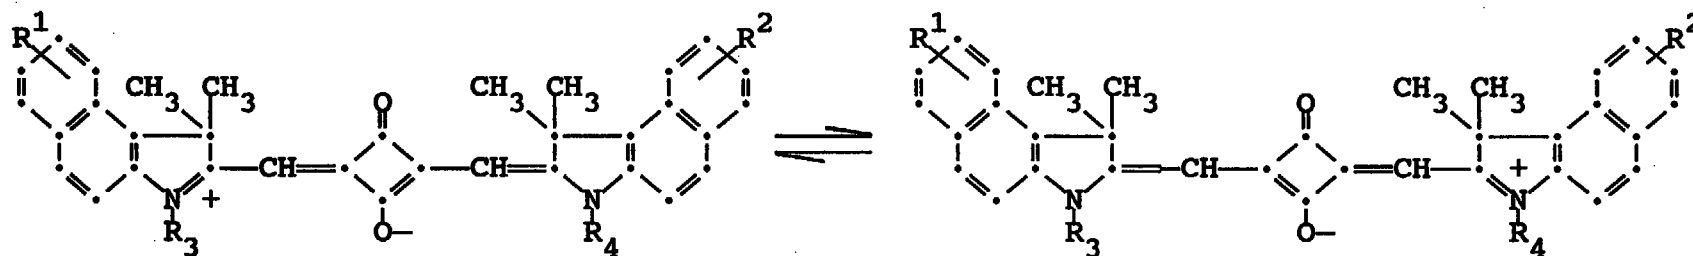TABLE 2
(Continued)



Ex. No.	R_1	R_2	R_3	R_4
63	7-SO ₂ (CH ₂) ₄ OH	7-SO ₂ (CH ₂) ₄ OH	H	H
64	7-SO ₂ C ₆ H ₄ -3-CO ₂ CH ₃	7-SO ₂ C ₆ H ₄ -3-CO ₂ CH ₃	H	H

TABLE 3

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
65	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcH ₂
66	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcAlOH
67	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcAl-OC ₆ H ₄ -4-CO ₂ CH ₃
68	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcAl-SC ₆ H ₄ -2-CO ₂ CH ₃
69	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcAl-S-C ₂ H ₄ OH
70	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcCa
71	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcVO
72	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcInCl
73	3(4), 9(10), 16(17), 23(24)-Tetraphenoxy-PcCrF

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
74	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcAlOCOCF ₃
75	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcNi
76	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-Sn
77	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcSnCl ₂
78	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcSn(OCOCH ₃) ₂
79	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcSiF ₂
80	3(4), 9(10), 16(17), 23(24)-Tetra-(4-methoxyphenoxy)-PcCo
81	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenylthio)-PcH ₂
82	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenylthio)-PcAlCl

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
83	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenylthio)-PcAlOCOCF ₃
84	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenylthio)-PcGe
85	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenylthio)-PcGa
86	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSiCl ₂
87	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSiOH
88	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSi(OC ₂ H ₄ OH) ₂
89	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSi(OC ₄ H ₉ -n) ₂
90	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcZn
91	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-Pc-Mg
92	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcMn

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
93	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcPt
94	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcPd
95	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcPb
96	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSi(OCOCH ₃) ₂
97	3(4), 9(10), 16(17), 23(24)-Tetra-(4-t-butylphenoxy)-PcSiF ₂
98	3(4), 9(10), 16(17), 23(24)-Tetra-(2-hydroxyethoxy)-PcAlOH
99	3(4), 9(10), 16(17), 23(24)-Tetra-(2-hydroxyethylthio)-Pc AlOCOCF ₃
100	3(4), 9(10), 16(17), 23(24)-Tetra-(4-carbomethoxyphenoxy)-PcSiCl ₂
101	3(4), 9(10), 16(17), 23(24)-Tetra-(2-carboxyphenylthio)-PcSi(OH) ₂
102	3(4), 9(10), 16(17), 23(24)-Tetra-(3-carbomethoxyphenylthio)-PcH ₂

1
9
0
1

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
103	3(4), 9(10), 16(17), 23(24)-Tetra-n-butoxy-PcVO
104	3(4), 9(10), 16(17), 23(24)-Tetraallyloxy-PcSn(OCOCF ₃) ₂
105	3(4), 9(10), 16(17), 23(24)-Tetrabenzoyloxy-PcZn
106	3(4), 9(10), 16(17), 23(24)-Tetracyclohexyloxy-PcSi[OC(C ₆ H ₅) ₃] ₂
107	3(4), 9(10), 16(17), 23(24)-Tetrabenzothiazol-2-ylthio-PcH ₂
108	3(4), 9(10), 16(17), 23(24)-Tetrabenzothiazol-2-ylthio-PcAlCl
109	3(4), 9(10), 16(17), 23(24)-Tetrabenzoxazol-2-ylthio-PcAlOCCOCF ₃
110	3(4), 9(10), 16(17), 23(24)-Tetra(5-methyl-1,3,4-thiadiazol-2-ylthio)-PcH ₂
111	3(4), 9(10), 16(17), 23(24)-Tetra-2-pyridylthio-PcSi(OC ₆ H ₅) ₂

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
112	3(4), 9(10), 16(17), 23(24)-Tetraphenylseleno-PcNi
113	3(4), 9(10), 16(17), 23(24)-Tetra-n-octylthio-PcSi(OC ₆ H ₄ -4-F) ₂
114	3(4), 9(10), 16(17), 23(24)-Tetra-(2-naphthylthio)-PcAlOH
115	3(4), 9(10), 16(17), 23(24)-Tetradiethylamino-PcH ₂
116	3(4), 9(10), 16(17), 23(24)-Tetrapiperidino-PcSn(OCOCF ₃) ₂
117	3(4), 9(10), 16(17), 23(24)-Tetratriazol-3-ylthio-PcSiCl ₂
118	3(4), 9(10), 16(17), 23(24)-Tetratriazol-3-ylthio-PcAl-OCOCF ₃
119	3(4), 9(10), 16(17), 23(24)-Tetraanilino-Pc-Cu
120	3(4), 9(10), 16(17), 23(24)-Tetra(4-methoxyanilino)-Pc-SnCl ₂

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
121	3(4), 9(10), 16(17), 23(24)-Tetra(4-dodecyloxyphenoxy)-PcIn-Cl
122	3(4), 9(10), 16(17), 23(24)-Tetra(2-naphthyloxy)-PcH ₂
123	3(4), 9(10), 16(17), 23(24)-Tetra(4-carbomethoxyphenylthio)-Pc-AlOH
124	1,4,8,11,15,18,22,25-Octamethoxy-2,3,9,10,16,17,23,24-Octachloro-PcSi(OH) ₂
125	1,4,8,11,15,18,22,25-Octamethoxy-2,3,9,10,16,17,23,24-Octachloro-PcAl-Cl
126	1,4,8,11,15,18,22,25-Octamethoxy-2,3,9,10,16,17,23,24-Octachloro-PcAlOCOCF ₃
127	1,4,8,11,15,18,22,25-Octamethoxy-2,3,9,10,16,17,23,24-Octachloro-PcVO
128	Hexadecachloro-PcAlOH
129	Hexadecaanilino-PcH ₂

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
130	Hexadeca(4-methylphenylthio)-PcSi(OC ₆ F ₅) ₂
131	1,4,8,11,15,18,22,25-Octaphenoxy-PcSiF ₂
132	1,4,8,11,15,18,22,25-Octaphenylthio-PcSi[O-Si(CH ₃) ₂ C ₆ H ₅] ₂
133	1,4,8,11,15,18,22,25-Octa-n-hexyloxyphenoxy-PcH ₂
134	1,4,8,11,15,18,22,25-Octa-(4-methylthiophenylthio)PcFe
135	2,3,9,10,16,17,23,24-Octachloro-Pc-Al-OH
136	2,3,9,10,16,17,23,24-Octabromo-Pc-AlOCOCF ₃
137	2,3,9,10,16,17,23,24-Octafluoro-Pc-SiCl ₂
138	2,3,9,10,16,17,23,24-Octaphenylthio-PcSi(OC ₆ H ₅) ₂



TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
139	2,3,9,10,16,17,23,24-Octa(2-hydroxyethoxy)PcSi[OC ₆ H ₄ -4-COOH] ₂
140	2,3,9,10,16,17,23,24-Octa(2-hydroxyethylthio)PcSi(OCOCF ₃) ₂
141	2,3,9,10,16,17,23,24-Octa(t-butoxyphenoxy)-PcH ₂
142	2,3,9,10,16,17,23,24-Octabenzothiazol-2-ylthio-PcAlOH
143	1,4,8,11,15,18,22,25-Octa(3-methylbutoxy)-2,3,9,10,16,17,23,24-octaphenylthio-PcAlOH
144	1,4,8,11,15,18,22,25-Octa(3-methylbutoxy)-2,3,9,10,16,17,23,24-octaphenoxy-PcSi(OH) ₂

TABLE 3
(Continued)

PHTHALOCYANINE COMPOUNDS
(Pc = PHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
145	1,4,8,11,15,18,22,25-Octa(3-methylbutoxy)-2,3,9,10,16,17,23,24-octa-n-butylthio-PcH ₂
146	1,4,8,11,15,18,22,25-Octafluoro(3-methylbutoxy)-2,3,9,10,16,17,23,24-octa-4(t-butylphenylthio)PcCu
147	1,4,8,11,15,18,22,25-Octafluoro-2,3,9,10,16,17,23,24-octaphenylthio-PcAlOC ₆ H ₄ -4-CO ₂ CH ₃
148	1,4,8,11,15,18,22,25-Octafluoro-2,3,9,10,16,17,23,24-octaphenylthio-PcVO
149	3(4), 9(10), 16(17), 23(24)-Tetra(1,1-dimethylpropyl)-PcAlOH
150	3(4), 9(10), 16(17), 23(24)-Tetra(1,1-dimethylpropyl)-PcAlCl
151	3(4), 9(10), 16(17), 23(24)-Tetra(1,1-dimethylpropyl)-PcAl-OC ₆ H ₃ -3,5-di-CO ₂ CH ₃

TABLE 4

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
152	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcH ₂
153	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcCu
154	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcSi(OH) ₂
155	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcVO
156	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcAlOH
157	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcAlOCOCF ₃
158	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcZn
159	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcSnCl ₂
160	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcCo
161	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcCa
162	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcPd

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
163	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcAlOC ₆ H ₄ -4-COOH
164	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcAlOC ₆ H ₃ -3,5-diCO ₂ CH ₃
165	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcSi(OC ₆ H ₄ -4-CO ₂ CH ₃) ₂
166	2(3), 11(12), 20(21), 29(30) Tetra-t-butyl-NcSn(OCOCH ₃) ₂
167	2(3), 11(12), 20(21), 29(30) Tetramethyl-NcH ₂
168	2(3), 11(12), 20(21), 29(30) Tetramethoxy-NcAlOH
169	2(3), 11(12), 20(21), 29(30) Tetramethylthio-NcAlOCCOCF ₃
170	NcVO
171	NcInCl
172	NcZn

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
173	$\text{Nc}(\text{SiOCOCF}_3)_2$
174	NcMg
175	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- NcH_2
176	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- NcVO
177	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- $\text{NcSi}(\text{OH})_2$
178	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- $\text{NcSi}[\text{OSi}(\text{C}_6\text{H}_5)_3]_2$
179	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- $\text{NcSn}[\text{OCOCH}_3]_2$
180	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- NcZn
181	2(3), 11(12), 20(21), 29(30) Tetra-n-butoxy- NcMg
182	2(3), 11(12), 20(21), 29(30) Tetradodecyloxy- $\text{NcSi}(\text{OH})_2$

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
183	2(3), 11(12), 20(21), 29(30) Tetrabenzothiazol-2-yl-thio-NcAlOH
184	2(3), 11(12), 20(21), 29(30) Tetrabenzimidazol-2-ylthio-NcAlOCOCF ₃
185	2(3), 11(12), 20(21), 29(30) Tetraphenylseleno-NcSnCl ₂
186	2(3), 11(12), 20(21), 29(30) Tetraphenyltelluro-NcSiCl ₂
187	2(3), 11(12), 20(21), 29(30) Tetraanilino-NcSi(OH) ₂
188	2(3), 11(12), 20(21), 29(30) Tetra-(2-naphthyloxy)-NcCSi(OCOCF ₃) ₂
189	2(3), 11(12), 20(21), 29(30) Tetra-(2-naphthylthio)-NcSi(OCOCH ₃) ₂
190	2(3), 11(12), 20(21), 29(30) Tetraallyloxy-Nc-Sn(OCOCH ₃) ₂
191	2(3), 11(12), 20(21), 29(30) Tetrapropargyloxy-NC-Si(OH) ₂

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
192	2(3), 11(12), 20(21), 29(30) Tetracyclohexyloxy-Nc-Si[OC ₆ H ₃ -3,5-diCO ₂ CH ₃] ₂
193	2(3), 11(12), 20(21), 29(30) Tetra(2-phenoxyethoxy)-Nc-AlOH
194	2(3), 11(12), 20(21), 29(30) Tetra(2-phenylethoxy)-Nc-VO
195	2(3), 11(12), 20(21), 29(30) Tetrabenzoyloxy-Nc-InCl
196	2(3), 11(12), 20(21), 29(30) Tetrapiperidino-Nc-Cu
197	5,9,14,18,23,27,32,36-Octamethoxy-NcSi(OH) ₂
198	5,9,14,18,23,27,32,36-Octa-n-butoxy-NcSi(OCCOCF ₃) ₂
199	5,9,14,18,23,27,32,36-Octaphenoxy-NcMg
200	5,9,14,18,23,27,32,36-Octaallyloxy-NcAlOC ₆ H ₄ -4-CO ₂ CH ₃

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
201	5,9,14,18,23,27,32,36-Octaethoxy-NcVO
202	2(3), 11(12), 20(21), 29(30) - Tetrachloro-NcH ₂
203	2(3), 11(12), 20(21), 29(30) - Tetrabromo-NcH ₂
204	2,3,11,12,20,21,29,30-Octabromo-NcZn
205	2,3,11,12,20,21,29,30-Octaphenoxy-NcAlOH
206	2,3,11,12,20,21,29,30-Octaphenylthio-NcSi(OH) ₂
207	2,3,11,12,20,21,29,30-Octabenzothiazol-2-ylthio-NcSi(OCOCF ₃) ₂
208	2,3,11,12,20,21,29,30-Octabenzoxazol-2-ylthio-NcVO
209	2,3,11,12,20,21,29,30-Octatriazol-3-ylthio-NcCu
210	2,3,11,12,20,21,29,30-Octa(4-t-butoxyphenoxy)NcAlOH

TABLE 4
(Continued)

NAPHTALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
211	2,3,11,12,20,21,29,30-Octa(4-methoxyphenylthio)NcSi(OH) ₂
212	2,3,11,12,20,21,29,30-Octa(2-ethylhexoxy)-NcSi(OH) ₂
213	2,3,11,12,20,21,29,30-Octa(2-hydroxyethoxy)-NcAlCl
214	2,3,11,12,20,21,29,30-Octa(2-hydroxyethylthio)-NcSi(OH) ₂
215	2,3,11,12,20,21,29,30-Octa(4-hydroxybutylthio)-NcH ₂
216	2,3,11,12,20,21,29,30-Octamethyl-NcAlOH
217	2,3,11,12,20,21,29,30-Octa-p-t-butylphenylthio-Nc-Si(OH) ₂
218	2(3), 11(12), 20(21), 29(30)-Tetra diethylamino-NcAlOH
219	2(3), 11(12), 20(21), 29(30)-Tetra morpholino-NcAlOCOCF ₃
220	2(3), 11(12), 20(21), 29(30)-Tetra-O(C ₂ H ₄ O) ₂ CH ₃ Nc-Si(OH) ₂

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex. No.</u>	<u>COMPOUND</u>
221	2(3), 11(12), 20(21), 29(30)-Tetra-O(C ₂ H ₄ O) ₂ CH ₃ -Nc-Si(OH) ₂
222	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₃ -Si-CH ₂ S]-Nc-Si[OSi(C ₄ H ₉) ₃] ₂
223	2(3), 11(12), 20(21), 29(30)-tetra [(C ₂ H ₅) ₃ -Si-(CH ₂) ₂ S]-Nc-Si[OSi(CH ₃) ₃] ₂
224	2(3), 11(12), 20(21), 29(30)-tetra [(C ₆ H ₁₃) ₃ -Si-CH ₂ S]-Nc-Si[OSi(OCH ₃) ₃] ₂
225	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃ O) ₃ -Si-(CH ₂) ₃ S]-Nc-Ge[OSi(C ₂ H ₅) ₃] ₂
226	2(3), 11(12), 20(21), 29(30)-tetra [(C ₆ H ₅ O) ₃ -Si-CH ₂ -S]-Nc-Ge[OSi(OCH ₃) ₃] ₂
227	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₃ -Si-CH ₂ CH ₂ O]-Nc-Si(OH) ₂
228	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₃ -SiC(Cl) ₂ CH ₂ S]-Nc-Ge[OSi(CH ₃) ₃] ₂
229	2(3), 11(12), 20(21), 29(30)-tetra [(C ₆ H ₅) ₃ -SiCH ₂ O]-Nc-Ge(OCOCF ₃) ₂
230	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₃ -Si-CH ₂ S]-Nc-Sn[OSi(C ₂ H ₅) ₃] ₂

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
231	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₃ -Si-CH ₂ S]-Nc-Sn[OC ₁₈ H ₃₇) ₂
232	2(3), 11(12), 20(21), 29(30)-tetra [(CH ₃) ₂ C ₆ H ₅ Si-(CH ₂) ₄ O]-Nc-AlOH
233	2,3,11,12,20,21,29,30-octa [(CH ₃) ₃ Si-CH ₂ S]-Nc-Si(OH) ₂
234	5(36), 9(14), 18(23), 27(32)-tetra(dodecylamino)-NcAlCl
235	5(36), 9(14), 18(23), 27(32)-tetra(n-octylamino)-NcAlOH
236	2(36), 9(14), 18(23), 27(32)-tetra(n-octylamino)-NcAl-OC ₆ H ₃ -3,5-di-CO ₂ CH ₃
237	2(3), 11(12), 20(21), 29(30)-tetra(dodecylthio)-NcAlOH
238	2(3), 11(12), 20(21), 29(30)-tetra(n-octylthio)-NcAlCl
239	2(3), 11(12), 20(21), 29(30)-tetra(dodecylthio)-NcAl- OC ₆ H ₃ -3,5-di-CO ₂ CH ₃

TABLE 4
(Continued)

NAPHTHALOCYANINE COMPOUNDS
(Nc = NAPHTHALOCYANINE NUCLEUS)

<u>Ex.</u> <u>No.</u>	<u>COMPOUND</u>
240	2, 3, 11, 12, 20, 21, 29, 30-Octa(dodecylthio)-NcSi(OH) ₂
241	2, 3, 11, 12, 20, 21, 29, 30-Octa(dodecylthio)-NcSi(-OC ₆ H ₄ -4-CO ₂ CH ₃) ₂





- 77 -

Claims

We claim:


- 5 1. A thermoplastic polymer composition which comprises
a thermoplastic polymer having admixed therein one
or more monomeric near-infrared fluorescing
compounds, provided that said near-infrared
10 fluourescing compounds do not substantially absorb
light in the visible spectrum, wherein said
compounds are present in a concentration sufficient
to impart fluorescence capable of detection by near
infrared detection means when exposed to electro-
magnetic radiation having a wavelength of about 670
15 to 2500 nm.
2. The thermoplastic polymer composition of claim 1,
wherein the thermoplastic polymer is selected from
a list consisting of polyesters, polyolefins,
20 polyamides, polyvinyl chlorides, polyvinylidene
chlorides, polycarbonates, cellulose esters,
polyacrylates, polyimides, polyester-amides, and
polystyrenes.
- 25 3. The thermoplastic polymer composition of claim 1 or
2, wherein the thermoplastic polymer is a
polyester.
- 30 4. The thermoplastic polymer composition of claim 1, 2
or 3, wherein the polyester is a poly(ethylene)
terephthalate.
- 35 5. The thermoplastic polymer composition of claim 1,
wherein the near infrared fluorescing compound is
selected from the classes of phathalocyanines,






- 78 -


naphthalocyanines and squaraines and correspond to
Formulae II, III and IV:



(II)




(III)

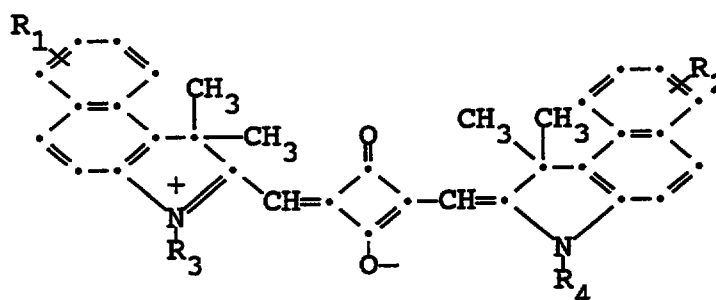


IV

wherein Pc and Nc represent the phthalocyanine and
2,3-naphthalocyanine moieties of Formulae IIa and
IIIa,



IIa

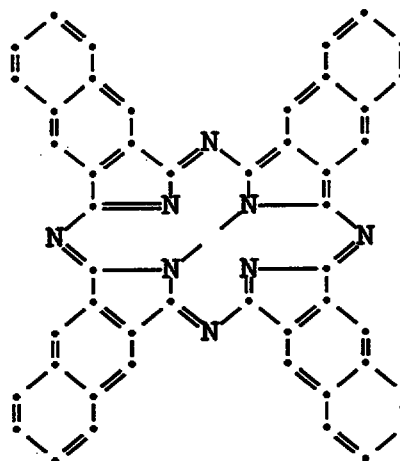

IIIa






- 79 -

5 respectively, covalently bonded to hydrogen or to various metals, halometals, organometallic groups, and oxymetals selected from a list consisting of AlCl, AlBr, AlF, AlOH, AlOR₅, AlSR₅, Ca, Co, CrF, Fe, Ge, Ga, InCl, Mg, Mn, Ni, Pb, Pt, Pd, SiCl₂, SiF₂, SnCl₂, Sn(OR₆)₂, Si(OR₆)₂, Sn(SR₆)₂, Si(SR₆)₂, Sn, TiO, VO or Zn,

10 wherein R₅ and R₆ are selected from hydrogen, alkyl, aryl, lower alkanoyl, trifluoroacetyl or groups of the formulae



25 R₇, R₈ and R₉ are independently selected from alkyl, phenyl or phenyl substituted with lower alkyl, lower alkoxy or halogen;

30 X is selected from oxygen, sulfur, selenium, tellurium or a group of the formula -N-R₁₀, wherein R₁₀ is hydrogen, cycloalkyl, alkyl, acyl, alkylsulfonyl, or aryl or R₁₀ and R taken together form an aliphatic or aromatic ring with the nitrogen atom to which they are attached;

35 Y is selected from alkyl, halogen or hydrogen;


R is selected from unsubstituted or substituted alkyl, alkenyl, alkynyl,

40 C₃-C₈ cycloalkyl, aryl, heteroaryl,






- 80 -



10

-(X-R)_m is alkylsulfonylamino, arylsulfonylamino, or a group selected from the formulae -X(C₂H₄O)_zR¹,

15




25

wherein R¹ is hydrogen or R as defined above; Z is an integer of from 1-4;

30 or two -(X-R)_m groups can be taken together to form divalent substituents of the formula

35



40

45 wherein each X¹ is independently selected from -O-, -S-, or -N-R₁₀ and A is selected from ethylene; propylene; trimethylene; and such groups substituted with C₁-C₄ alkyl, C₁-C₄ alkoxy, aryl and cycloalkyl; 1,2-phenylene and 1,2-phenylene containing 1-3 substituents selected from C₁-C₄ alkyl, C₁-C₄ alkoxy or halogen;

50


55 R₁ and R₂ are independently selected from hydrogen, lower alkyl, lower alkoxy, halogen, aryloxy, lower alkylthio, arylthio, lower alkylsulfonyl; arylsulfonyl; lower alkylsulfonylamino, arylsulfonylamino, cycloalkylsulfonylamino, carboxy, unsubstituted and substituted carbamoyl and





- 81 -

sulfamoyl, lower alkoxy carbonyl, hydroxy or lower alkanoyloxy,



15 R_3 and R_4 are independently selected from hydrogen, lower alkyl, alkenyl or aryl; n is an integer from 0-12; n_1 is an integer from 0-16, m is an integer from 4-16; m_1 is an integer from 0-16; provided that the sums of $n+m$ and n_1+m_1 are 16 and 24, respectively.

20

6. The thermoplastic polymer composition of claim 5, wherein the near infrared fluorescing compound is a squaraine compound of Formula IV, wherein R_1 and R_2 are independently carboxy or lower alkoxy carbonyl.

25

7. The thermoplastic polymer composition of claim 5, wherein the near infrared fluorescing compound is a 2,3-naphthalocyanine compound of Formula III, wherein Y is hydrogen, n_1 is 24, and m_1 is 0.

30

8. The thermoplastic polymer composition of claim 5, wherein the near infrared fluorescing compound is a 2,3-naphthalocyanine compound of Formula III, wherein the naphthalocyanine moiety is bonded to $SiCl_2$, $Si(OH)_2$, or $Si(OR_6)_2$.

35

9. The thermoplastic polymer composition of claim 5, wherein the near infrared fluorescing compound is a phthalocyanine compound of Formula II, wherein X is oxygen, R is aryl, Y

40





- 82 -

is hydrogen, m is 4, and n is 12; and wherein the phthalocyanine moiety is bonded to AlCl , AlOH , AlOCOCF_3 , AlOR_3 , SiCl_2 , Si(OH)_2 , or $\text{Si(OR}_6)_2$.

5

10. A thermoplastic polymer composition which comprises a thermoplastic condensation polymer having copolymerized therein at least 0.1 ppm of one or more near infrared fluorescing compounds.

10

11. The thermoplastic polymer composition of claim 10, wherein the thermoplastic condensation polymer is poly(ethylene terephthalate).

15

12. The thermoplastic polymer composition of claim 10, further comprising one or more thermoplastic polymers blended therein.

20

13. The thermoplastic polymer composition of claim 12, wherein the thermoplastic polymer(s) blended therein is (are) selected from a list consisting from polyesters, polyolefins, polyamides, polyvinyl chlorides, polyvinylidene chlorides, polycarbonates, cellulose esters, polyacrylates, polyimides, polyester-amides, and polystyrenes.

25

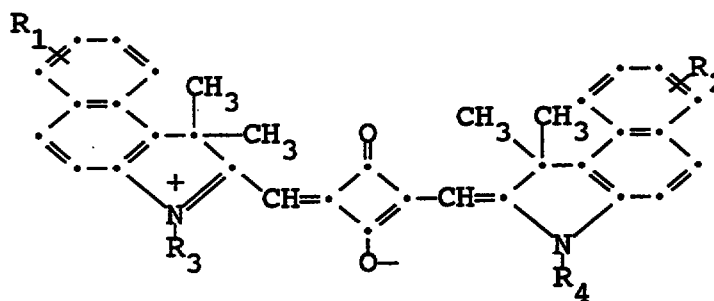


14. The thermoplastic polymer composition of claim 10, wherein the near infrared fluorescing compound is






- 83 -

selected from the classes of phthalocyanines, 2,3-naphthalocyanines and squaraines and correspond to Formulae II, III and IV:




IV

wherein Pc and Nc represent the phthalocyanine and 2,3-naphthalocyanine moieties of Formulae IIa and IIIa,



IIa

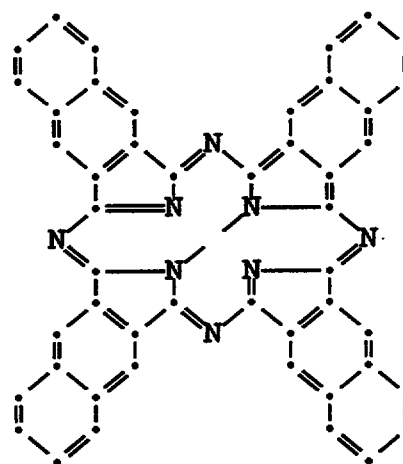

IIIa





15



30

or two $-(X-R)_m$ groups can be taken together to form divalent substituents of the formula




45

50

55



alkylthio, arylthio, lower alkylsulfonyl; aryl-
sulfonyl; lower alkylsulfonylamino, arylsulfonyl-
amino, cycloalkylsulfonylamino, carboxy,
unsubstituted and substituted carbamoyl and
5 sulfamoyl, lower alkoxy carbonyl, hydroxy, lower
alkanoyloxy,



R_3 and R_4 are independently selected from hydrogen,
20 lower alkyl, alkenyl or aryl; n is an integer from
0-12; n_1 is an integer from 0-16, m is an integer
from 4-16; m_1 is an integer from 0-16; provided
that the sums of $n+m$ and n_1+m_1 are 16 and 24,
respectively, provided that at least one polyester
25 reactive group is present.

15. The thermoplastic polymer composition of claim 14,
wherein the near infrared fluorescing compound is a
squaraine compound of Formula IV, wherein R_1 and R_2
30 are independently carboxy or lower alkoxy carbonyl.

16. The thermoplastic polymer composition of claim 14,
wherein the near infrared fluorescing compound is a
2,3-naphthalocyanine compound of Formula III,
35 wherein Y is hydrogen, n_1 is 24, and m_1 is 0.

17. The thermoplastic polymer composition of claim
14, wherein the near infrared fluorescing
compound is a 2,3-naphthalocyanine compound of
40 Formula III, wherein the naphthalocyanine
moiety is bonded to SiCl_2 , $\text{Si}(\text{OH})_2$, or $\text{Si}(\text{OR}_6)_2$.



18. The thermoplastic polymer composition of claim 14, wherein the near infrared fluorescing compound is a phthalocyanine compound of Formula II, wherein X is oxygen, R is aryl, Y is hydrogen, m is 4, and n is 12; and wherein the phthalocyanine moiety is bonded to AlCl, AlOH, AlOCOCF₃, AlOR₃, SiCl₂, Si(OH)₂, or Si(OR₆)₂.
19. The thermoplastic condensation polymer composition of claim 11, wherein the polyester is a semi-crystalline powder having an average particle size of less than about 50 microns.
20. The thermoplastic condensation polymer composition of claim 10, wherein the polyester is a semi-crystalline powder having an average particle size of less than about 50 microns.
21. A method of tagging for identification purposes one or a mixture of thermoplastic polymers, which comprises contacting said thermoplastic polymer(s) with one or a mixture of thermally stable, near infrared fluorescent tagging compounds, wherein said tagging compound(s) has substantial near infrared radiation absorbance and is added in sufficient quantity to impart fluorescence capable of detection by a near infrared radiation detector when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.
22. A method for tagging a condensation polymer comprising copolymerizing one or a mixture of thermally stable, near infrared fluorescent tagging compounds therein during said polymer's



preparation, wherein the tagging compound(s) has (have) substantial near infrared radiation absorbance and is added in sufficient quantity to impart fluorescence capable of detection by a near infrared radiation detector when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.

23. A method for tagging a thermoplastic polymer material comprising contacting said material with a condensation polymer selected from polyesters, polycarbonates and polyurethanes, said condensation polymer having at least 100 ppm of one or more thermally stable, near infrared fluorescent tagging compound(s) copolymerized therein, said tagging compound(s) being present in the final thermoplastic polymeric composition in sufficient quantity to impart fluorescence capable of detection by near infrared radiation detection means when exposed to electromagnetic radiation having wavelengths of about 670-2500 nm.

24. A method for detecting and separating thermoplastic containers, said containers comprising a thermoplastic material containing a compound or residue having detectible fluorescence when exposed to near infrared radiation, which comprises the following steps:

(a) exposure of a mixture of thermoplastic containers to near infrared radiation having wavelengths of about 670-2,500 nm, with the provision that at least one of said thermoplastic container compositions contain one or more near infrared tagging compounds having



substantial near infrared absorbance and which is (are) present in sufficient quantity to impart fluorescence when exposed to radiation having wavelengths of about 670-2,5000 nm, provided by light sources;

5

(b) detection of the emitted (fluorescent) light via near infrared light detection means; and

10

(c) separating the fluorescing containers from the non-fluorescing containers or containers fluorescing at a detectibly different wavelength or wavelengths by mechanical means.

15


25. An article comprised of the thermoplastic polymer composition of claim 1.

26. An article comprised of the thermoplastic polymer composition of claim 10.

20


27. A compound of Formulae II, III, or IV:

25



30

(II)



35

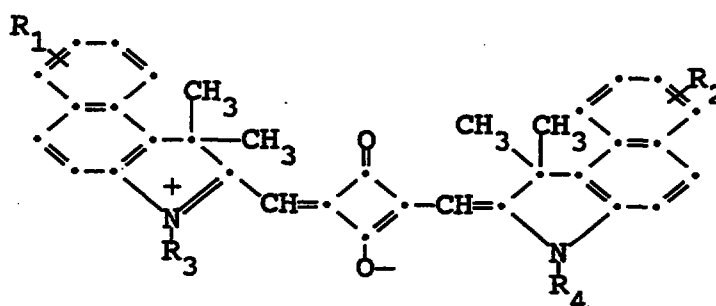
(III)

40

45

50


55



IV



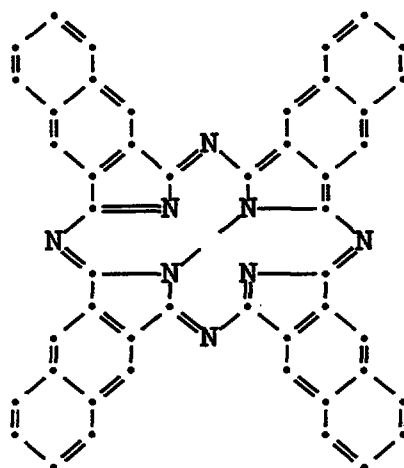5
10
15
20
25
30
35
40



IIIa

50


55

X is selected from oxygen, sulfur, selenium, tellurium or N-R₁₀, wherein R₁₀ is hydrogen, cycloalkyl, alkyl, acyl, alkylsulfonyl, or aryl or R₁₀ and R taken together form an aliphatic or aromatic ring with the nitrogen atom to which they are attached;


60



C₃-C₈ cycloalkyl, aryl, heteroaryl, alkylene



15
-(X-R)_m is alkylsulfonylamino, arylsulfonylamino,
or a group selected from the formulae -X(C₂H₄O)_ZR¹,



wherein R¹ is hydrogen or R as defined above; Z is an
integer of from 1-4;

30

or two -(X-R)_m groups can be taken together to form
divalent substituents of the formula



45

wherein each X¹ is independently selected from -O-,
-S-, or -N-R₁₀ and A is selected from ethylene;
propylene; trimethylene; and said groups
substituted with C₁-C₄ alkyl, C₁-C₄ alkoxy, aryl and
50 cycloalkyl; 1,2-phenylene and 1,2-phenylene
containing 1-3 substituents selected from C₁-C₄
alkyl, C₁-C₄ alkoxy or halogen;

R₁ and R₂ are polyester reactive groups;

55

R₃ and R₄ are independently selected from hydrogen,
lower alkyl, alkenyl or aryl; n is an integer from



0-12; n_1 is an integer from 0-16, m is an integer from 4-16; and m_1 is an integer from 0-16, provided that the sums of $n+m$ and n_1+m_1 are 16 and 24, respectively.

5

28. The compound of claim 27, wherein R_5 and R_6 are aryl groups substituted by at least one polyester reactive group.

10 29. The compound of claim 27 having the formula

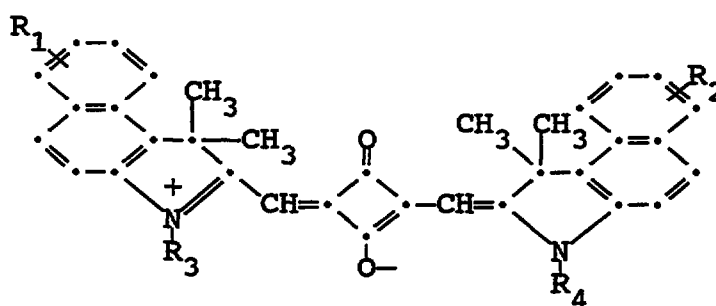
15

20

25

30

35



wherein R_1 and R_2 are independently alkoxy carbonyl or carboxy groups.

40 30. A compound of claim 27 selected from a list consisting of

2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-Al-[O-(3,5-dimethoxycarbonyl)phen-1-yl)];

45 2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-Si-[O-(3,5-dimethoxycarbonyl)phen-1-yl]₂;

31. A compound of claim 27 selected from a list consisting of

50



2(3), 9(10), 16(17), 23(24)-tetra-(4-t-butyl-1-phenylthio)-PcAl-[O-(3,5-dimethoxycarbonyl)phen-1-yl];

5 2(3), 9(10), 16(17), 23(24)-tetra-(4-t-butyl-1-phenylthio)-PcSi-[O-(4-methoxycarbonyl)phen-1-yl]₂;

2(3), 9(10), 16(17), 23(24)-tetra-(SC₁₂H₂₅)-PcAl-[O-(3,5-dimethoxycarbonyl)phen-1-yl];

10 2(3), 9(10), 16(17), 23(24)-tetra-(SC₁₂H₂₅)-PcSi-[O-(4-methoxycarbonyl)phen-1-yl]₂;

15 2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-Al-[O(2,3,4,5,6-pentafluorophen-1-yl)];

2(3), 9(10), 16(17), 23(24)-tetraphenoxy-Pc-Si-[O(2,3,4,5,6-pentafluorophen-1-yl)]₂;

20 32. A compound of claim 27 selected from a list consisting of

25 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-NcSi-[O-(4-methoxycarbonyl)phen-1-yl]₂;

2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-NcSi-[O-(5-carboxynaphth-1-yl)]₂;

30 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-NcAl-O-[(3,5-dimethoxycarbonyl)phen-1-yl];

2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-NcAl-O-(4-methoxycarbonyl)phen-1-yl];



- 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcAl-O-(2,3,4,5,6-pentafluorophen-1-yl);
- 5 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(2,3,4,5,6-pentafluorophen-1-yl)]₂;
- 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcAl-O-[(2-carboxy)phen-1-yl];
- 10 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcAl-O-[(3-carboxy)phen-1-yl];
- 2, 3, 11, 12, 20, 21, 29, 30-octa(dodecylthio)-
NcAl-O-[(4-carboxy)phen-1-yl];
- 15 2, 3, 11, 12, 20, 21, 29, 30-octa(dodecylthio)-
NcAl-O-[(4-hydroxyethyl)phen-1-yl];
- 2, 3, 11, 12, 20, 21, 29, 30-octa(dodecylthio)-
NcAl-O-[(2-methoxycarbonyl)phen-1-yl];
- 20 2, 3, 11, 12, 20, 21, 29, 30-octa(dodecylthio)-
NcAl-O-[(4-trifluoromethyl)phen-1-yl];
- 25 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(2-carboxy)phen-1-yl]₂;
- 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(3-carboxy)phen-1-yl]₂;
- 30 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(4-carboxy)phen-1-yl]₂;
- 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(4-hydroxyethyl)phen-1-yl]₂;
- 35



- 2, 3, 11, 12, 20, 21, 29, 30-octa(hexadecylthio)-
NcSi-[O-(2-methoxycarbonyl)phen-1-yl]₂;
- 5 2, 3, 11, 12, 20, 21, 29, 30-octa(dodecylthio)-
NcSi-[O-(4-trifluoromethyl)phen-1-yl]₂;
- 3(4), 9(10), 16(17), 23(24)-Tetra(1,1-
dimethylpropyl)-PcAlOH
- 10 3(4), 9(10), 16(17), 23(24)-Tetra(1,1-
dimethylpropyl)-PcAlCl
- 3(4), 9(10), 16(17), 23(24)-Tetra(1,1-
dimethylpropyl)-PcAl-OC₆H₃-3,5-di-CO₂CH₃
- 15 5(36), 9(14), 18(23), 27(32)-tetra(dodecylamino)-
NcAlCl
- 5(36), 9(14), 18(23), 27(32)-tetra(n-octylamino)-
20 NcAlOH
- 2(36), 9(14), 18(23), 27(32)-tetra(n-octylamino)-
NcAl-OC₆H₃-3,5-di-CO₂CH₃
- 25 2(3), 11(12), 20(21), 29(30)-tetra(dodecyl-
thio)-NcAlOH
- 2(3), 11(12), 20(21), 29(30)-tetra(n-octylthio)-
NcAlCl
- 30 2(3), 11(12), 20(21), 29(30)-tetra(dodecyl-
thio)-NcAl-OC₆H₃-3,5-di-CO₂CH₃



2, 3, 11, 12, 20, 21, 29, 30-Octa(dodecylthio)-
NcSi(OH)₂

5 2, 3, 11, 12, 20, 21, 29, 30-Octa(dodecylthio)-
NcSi(-OC₆H₄-4-CO₂CH₃)₂

