

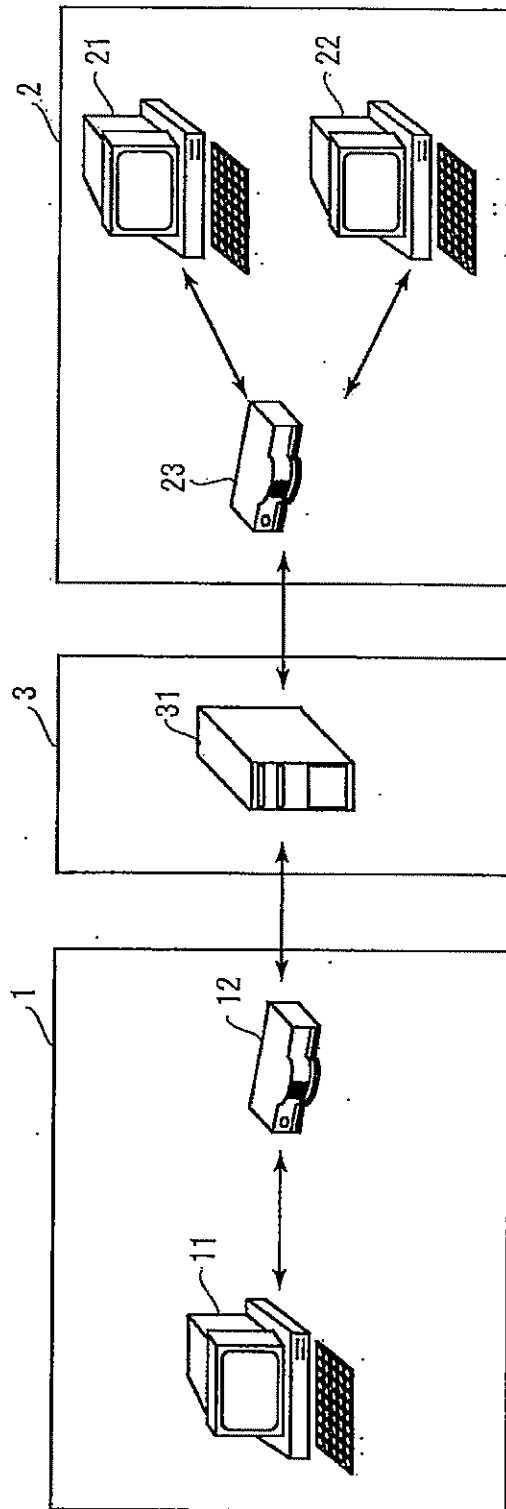


FIG. 1

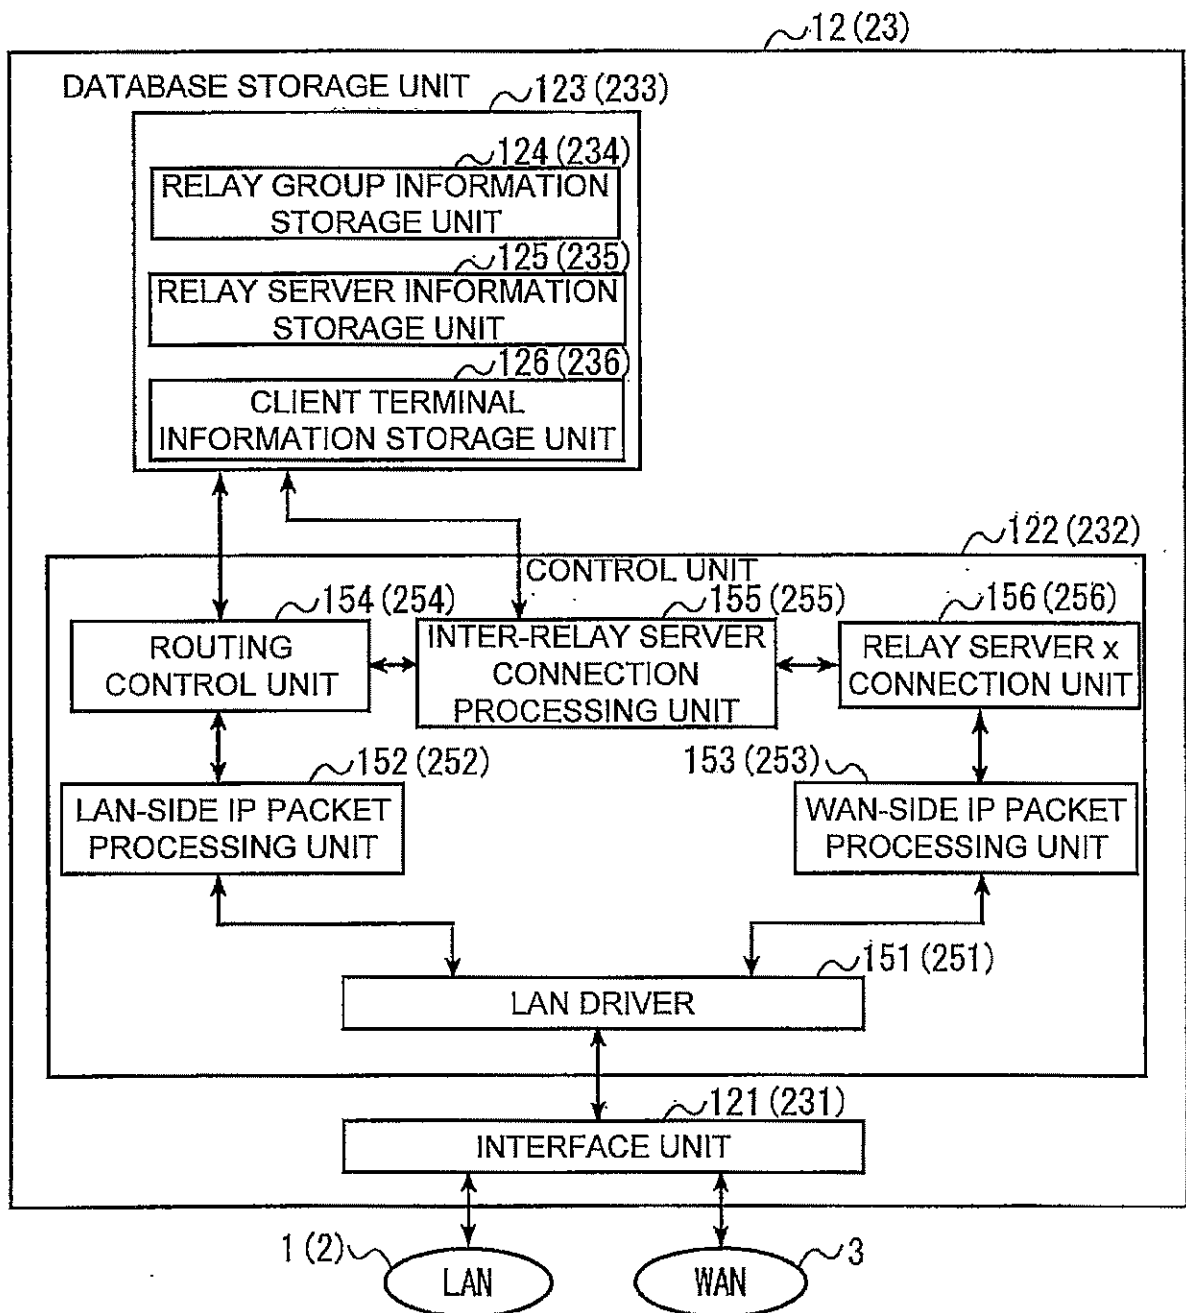


FIG. 2

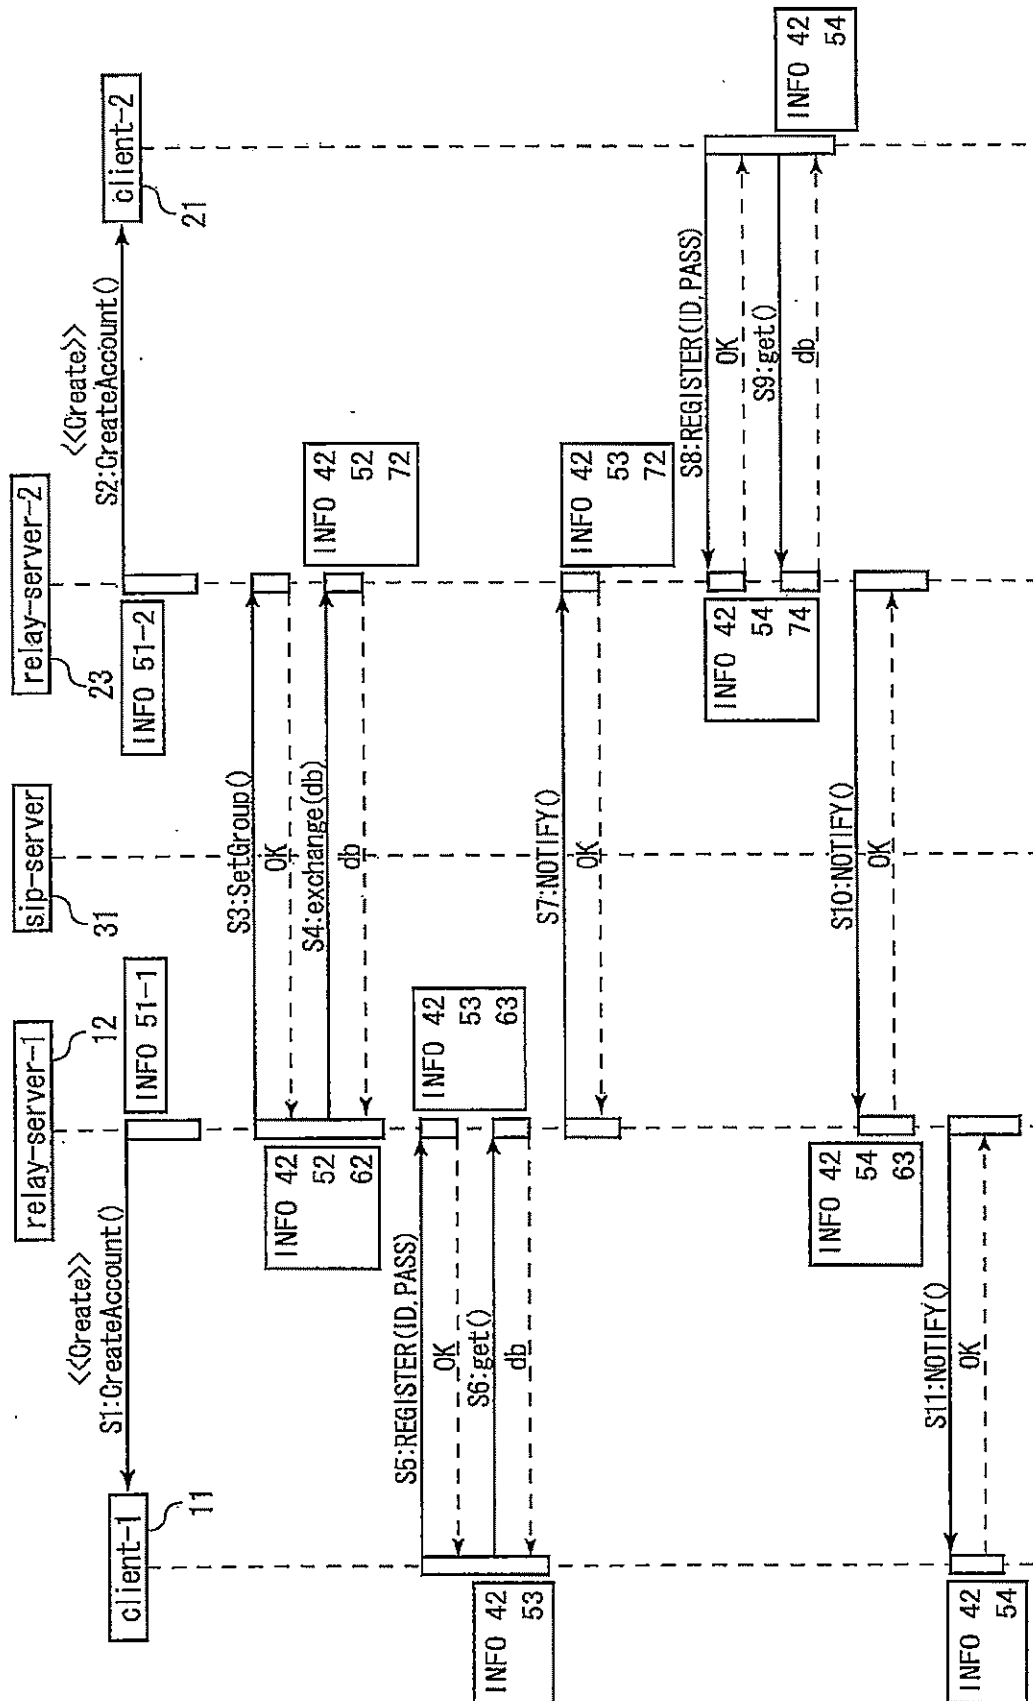


FIG. 3

51-1

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  -<site id= "relay-server-1@abc.net"
    name= "RELAY SERVER 1" stat= "active" > } 511-1
    <node div= "software" 513-1
      group= "20070402133100@relay-server-1. abc. net" } 512-1
      id= "client-1@relay-server-1. abc. net"
      name= "CLIENT 1" site= "" />
    </site> 514-1
  </root>

```

51-2

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  -<site id= "relay-server-2@abc.net"
    name= "RELAY SERVER 2" stat= "active" > } 511-2
    <node div= "software" 513-2
      group= "20070402133100@relay-server-1. abc. net" } 512-2
      id= "client-2@relay-server-2. abc. net"
      name= "CLIENT 2" site= "" />
    </site> 514-2
  </root>

```

FIG. 4

42

```

<?xml version= "1.0" encoding= "UTF-8" standalone= "no" ?>
-<root>
-<group id= "20070402133100@relay-server-1.abc.net" } 421
  lastmod= "20070402133100" name= "GROUP 1" >
    <site id= "relay-server-1@abc.net" /> } 422
    <site id= "relay-server-2@abc.net" /> } 422
  </group>
</root>

```

52

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
-<site id= "relay-server-1@abc.net"
  name= "RELAY SERVER 1" stat= "active" > } 521-1
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    id= "client-1@relay-server-1.abc.net"
    name= "CLIENT 1" site= "" /> } 522-1
  </site>
-<site id= "relay-server-2@abc.net"
  name= "RELAY SERVER 2" stat= "active" > } 521-2
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    id= "client-2@relay-server-2.abc.net"
    name= "CLIENT 2" site= "" /> } 522-2
  </site>
</root>

```

62

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "" expr= "0" ~ 622
    id= "client-1@relay-server-1.abc.net"
    name= "CLIENT 1" pass= "client-1" port= "" />
  </root>

```

621 ~ 623

72

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "" expr= "0" ~ 722
    id= "client-2@relay-server-2.abc.net"
    name= "CLIENT 2" pass= "client-2" port= "" />
  </root>

```

721 ~ 723

FIG. 5

42

```

<?xml version= "1.0" encoding= "UTF-8" standalone= "no" ?>
-<root>
  -<group id= "20070402133100@relay-server-1.abc.net"
    lastmod= "20070402133100" name= "GROUP 1" >
    <site id= "relay-server-1@abc.net" />
    <site id= "relay-server-2@abc.net" />
  </group>
</root>

```

53

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  -<site id= "relay-server-1@abc.net"
    name= "RELAY SERVER 1" stat= "active" >
    <node div= "software" 533-1
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-1@relay-server-1.abc.net"
      name= "CLIENT 1" site= "relay-server-1@abc.net" />
    </site>
  -<site id= "relay-server-2@abc.net"
    name= "RELAY SERVER 2" stat= "active" >
    <node div= "software" 533-2
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-2@relay-server-2.abc.net"
      name= "CLIENT 2" site= "" />
    </site>
  </root>

```

532
-1

63

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "200.1.10.1" expr= "1213935960484"
    id= "client-1@relay-server-1.abc.net"
    name= "CLIENT 1" pass= "client-1" port= "5070" />
  </root>

```

631 ~~~~~ 632
~~~~~ 633

72

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "" expr= "0"
    id= "client-2@relay-server-2.abc.net"
    name= "CLIENT 2" pass= "client-2" port= "" />
  </root>

```

721 ~~~~~ 723

FIG. 6

42

```

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
-<root>
  -<group id="20070402133100@relay-server-1.abc.net"
    lastmod="20070402133100" name="GROUP 1" >
    <site id="relay-server-1@abc.net" />
    <site id="relay-server-2@abc.net" />
  </group>
</root>

```

54

```

<?xml version="1.0" encoding="UTF-8" ?>
-<root>
  -<site id="relay-server-1@abc.net"
    name="RELAY SERVER 1" stat="active" >
    <node div="software" 543-1
      group="20070402133100@relay-server-1.abc.net"
      id="client-1@relay-server-1.abc.net"
      name="CLIENT 1" site="relay-server-1@abc.net" />
    </site>
  -<site id="relay-server-2@abc.net"
    name="RELAY SERVER 2" stat="active" >
    <node div="software" 543-2
      group="20070402133100@relay-server-1.abc.net"
      id="client-2@relay-server-2.abc.net"
      name="CLIENT 2" site="relay-server-2@abc.net" />
    </site>
  </root>

```

542  
-2

63

```

<?xml version="1.0" encoding="UTF-8" ?>
-<root>
  <node div="software"
    group="20070402133100@relay-server-1.abc.net"
    node addr="200.1.10.1" expr="1213935960484"
    id="client-1@relay-server-1.abc.net"
    name="CLIENT 1" pass="client-1" port="5070" />
  </root>

```

631 { 633

74

```

<?xml version="1.0" encoding="UTF-8" ?>
-<root>
  <node div="software"
    group="20070402133100@relay-server-1.abc.net"
    node addr="210.10.20.1" expr="1213935978484"
    id="client-2@relay-server-2.abc.net"
    name="CLIENT 2" pass="client-2" port="5070" />
  </root>

```

741 { 742  
743

FIG. 7

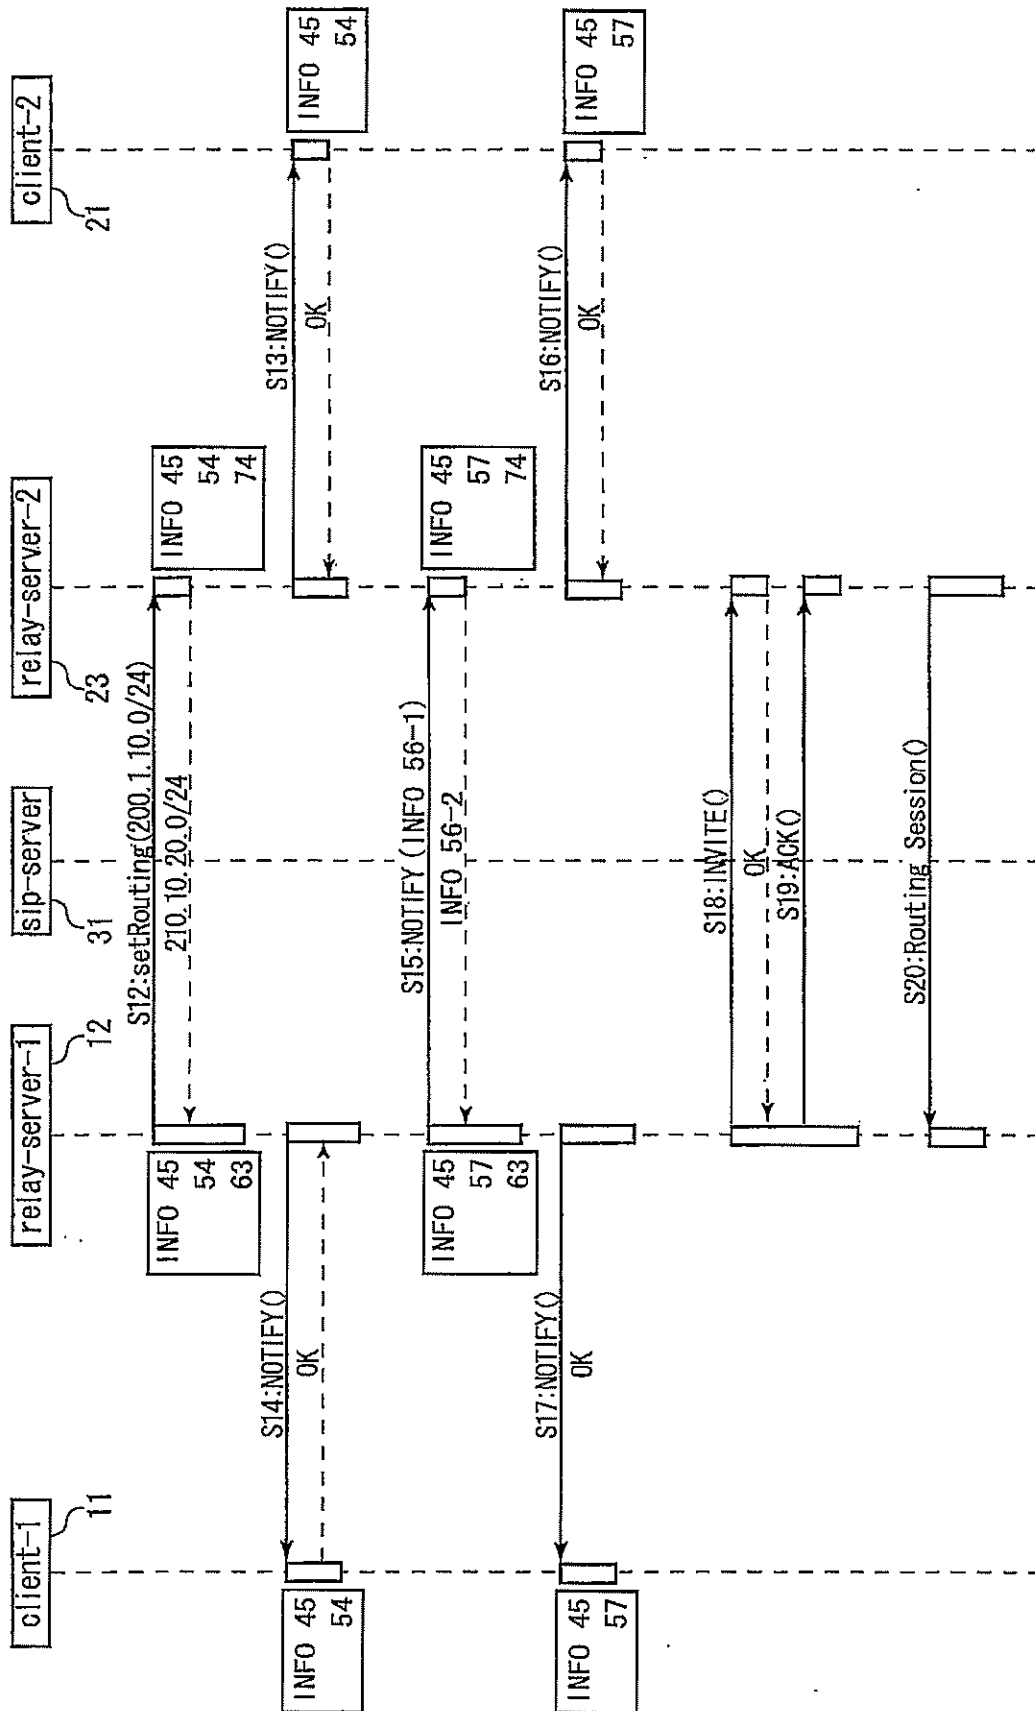


FIG. 8

45

```

<?xml version= "1.0" encoding= "UTF-8" standalone= "no" ?>
-<root>
  -<group id= "20070402133100@relay-server-1.abc.net"
    lastmod= "20070402133100" name= "GROUP 1" >
    <site id= "relay-server-1@abc.net"
      lan= "200.1.10.0/24" />
    <site id= "relay-server-2@abc.net"
      lan= "210.10.20.0/24" />
    </group>
  </root>

```

54

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  -<site id= "relay-server-1@abc.net"
    name= "RELAY SERVER 1" stat= "active" >
    <node div= "software"
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-1@relay-server-1.abc.net"
      name= "CLIENT 1" site= "relay-server-1@abc.net" />
    </site>
  -<site id= "relay-server-2@abc.net"
    name= "RELAY SERVER 2" stat= "active" >
    <node div= "software"
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-2@relay-server-2.abc.net"
      name= "CLIENT 2" site= "relay-server-2@abc.net" />
    </site>
  </root>

```

63

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "200.1.10.1" expr= "1213935960484"
    id= "client-1@relay-server-1.abc.net"
    name= "CLIENT 1" pass= "client-1" port= "5070" />
  </root>

```

74

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    node addr= "210.10.20.1" expr= "1213935978484"
    id= "client-2@relay-server-2.abc.net"
    name= "CLIENT 2" pass= "client-2" port= "5070" />
  </root>

```

FIG. 9

56-1

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
-<site id= "relay-server-1@abc.net"
  name= "RELAY SERVER 1" stat= "active" } 561-1
  lan= "200.1.10.254" >
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    id= "client-1@relay-server-1.abc.net"
    name= "CLIENT 1" site= "relay-server-1@abc.net" } 562-1
    lan= "200.1.10.1" />
  </node>
</site>
</root>

```

56-2

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
-<site id= "relay-server-2@abc.net"
  name= "RELAY SERVER 2" stat= "active" } 561-2
  lan= "210.10.20.254" >
  <node div= "software"
    group= "20070402133100@relay-server-1.abc.net"
    id= "client-2@relay-server-2.abc.net"
    name= "CLIENT 2" site= "relay-server-2@abc.net" } 562-2
    lan= "210.10.20.1" />
  </node>
</site>
</root>

```

FIG. 10

45

```

<?xml version= "1.0" encoding= "UTF-8" standalone= "no" ?>
-<root>
  -<group id= "20070402133100@relay-server-1.abc.net"
    lastmod= "20070402133100" name= "GROUP 1" >
    <site id= "relay-server-1@abc.net"
      lan= "200.1.10.0/24" />
    <site id= "relay-server-2@abc.net"
      lan= "210.10.20.0/24" />
    </group>
  </root>

```

57

```

<?xml version= "1.0" encoding= "UTF-8" ?>
-<root>
  -<site id= "relay-server-1@abc.net"
    name= "RELAY SERVER 1" stat= "active" } 571-1
    lan= "200.1.10.254" >
    <node div= "software"
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-1@relay-server-1.abc.net"
      name= "CLIENT 1" site= "relay-server-1@abc.net" } 572-1
      lan= "200.1.10.1" />
    </site>
  -<site id= "relay-server-2@abc.net"
    name= "RELAY SERVER 2" stat= "active" } 571-2
    lan= "210.10.20.254" >
    <node div= "software"
      group= "20070402133100@relay-server-1.abc.net"
      id= "client-2@relay-server-2.abc.net"
      name= "CLIENT 2" site= "relay-server-2@abc.net" } 572-2
      lan= "210.10.20.1" />
    </site>
  </root>

```

63

NO CHANGE FROM FIG. 9

74

NO CHANGE FROM FIG. 9

FIG. 11

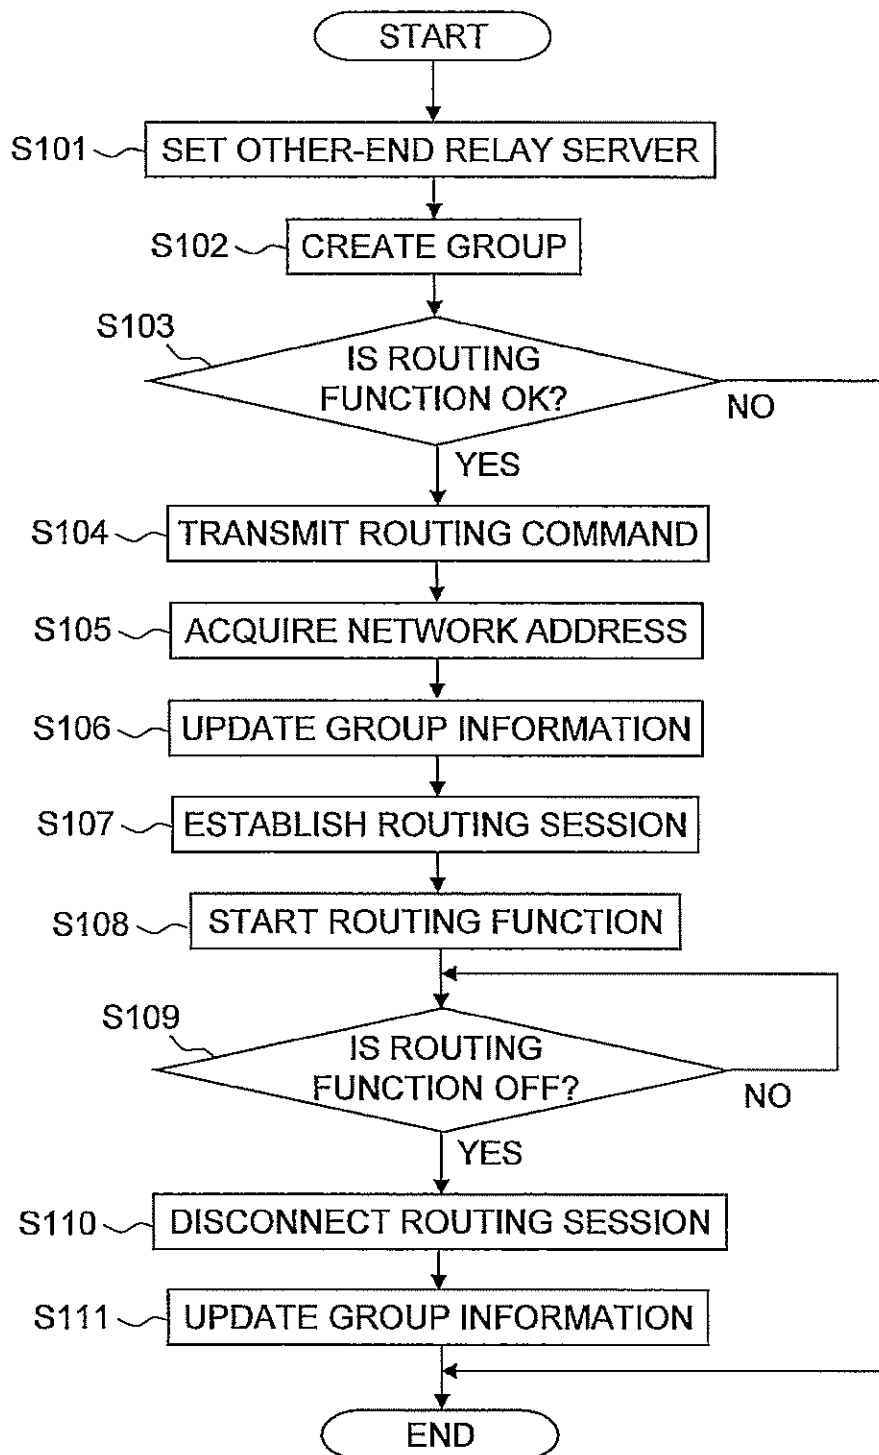


FIG. 12

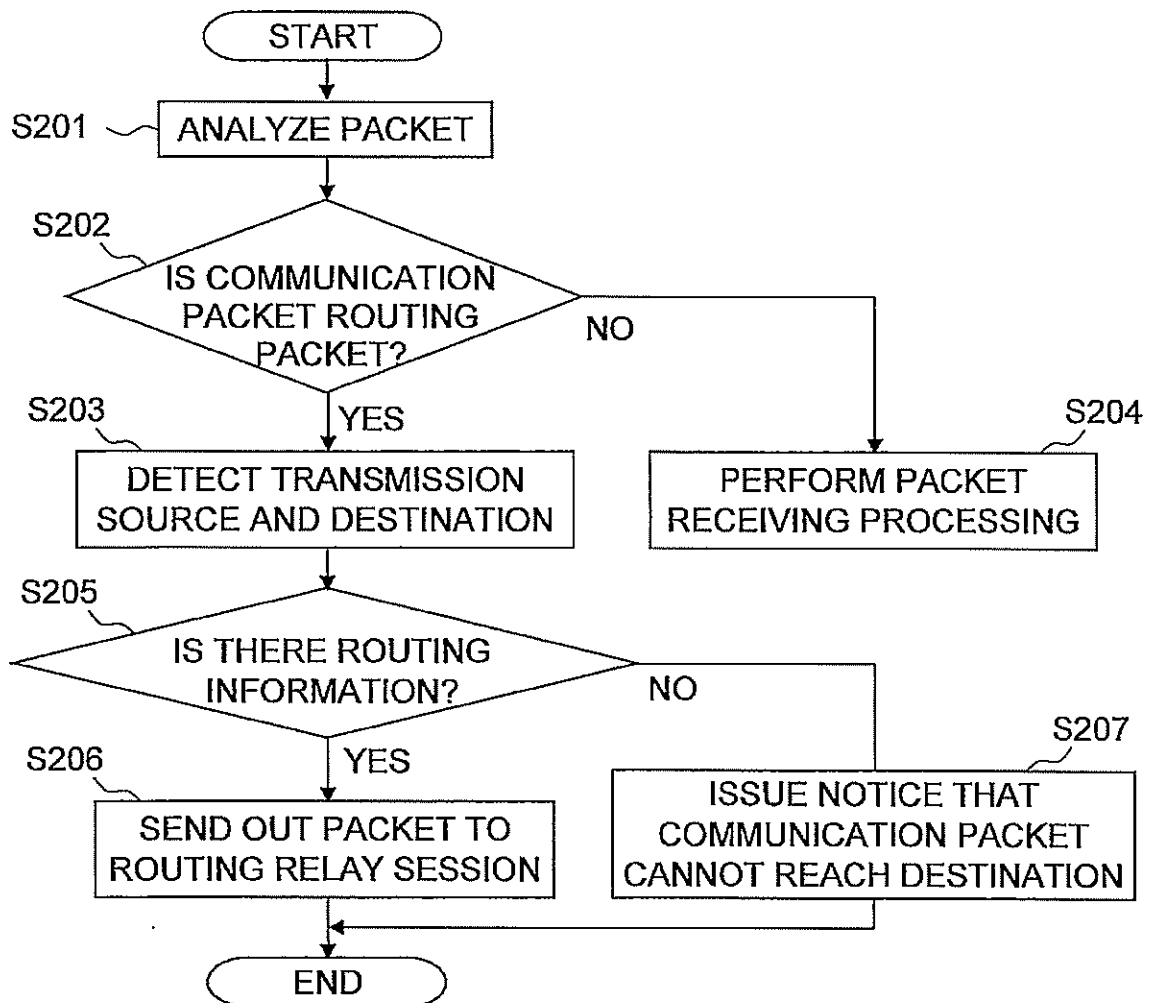


FIG. 13

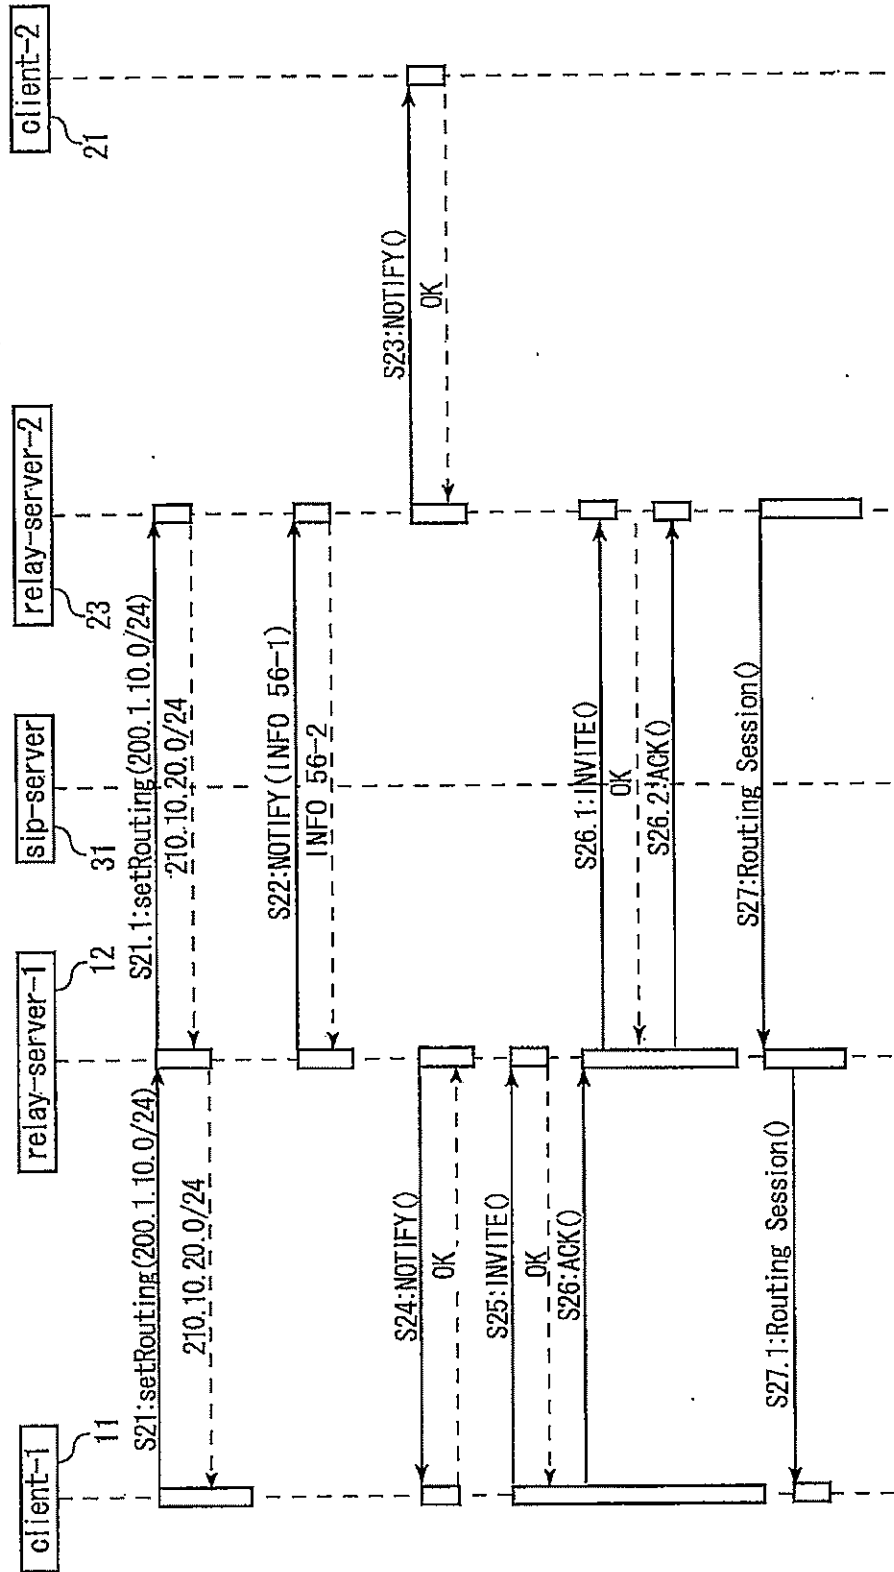


FIG. 14

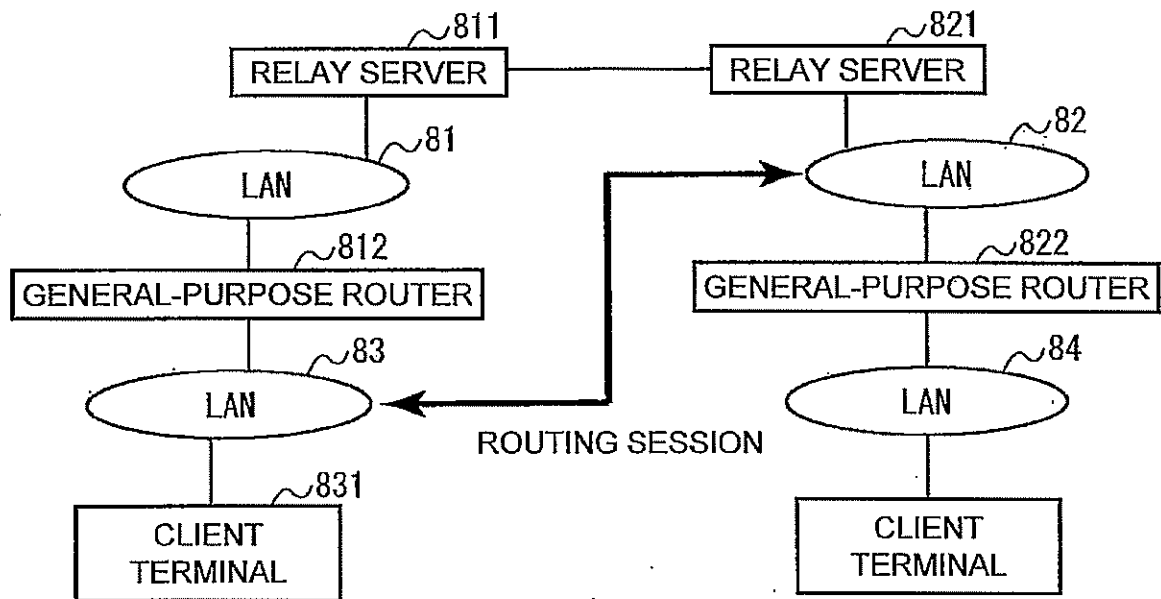


FIG. 15

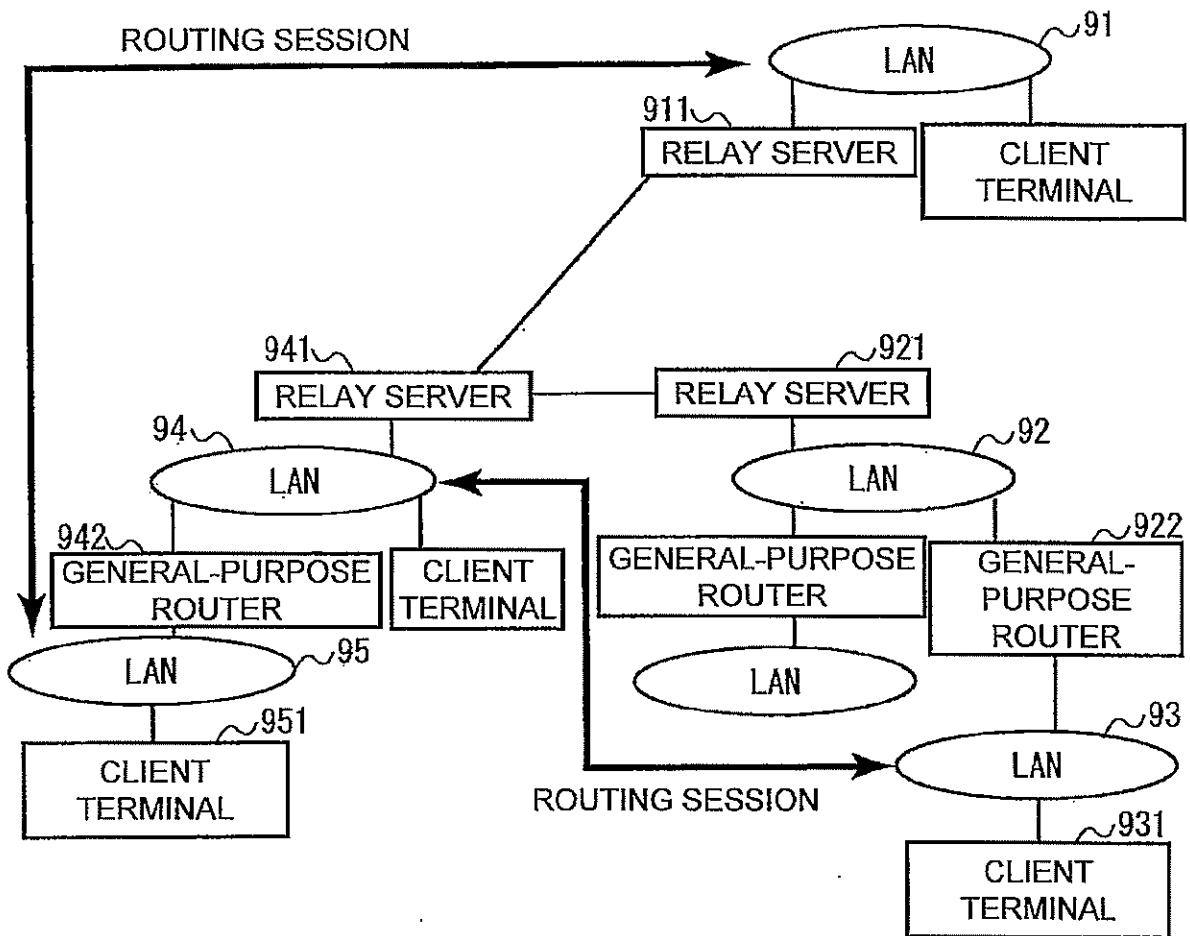


FIG. 16

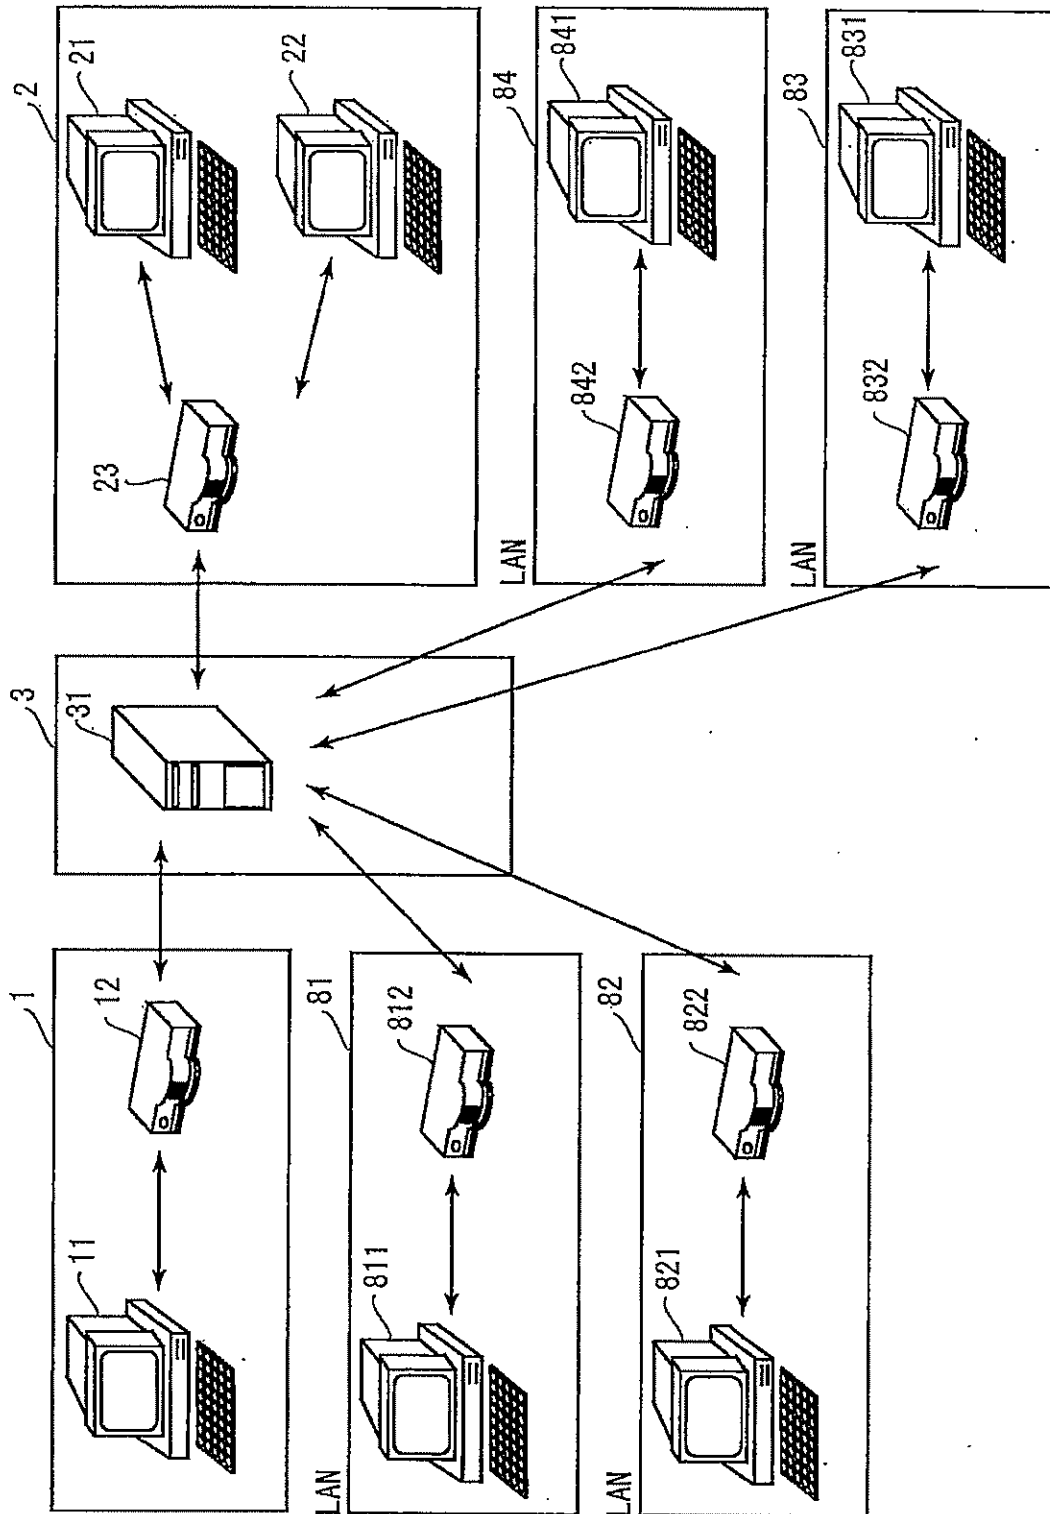


FIG. 17

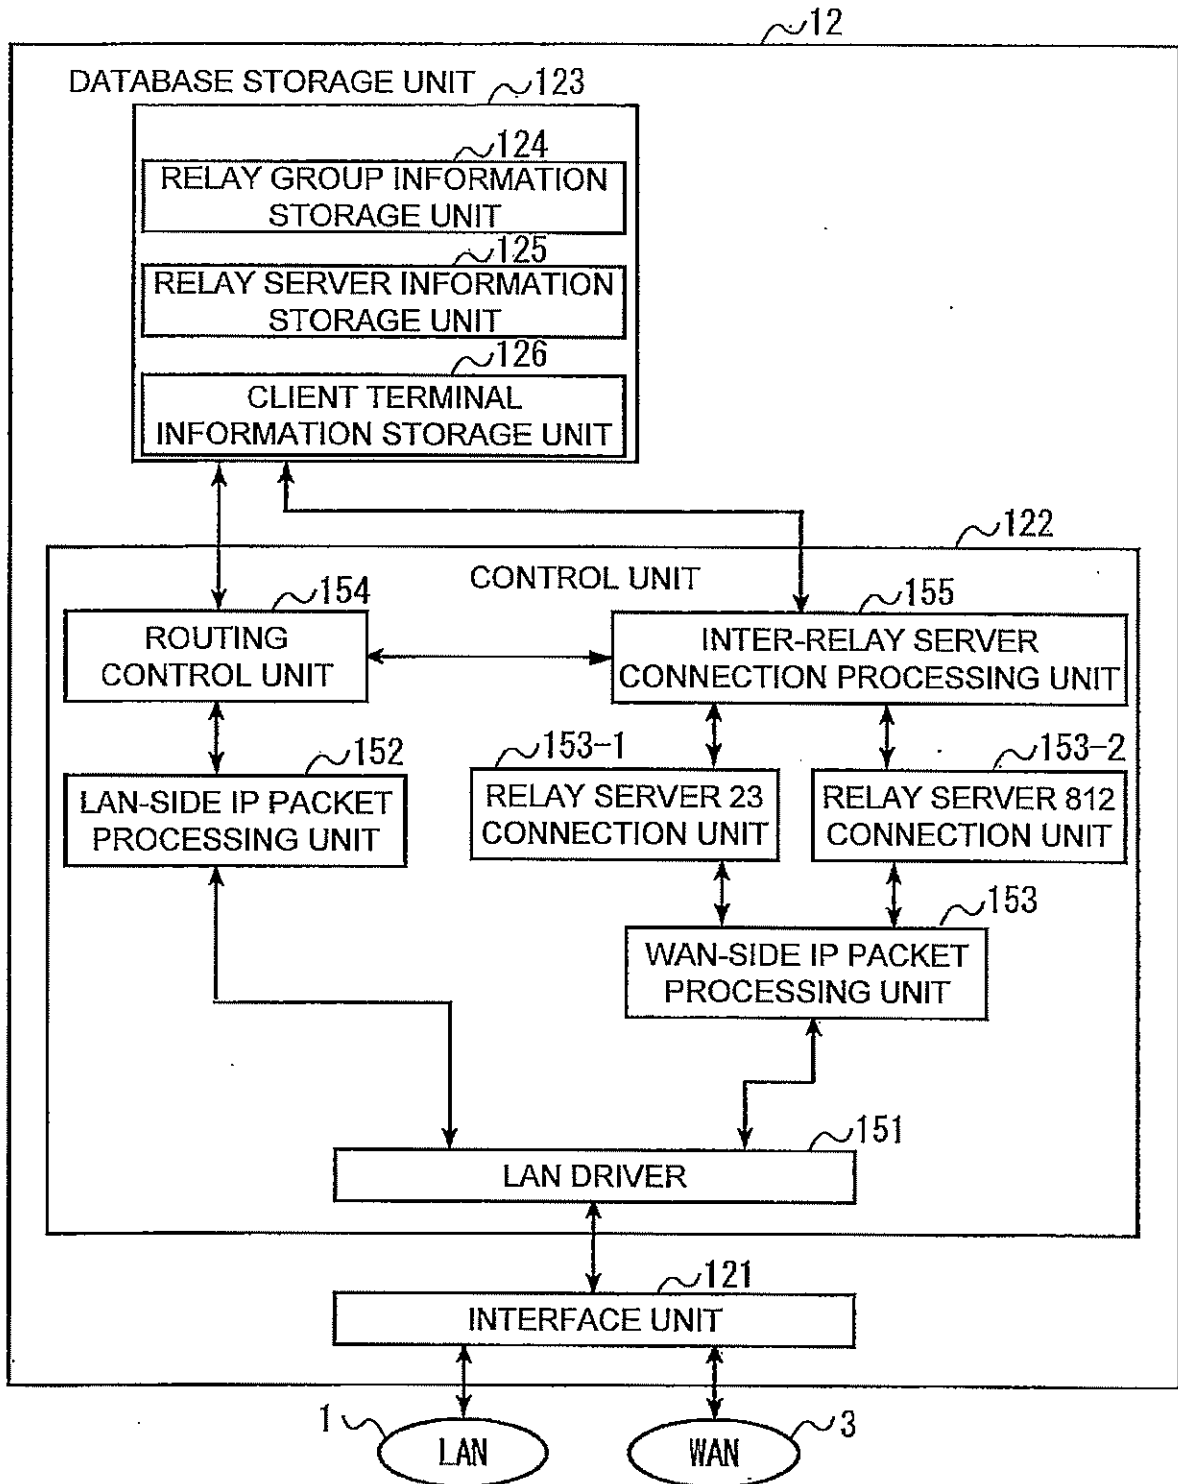


FIG. 18



47

```

<?xml version= "1.0" encoding= "UTF-8" standalone= "no" ?>
-<root>
  -<group id= "20070402567800@relay-server-1.abc.net" > 471
    lastmod= "20070402567800" name= "GROUP 2" >
      <site id= "relay-server-1@abc.net"
        lan= "200.1.10.0/24 rtid= "0003,0004" />
      <site id= "relay-server-4@abc.net" 473
        lan= "230.10.5.0/24 rtid= "0003" />
      <site id= "relay-server-5@abc.net"
        lan= "240.10.10.0/24 rtid= "0003" />
      <site id= "relay-server-6@abc.net"
        lan= "250.0.10.0/24 rtid= "0004" />
      </group> 473
    </root>
  } 472

```

FIG. 21

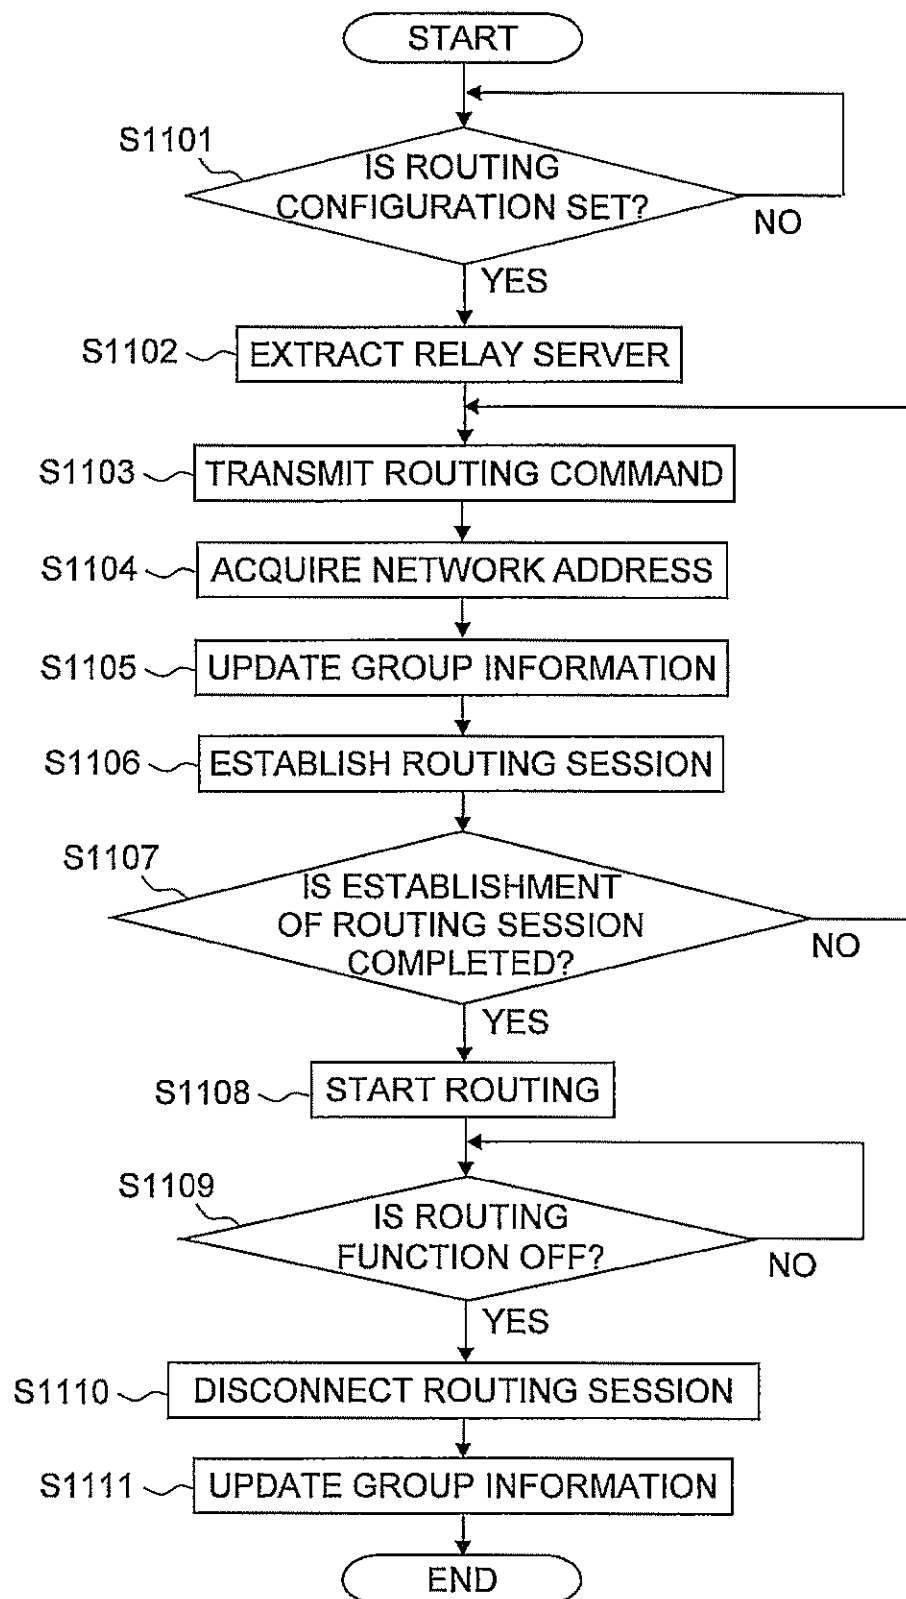


FIG. 22

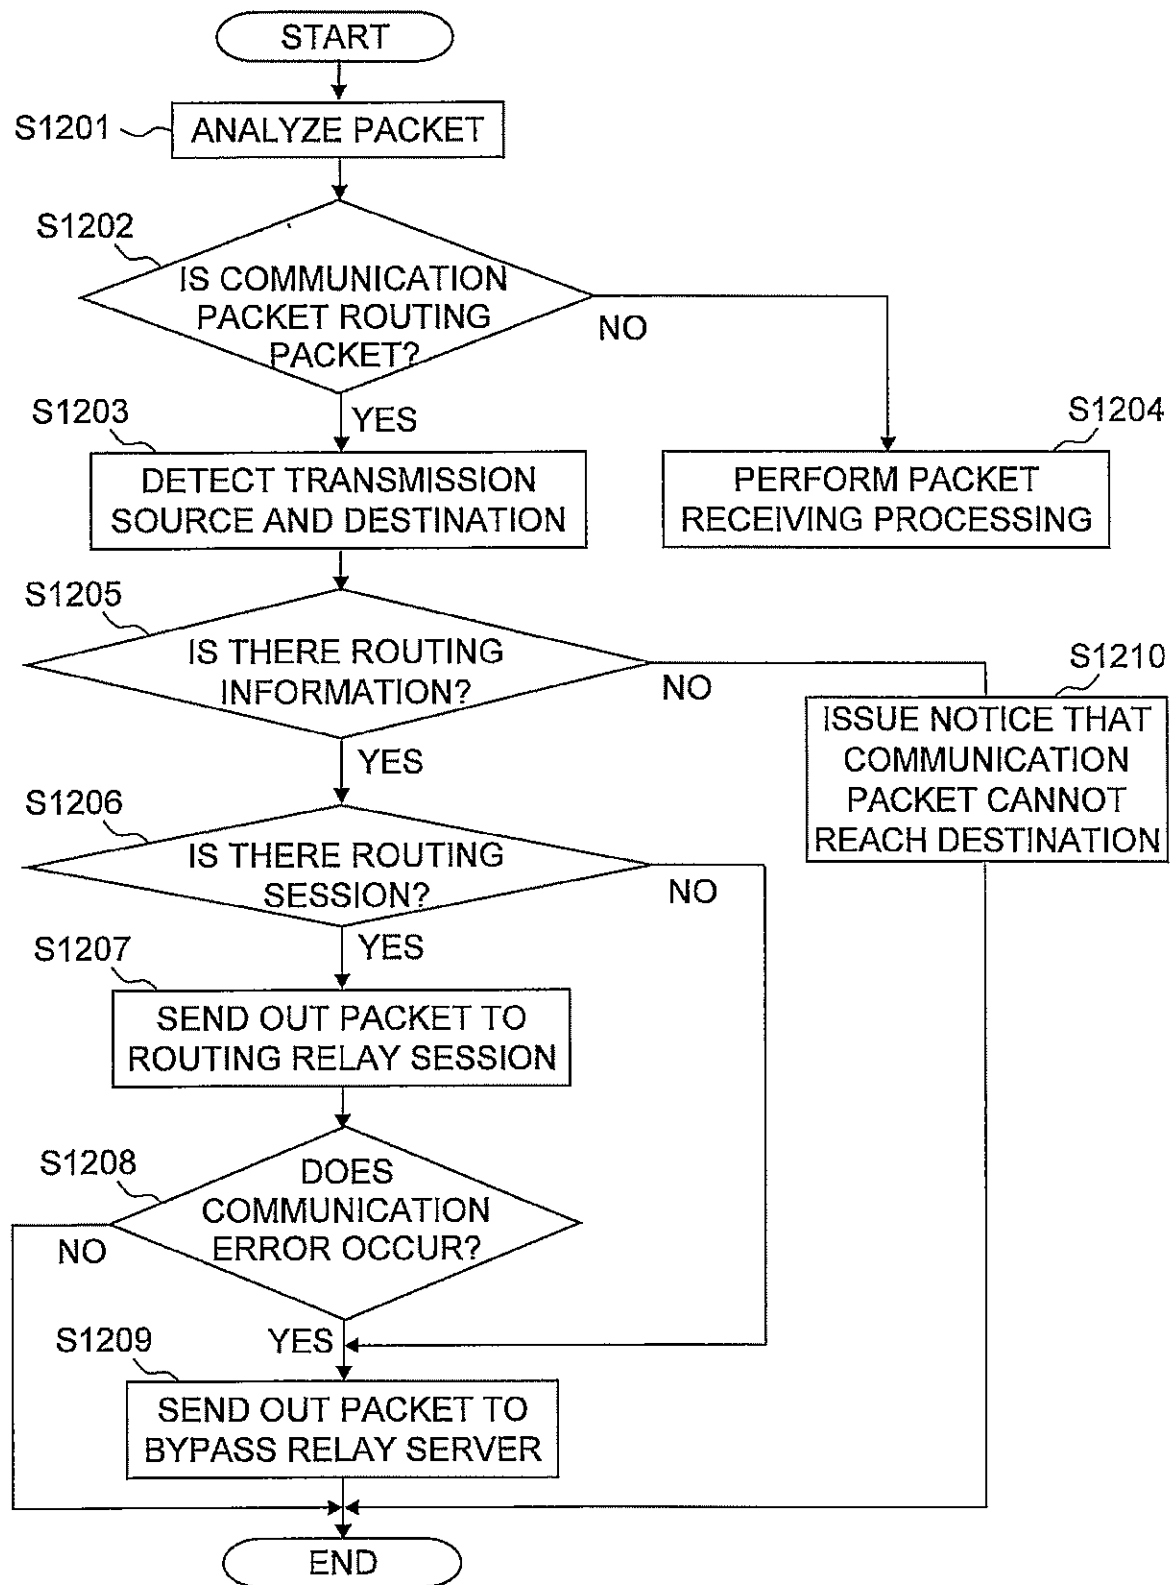


FIG. 23