

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2024/109400 A1

(43) 国际公布日
2024 年 5 月 30 日 (30.05.2024)

(51) 国际专利分类号:
G06F 16/957 (2019.01)

(21) 国际申请号: PCT/CN2023/125145

(22) 国际申请日: 2023 年 10 月 18 日 (18.10.2023)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202211489870.0 2022 年 11 月 25 日 (25.11.2022) CN

(71) 申请人: 腾讯科技(深圳)有限公司 (TENCENT TECHNOLOGY (SHENZHEN) COMPANY LIMITED) [CN/CN]; 中国广东省深圳市南山区高新区科技中一路腾讯大厦 35 层, Guangdong 518057 (CN)。

(72) 发明人: 傅博泉 (FU, Boquan); 中国广东省深圳市南山区高新区科技中一路腾讯大厦 35 层, Guangdong 518057 (CN)。

(74) 代理人: 华进联合专利商标代理有限公司 (ADVANCE CHINA IP LAW OFFICE); 中国广东省广州市天河区珠江东路 6 号 4501 房 (部位: 自编 01-03 和 08-12 单元) (仅限办公用途), Guangdong 510623 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN,

(54) Title: SUB-APPLICATION PAGE PROCESSING METHOD AND APPARATUS, AND COMPUTER DEVICE AND STORAGE MEDIUM

(54) 发明名称: 子应用页面处理方法、装置、计算机设备和存储介质

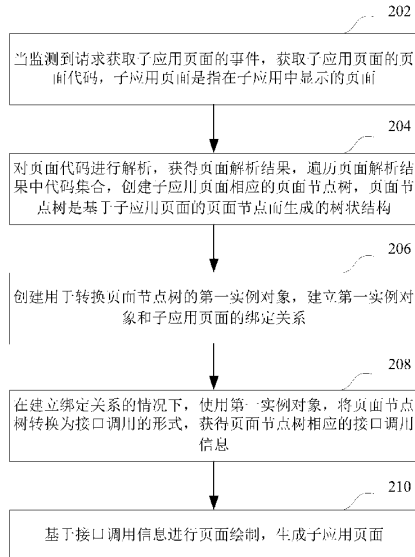


图 2

- 202 When an event of requesting the acquisition of a sub-application page is detected, acquire a page code of the sub-application page, wherein the sub-application page refers to a page displayed in a sub-application
- 204 Parse the page code to obtain a page parsing result, traverse a code set in the page parsing result, and create a page node tree corresponding to the sub-application page, wherein the page node tree is a tree structure which is generated on the basis of page nodes of the sub-application page
- 206 Create a first instance object for converting the page node tree, and establish a binding relationship between the first instance object and the sub-application page
- 208 Once the binding relationship is established, convert the page node tree to an interface calling form by using the first instance object, so as to obtain interface calling information corresponding to the page node tree
- 210 Perform page drawing on the basis of the interface calling information, so as to generate the sub-application page

(57) Abstract: A sub-application page processing method and apparatus, and a computer device, a storage medium and a computer program product. The method comprises: when an event of requesting the acquisition of a sub-application page is detected, acquiring a page code of the sub-application page, wherein the sub-application page refers to a page displayed in a sub-application (202); parsing the page code to obtain a page parsing result, traversing a code set in the page parsing result, and creating a page node tree corresponding to the sub-application page, wherein the page node tree is a tree structure which is generated on the basis of page nodes of the sub-appli-

[见续页]

MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

- (84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

cation page (204); creating a first instance object for converting the page node tree, and establishing a binding relationship between the first instance object and the sub-application page (206); once the binding relationship is established, converting the page node tree to an interface calling form by using the first instance object, so as to obtain interface calling information corresponding to the page node tree (208); and performing page drawing on the basis of the interface calling information, so as to generate the sub-application page (210).

(57) 摘要: 一种子应用页面处理方法、装置、计算机设备、存储介质和计算机程序产品, 方法包括: 当监测到请求获取子应用页面的事件, 获取子应用页面的页面代码, 子应用页面是指在子应用中显示的页面(202); 对页面代码进行解析, 获得页面解析结果, 遍历页面解析结果中代码集合, 创建子应用页面相应的页面节点树, 页面节点树是基于子应用页面的页面节点而生成的树状结构(204); 创建用于转换页面节点树的第一实例对象, 建立第一实例对象和子应用页面的绑定关系(206); 在建立绑定关系的情况下, 使用第一实例对象, 将页面节点树转换为接口调用的形式, 获得页面节点树相应的接口调用信息(208); 基于接口调用信息进行页面绘制, 生成子应用页面(210)。