25/11/02
2002072692

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/92857 A3

(51) International Patent Classification[7]: G01N 21/35, G01J 3/453, A61B 5/00

(21) International Application Number: PCT/US01/16204

(22) International Filing Date: 17 May 2001 (17.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/586,692 1 June 2000 (01.06.2000) US

(71) Applicant: **LIFESCAN, INC.** [US/US]; 1000 Gibraltar Drive, Milpitas, CA 95035-6312 (US).

(72) Inventors: **DEBRECZENY, Martin, P.**; 310 Freitas Court, Danville, CA 94526 (US). **O'NEIL, Michael, P.**; 356 Morse Avenue, Sunnyvale, CA 94086 (US).

(74) Agent: **FIELD, Bret, E.**; Bozicevic, Field & Francis LLP, Suite 200, 200 Middlefield Road, Menlo Park, CA 94025 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(88) Date of publication of the international search report:
30 May 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DUAL BEAM FTIR METHODS AND DEVICES FOR ANALYTE DETECTION IN SAMPLES OF LOW TRANSMISSIVITY

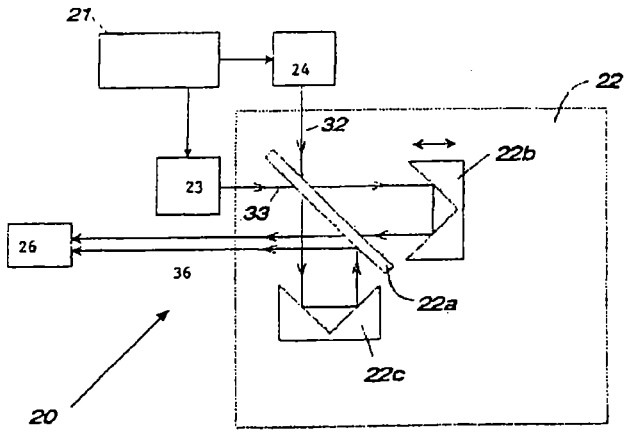

(57) Abstract: Methods and devices are provided for determining the presence and/or concentration of at least one analyte in a sample (24) of low transmissivity. In the subject methods, a forward beam (32) and a backward beam (33) are produced by or introduced into an interferometer (22) from at least one infrared radiation source (21). The forward beam is passed into the sample and then collected to produce a sample beam while the backward beam is passed into a reference and then collected to provide a reference beam. The sample and reference beams are recombined either optically into a null beam (36) which is detected at a single detector (26) or electronically nulled after detection on two separate detectors. The presence, and often amount, of at least one analyte in the sample is then derived from the detected null beam. Also provided are devices for practicing the above methods. The subject methods and devices are suitable for use in a variety of different applications, including the detection of the presence, and amount, of one or more blood analytes in a physiological sample, such as blood, tissue or derivatives thereof.

WO 01/92857 A3

ACTION