

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
16 December 2021 (16.12.2021)



(10) International Publication Number
WO 2021/249846 A1

- (51) International Patent Classification:
G02C 7/02 (2006.01) *B29D 11/00* (2006.01)
- (21) International Application Number:
PCT/EP2021/064793
- (22) International Filing Date:
02 June 2021 (02.06.2021)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20305651.0 12 June 2020 (12.06.2020) EP
- (71) Applicant: **ESSILOR INTERNATIONAL** [FR/FR]; 147 rue de Paris, 94220 CHARENTON-LE-PONT (FR).
- (72) Inventors: **GACOIN, Eric**; c/o ESSILOR INTERNATIONAL, 147 rue de Paris, 94220 CHARENTON-LE-PONT (FR). **GUILLOT, Matthieu**; c/o ESSILOR INTERNATIONAL, 147 rue de Paris, 94220 CHARENTON-LE-PONT (FR). **FERMIGIER, Bruno**; c/o ESSILOR INTERNATIONAL, 147 rue de Paris, 94220 CHARENTON-LE-PONT (FR). **LE SAUX, Gilles**; c/o ESSILOR INTERNATIONAL, 147 rue de Paris, 94220 CHARENTON-LE-PONT (FR).
- (74) Agent: **CABINET NOVITECH** et al.; 188 Grande Rue Charles de Gaulle, 94130 NOGENT-SUR-MARNE (FR).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: LENS ELEMENT

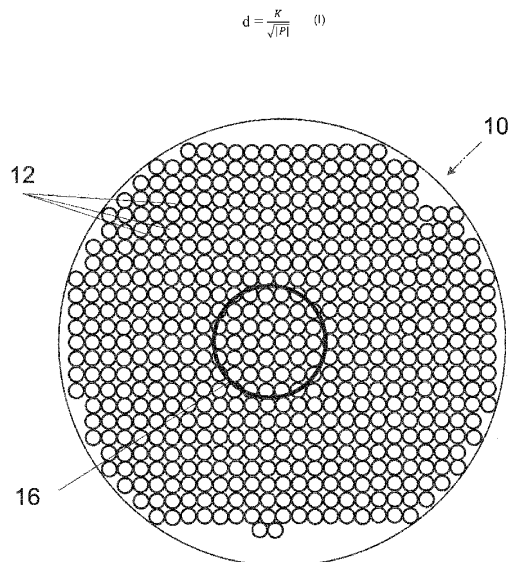


Fig.2

(57) Abstract: An optical lens intended to be worn in front of an eye of a wearer having at least one prescribed refractive power P_x , the optical lens comprising two opposite optical faces and a plurality of contiguous optical elements at least part of the optical elements having an optical function of not focusing an image on the retina of the eye of the wearer so as to slow down the progression of the abnormal refraction of the eye, wherein: - over a pupil having at least a 4 mm diameter, one can measure in a plane corresponding to the at least one prescribed refractive power along at least one direction, a Modulation Transfer Function through the optical lens greater than 0.1 between 0 and 20 cyc/deg; - a majority of the light rays passing through the optical lens over said pupil pass through at least one of the plurality of optical elements, and - each of the contiguous optical element verifies that Formula (1) with d a characteristic dimension of the contour of said optical element in mm, $|P|$ the absolute value of a characteristic optical power of said optical element expressed in diopter, and K a number greater or equal to 0.9 and smaller than or equal to 1.7.