

FIG. 1

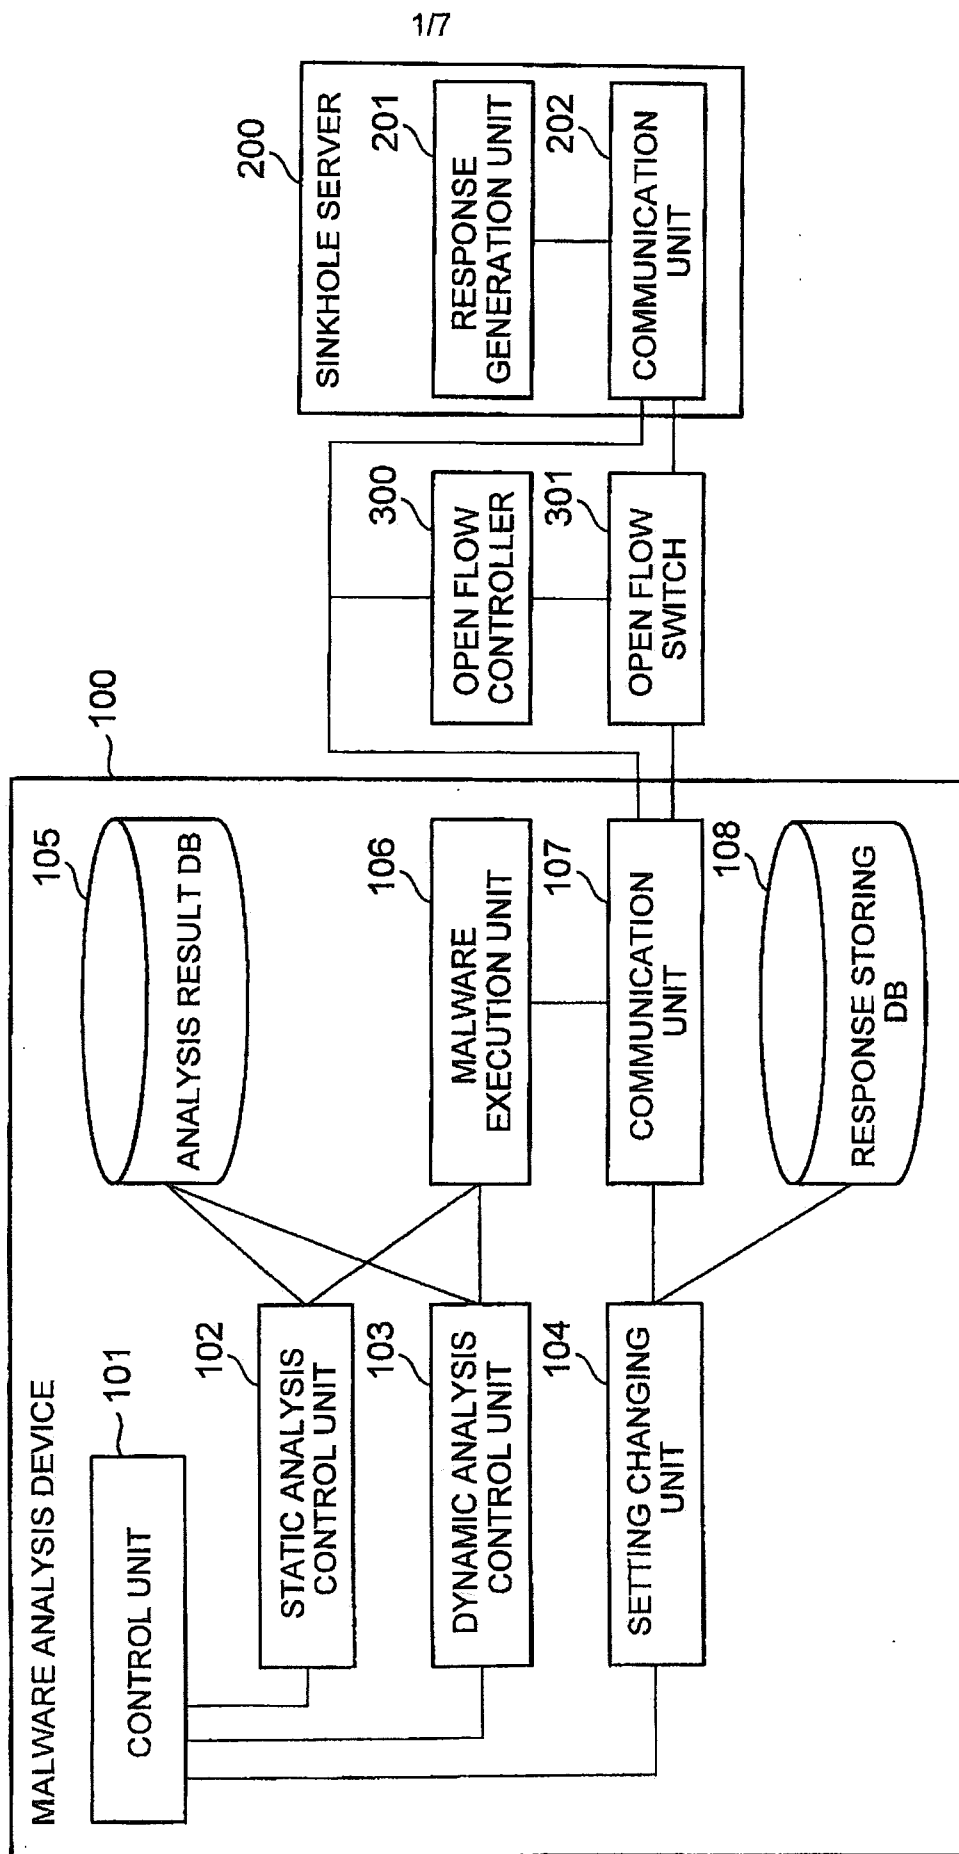


FIG. 2

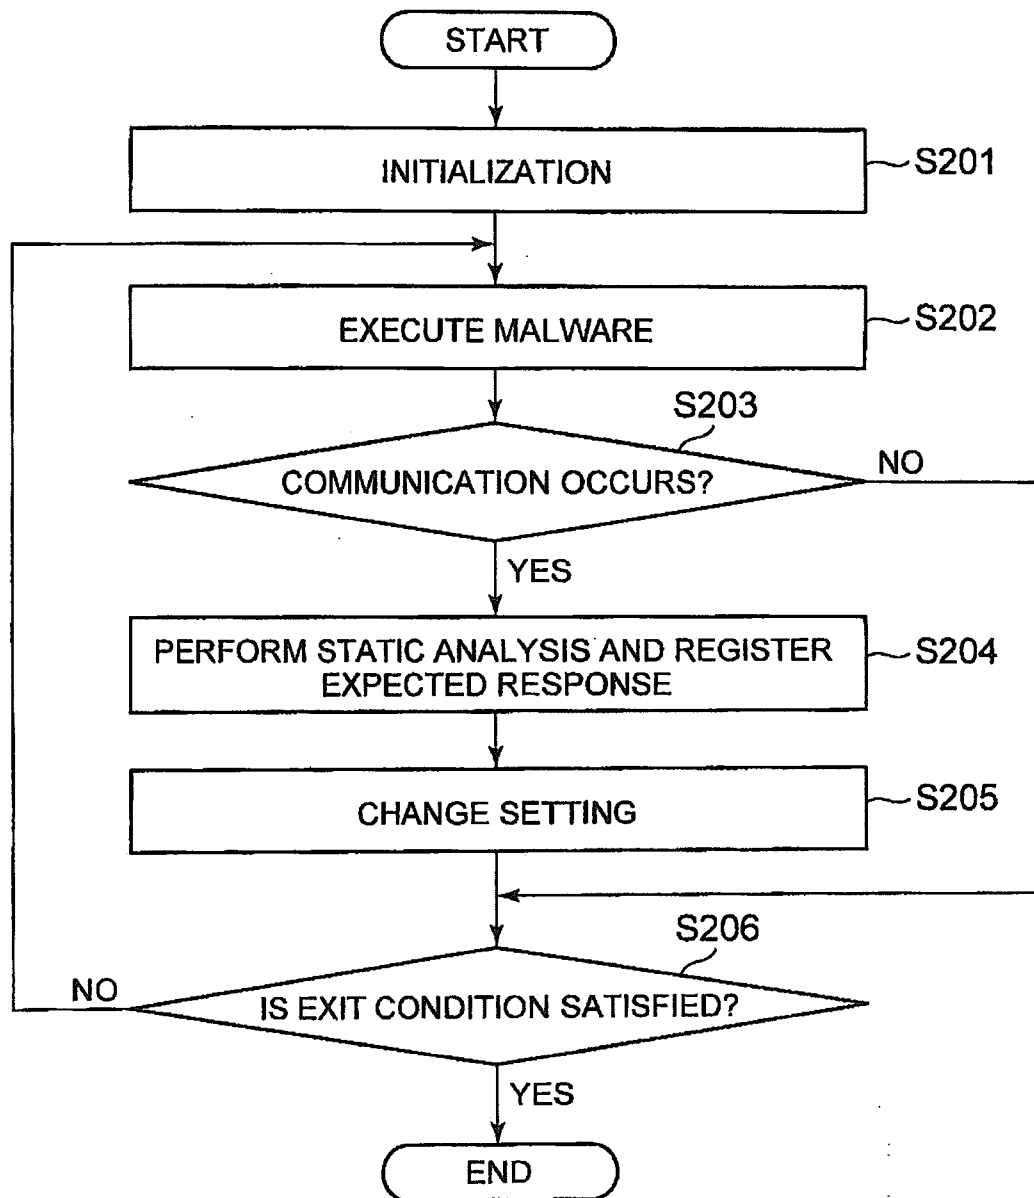


FIG. 3

API	ARGUMENT	FLOW INFORMATION	EXPECTED RESPONSE	SETTING METHOD
GetHostAddresses()	malware.example.com	SOURCE/DESTINATION MAC ADDRESSES SOURCE/DESTINATION IP ADDRESSES SOURCE/DESTINATION PORT NUMBERS . . .	A 10.20.30.40	ADD ENTRY OF DNS SERVER
GetResponse()	malicious.site.net	SOURCE/DESTINATION MAC ADDRESSES SOURCE/DESTINATION IP ADDRESSES SOURCE/DESTINATION PORT NUMBERS	HTTP/1.1 200 OK Server: . . . Date: . . . abcdef	CREATE CONTENT OF WEB SERVER

FIG. 4

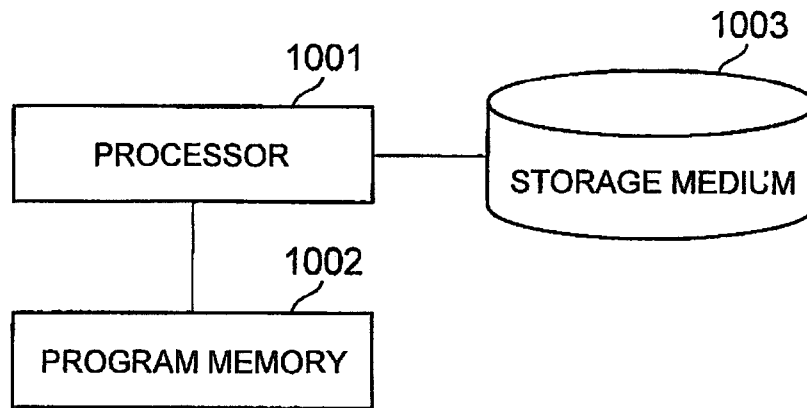


FIG. 5

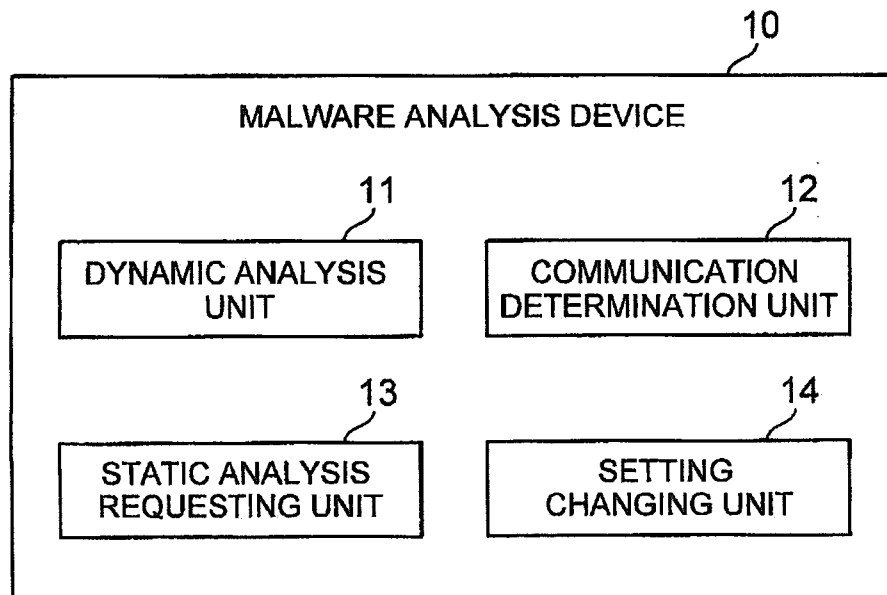


FIG. 6

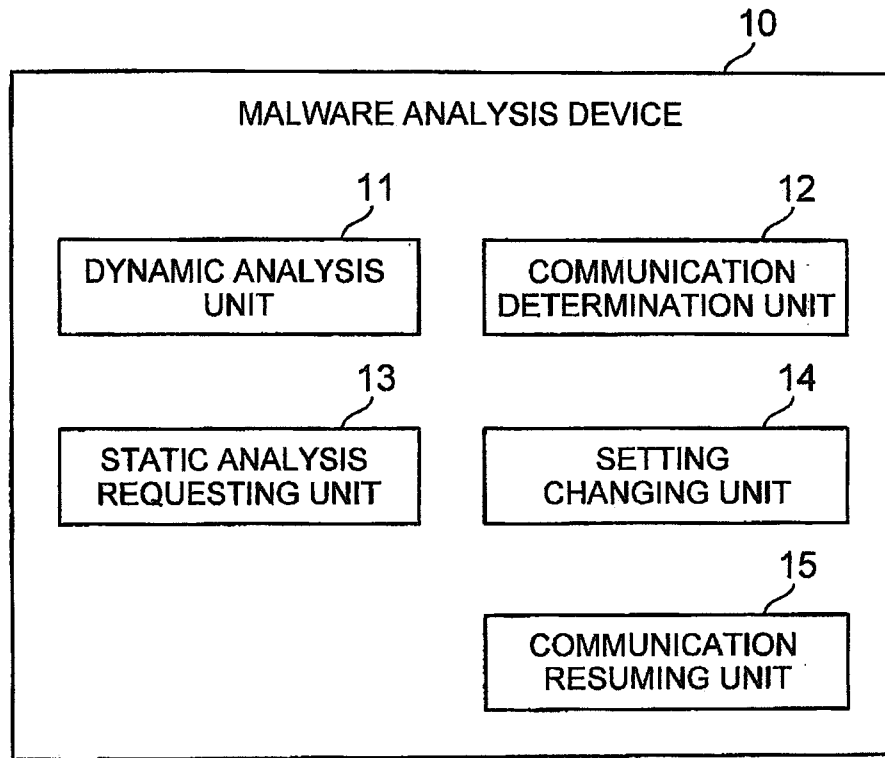


FIG. 7

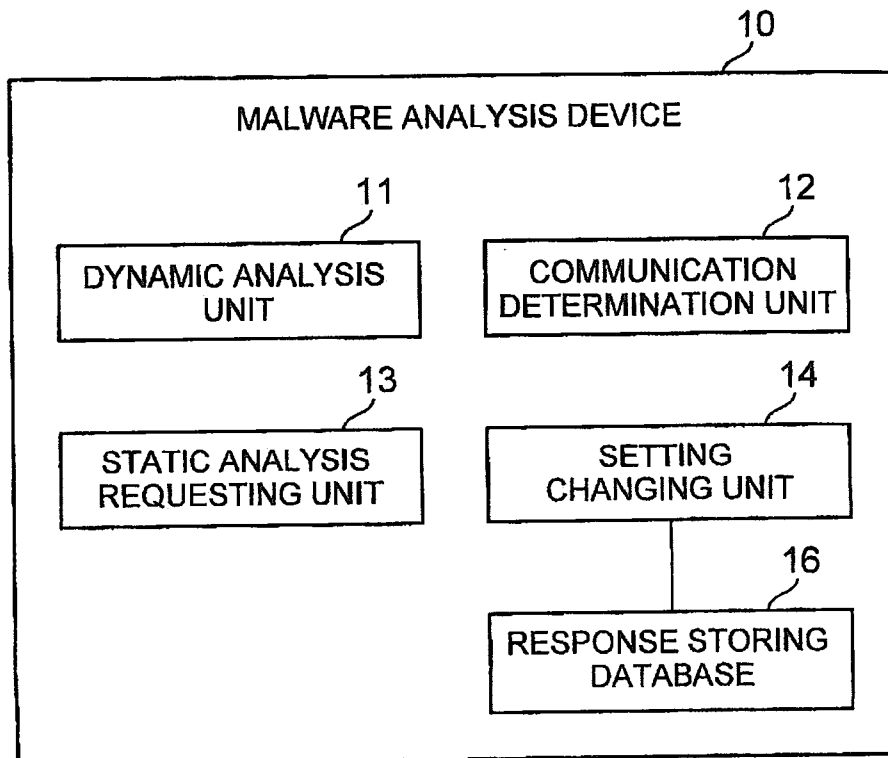


FIG. 8

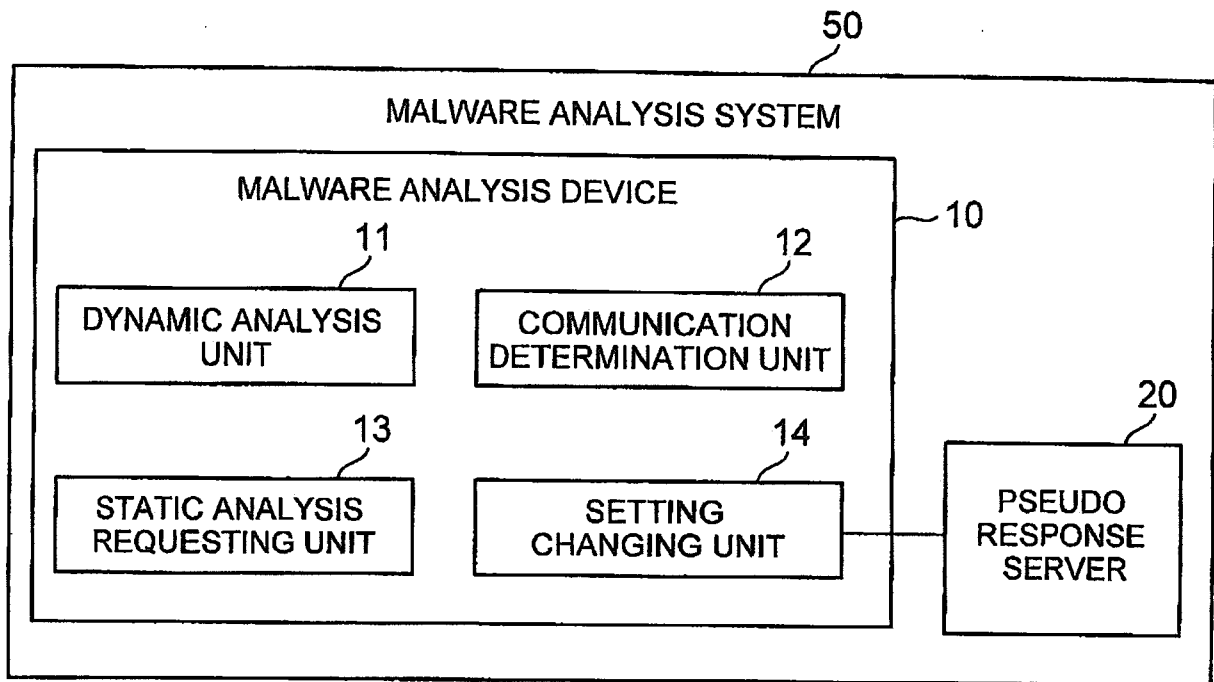


FIG. 9

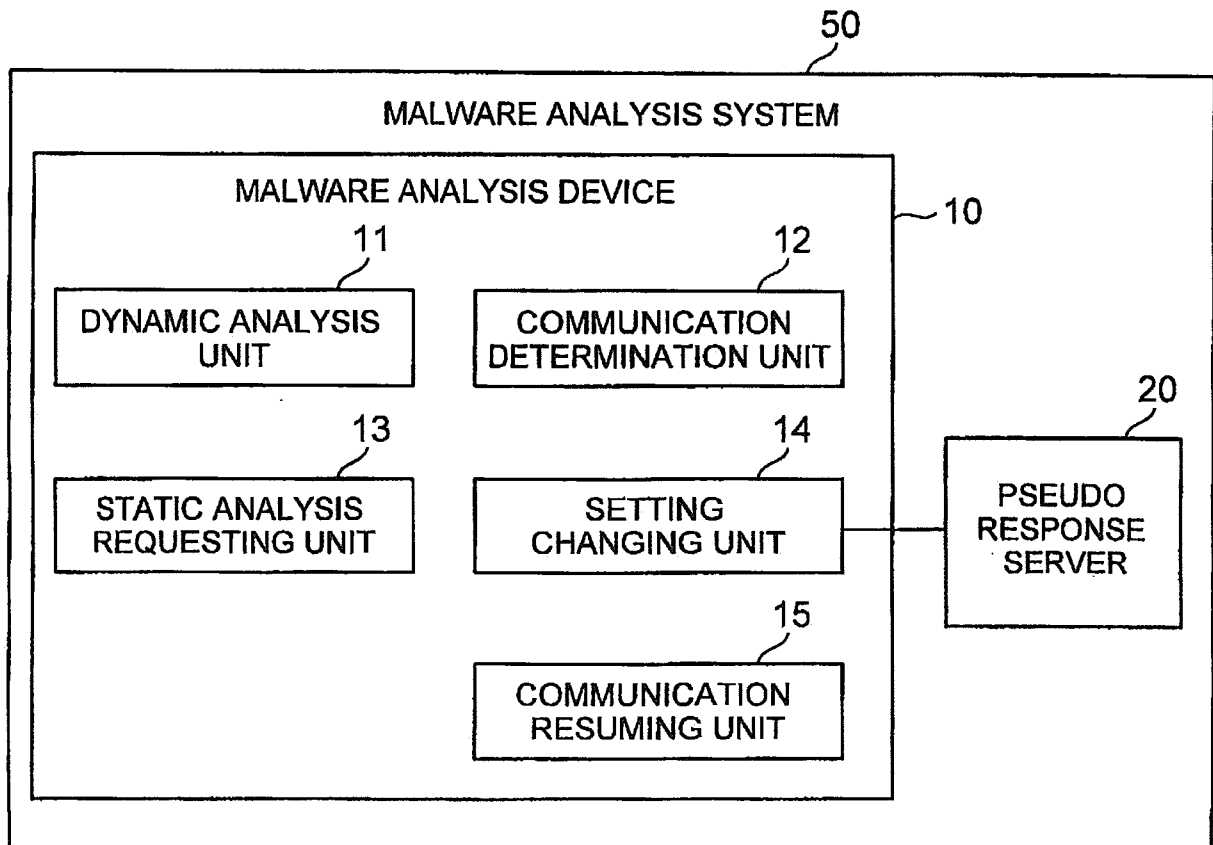


FIG. 10

