

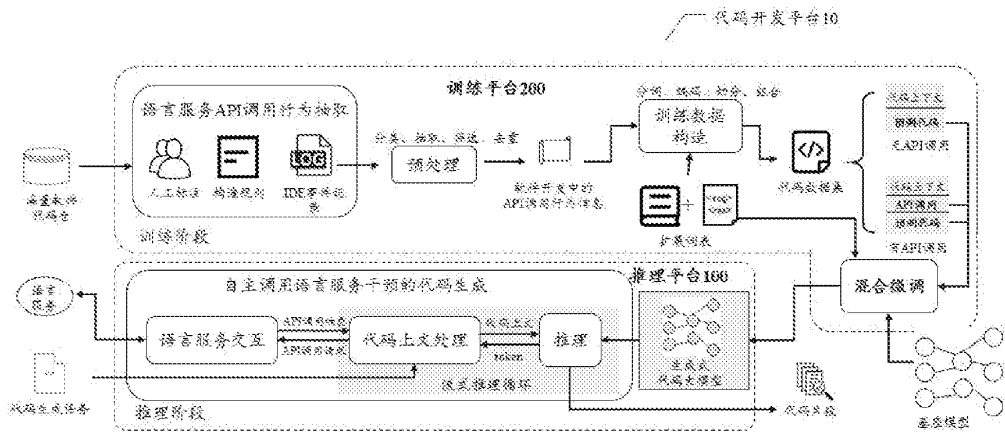


图 1

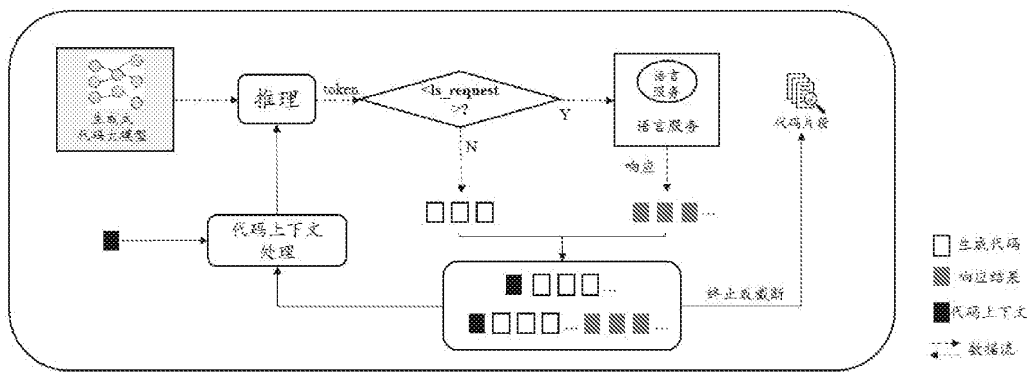


图 2

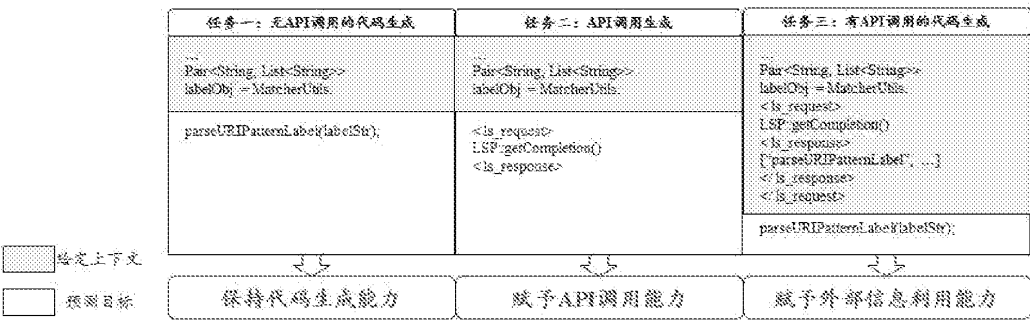


图 3

- 2 -

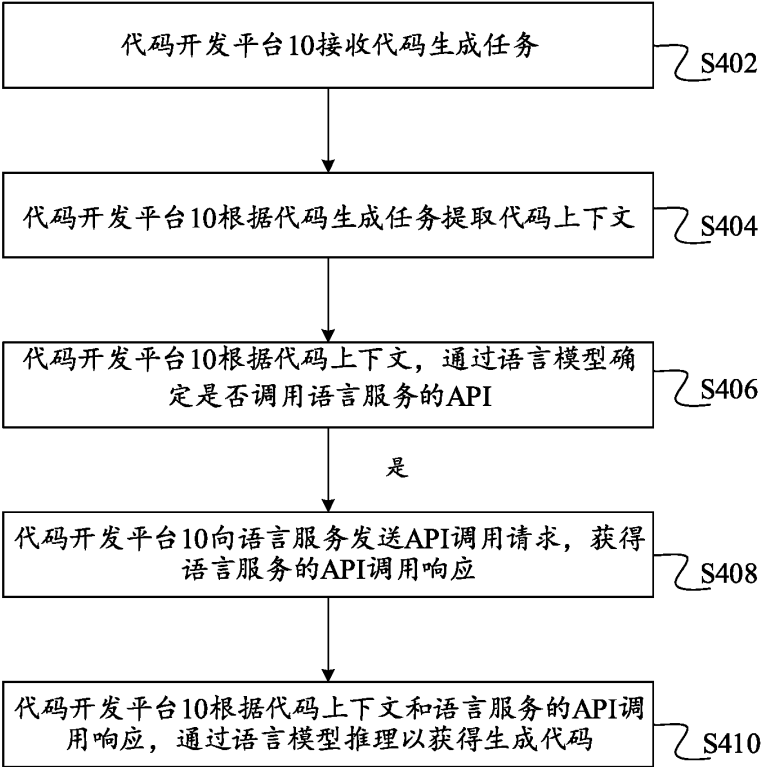


图 4

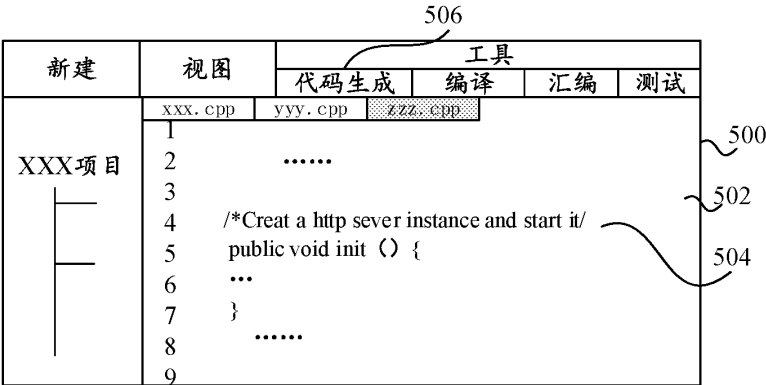


图 5

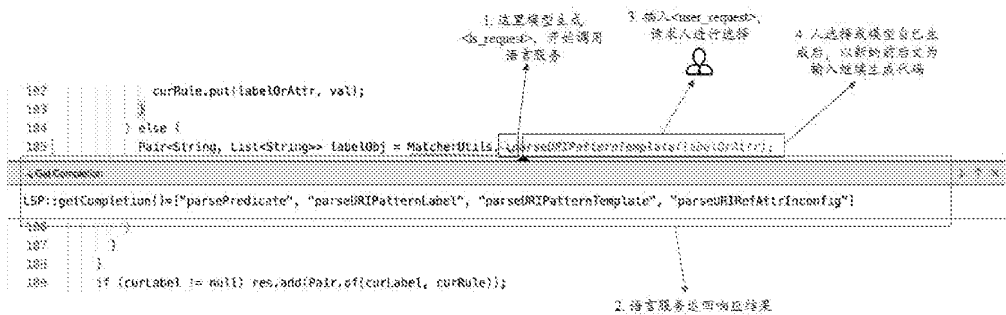


图 6

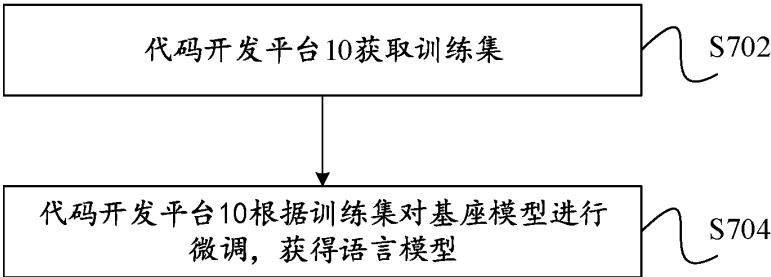


图 7

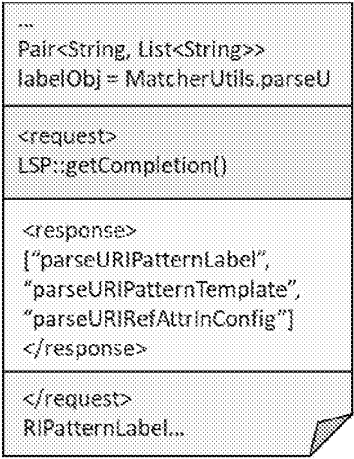


图 8

```
...
String attr_param_cnt =
  MatcherUtils.parseU

<request>
LSP::getCompletion()

<response>
{"parseURIPatternLabel",
 "parseURIPatternTemplate",
 "parseURIRefAttrInConfig"}
</response>

<request>
LSP::getDef{"parseURIRefAttrIn
Config"}

<response>
public static Map<String, String>
parseURIRefAttrInConfig(...){...
  res.put{"paramCnt", "5"};...}
</response>

</request>
RIRefAttrInConfig(uriRefStr)
.get{"paramCnt"};
```

图 9

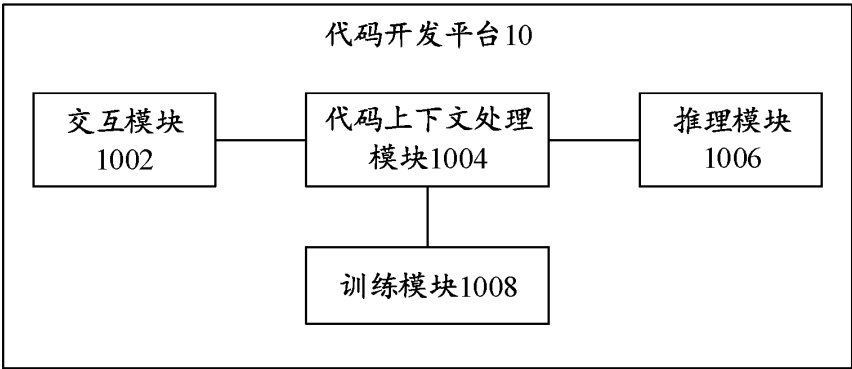


图 10

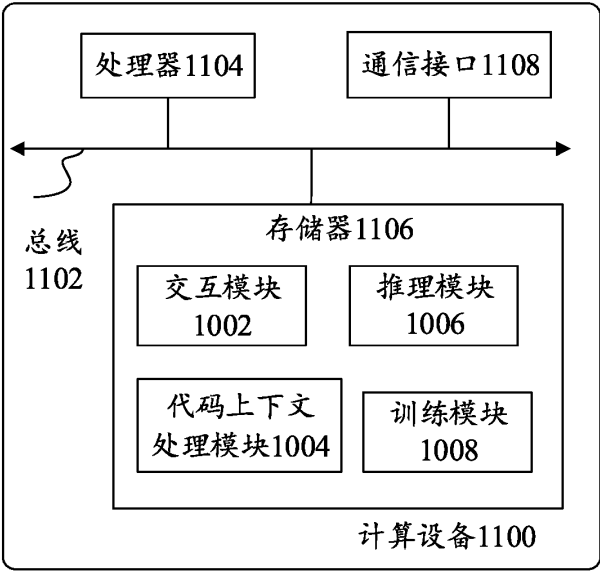


图 11

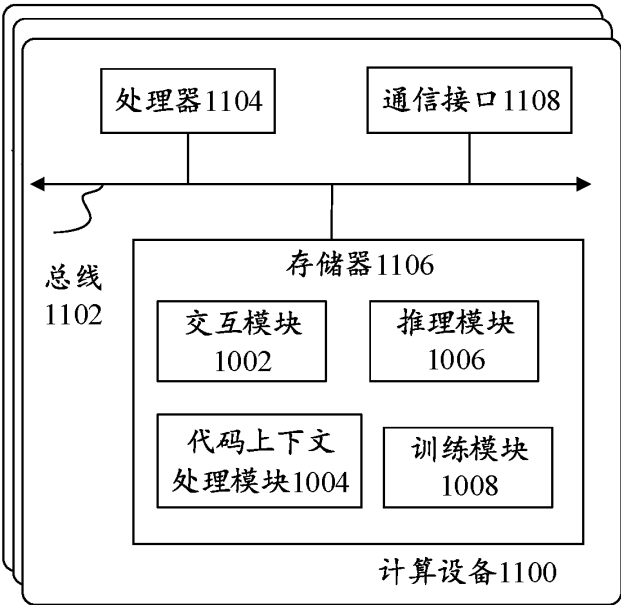


图 12

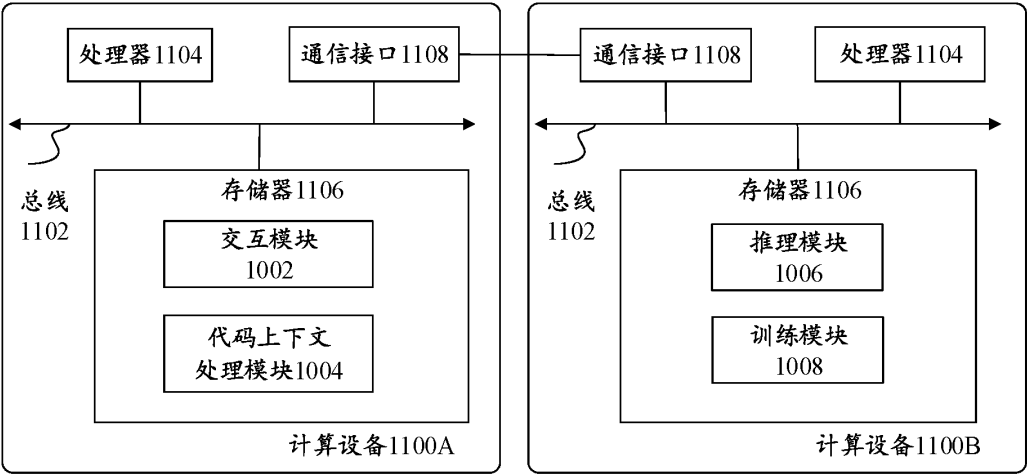


图 13

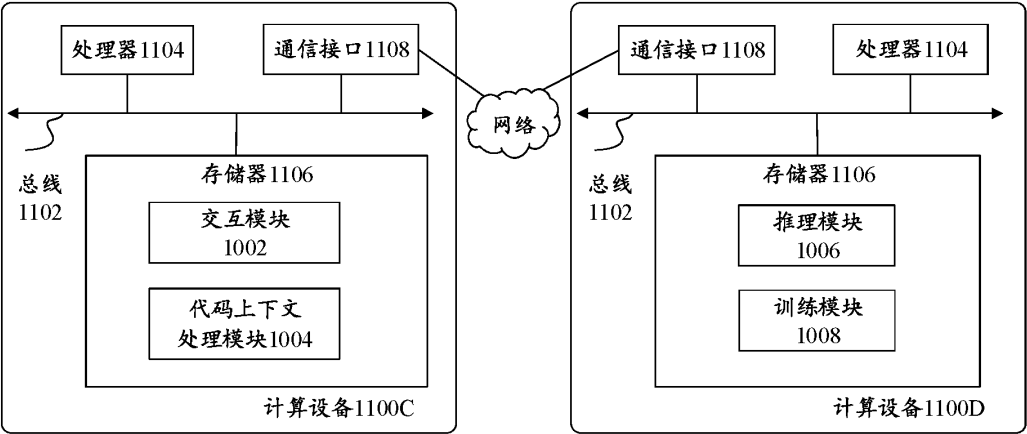


图 14