

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 April 2008 (03.04.2008)

PCT

(10) International Publication Number
WO 2008/039143 A1

(51) International Patent Classification:
F16D 1/097 (2006.01) **F04D 29/20** (2006.01)

(21) International Application Number:
PCT/SE2007/050589

(22) International Filing Date: 29 August 2007 (29.08.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0602040-8 29 September 2006 (29.09.2006) SE

(71) Applicant (for all designated States except US): **ITT
MANUFACTURING ENTERPRISES INC** [US/US];
1105 North Market Street, Wilmington, DE 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HALLGREN, Gert**
[SE/SE]; Pjåxvägen 19, S-126 39 Hägersten (SE).


(74) Agent: **DR LUDWIG BRANN PATENTBYRÅ AB**; P O
Box 17192, S-104 62 Stockholm, (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: A DEVICE FOR INTERCONNECTING A FIRST ELEMENT AND A SECOND ELEMENT AS WELL AS A PUMP COMPRISING SUCH A DEVICE

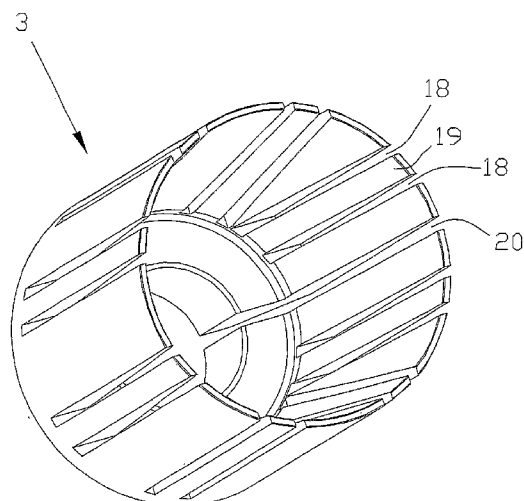

(57) Abstract: In a first aspect the invention relates to a device for interconnecting a first element (2) and a second element (1) to each other in order to transmit a rotational motion. The device (3) comprises a tubular wall (4) having a circular inner surface, a part of which that is adjacent to said first end being arranged to abut said first element (2), and having a circular outer surface, a part of which that is adjacent to said first end being arranged to abut said second element (1). Furthermore, said tubular wall (4) comprises at least one pair of slits (18), which slits (18) are adjacent to each other and extends from said first end towards said second end, obtaining a finger shaped segment (19), which is deflectable in relation to neighboring parts of said tubular wall (4). The invention also relates to a pump comprising such a device (3).

WO 2008/039143 A1