

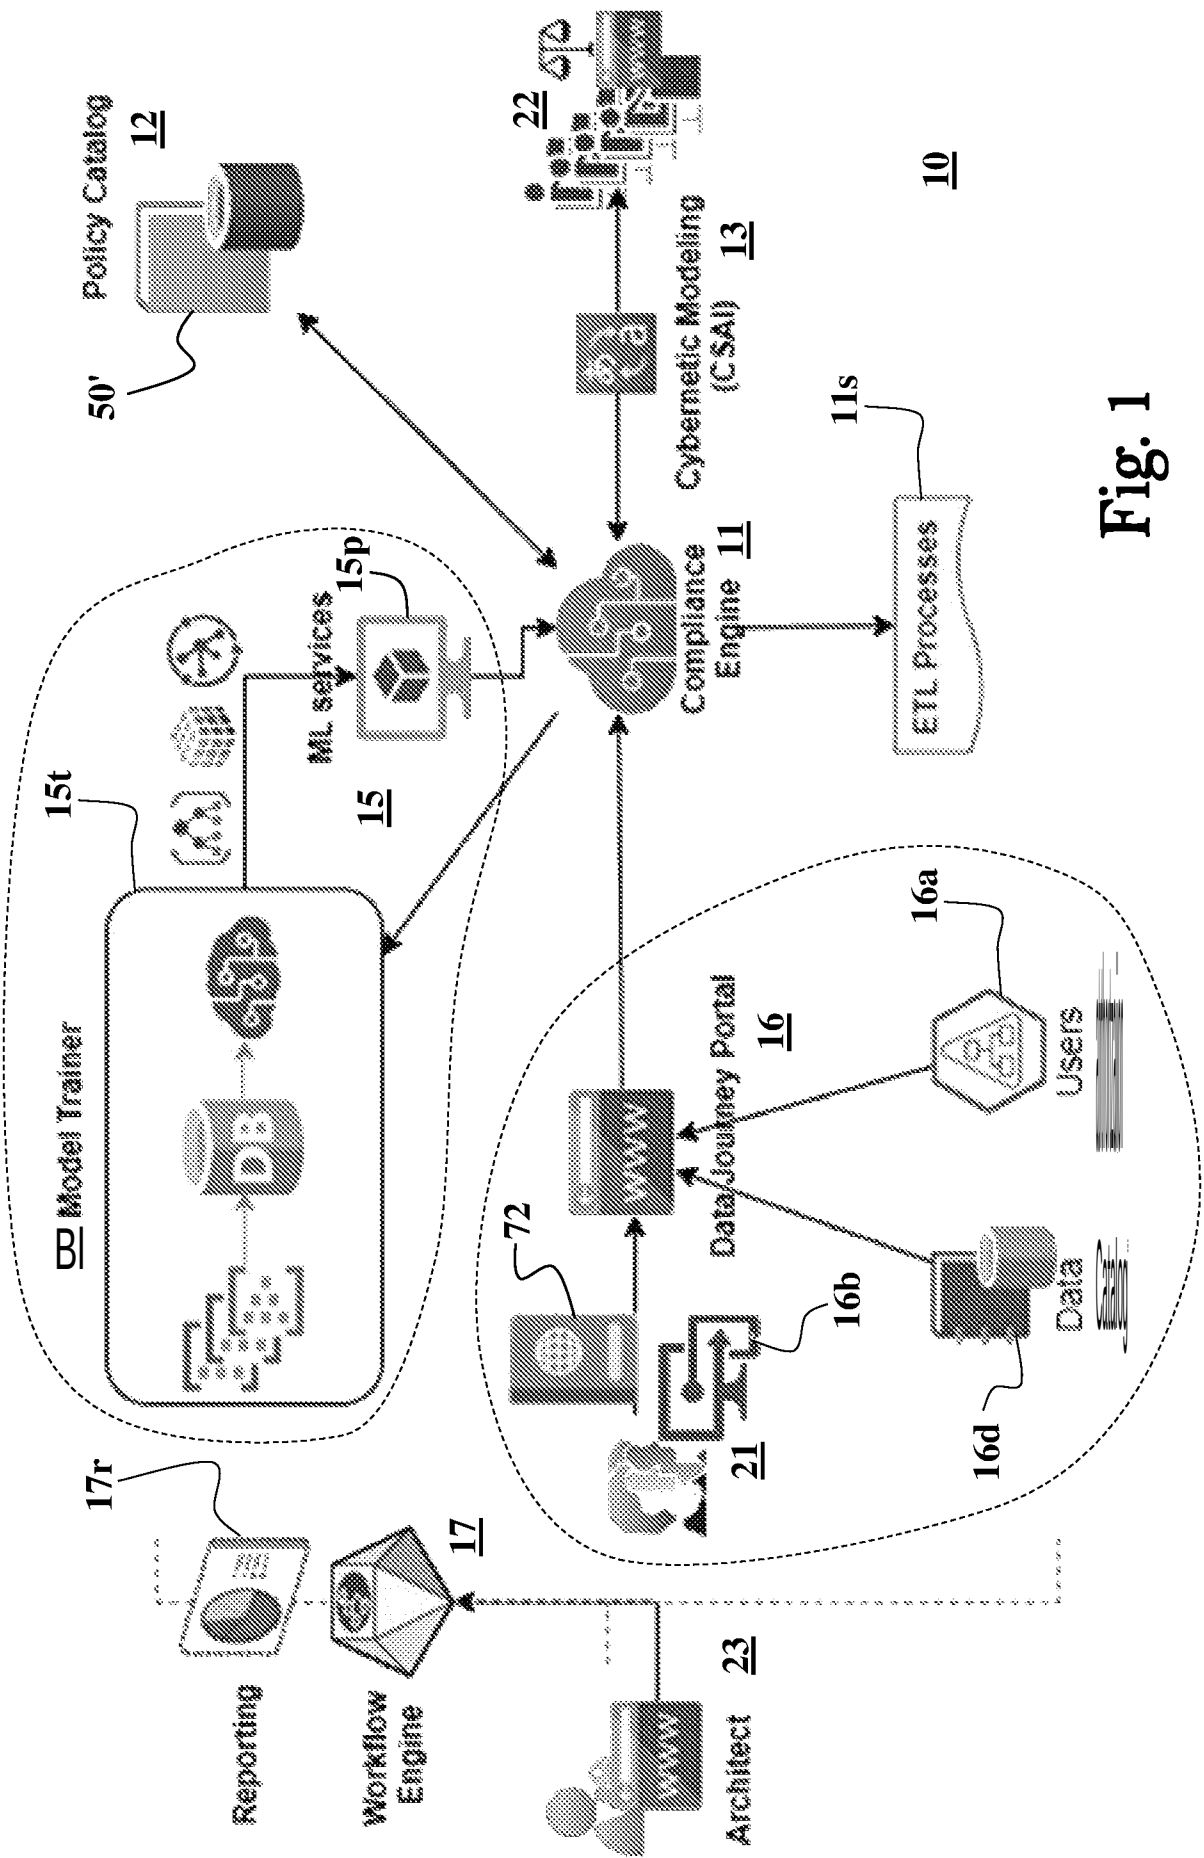


Fig. 1

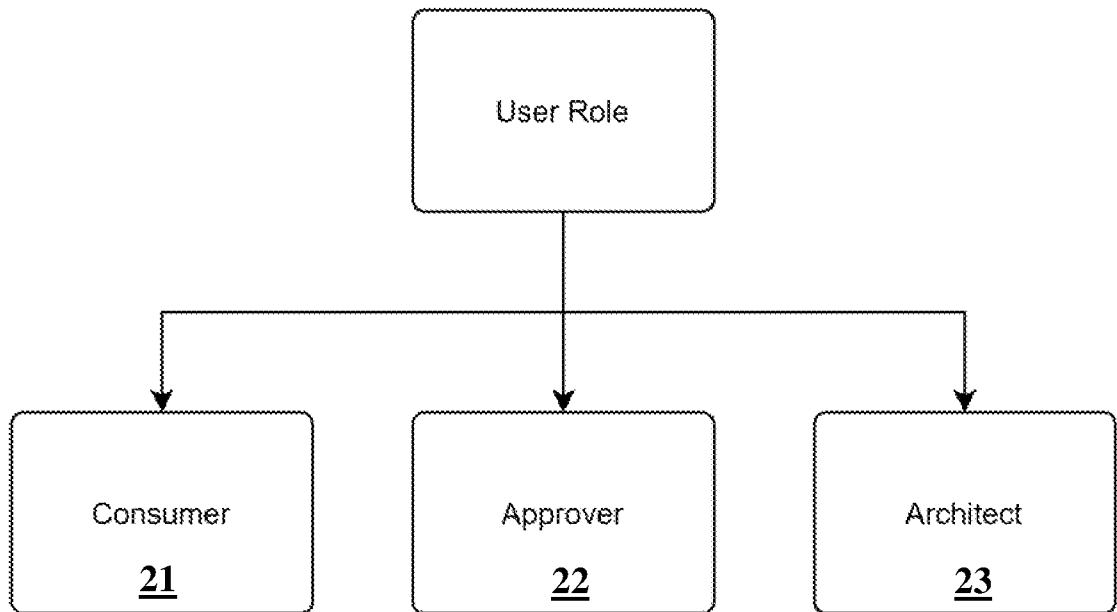


Fig. 2

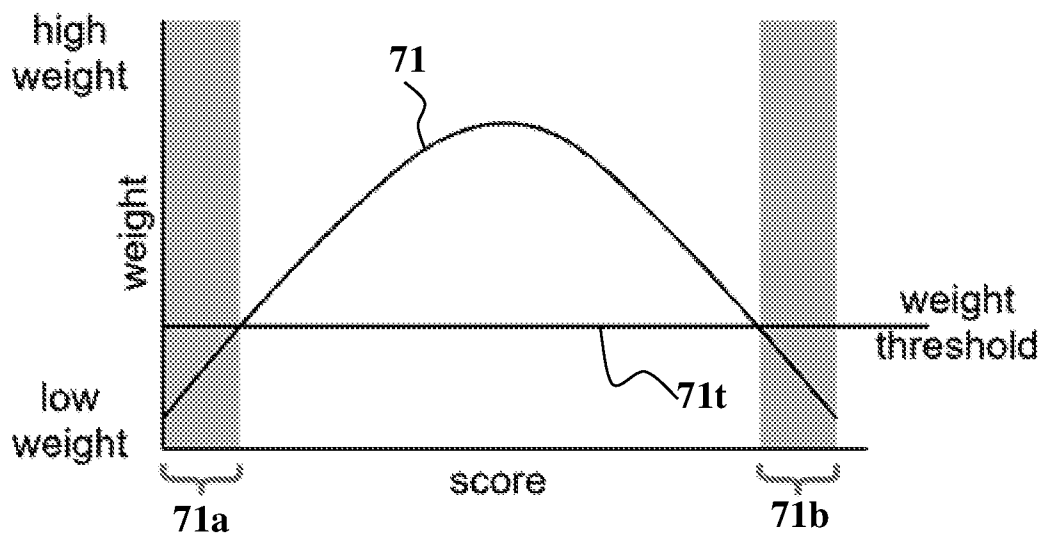


Fig. 7

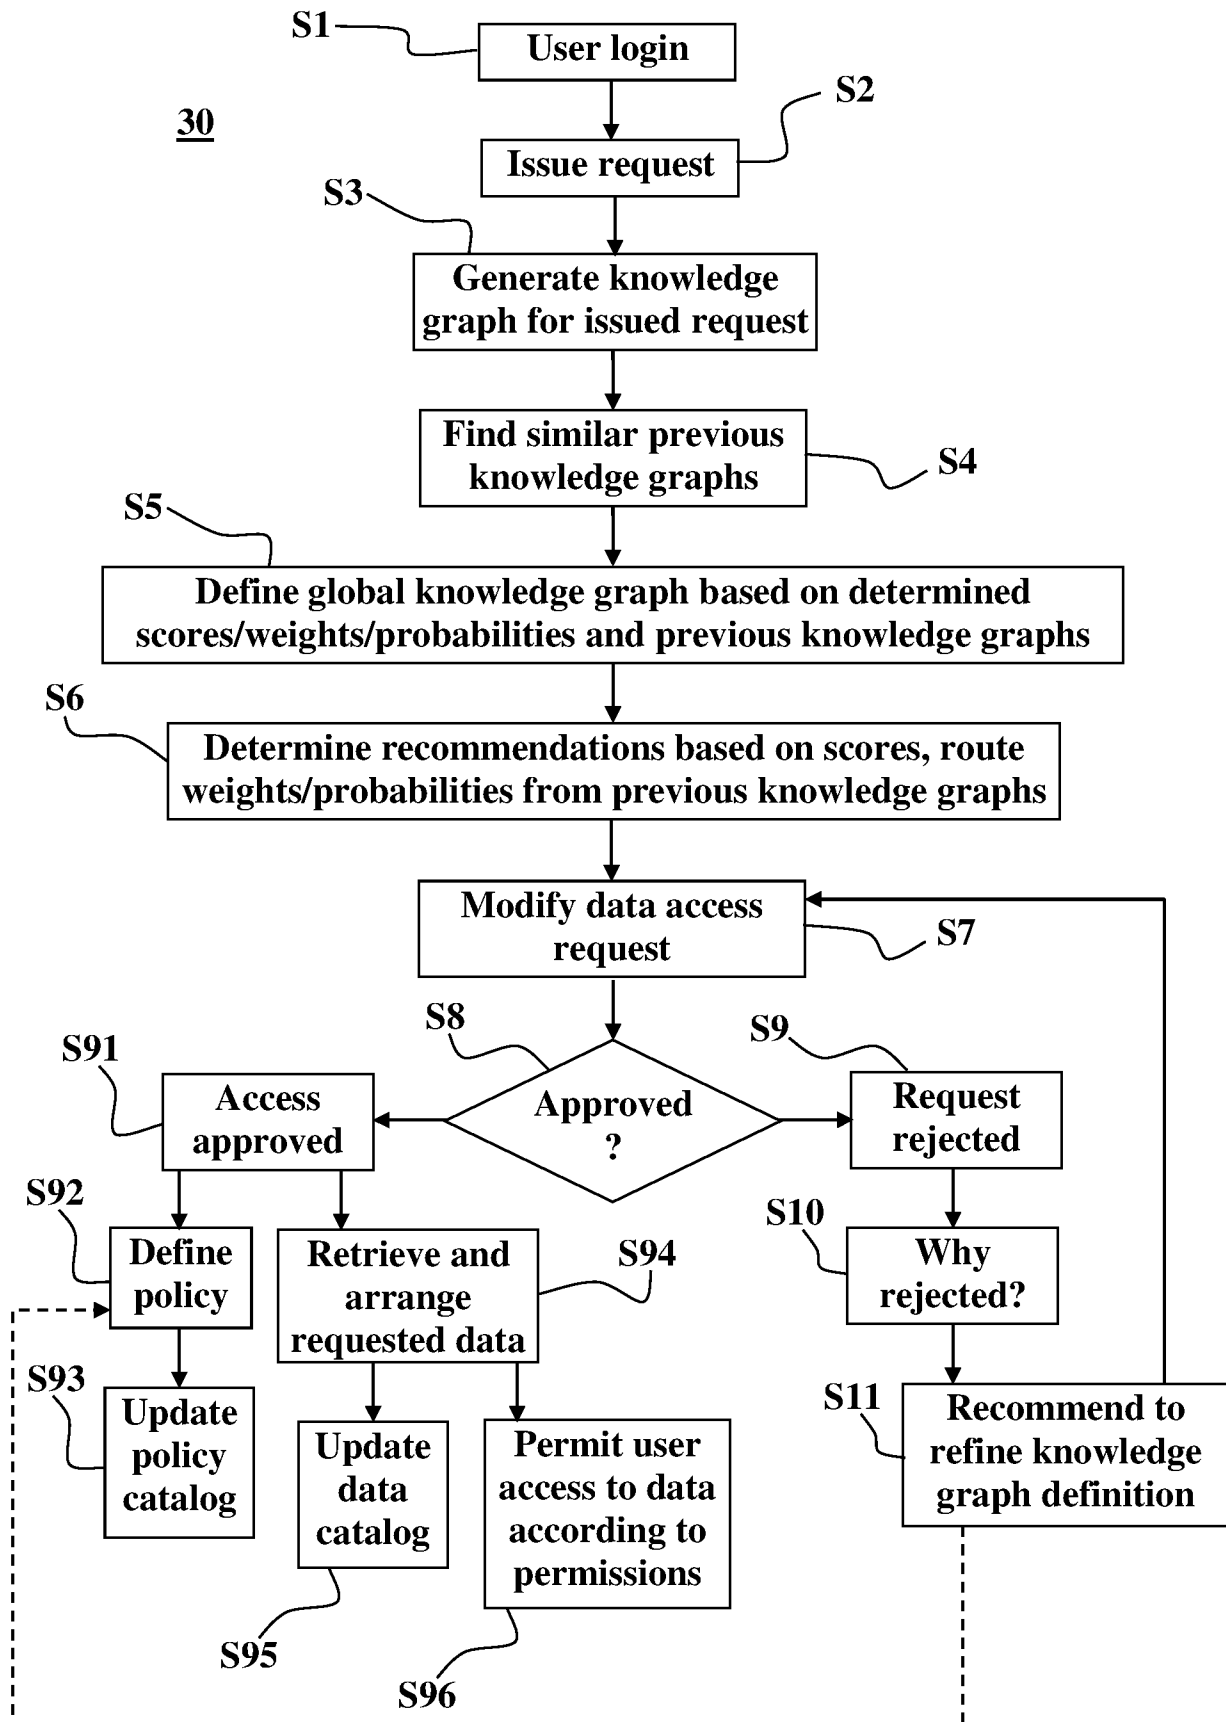


Fig. 3

Request Definition Example

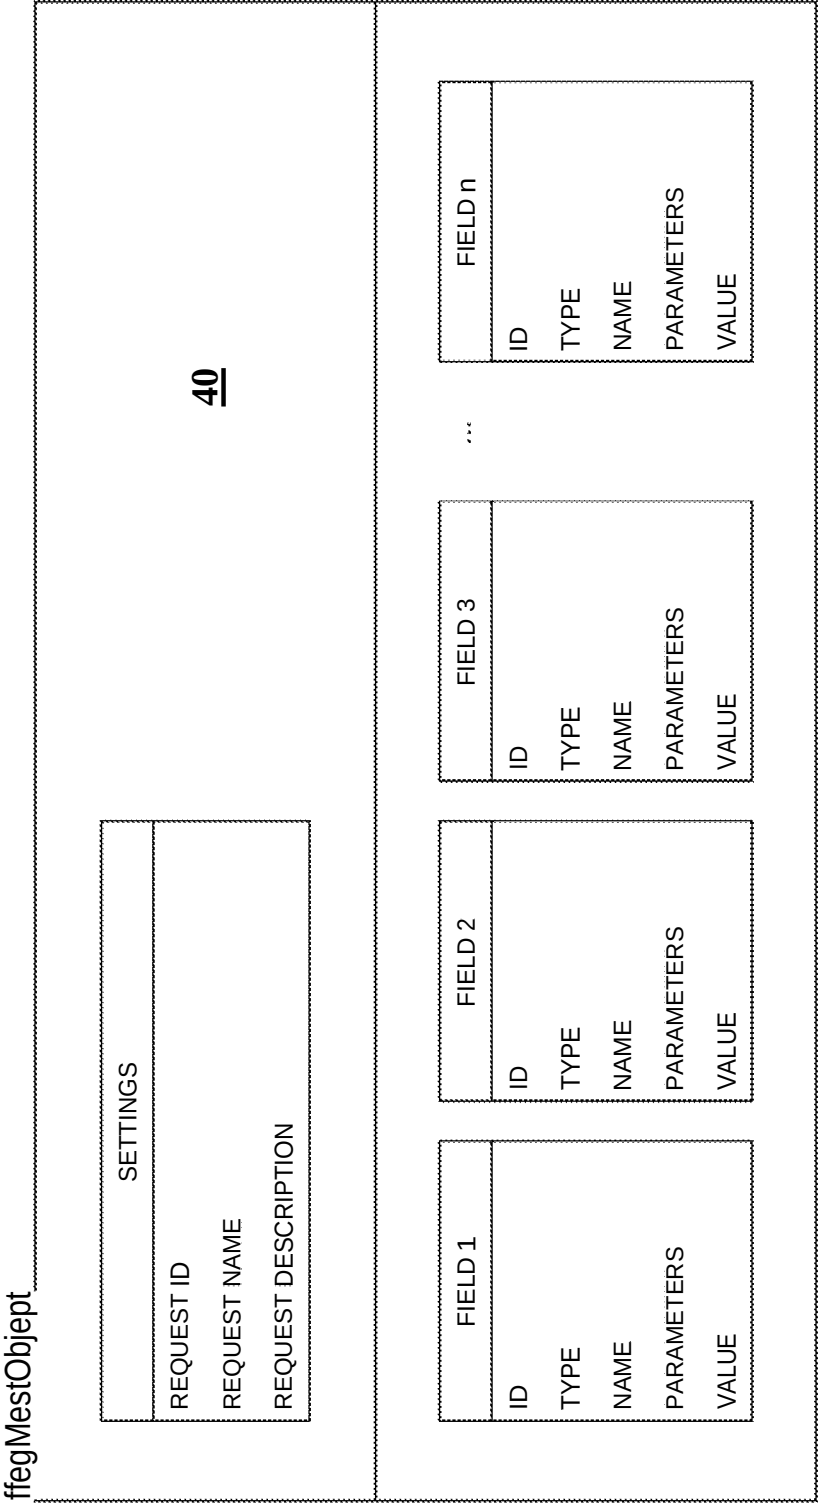


Fig. 4A

Request Definition Example

SETTINGS REQUEST ID = RJ0001 REQUEST NAME » Data Access Request REQUEST DESCRIPTION = Request access to data source	HELD 1 ID = ©001 TYPE = STRING NAME = Request issuer Name
	HELD 2 ©=©002 TYPE = STRING NAME = Request Issuer Region PARAMETERS = HIDDEN, FIXED, FILL RY SYSTEM VALUE = TMEA, LATAM, NA, APAC]
	REID 3 ©a ©003 TYPE = ENUM NAME = Request Purpose VALUE = [Marketing, Audit, Analytics]
	REID 4 ID = ID004 TYPE - ENUM NAME = Classification VALUE ~ [Confidential, Internal, External]
	HELD 5 © = ©005 TYPE = STRING NAME » Data source name

41

Fig. 4B

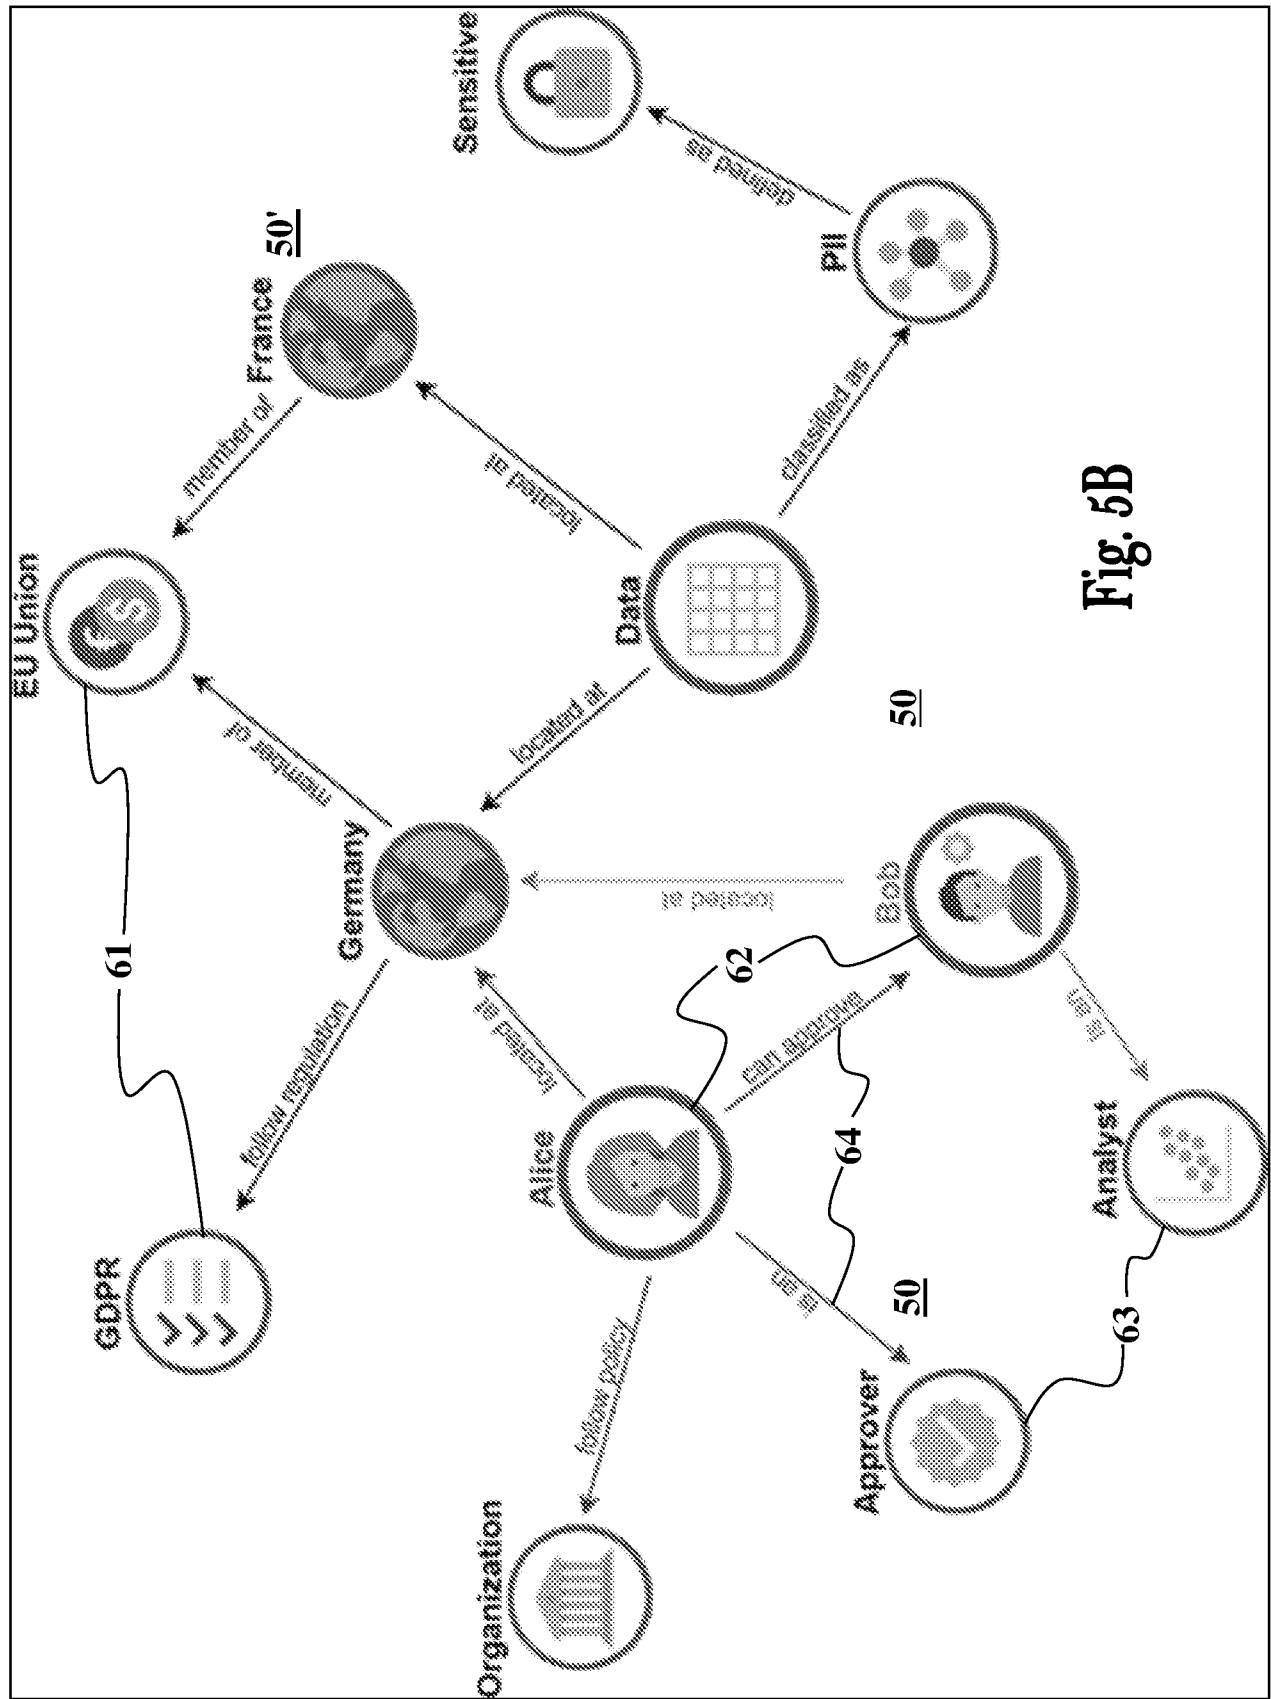


Fig. 5B

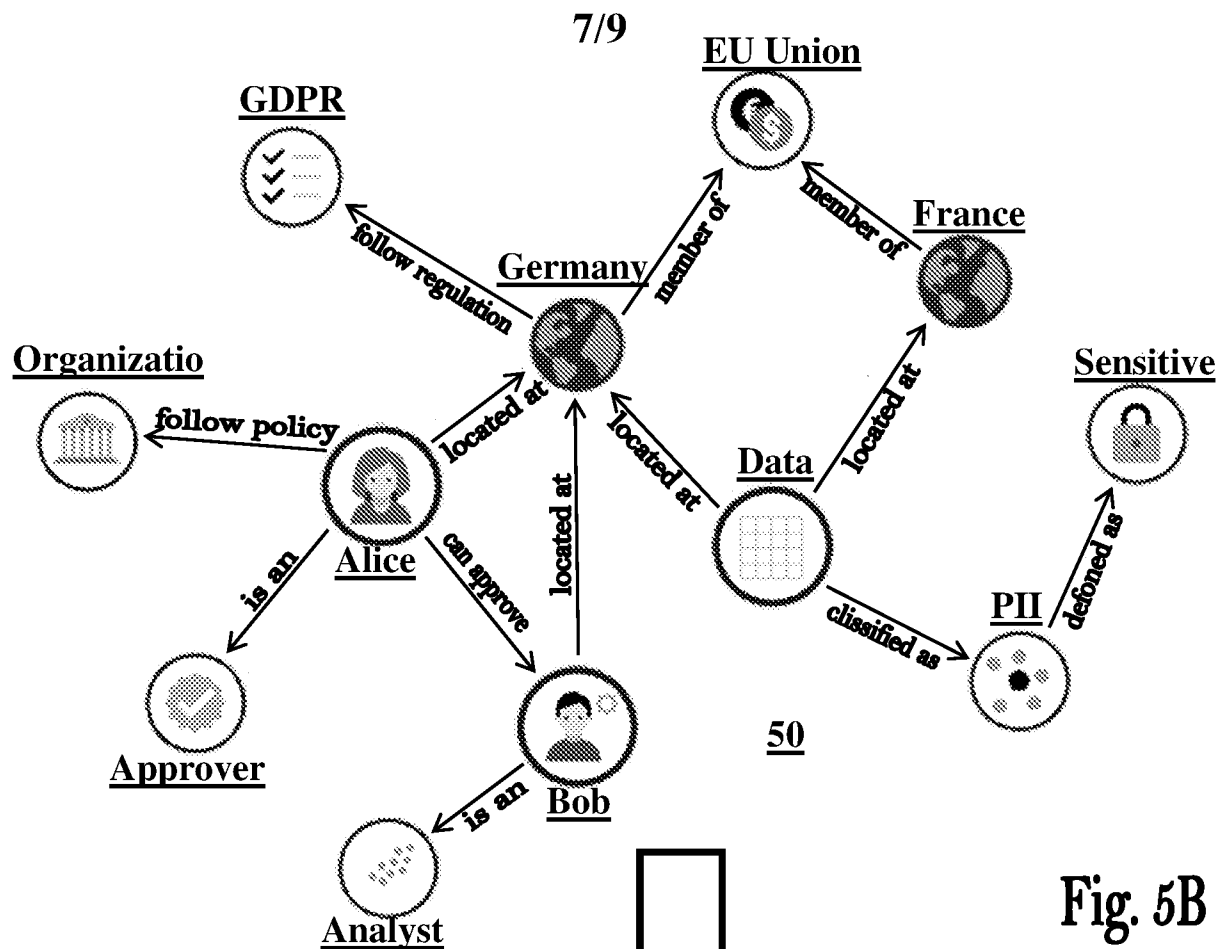
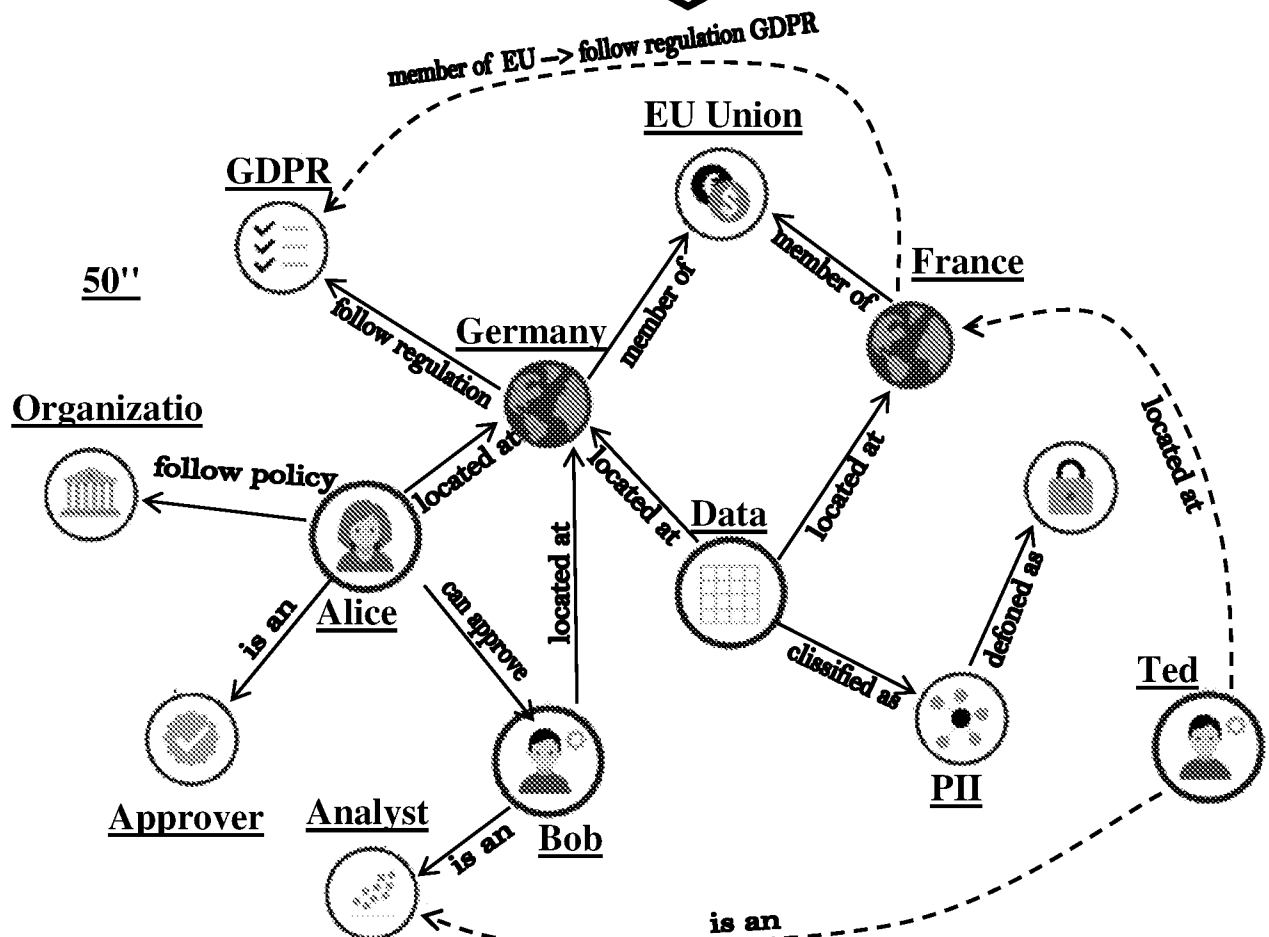


Fig. 5B



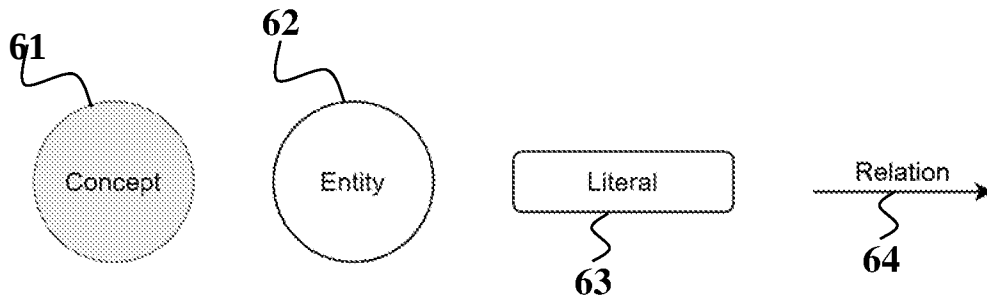


Fig. 6A

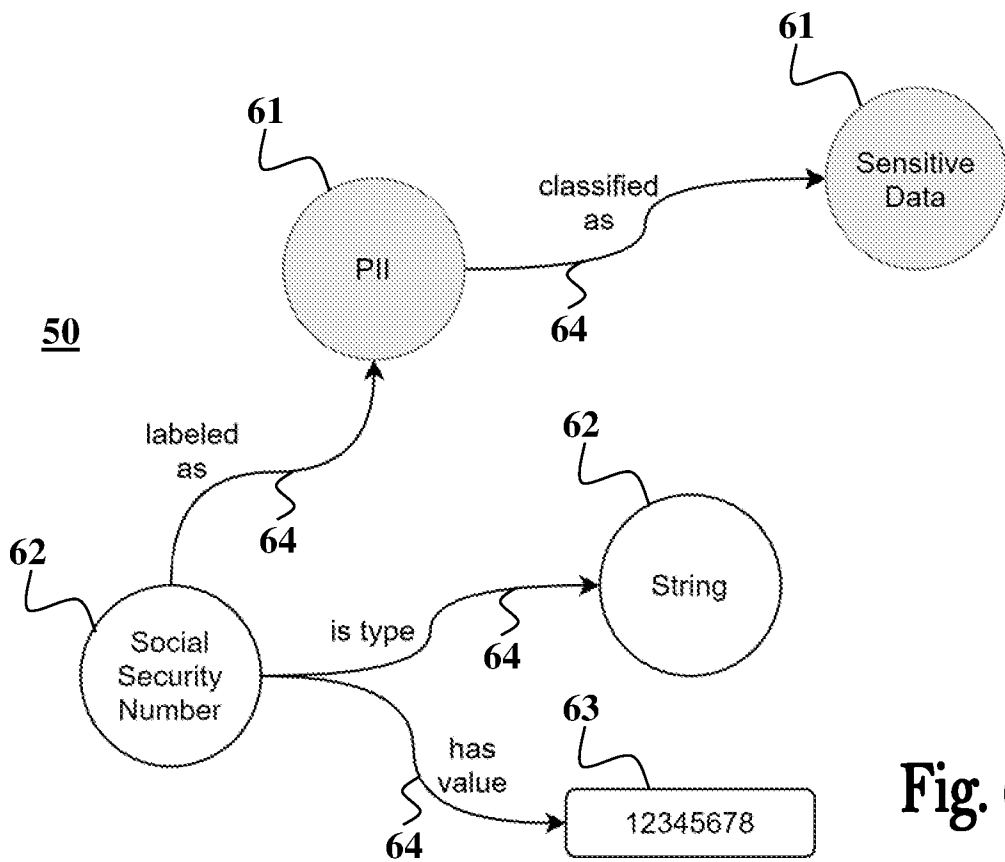


Fig. 6B

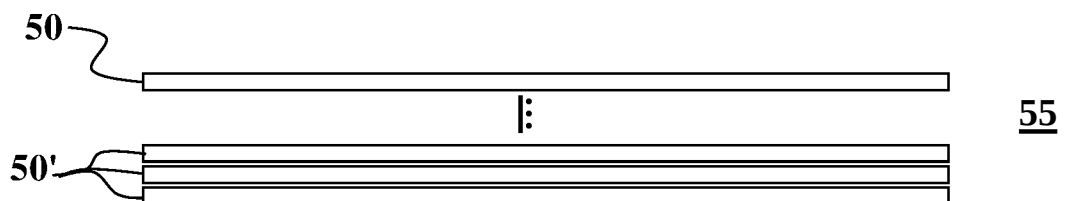


Fig. 6C

