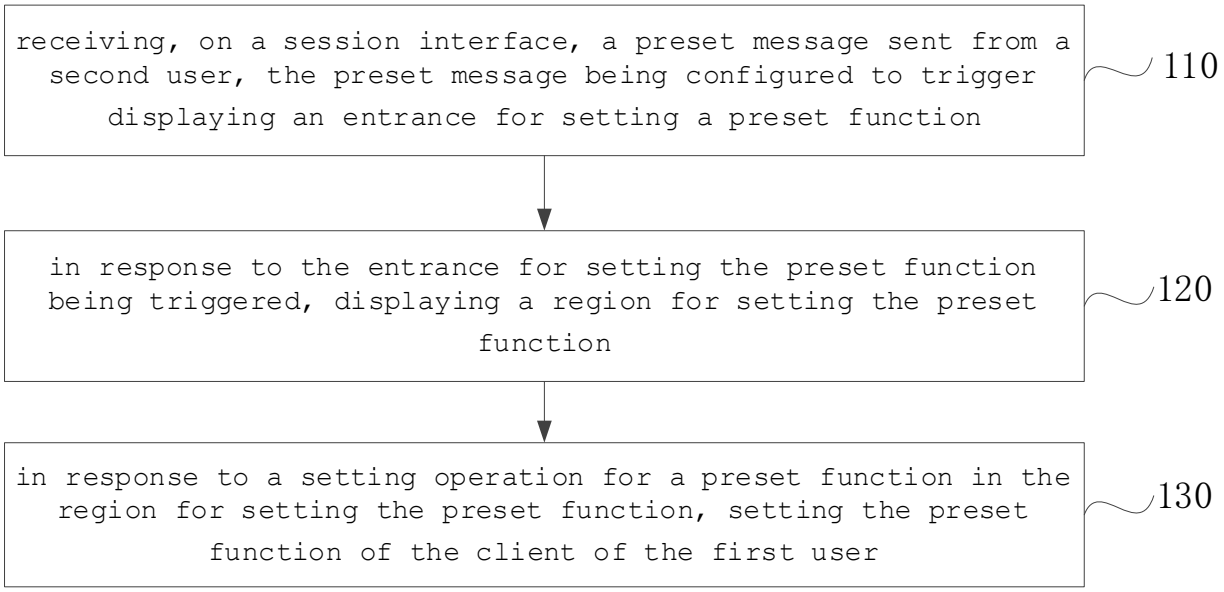

receiving, on a session interface, a preset message sent from a second user, the preset message being configured to trigger displaying an entrance for setting a preset function
110
in response to the entrance for setting the preset function being triggered, displaying a region for setting the preset function
120
in response to a setting operation for a preset function in the region for setting the preset function, setting the preset function of the client of the first user
130

Fig.1