

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2020 年 4 月 30 日 (30.04.2020)



(10) 国际公布号
WO 2020/082885 A1


- (51) 国际专利分类号:
G06Q 20/40 (2012.01) **H04L 29/06** (2006.01)
- (21) 国际申请号: PCT/CN2019/102787
- (22) 国际申请日: 2019 年 8 月 27 日 (27.08.2019)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
201811248773.6 2018 年 10 月 25 日 (25.10.2018) CN
- (71) 申请人: 阿里巴巴集团控股有限公司 (ALIBABA GROUP HOLDING LIMITED) [—/CN]; 开曼群岛大开曼资本大厦一座四层 847 号邮箱, Grand Cayman (KY)。
- (72) 发明人: 朱金标 (ZHU, Jinbiao); 中国浙江省杭州市余杭区文一西路 969 号 3 号楼 5 楼阿里巴巴集团法务部, Zhejiang 311121 (CN)。
- (74) 代理人: 北京博思佳知识产权代理有限公司 (BEIJING BESTIPR INTELLECTUAL

PROPERTY LAW CORPORATION); 中国北京市海淀区上地三街 9 号嘉华大厦 B 座 409, Beijing 100085 (CN)。

- (81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。
- (84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,

(54) Title: IDENTITY AUTHENTICATION, NUMBER SAVING AND SENDING, AND NUMBER BINDING METHOD, APPARATUS AND DEVICE

(54) 发明名称: 身份认证、号码保存和发送、绑定号码方法、装置及设备

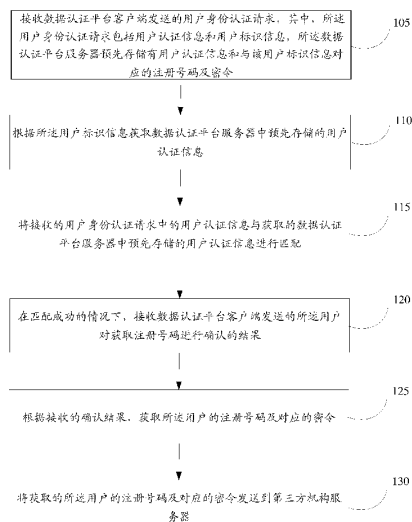

(57) Abstract: Disclosed are an identity authentication, number saving and sending, and number binding method, apparatus and device. The identity authentication method comprises: receiving a user identity authentication request sent by a data authentication platform client, wherein the user identity authentication request comprises user authentication information and user identification information, and a data authentication platform server pre-stores the user authentication information and a registration number and a password, which correspond to the user identification information; acquiring, according to the user identification information, the user authentication information pre-stored in the data authentication platform server; matching the user authentication information in the acquired user identity authentication request with the acquired user authentication information pre-stored in the data authentication platform server; when the matching is successful, receiving a result, sent by the data authentication platform client, of confirming the acquisition of the registration number by a user; according to the received confirmation result, acquiring the registration number and the corresponding password of the user; and sending the acquired registration number and corresponding password of the user to a third-party mechanism server.

图 1

- 105 Receive a user identity authentication request sent by a data authentication platform client, wherein the user identity authentication request comprises user authentication information and user identification information, and a data authentication platform server pre-stores the user authentication information and a registration number and a password, which correspond to the user identification information.
- 110 Acquire, according to the user identification information, the user authentication information pre-stored in the data authentication platform server.
- 115 Match the user authentication information in the acquired user identity authentication request with the acquired user authentication information pre-stored in the data authentication platform server.
- 120 In the case of successful matching, receive the user authentication information sent by the data authentication platform client, and confirm the registration number of the user.
- 125 According to the confirmation result, acquire the registration number and the corresponding password of the user.
- 130 Send the acquired registration number and corresponding password of the user to a third-party mechanism server.

WO 2020/082885 A1

[见续页]

RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告(条约第21条(3))。

(57) 摘要：本说明书公开了一种身份认证、号码保存和发送、绑定号码方法、装置及设备。该方法包括：接收数据认证平台客户端发送的用户身份认证请求，其中，所述用户身份认证请求包括用户认证信息和用户标识信息，所述数据认证平台服务器预先存储有用户认证信息和与该用户标识信息对应的注册号码及密令；根据所述用户标识信息获取数据认证平台服务器中预先存储的用户认证信息；将获取的用户身份认证请求中的用户认证信息与获取的数据认证平台服务器中预先存储的用户认证信息进行匹配；在匹配成功的情况下，接收数据平台客户端发送的所述用户对获取注册号码进行确认的结果；根据接收的确认结果，获取所述用户的注册号码及对应的密令；将获取的所述用户的注册号码及对应的密令发送到第三方机构服务器。