

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/99045 A1

(51) International Patent Classification⁷: **G06K 11/08**

(21) International Application Number: PCT/SG00/00091

(22) International Filing Date: 19 June 2000 (19.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
TEMASEK POLYTECHNIC [SG/SG]; 21 Tampines
Avenue 1, Singapore 529757 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CHEOW, David Yeo
Woo** [SG/SG]; 31 Duku Road, Singapore 429189 (SG).

(74) Agent: **ELLA CHEONG & G. MIRANDAH**; P.O. Box
0931, Raffles City, Singapore 911732 (SG).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,

DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM AND METHOD FOR USE IN DETERMINING A CURSOR POSITION

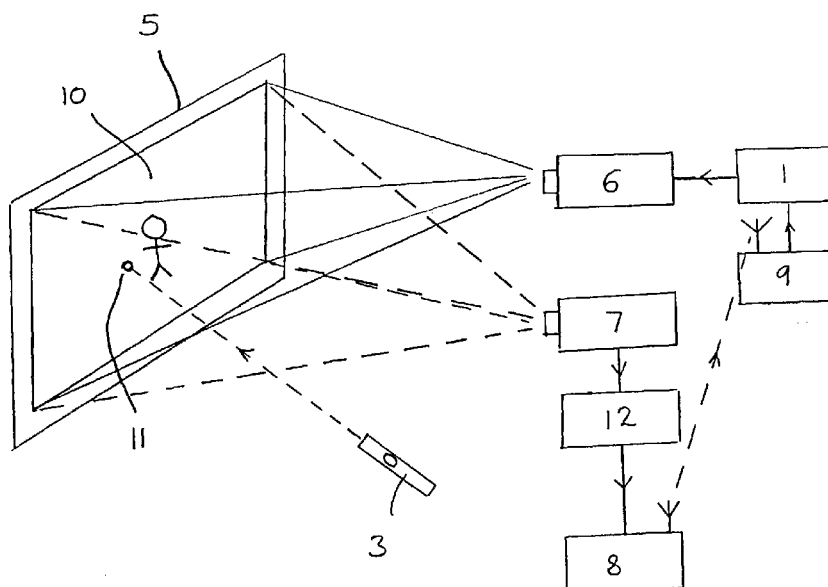

(57) Abstract: A computer (1) generates a series of slide image signals which are passed to a projector (6). The projector projects images from the signals onto a screen but during its flyback period projects no image. A laser pointer (3) is directed by a user at the image on the screen, even during the flyback period. A camera (7) is directed at the screen and captures images during the flyback period, when only the spot from the laser pointer (3) is on the screen. The captured image is sent to a processor to determine the position at which the laser pointer is pointing. This data is provided to the computer (1). It updates the position of its cursor on the image, the signal for which it is sending to the projector, to be at that position. If the position of the spot is a highlight function area, that area is automatically highlighted.