

1/4

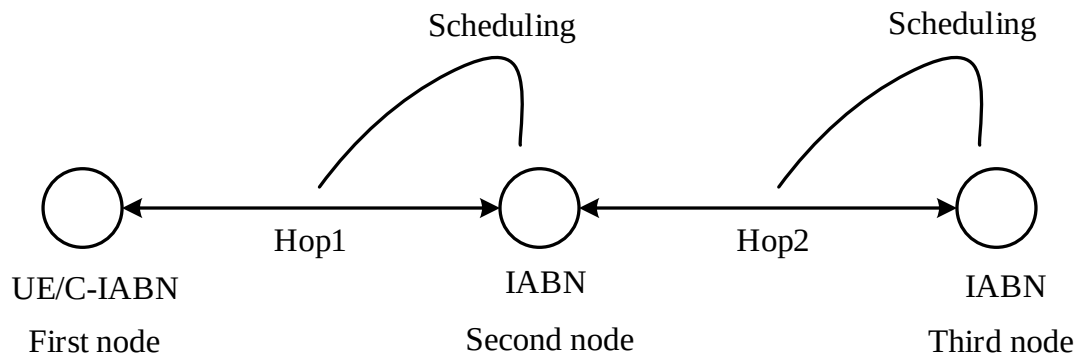


FIG. 1

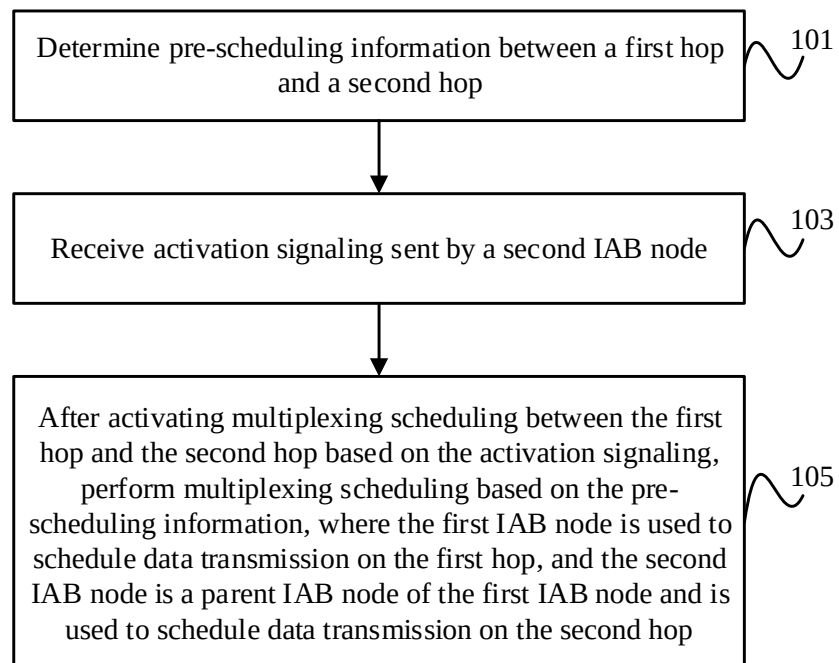


FIG. 2

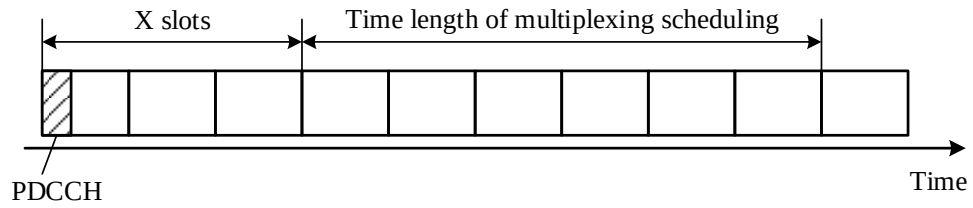


FIG. 3

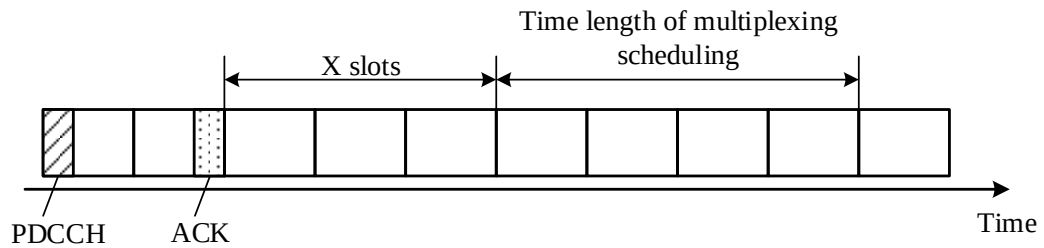


FIG. 4

Send activation signaling to a first IAB node, where the activation signaling is used to activate the first IAB node to activate multiplexing scheduling between a first hop and a second hop, the first IAB node is used to schedule data transmission on the first hop, and the second IAB node is a parent IAB node of the first IAB node and is used to schedule data transmission on the second hop

201

FIG. 5

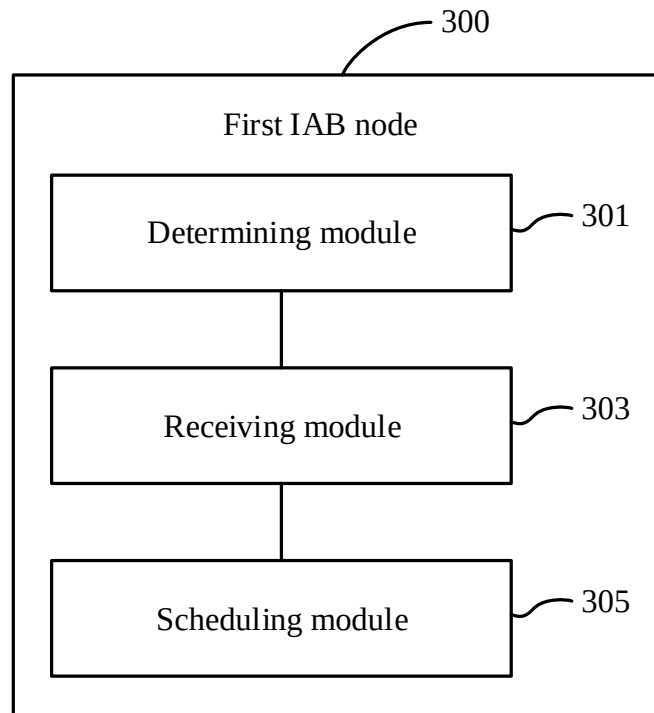


FIG. 6

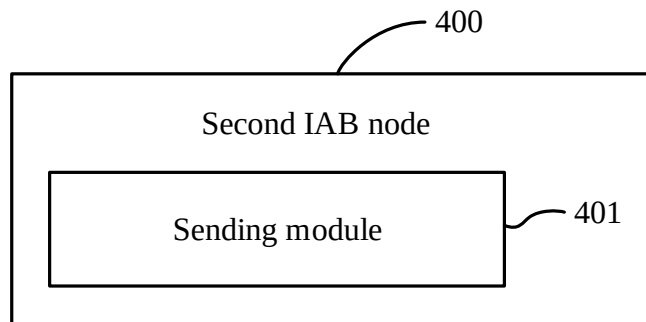


FIG. 7

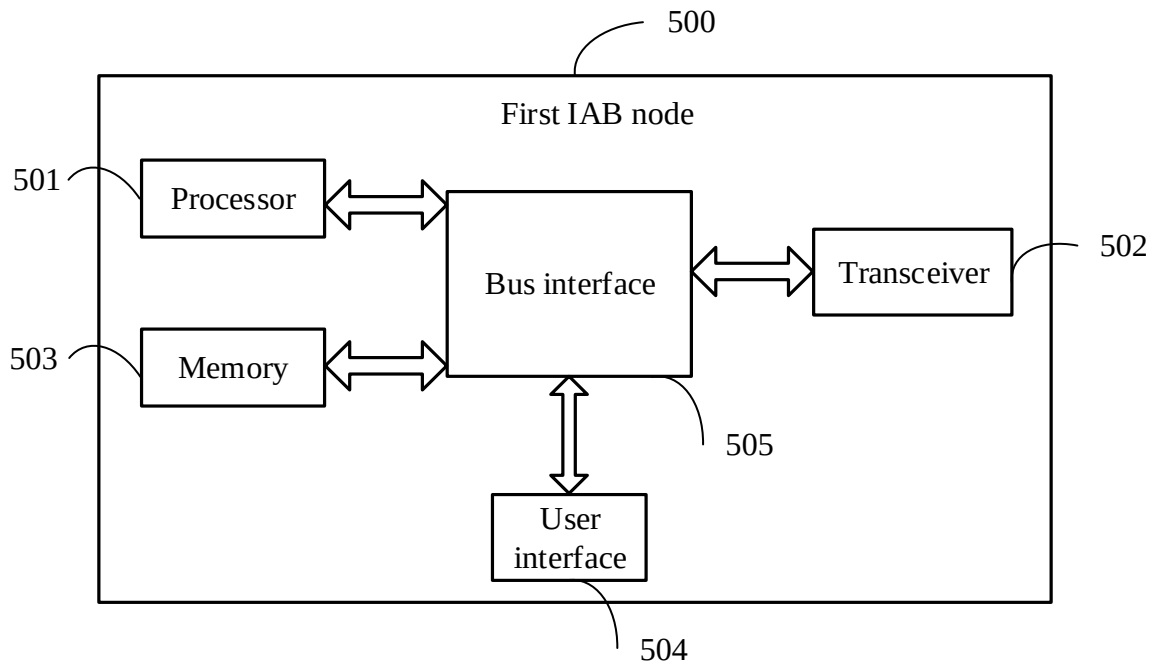


FIG. 8

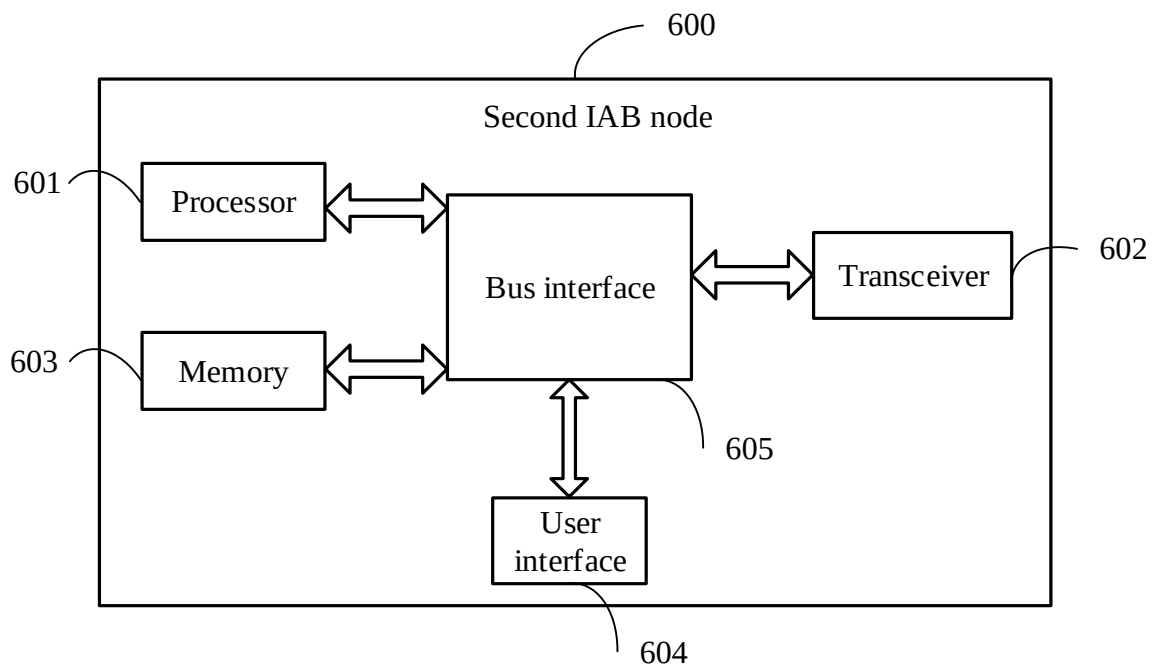


FIG. 9