




[図1]

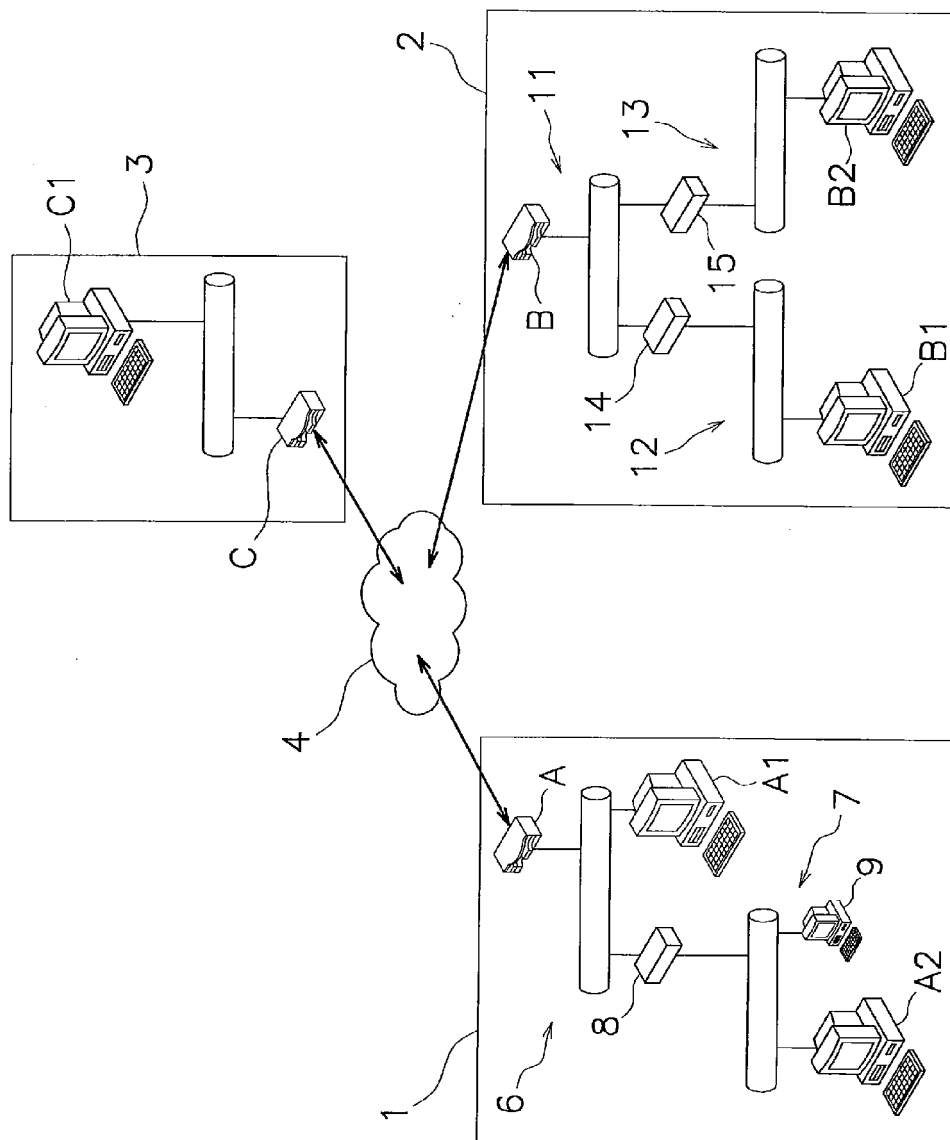


[図2]

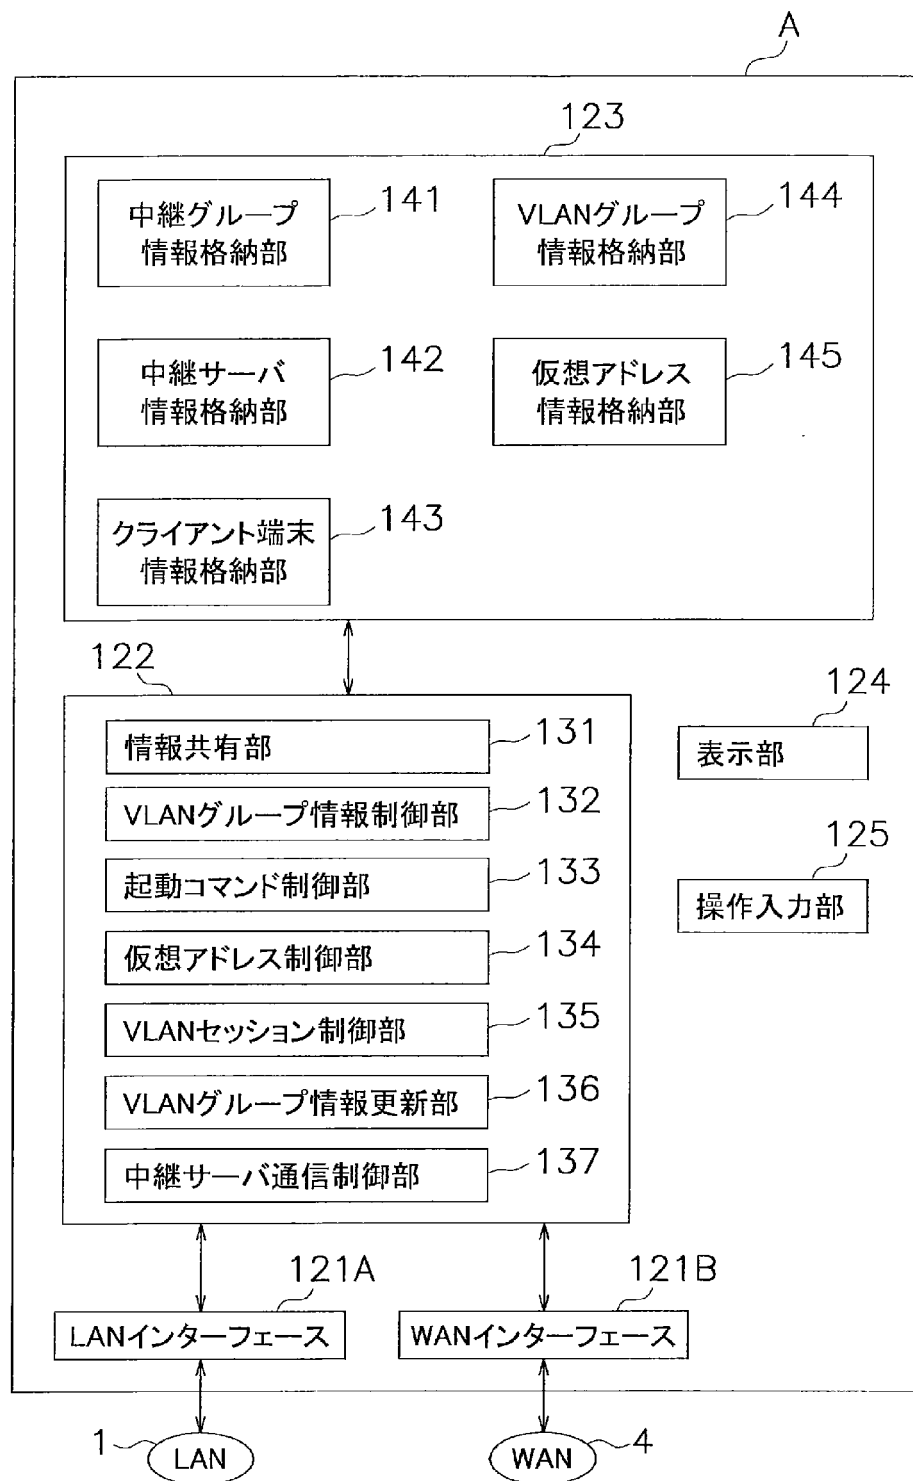


[図3]

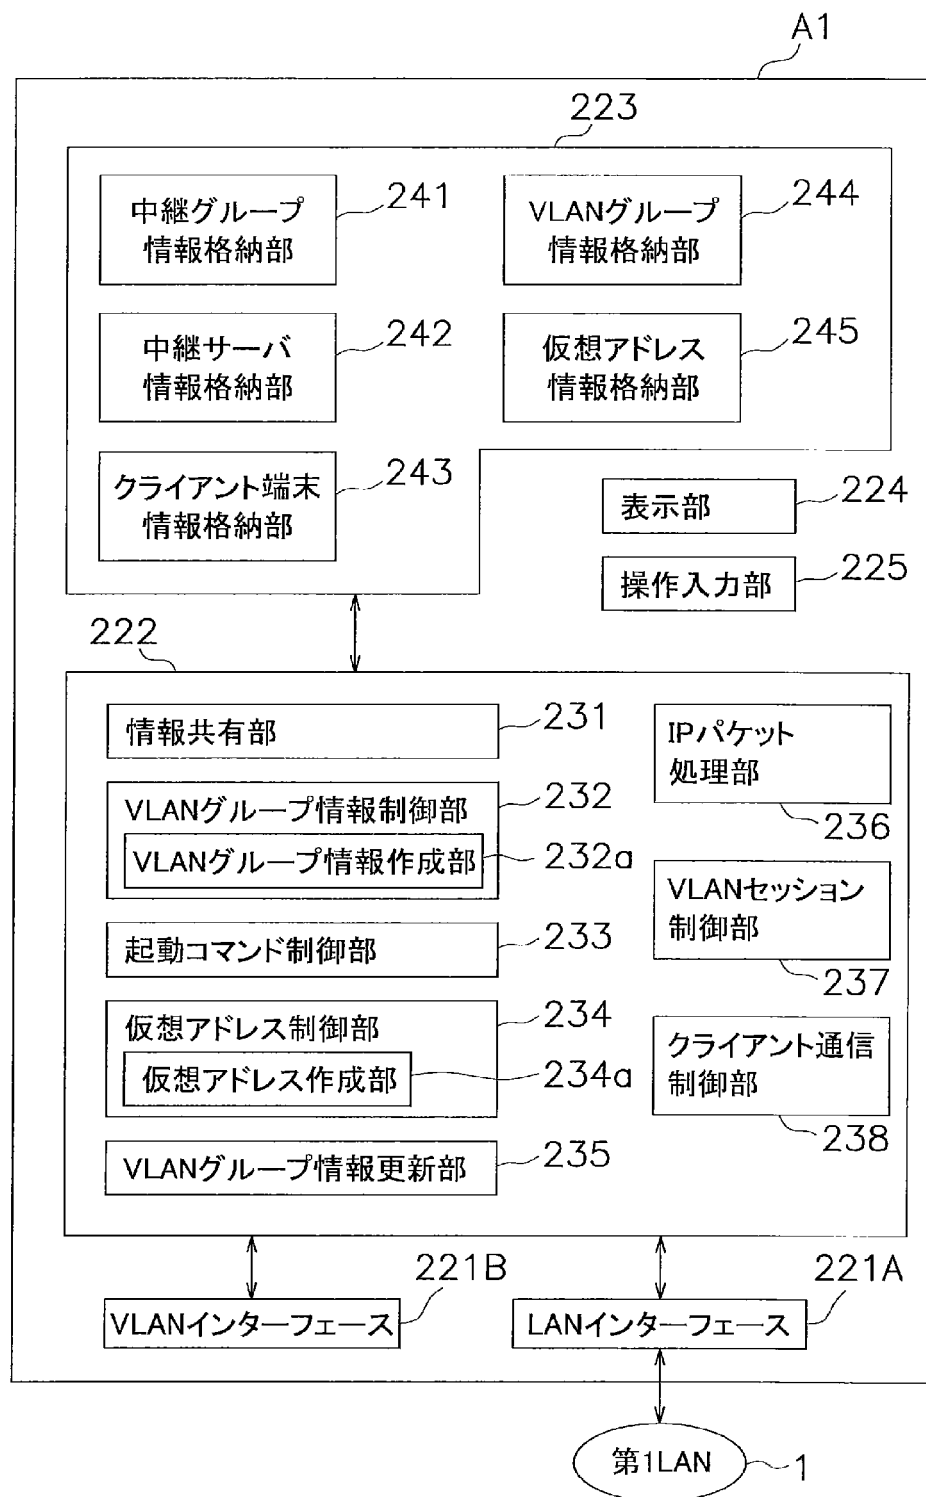

[図4]

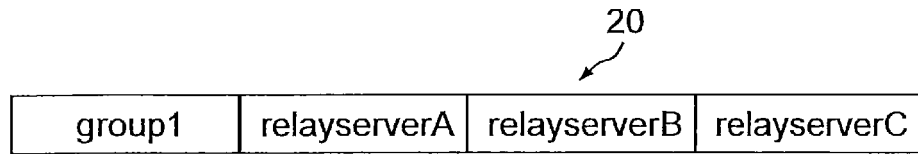

[図5]

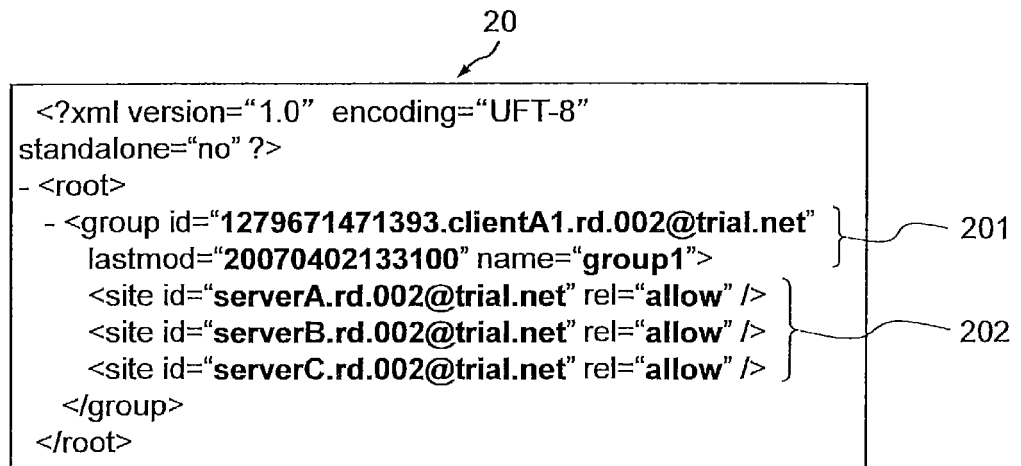

[図6]

30

relayserverA	clientA1
	clientA2
relayserverB	clientB1
	clientB2
relayserverC	clientC1

[図7]

30

```

<?xml version="1.0" encoding="UTF-8" ?>
<root>
- <site id="serverA@trial.net" name="serverA" stat="active">
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA1.rd.002@serverA.trial.net" name="clientA1"
    site="serverA@trial.net" />
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA2.rd.002@serverA.trial.net" name="clientA2"
    site="serverA@trial.net" />
</site>
- <site id="serverB@trial.net" name="serverB" stat="active">
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB1.rd.002@serverB.trial.net" name="clientB1"
    site="serverB@trial.net" />
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB2.rd.002@serverB.trial.net" name="clientB2"
    site="serverB@trial.net" />
</site>
- <site id="serverC@trial.net" name="serverC" stat="active">
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientC1.rd.002@serverC.trial.net" name="clientC1"
    site="serverC@trial.net" />
</site>
</root>

```

301-1

302-1

301-2

302-2

301-3

302-3

[図8]

40

```

<?xml version="1.0" encoding="UFT-8" ?>
<root>
  <node addr="192.168.2.1" div="dev" expr="1213935978484"
    group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA2.rd.002@serverA.trial.net" name="clientA2" pass="abc"
    port="50700" />
  <node addr="192.168.1.30" div="dev" expr="1213935978484"
    group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA1.rd.002@serverA.trial.net" name="clientA1" pass="def" port="0" />
</root>

```

[図9]

50

```

<?xml version="1.0" encoding="UFT-8" ?>
<root>
  <node addr="192.100.1.3" div="dev" expr="1213935978484"
    group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB1.rd.002@serverB.trial.net" name="clientB1" pass="abc"
    port="50700" />
  <node addr="192.100.1.2" div="dev" expr="1213935978484"
    group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB2.rd.002@serverB.trial.net" name="clientB2" pass="noui"
    port="50700" />
</root>

```

[図10]


60

```

<?xml version="1.0" encoding="UFT-8" ?>
<root>
  <node addr="200.1.2.1" div="dev" expr="1213935978484"
    group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientC1.rd.002@serverC.trial.net" name="clientC1" pass="abc"
    port="50700" />
</root>

```

[図11]

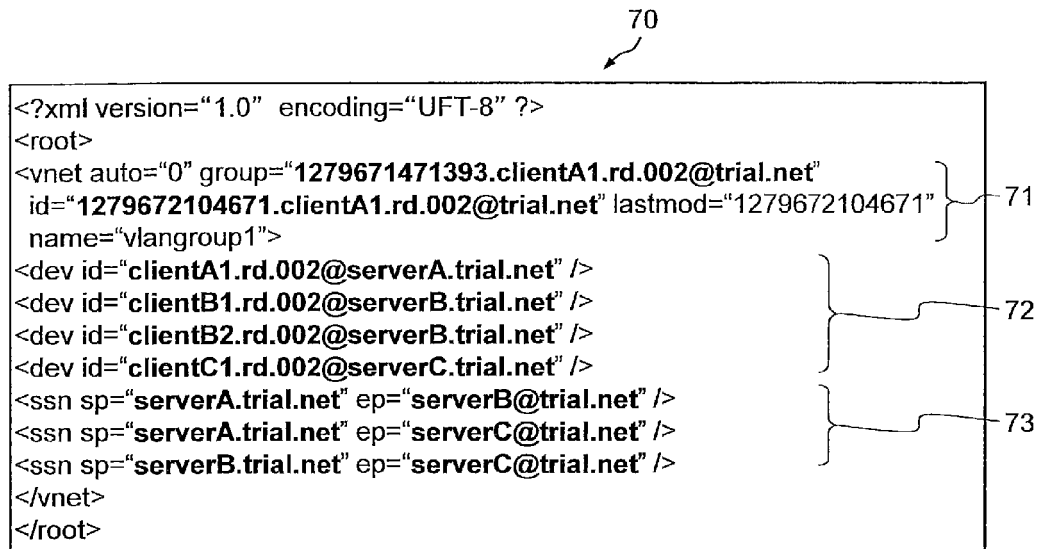


[図12]

80

ID	仮想IPアドレス	仮想MACアドレス
clientA1.rd.002@trial.net	117.112.0.1	00.11.22.f0.00.01
clientB1.rd.002@trial.net	117.112.0.2	00.11.22.f0.00.02
clientB2.rd.002@trial.net	117.112.0.3	00.11.22.f0.00.03
clientC1.rd.002@trial.net	117.112.0.4	00.11.22.f0.00.04

[図13]

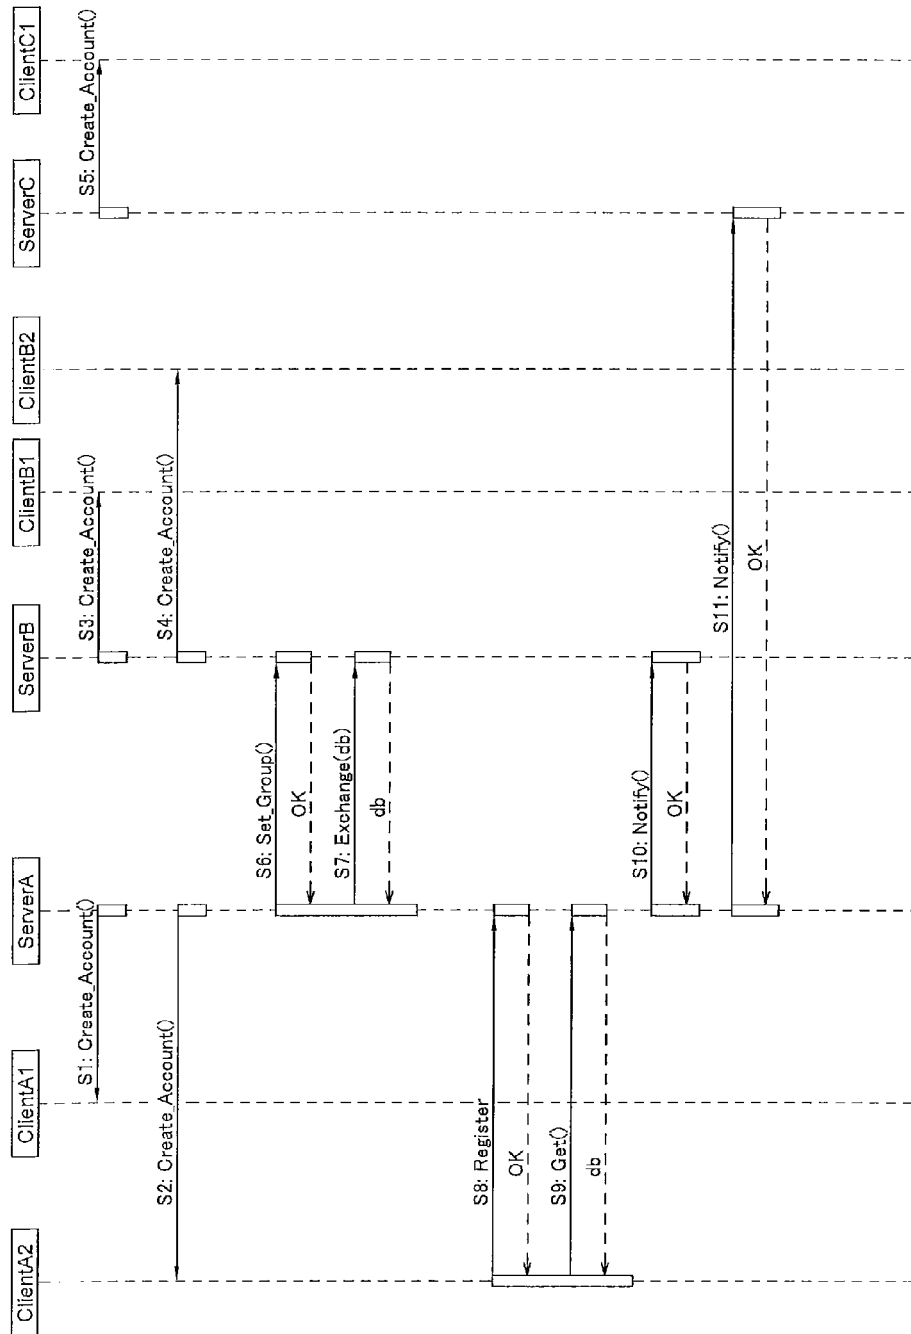

[図14]

31-1

```

<?xml version="1.0" encoding="UFT-8" ?>
<root>
- <site id="serverA@trial.net" name="serverA" stat="active"> } 311-1
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA1.rd.002@serverA.trial.net" name="clientA1"
    site="serverA@trial.net" />
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientA2.rd.002@serverA.trial.net" name="clientA2"
    site="serverA@trial.net" />
</site>
</root>
  
```

312-1

[図15]

31-2

```

<?xml version="1.0" encoding="UFT-8" ?>
<root>
- <site id="serverB@trial.net" name="serverB" stat="active"> } 311-2
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB1.rd.002@serverB.trial.net" name="clientB1"
    site="serverB@trial.net" />
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientB2.rd.002@serverB.trial.net" name="clientB2"
    site="serverB@trial.net" />
</site>
</root>
  
```

312-2

[図16]


31-3

```


<?xml version="1.0" encoding="UFT-8" ?>
<root>
- <site id="serverC@trial.net" name="serverC" stat="active"> } 311-3
  <node div="dev" group="1279671471393.clientA1.rd.002@serverA.trial.net"
    id="clientC1.rd.002@serverC.trial.net" name="clientC1"
    site="serverC@trial.net" />
</site>
</root>
  
```

312-3


[図17]

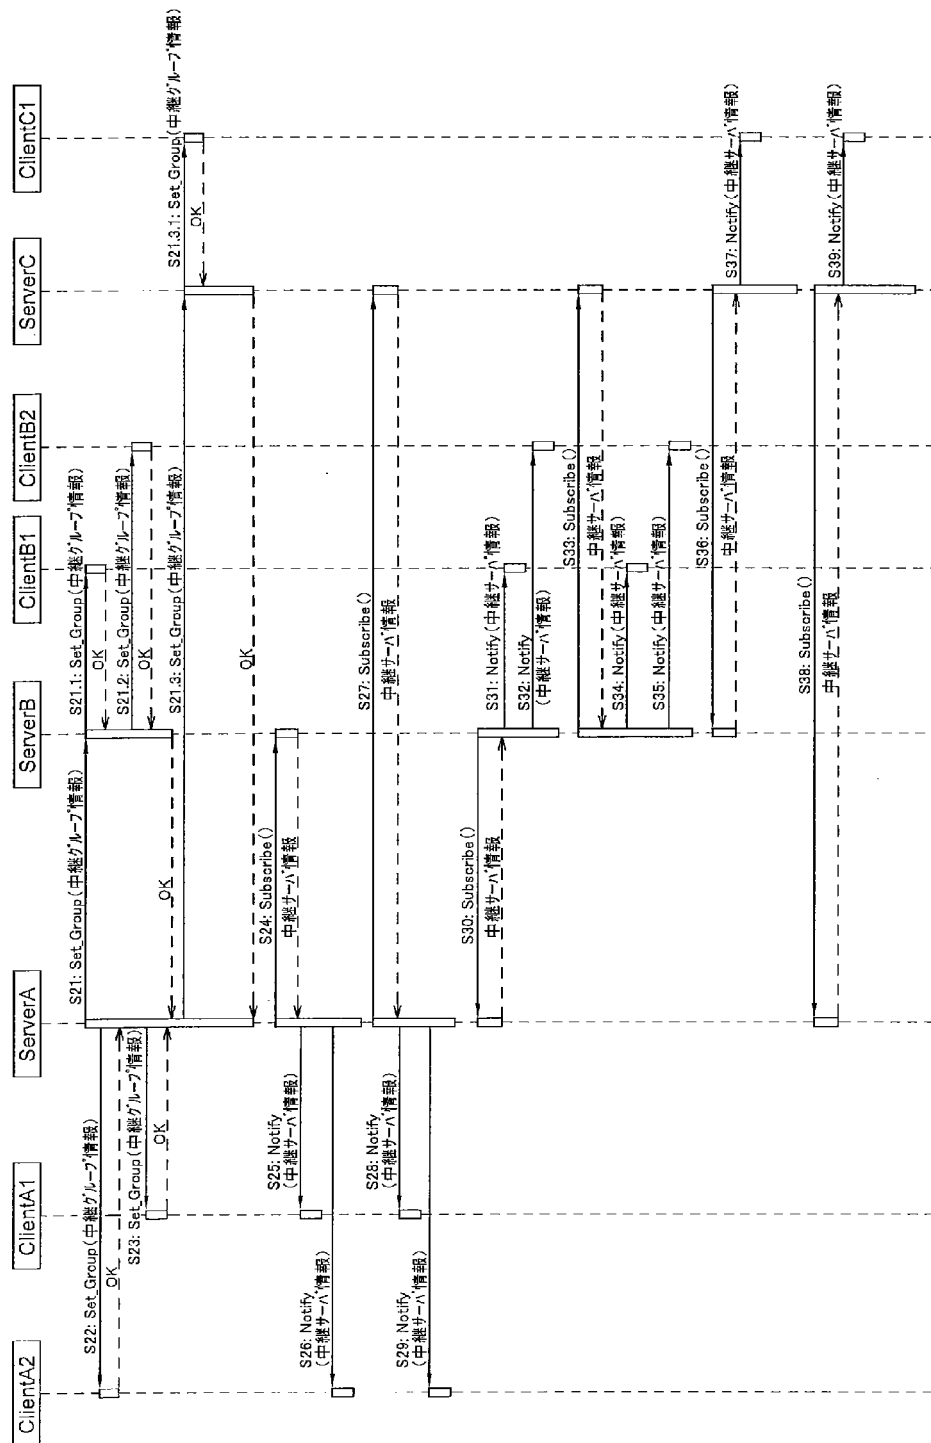


[図18]

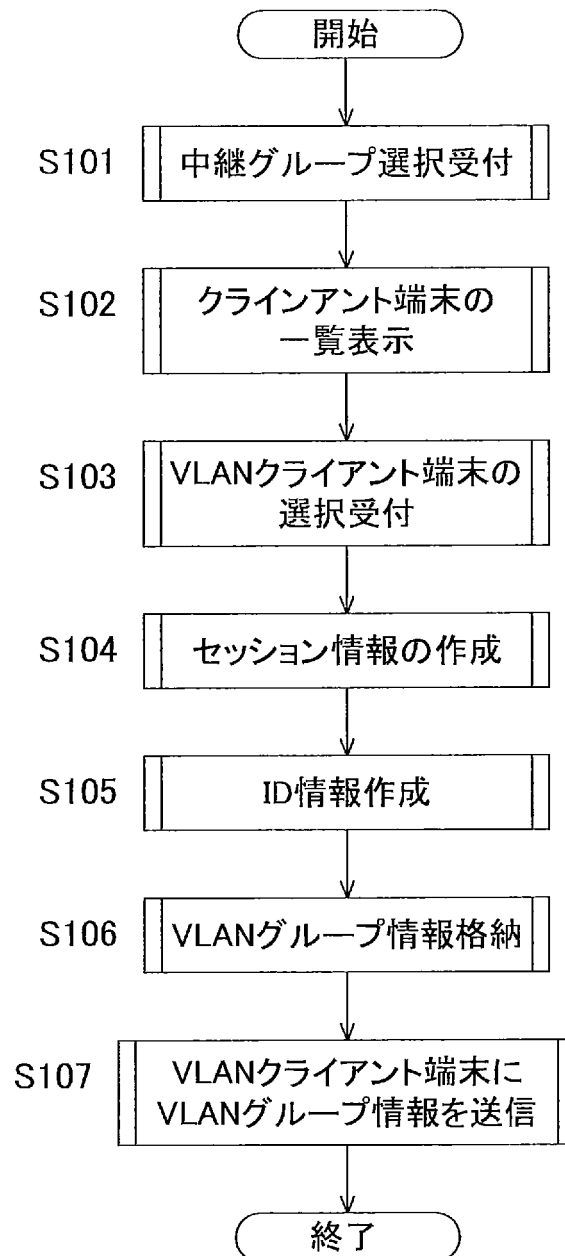

[図19]

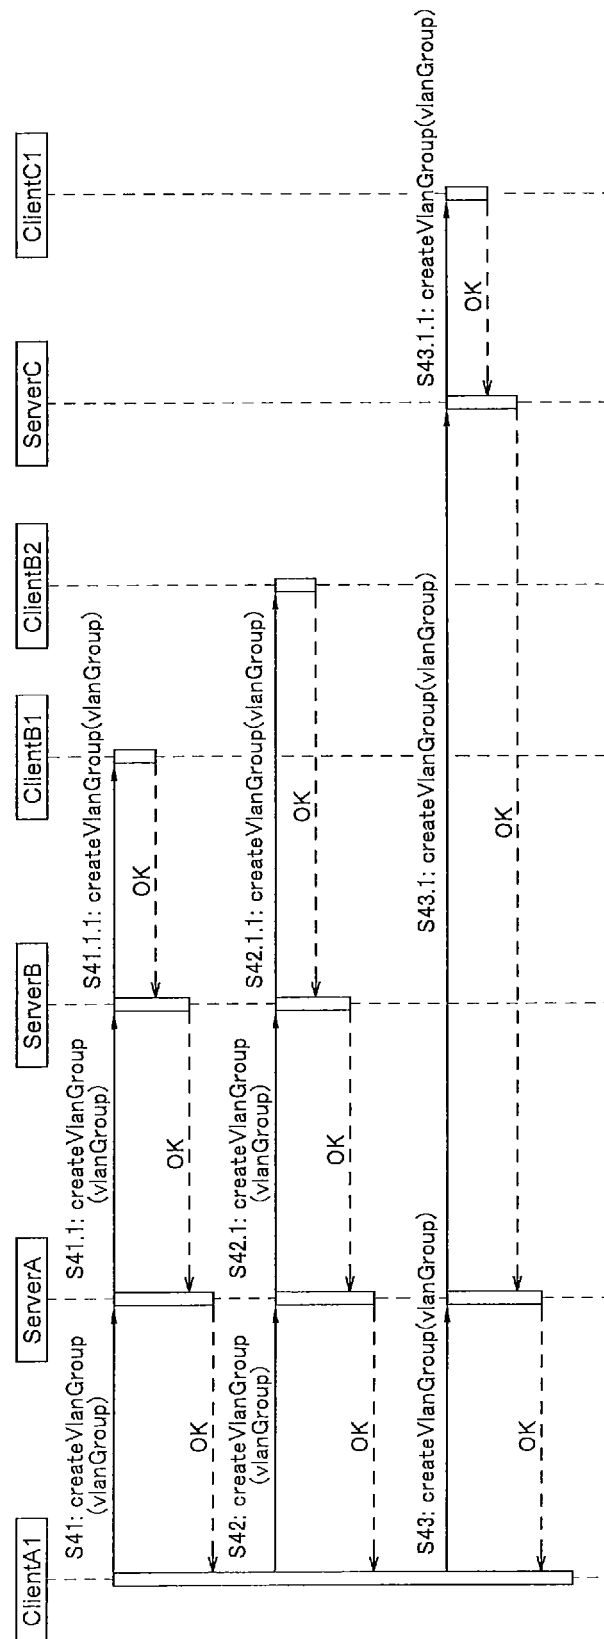

[図20]

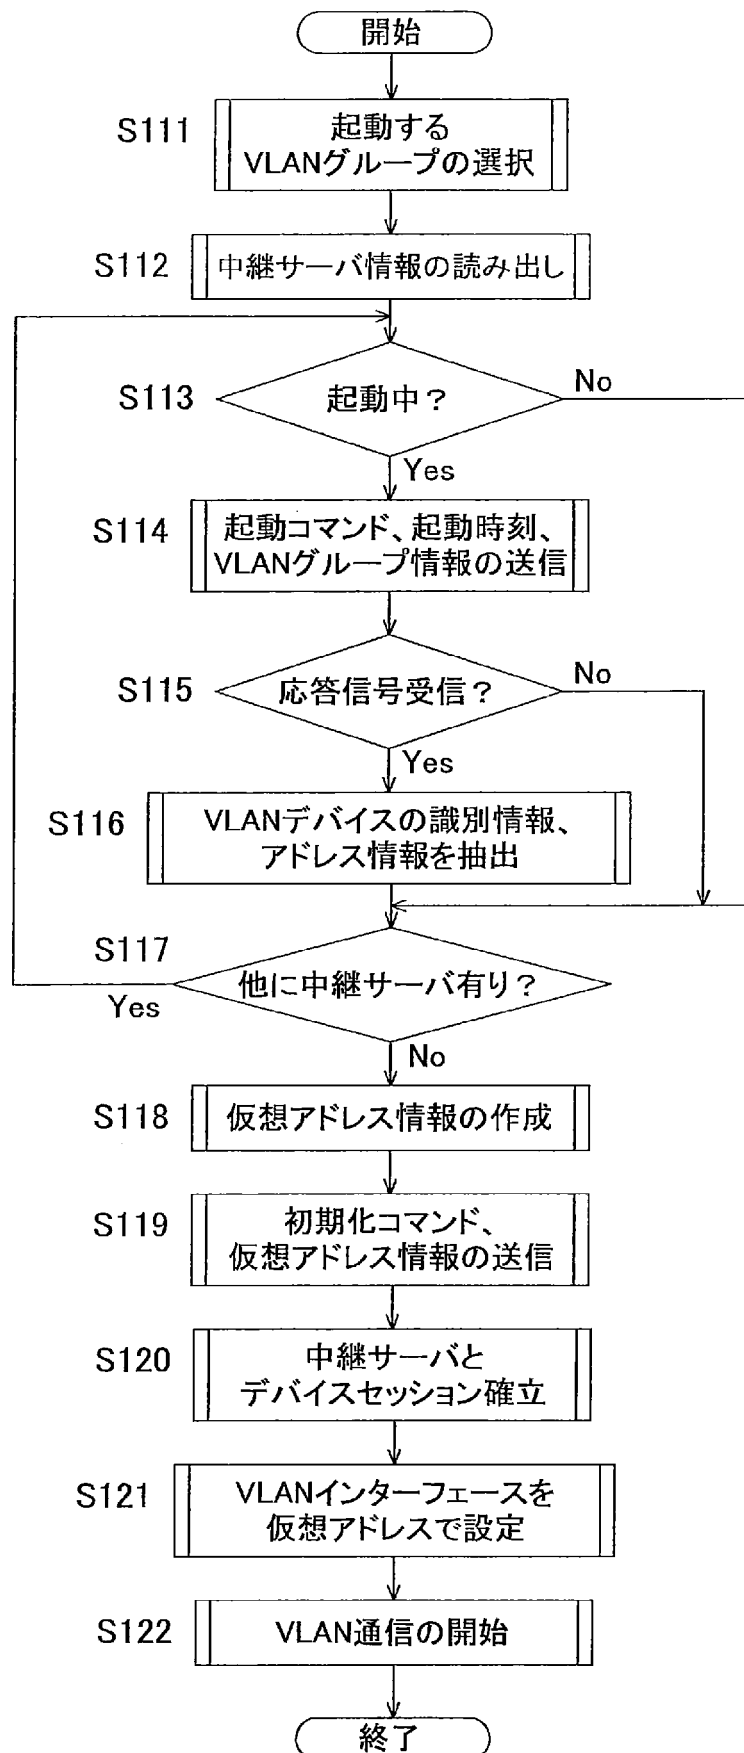

[図21]

90


clientB1.rd.002@trial.net	201.101.35.189	01:5e:0c:00:22:28	} 90-1
clientB2.rd.002@trial.net	201.101.35.175	01:5e:0c:ab:cd:28	
clientC1.rd.002@trial.net	172.168.1.25	00:01:0c:07:ac:28	} 90-2

[図22]

91

clientA1.rd.002@trial.net	200.1.40.165	05:81:dc:09:0c:08
clientB1.rd.002@trial.net	201.101.35.189	01:5e:0c:00:22:28
clientB2.rd.002@trial.net	201.101.35.175	01:5e:0c:ab:cd:28
clientC1.rd.002@trial.net	172.168.1.25	00:01:0c:07:ac:28

[図23]

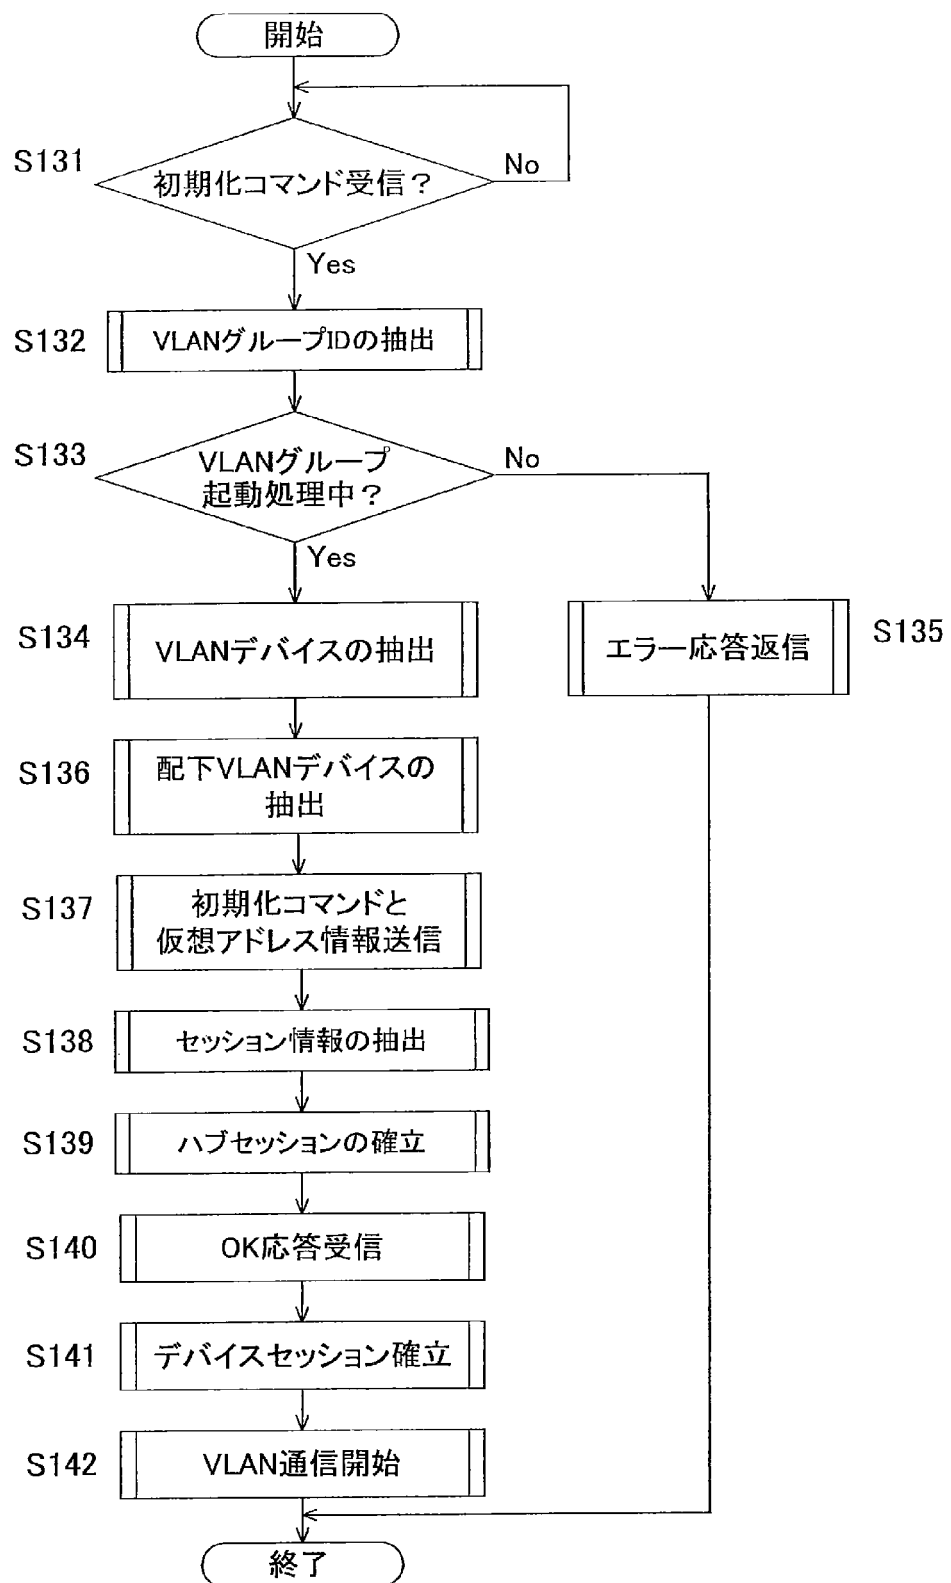

[図24]

