



(51) International Patent Classification:
H04L 29/06 (2006.01)

(21) International Application Number:

PCT/EP2012/001504

(22) International Filing Date:

4 April 2012 (04.04.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11161033.3	4 April 2011 (04.04.2011)	EP
------------	---------------------------	----

(71) **Applicant** (*for all designated States except US*):
BUNTINX [BE/BE]; Elstrekenweg 82, B-3520 Zonhoven
 (BE).

(72) Inventor; and

(75) **Inventor/Applicant** (for US only): **BUNTINX, Luc**
[BE/BE]; p/a Buntinx, Elstrekenweg 82, B-3520 Zonhoven
(BE).

(74) **Agents:** SARLET, Steven et al.; Gevers Patents, Holidaystraat 5, B-1831 Diegem (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: METHOD AND SYSTEM FOR AUTHENTICATING ENTITIES BY MEANS OF TERMINALS

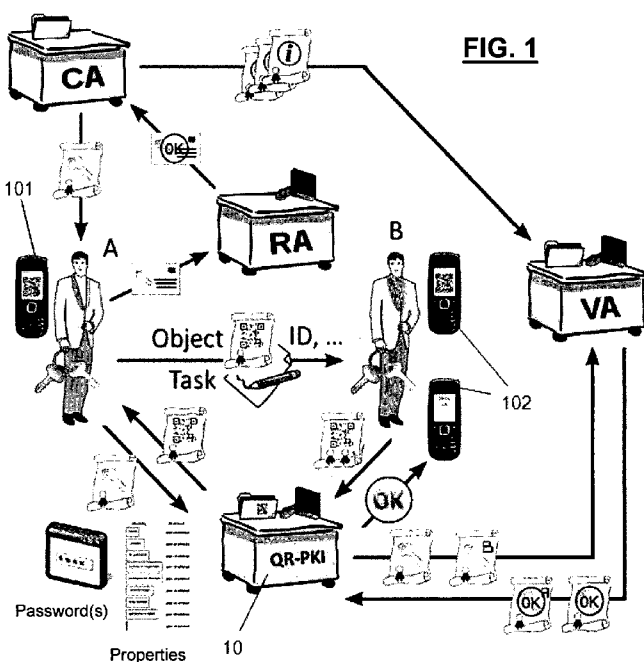

(57) Abstract: In the proposed method users (A, B) are provided with sets of authentication codes (3,4,5), each set comprising at least one secret (3), a private key container (4) and a matching public key container (5), the private and public key container generated from respectively a first string (1) comprising a domain name of an authentication server system (10) and a PKI private key and a second string (2) comprising the same domain name and a matching PKI public key. Upon receipt on the authentication server system (10) of one of the first strings (1) as a result of a first user reading the respective private key container (4), an action definition procedure is performed in which the first user is requested to enter a secret (3) of the same set of authentication codes (3,4,5). If a check returns a positive result, the first user can define a set of actions to be performed upon receipt of the second string (2) belonging to the same set of authentication codes on the authentication server system (10).