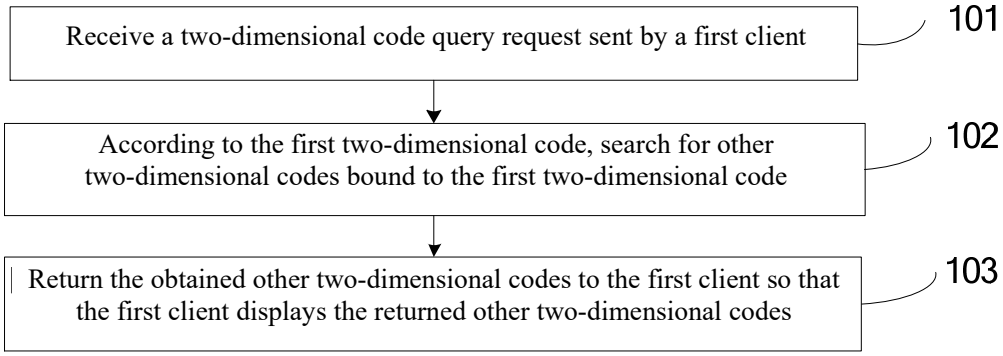

FIG. 1

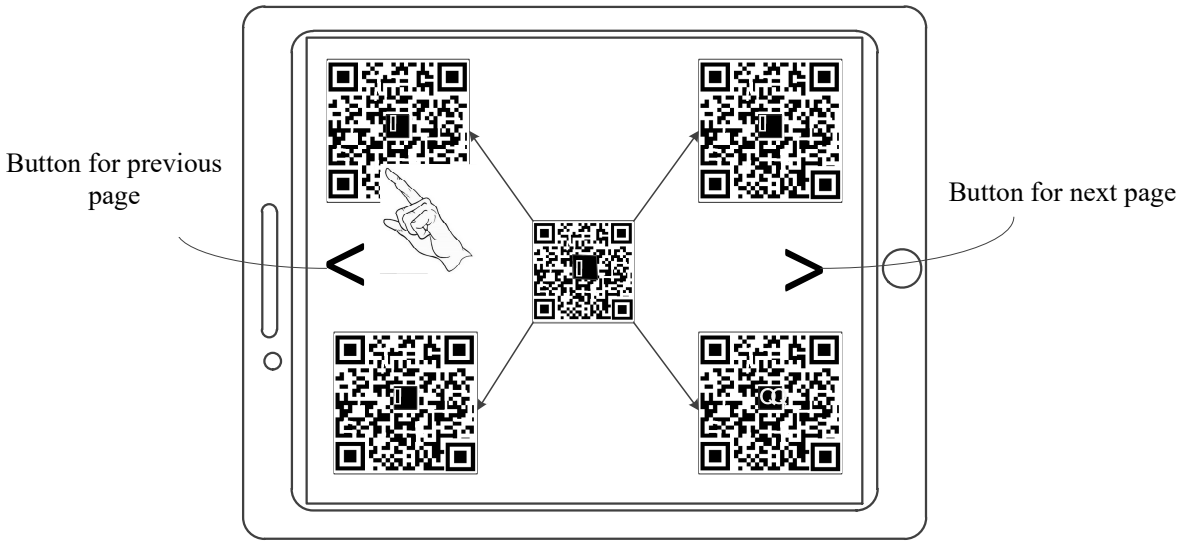

FIG. 2

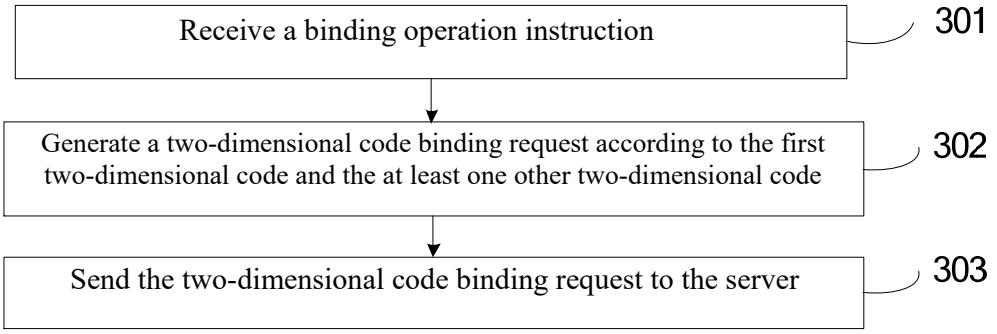

FIG. 3

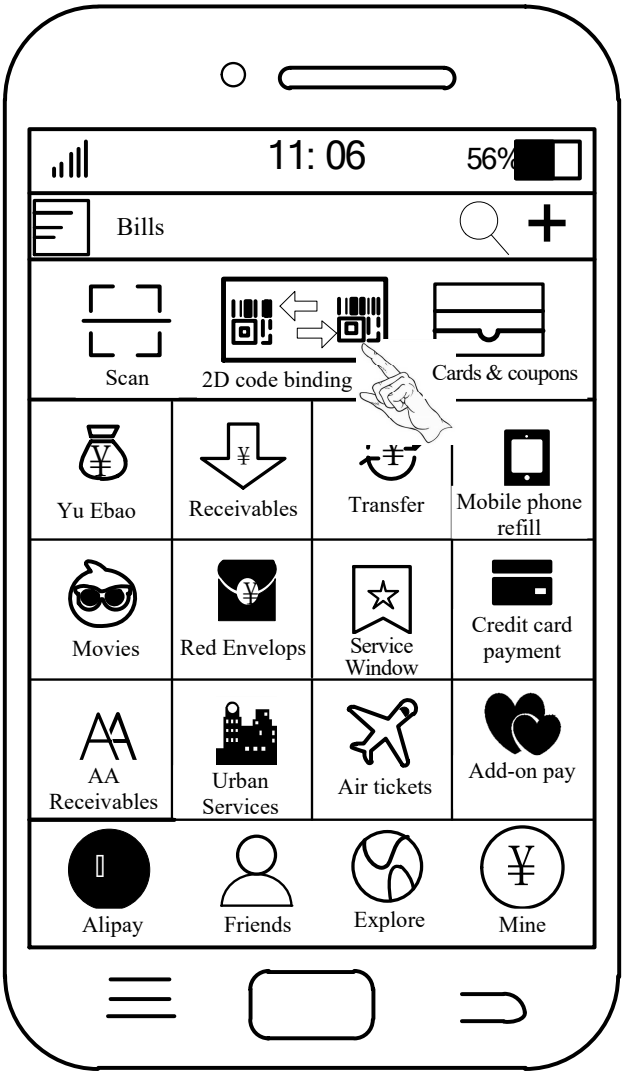
11: 06
56%
Bills
Scan
2D code binding
Cards & coupons
Yu Ebao
Receivables
Transfer
Mobile phone refill
Movies
Red Envelops
Service Window
Credit card payment
AA Receivables
Urban Services
Air tickets
Add-on pay
Alipay
Friends
Explore
Mine

FIG. 4

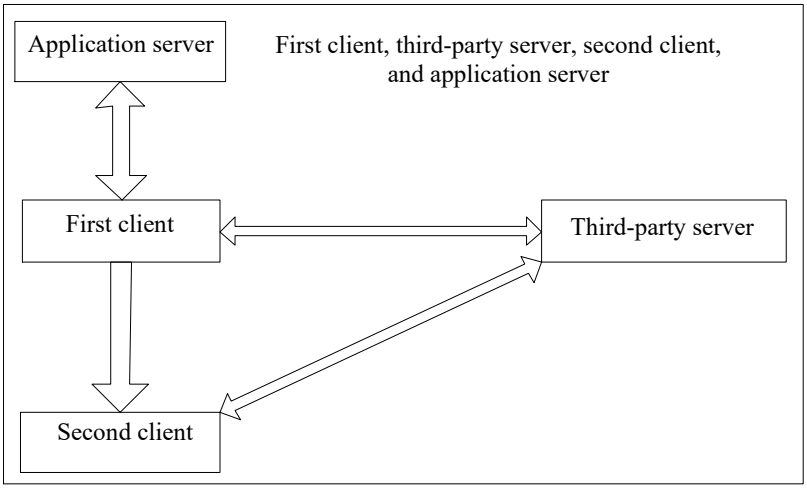
Application server
First client, third-party server, second client, and application server
First client
Third-party server
Second client

FIG. 5

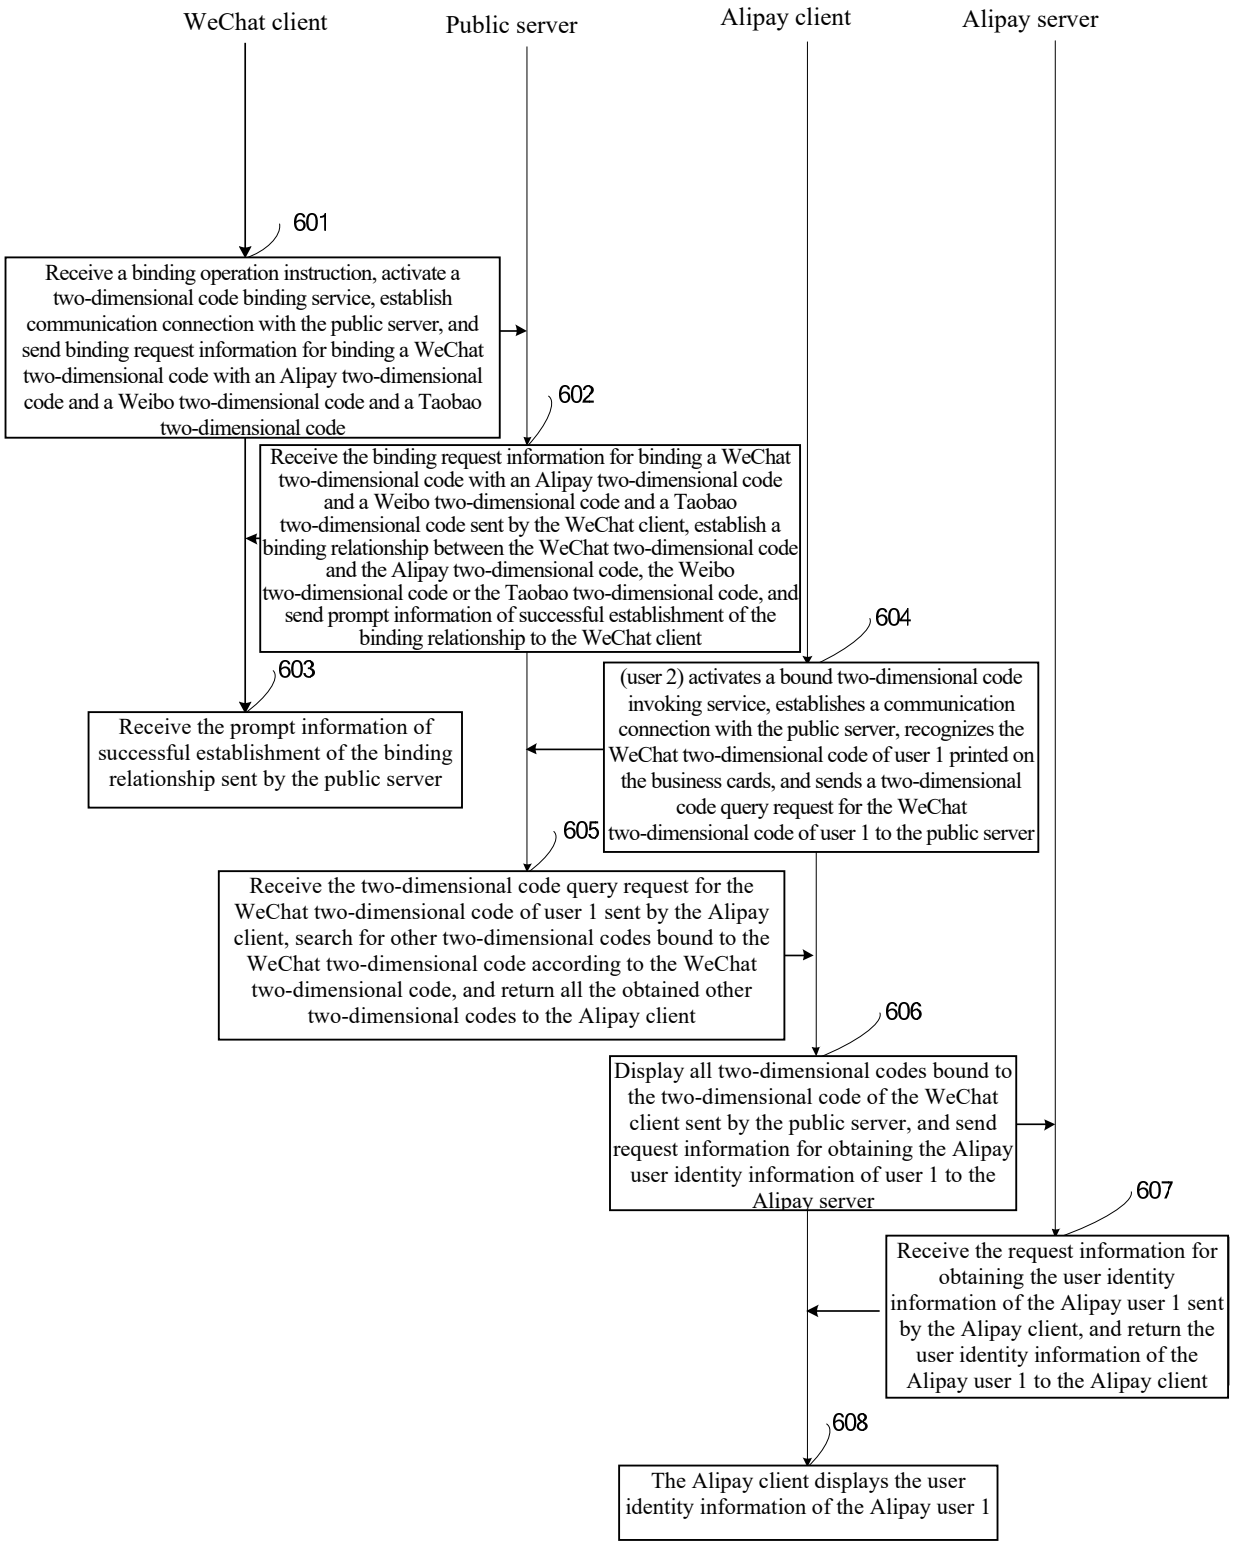
WeChat client
Public server
Alipay client
Alipay server
601
Receive a binding operation instruction, activate a two-dimensional code binding service, establish communication connection with the public server, and send binding request information for binding a WeChat two-dimensional code with an Alipay two-dimensional code and a Weibo two-dimensional code and a Taobao two-dimensional code
602
Receive the binding request information for binding a WeChat two-dimensional code with an Alipay two-dimensional code and a Weibo two-dimensional code and a Taobao two-dimensional code sent by the WeChat client, establish a binding relationship between the WeChat two-dimensional code and the Alipay two-dimensional code, the Weibo two-dimensional code or the Taobao two-dimensional code, and send prompt information of successful establishment of the binding relationship to the WeChat client
603
Receive the prompt information of successful establishment of the binding relationship sent by the public server
604
(user 2) activates a bound two-dimensional code invoking service, establishes a communication connection with the public server, recognizes the WeChat two-dimensional code of user 1 printed on the business cards, and sends a two-dimensional code query request for the WeChat two-dimensional code of user 1 to the public server
605
Receive the two-dimensional code query request for the WeChat two-dimensional code of user 1 sent by the Alipay client, search for other two-dimensional codes bound to the WeChat two-dimensional code according to the WeChat two-dimensional code, and return all the obtained other two-dimensional codes to the Alipay client
606
Display all two-dimensional codes bound to the two-dimensional code of the WeChat client sent by the public server, and send request information for obtaining the Alipay user identity information of user 1 to the Alipay server
607
Receive the request information for obtaining the user identity information of the Alipay user 1 sent by the Alipay client, and return the user identity information of the Alipay user 1 to the Alipay client
608
The Alipay client displays the user identity information of the Alipay user 1

FIG. 6

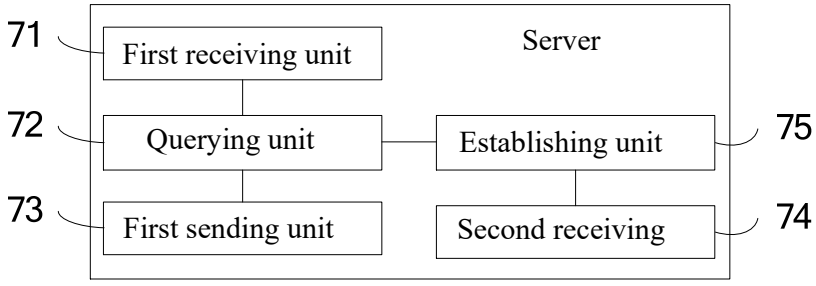

FIG. 7

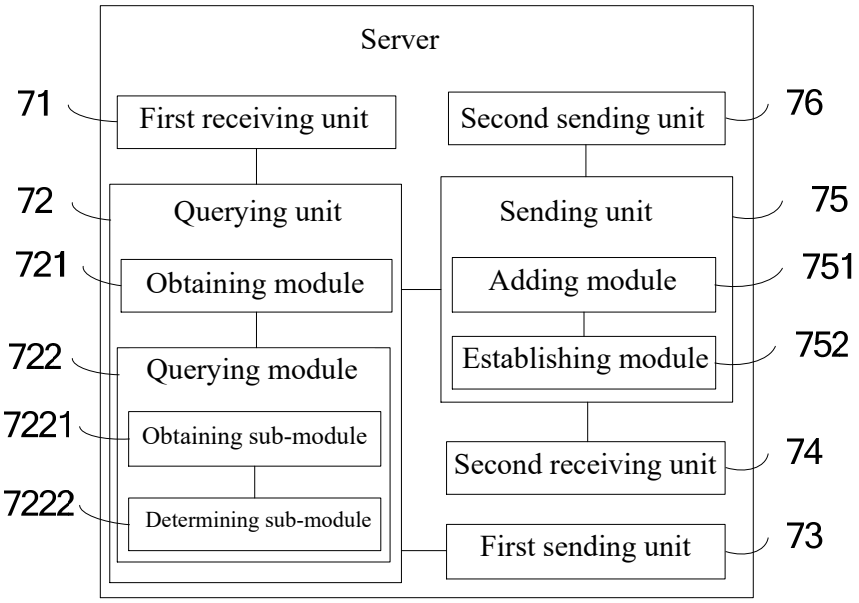

FIG. 8

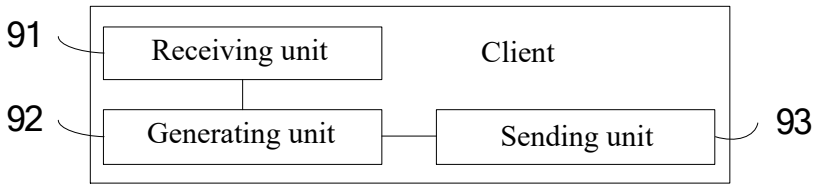

FIG. 9

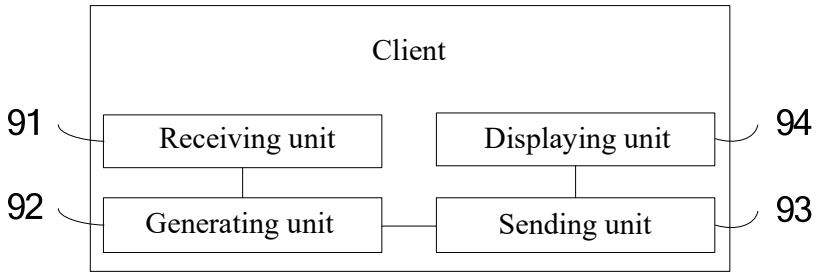

FIG. 10

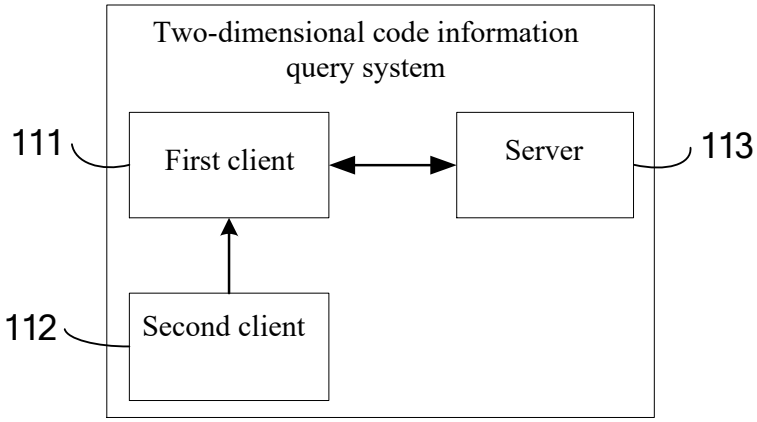

FIG. 11

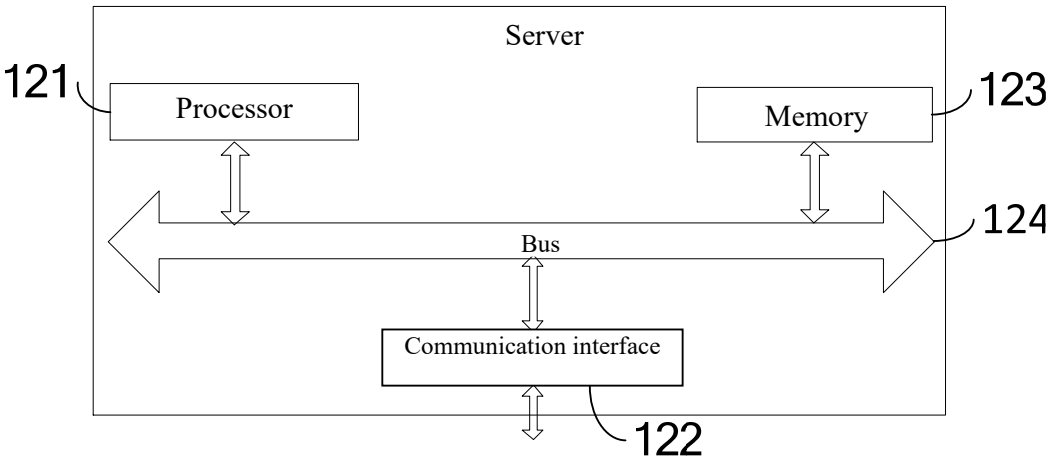

FIG. 12