

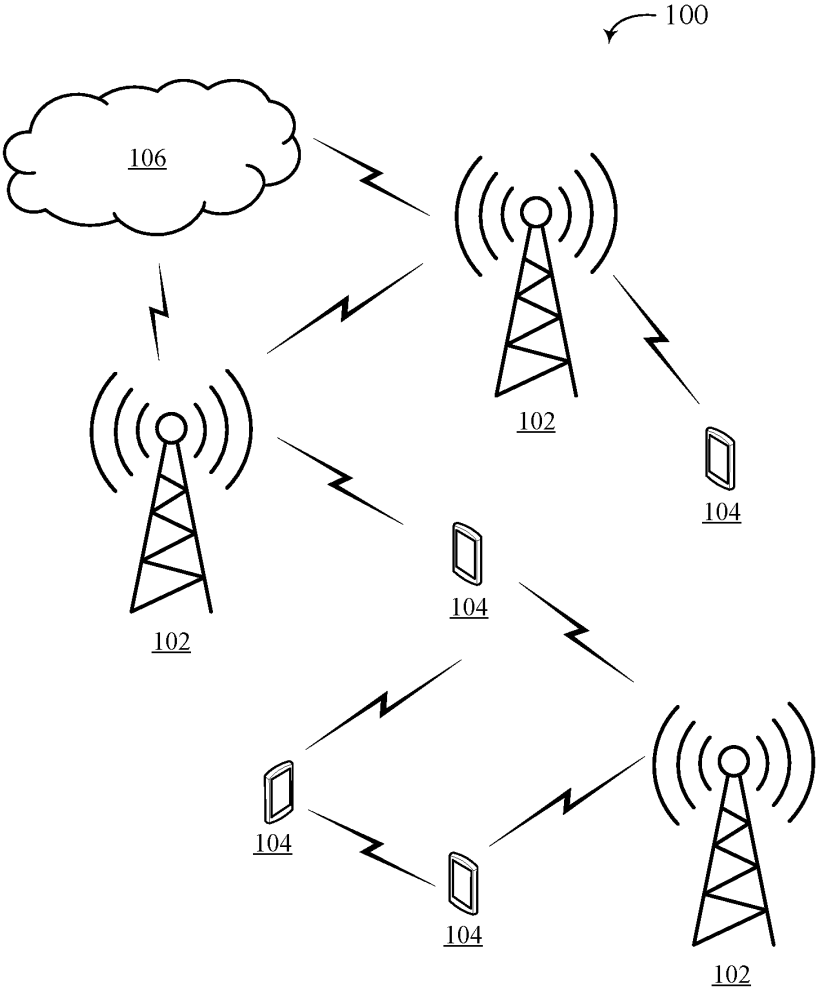


Figure 1

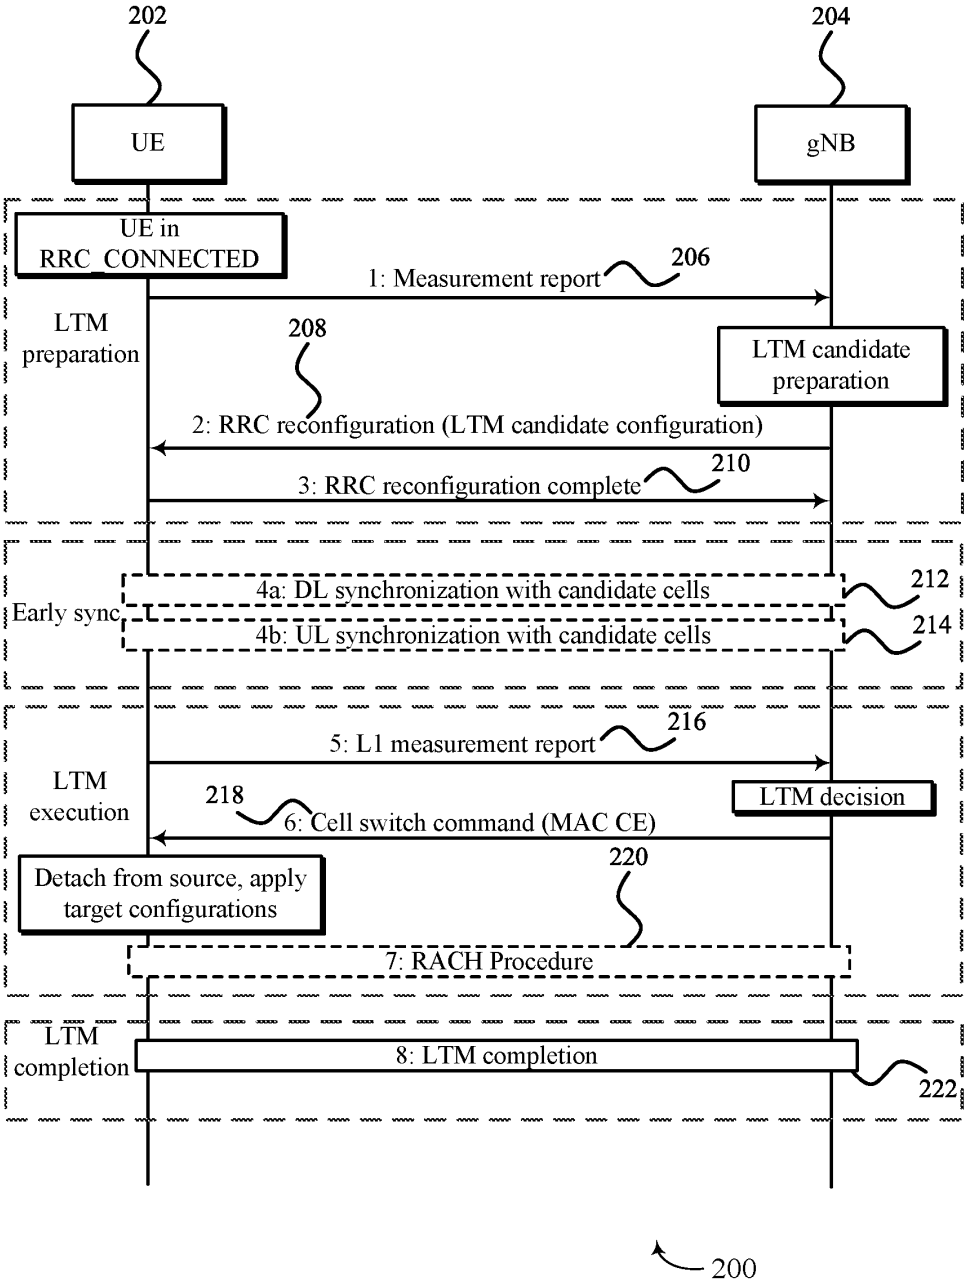


Figure 2

```
-- ASN1START
-- TAG-CONDITIONALRECONFIGURATION-START

ConditionalReconfiguration-r16 ::= SEQUENCE {
    attemptCondReconfig-r16  ENUMERATED {true}  OPTIONAL,
    condReconfigToRemoveList-r16  CondReconfigToRemoveList-r16  OPTIONAL,
    condReconfigToAddModList-r16  CondReconfigToAddModList-r16  OPTIONAL,
    ...
}

CondReconfigToRemoveList-r16 ::= SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigId-r16

-- TAG-CONDITIONALRECONFIGURATION-STOP
-- ASN1STOP

CondReconfigToAddMod-r16 ::= SEQUENCE {
    condReconfigId-r16  CondReconfigId-r16,
    condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId OPTIONAL,
    condRRCReconfig-r16 OCTET STRING (CONTAINING RRCReconfiguration) OPTIONAL,
    ...
}
```

↖ 300

Figure 3

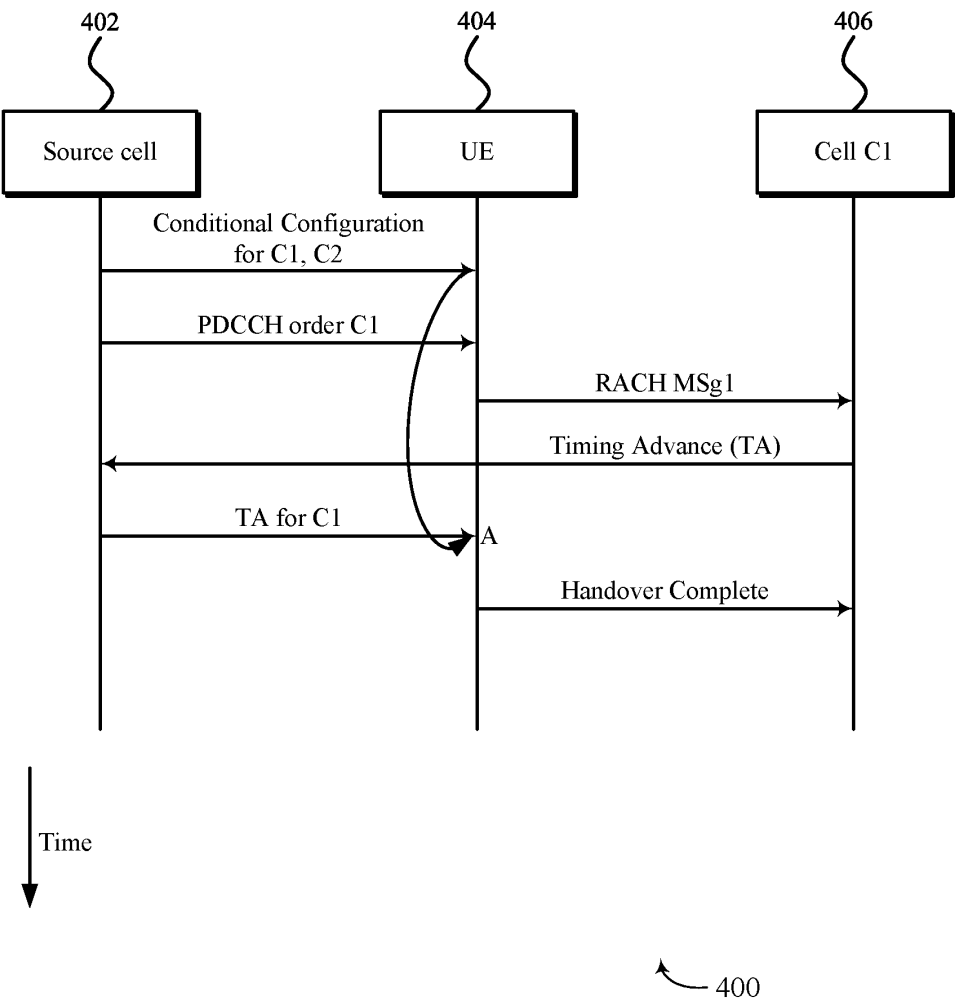


Figure 4

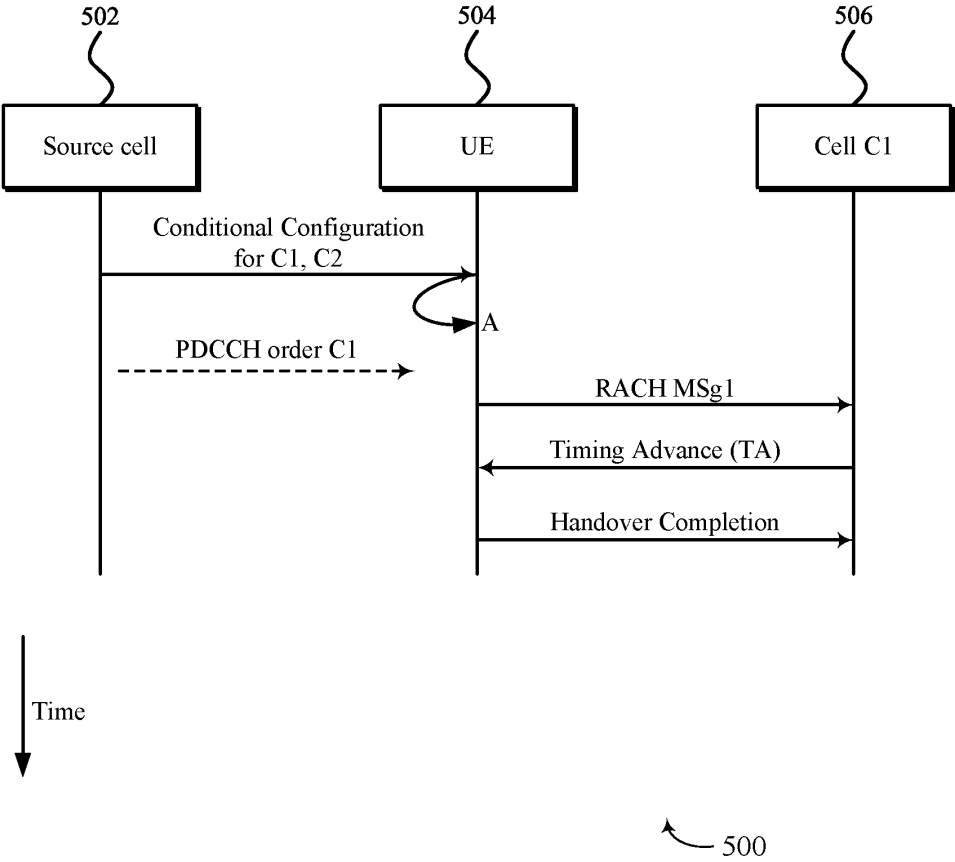


Figure 5

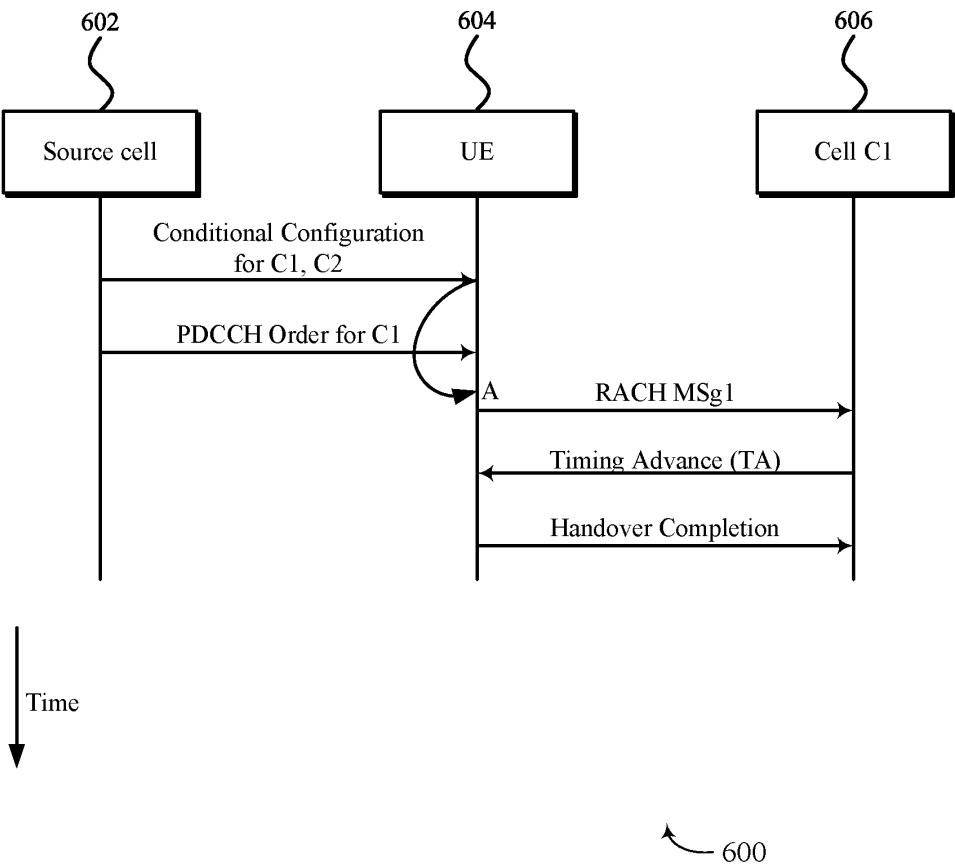


Figure 6

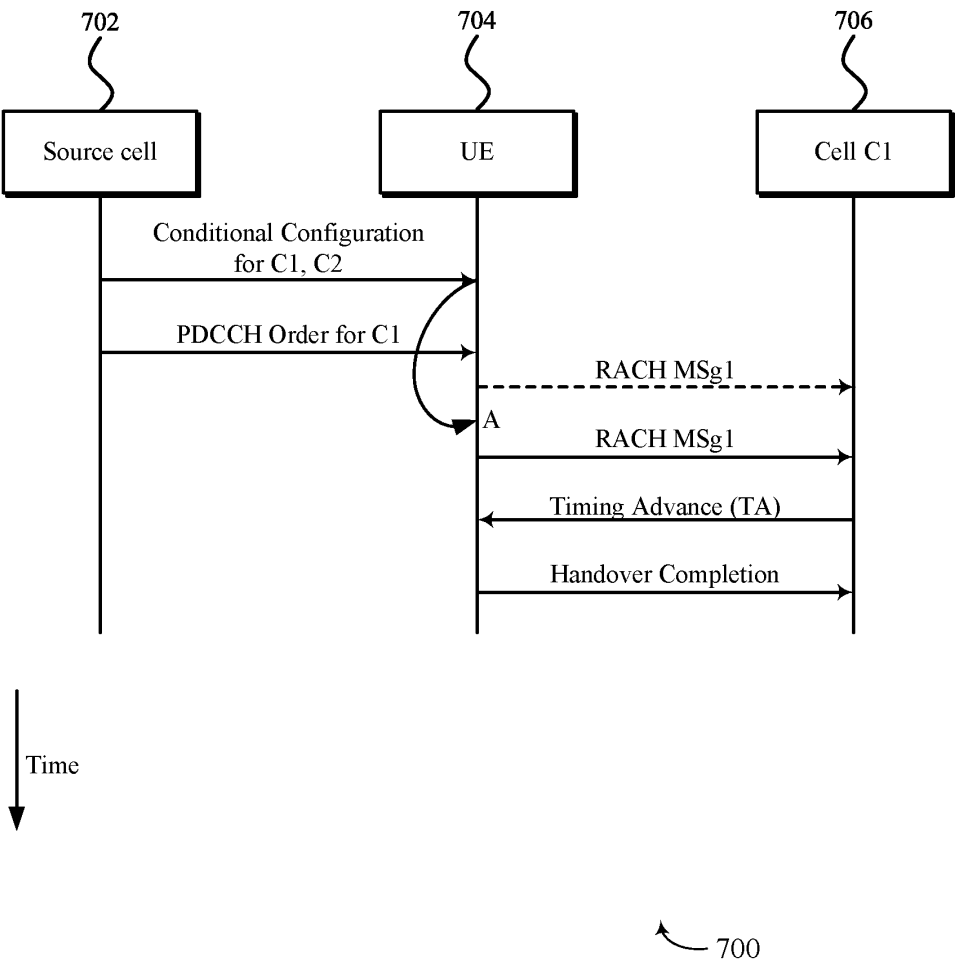


Figure 7

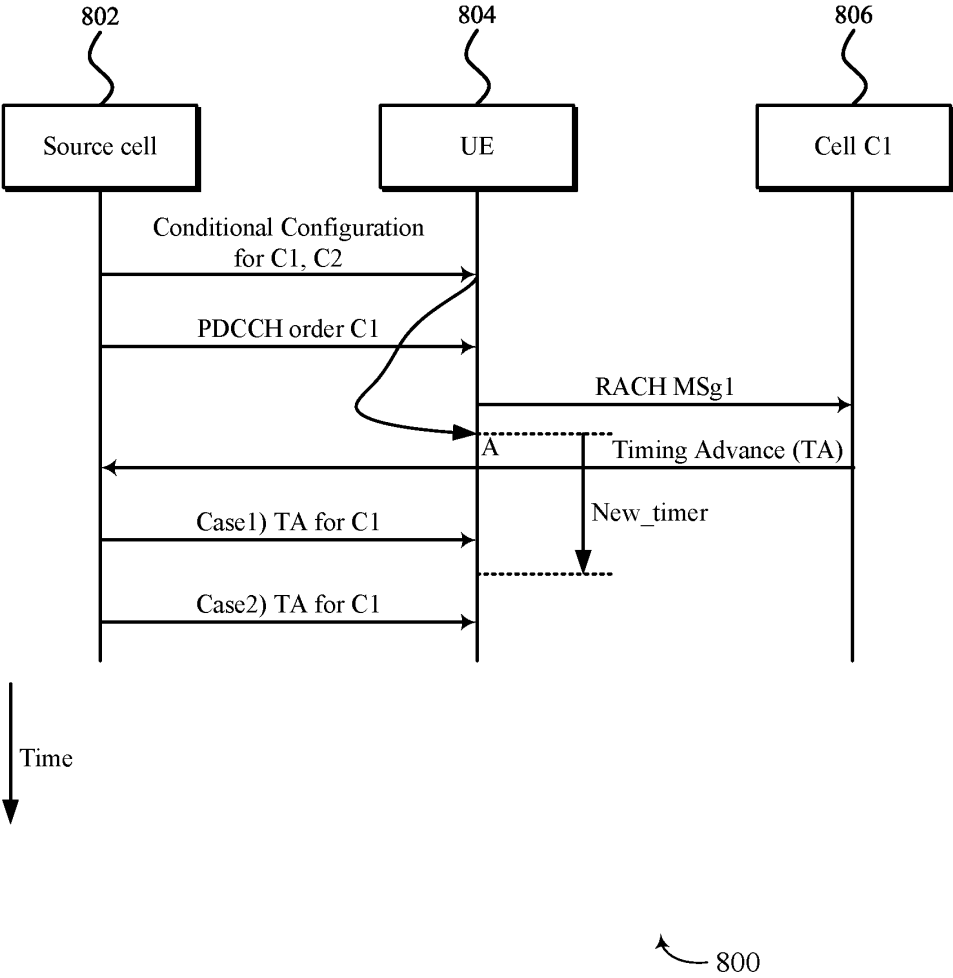


Figure 8

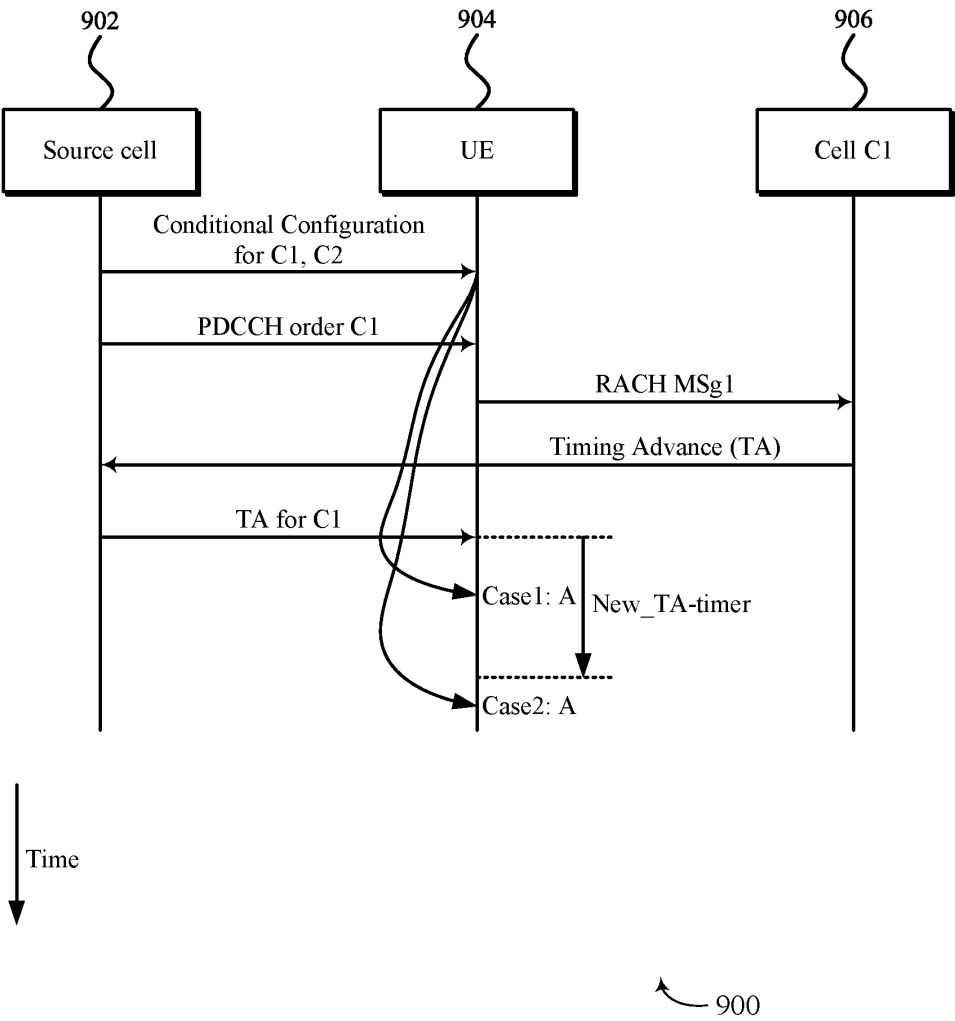


Figure 9

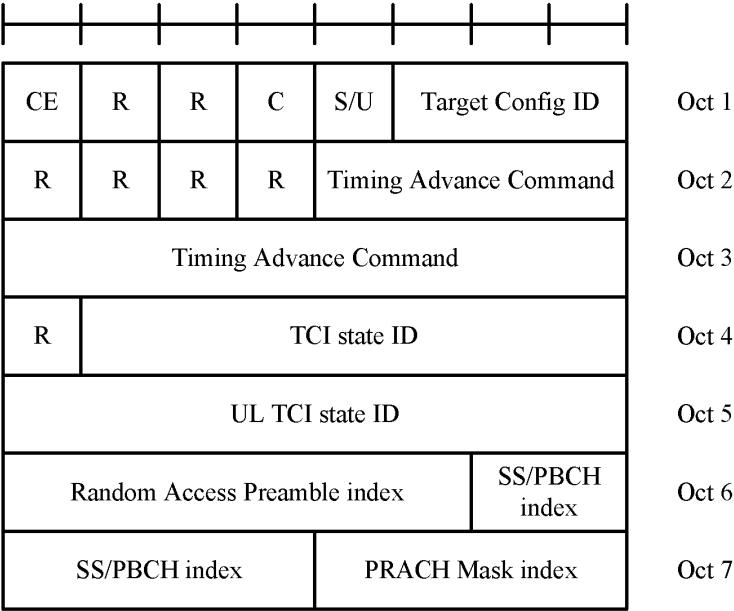


Figure 10

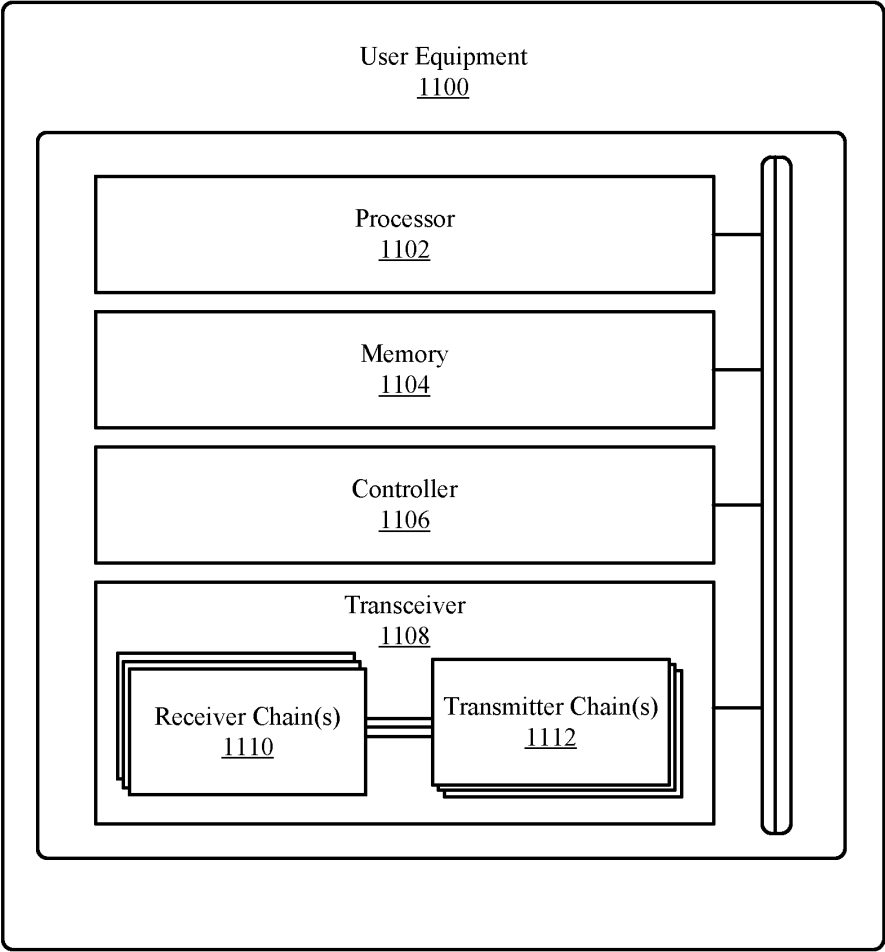


Figure 11

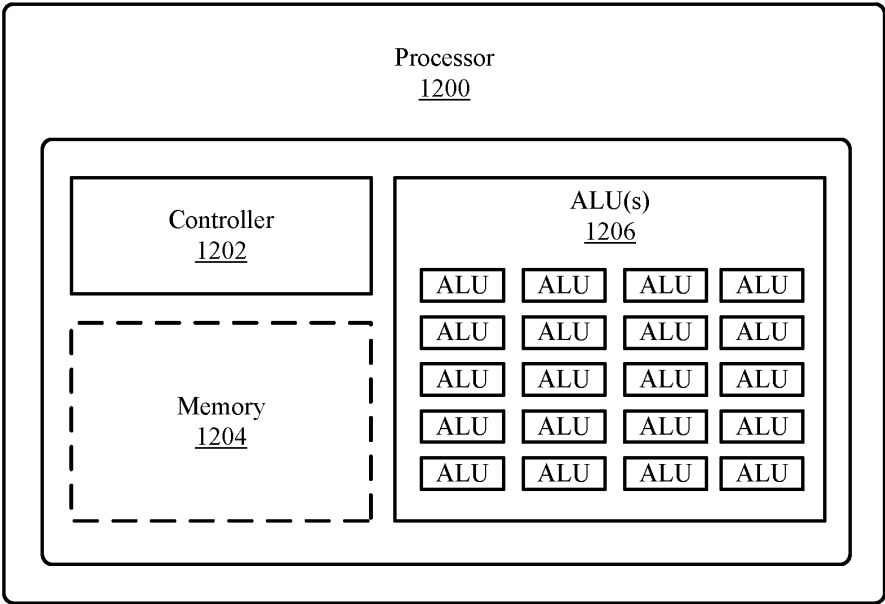


Figure 12

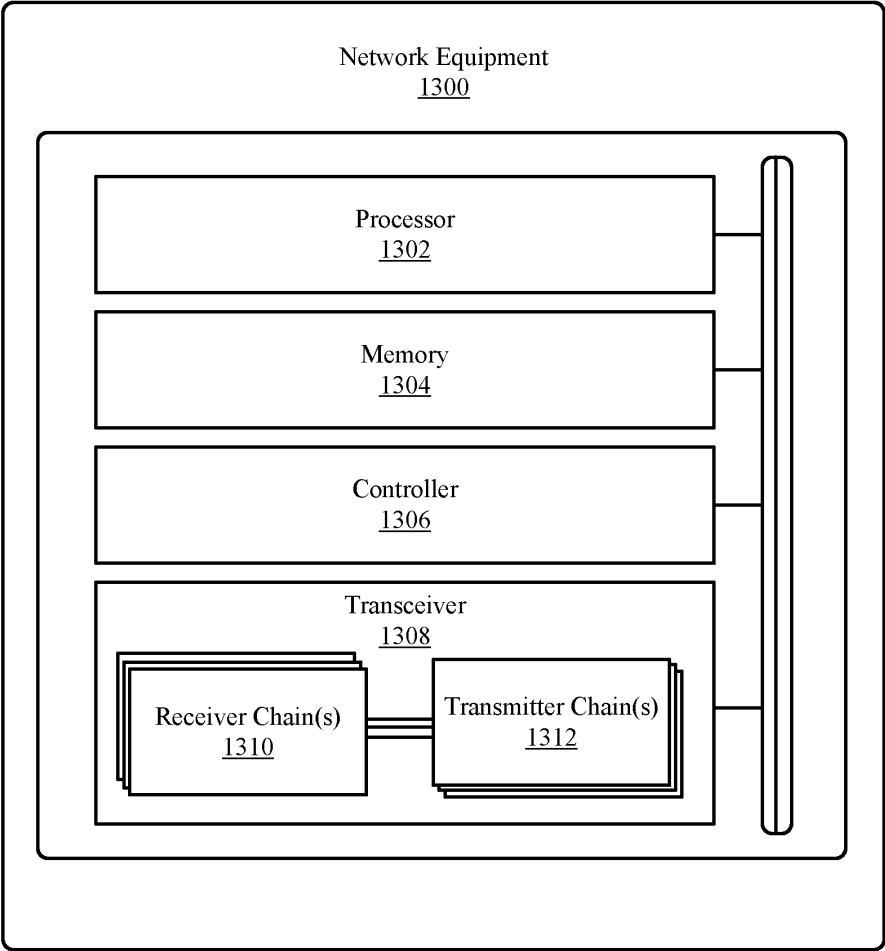


Figure 13

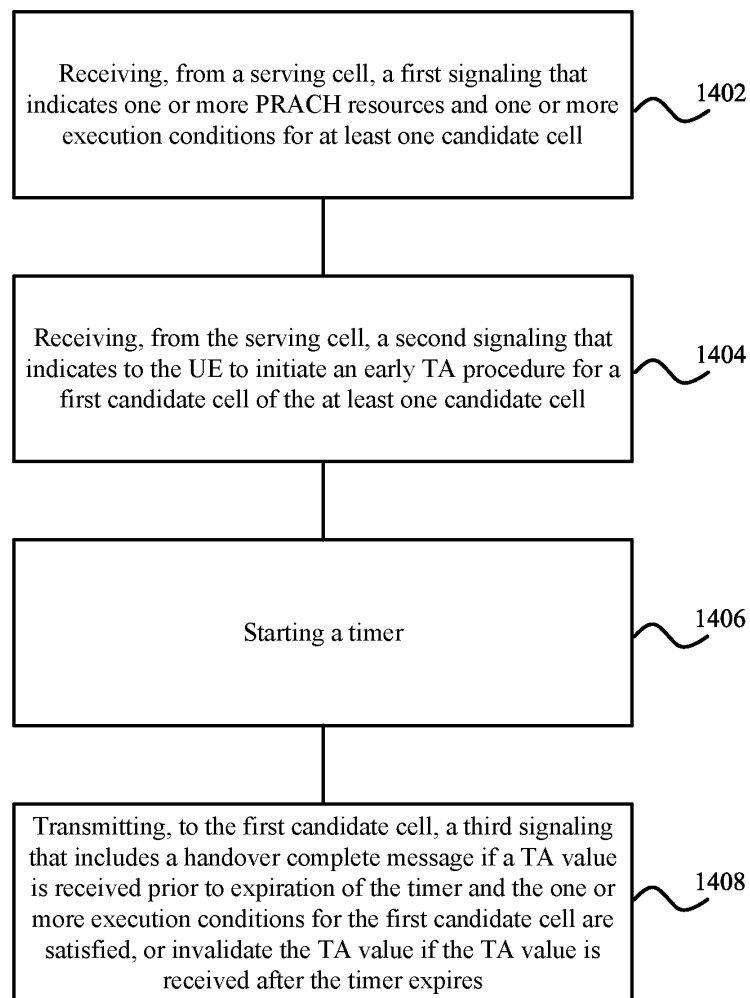


Figure 14

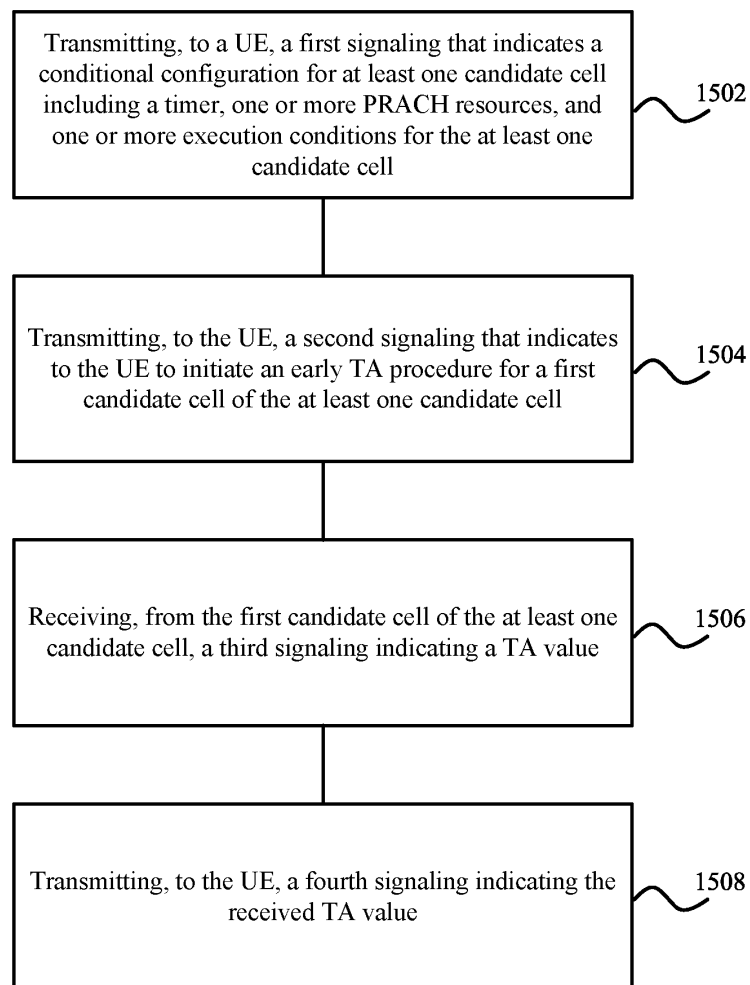


Figure 15