

METAL COMPLEXES CONTAINING AMIDOIMINE LIGANDS

TECHNICAL FIELD

[0001] The present technology relates generally to metal complexes including at least one amidoimine ligand, methods of making such metal complexes, and methods of
5 preparing metal-containing thin films using such metal complexes.

BACKGROUND

[0002] Various precursors are used to form thin films and a variety of deposition techniques have been employed. Such techniques include reactive sputtering, ion-assisted deposition, sol-gel deposition, CVD (also known as metalorganic CVD or MOCVD), and
10 ALD (also known as atomic layer epitaxy). CVD and ALD processes are being increasingly used as they have the advantages of good compositional control, high film uniformity, good control of doping and, significantly, they provide excellent conformal step coverage on highly non-planar geometries associated with modern microelectronic devices.

15 [0003] CVD is a chemical process whereby precursors are used to form a thin film on a substrate surface. In a typical CVD process, the precursors are passed over the surface of a substrate (*e.g.*, a wafer) in a low pressure or ambient pressure reaction chamber. The precursors react and/or decompose on the substrate surface creating a thin film of deposited material. Volatile by-products are removed by gas flow through the
20 reaction chamber. The deposited film thickness can be difficult to control because it depends on coordination of many parameters such as temperature, pressure, gas flow volumes and uniformity, chemical depletion effects, and time.

[0004] ALD is also a method for the deposition of thin films. It is a self-limiting, sequential, unique film growth technique based on surface reactions that can provide
25 precise thickness control and deposit conformal thin films of materials provided by precursors onto surfaces substrates of varying compositions. In ALD, the precursors are separated during the reaction. The first precursor is passed over the substrate surface producing a monolayer on the substrate surface. Any excess unreacted precursor is pumped out of the reaction chamber. A second precursor is then passed over the substrate

surface and reacts with the first precursor, forming a second monolayer of film over the first-formed monolayer of film on the substrate surface. This cycle is repeated to create a film of desired thickness.


[0005] Thin films, and in particular thin metal-containing films, have a variety of important applications, such as in nanotechnology and the fabrication of semiconductor devices. Examples of such applications include high-refractive index optical coatings, corrosion-protection coatings, photocatalytic self-cleaning glass coatings, biocompatible coatings, dielectric capacitor layers and gate dielectric insulating films in field-effect transistors (FETs), capacitor electrodes, gate electrodes, adhesive diffusion barriers, and integrated circuits. Dielectric thin films are also used in microelectronics applications, such as the high- κ dielectric oxide for dynamic random access memory (DRAM) applications and the ferroelectric perovskites used in infrared detectors and non-volatile ferroelectric random access memories (NV-FeRAMs). The continual decrease in the size of microelectronic components has increased the need for improved thin film technologies.

[0006] Technologies relating to the preparation of manganese-containing thin films are of particular interest. For example, manganese-containing films have found numerous practical applications in areas such as catalysts, batteries, memory devices, displays, sensors, and nano- and microelectronics. In the case of electronic applications, elemental manganese metal or manganese nitride films can act as barrier layers such that they prevent diffusion of copper interconnects into the underlying silicon dioxide substrate (*e.g.*, self-forming diffusion barrier layers). While barrier layers based on other metal systems may be employed to inhibit copper atom diffusion, there remain significant challenges with such systems. For example, tantalum nitride provides a suitable copper diffusion barrier at film thicknesses greater than about 10 Å—a thickness where such films are continuous—thinner films of tantalum nitride are not continuous, and as such, do not provide adequate diffusion barrier properties. This is a significant hurdle for smaller node devices (less than ~32 nm) where thinner diffusion barriers are required. Evidence suggests that manganese nitride diffusion barriers may be an attractive alternative to tantalum-based diffusion barriers in the back-end-of-line copper interconnections in next generation devices. However, there are few examples of manganese precursors which can provide high quality and/or high purity films of elemental manganese or manganese


nitride. Potential manganese precursor candidates often suffer from poor vapor pressures and reaction rates, and/or provide manganese-containing films with undesirable morphology. Accordingly, there exists significant interest in the development of manganese complexes with performance characteristics which make them suitable for use as precursor materials in vapor deposition processes to prepare manganese nitride and other manganese-containing films. For example, manganese precursors with improved performance characteristics (*e.g.*, thermal stabilities, vapor pressures, deposition rates, and barrier properties of films produced therefrom) are needed, as are methods of depositing thin films from such precursors.

SUMMARY

10 **[0007]** According to one embodiment, a metal complex of Formula I is provided:



wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl, and aryl; M is a metal selected from Groups 7–10 of the periodic table or is copper; and L comprises at least one ligand. In a first aspect, there is provided a metal complex of Formula I:



(I), wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of alkyl and aryl; M is selected from the group consisting of manganese, cobalt, nickel, and copper; and L is at least one ligand selected from the group consisting of a diazabutadiene ligand, an amidinate ligand, and an allyl ligand.


20 **[0008]** In some embodiments of the metal complex of Formula I, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

[0009] In some embodiments of the metal complex of Formula I, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl. In other embodiments, R_2 and R_2' are each methyl.

[0010] In some embodiments of the metal complex of Formula I, L comprises at least one monodentate or bidentate ligand. In such embodiments, L may be, for example,


an amidoimine ligand, a diazabutadiene (DAD) ligand, an amidinate (AMD) ligand or an allyl ligand. In one or more embodiments, L is an η^3 -allyl ligand.

[0011] According to another embodiment, a metal complex of Formula IA is provided:



(IA)

wherein R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 , and R_6' are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper. There is also provided a metal complex of Formula IA:



(IA), wherein R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 and R_6' are independently selected from the group consisting of alkyl and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.


[0012] In some embodiments of the metal complex of Formula IA, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

[0013] In some embodiments of the metal complex of Formula IA, R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 , and R_6' are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 and R_6' are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

[0014] In some embodiments of the metal complex of Formula IA, R_2 , $R_{2'}$, R_6 , and $R_{6'}$ are each methyl.


[0015] In some embodiments, the metal complex of Formula IA is a homoleptic complex, such that $R_1 = R_5$, $R_2 = R_6$, $R_{2'} = R_{6'}$, and $R_3 = R_4$.

5 **[0016]** According to another embodiment, a metal complex of Formula IB is provided:



(IB)

wherein R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is



- 5 copper. There is provided a metal complex of Formula IB: (IB), wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of alkyl and aryl; R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.


- [0017] In some embodiments of the metal complex of Formula IB, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

- [0018] In some embodiments of the metal complex of Formula IB, R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

- [0019] In some embodiments of the metal complex of Formula IB, R_2 and R_2' are each methyl.

- [0020] In some embodiments of the metal complex of Formula IB, R_8 and R_9 are each hydrogen.

- [0021] According to another aspect, a metal complex of Formula IC is provided:



(IC)


wherein R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.

- 5 **[0022]** In some embodiments of the metal complex of Formula IC, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

- 10 **[0023]** In some embodiments of the metal complex of Formula IC, R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.


[0024] In some embodiments of the metal complex of Formula IC, R_2 and R_2' are each methyl.

- 15 **[0025]** According to another embodiment, a metal complex of Formula ID is provided:



(ID)

- 20 wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl, and aryl; R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and M is a metal selected from Groups 7–10 of the periodic table or is copper. In another aspect, there is provided a metal complex



of Formula ID: (ID), wherein R₁, R₂, R₂', and R₃ are independently selected from the group consisting of alkyl and aryl; R₁₄, R₁₄', R₁₅, R₁₆, and R₁₆' are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.


- 5 **[0026]** In some embodiments of the metal complex of Formula ID, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

[0027] In some embodiments of the metal complex of Formula ID, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, C_6 – C_{10} -aryl; and R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, C_6 – C_{10} -aryl, and tri(C_1 – C_4 -alkyl)silyl. In particular
 5 embodiments, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, phenyl, and trimethylsilyl.


10 [0028] In some embodiments of the metal complex of Formula ID, R_2 and R_2' are each methyl.

[0029] In another aspect, a solvate of any one of the metal complexes of Formulas I, IA, IB, IC, or ID is provided. In some embodiments, the solvate includes a solvent coordinated (ligated) to the metal center of the metal complex. In some embodiments, the
 15 solvate is an ether solvate, an amine solvate or a hydrocarbon solvate.


[0030] Other embodiments of the present technology pertain to methods of making the metal complexes described herein—including those of Formulas I, IA, IB, IC, or ID, methods of making intermediates to such metal complexes, and vapor phase deposition methods employing such metal complexes as precursor materials as to provide metal-
 20 containing films. In an aspect, there is provided a method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal




complex corresponding in structure to Formula I: (I), wherein R_1 and R_3 are independently selected from the group consisting of hydrogen, alkyl and aryl; R_2 and R_2' are independently selected from the group consisting of alkyl and aryl; M is a metal
 25 selected from Groups 7–10 of the periodic table or is copper; and L is least one ligand selected from the group consisting of a diazabutadiene ligand, an amidinate ligand, and an allyl ligand. In yet another aspect, there is provided a method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula IA:



(IA), wherein R_1 , R_3 , R_4 , R_5 , R_6 and R_6' are independently selected from the group consisting of hydrogen, alkyl and aryl; R_2 and R_2' are independently selected from the group consisting of alkyl and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper. In still another aspect, there is provided a method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula IB:



(IB), wherein R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper. In a further aspect, there is provided a method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing the at least one metal complex corresponding in structure to the formula of the fourth aspect. In yet a further aspect, there is provided a method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula ID:



(ID), wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl and aryl; R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] Fig. 1 illustrates various embodiments of metal complexes of Formula I, where M is a metal selected from Groups 7–10 of the periodic table or is copper.

[0032] Fig. 2 illustrates various embodiments of ligands, L, which may be bonded
5 to any one of the metal complexes of Formula I illustrated in Fig. 1, in any combination.

DETAILED DESCRIPTION

[0033] Before describing several exemplary embodiments of the present technology, it is to be understood that the technology is not limited to the details of

construction or process steps set forth in the following description. The present technology is capable of other embodiments and of being practiced or being carried out in various ways. It is also to be understood that the metal complexes and other chemical compounds may be illustrated herein using structural formulas which have a particular stereochemistry. These illustrations are intended as examples only and are not to be construed as limiting the disclosed structure to any particular stereochemistry. Rather, the illustrated structures are intended to encompass all such metal complexes and chemical compounds having the indicated chemical formula.

[0034] In various aspects, metal complexes, methods of making such metal complexes, and methods of using such metal complexes to form thin metal-containing films via vapor deposition processes, are provided.

[0035] As used herein, the terms “metal complex” (or more simply, “complex”) and “precursor” are used interchangeably and refer to metal-containing molecule or compound which can be used to prepare a metal-containing film by a vapor deposition process such as, for example, ALD or CVD. The metal complex may be deposited on, adsorbed to, decomposed on, delivered to, and/or passed over a substrate or surface thereof, as to form a metal-containing film. In one or more embodiments, the metal complexes disclosed herein are manganese complexes.

[0036] As used herein, the term “metal-containing film” includes not only an elemental metal film as more fully defined below, but also a film which includes a metal along with one or more elements, for example a metal oxide film, metal nitride film, metal silicide film, and the like. As used herein, the terms “elemental metal film” and “pure metal film” are used interchangeably and refer to a film which consists of, or consists essentially of, pure metal. For example, the elemental metal film may include 100% pure metal or the elemental metal film may include at least about 90%, at least about 95%, at least about 96%, at least about 97%, at least about 98%, at least about 99%, at least about 99.9%, or at least about 99.99% pure metal along with one or more impurities. Unless context dictates otherwise, the term “metal film” shall be interpreted to mean an elemental metal film. In some embodiments, the metal-containing film is an elemental manganese film. In other embodiments, the metal-containing film is manganese oxide, manganese

nitride, or manganese silicide film. Such manganese-containing films may be prepared from various manganese complexes described herein.


[0037] As used herein, the term “vapor deposition process” is used to refer to any type of vapor deposition technique, including but not limited to, CVD and ALD. In various embodiments, CVD may take the form of conventional (*i.e.*, continuous flow) CVD, liquid injection CVD, or photo-assisted CVD. CVD may also take the form of a pulsed technique, *i.e.*, pulsed CVD. In other embodiments, ALD may take the form of conventional (*i.e.*, pulsed injection) ALD, liquid injection ALD, photo-assisted ALD, plasma-assisted ALD, or plasma-enhanced ALD. The term “vapor deposition process” further includes various vapor deposition techniques described in *Chemical Vapour Deposition: Precursors, Processes, and Applications*; Jones, A. C.; Hitchman, M. L., Eds. The Royal Society of Chemistry: Cambridge, 2009; Chapter 1, pp 1–36.

[0038] The term “alkyl” (alone or in combination with another term(s)) refers to a saturated hydrocarbon chain of 1 to about 12 carbon atoms in length, such as, but not limited to, methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, decyl, and so forth. The alkyl group may be straight-chain or branched-chain. “Alkyl” is intended to embrace all structural isomeric forms of an alkyl group. For example, as used herein, propyl encompasses both *n*-propyl and isopropyl; butyl encompasses *n*-butyl, *sec*-butyl, isobutyl and *tert*-butyl. Further, as used herein, “Me” refers to methyl, “Et” refers to ethyl, “*i*-Pr” refers to isopropyl, “*t*-Bu” refers to *tert*-butyl, and “Np” refers to neopentyl. In some embodiments, alkyl groups are C₁–C₈- or C₁–C₄-alkyl groups.

[0039] The term “solvate,” in relation to any metal complex described herein, refers to a metal complex that further includes a stoichiometric or non-stoichiometric amount of solvent associated with the metal complex. For instance, the solvent may be covalently bound to the metal center of the metal complex (*e.g.*, as a ligand) or otherwise associated with the metal complex, such as for example, through non-covalent intermolecular forces (*e.g.*, as a solvent of crystallization).

[0040] All of the metal complexes disclosed herein comprise at least one amidoimine ligand. Where a given metal complex comprises more than one amidoimine ligand, for instance two amidoimine ligands, the amidoimine ligand may be the same or different at each occurrence. The amidoimine ligand features a formally anionic amine


group (*i.e.*, an amido group) and a formally neutral imine group, as represented by the compound of Formula II:



(II)

5 wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl, and aryl. The amidoimine ligand coordinates to the metal center of the metal complex through the nitrogen atoms of the amido and imine groups. As further described herein, the metal complexes may include other ligands bound to the metal center, in addition to the one or more amidoimine ligands. While not wishing to be bound
10 by any particular theory, it is believed that such amidoimine ligands will offer benefits of amido and beta-diimines, such as all nitrogen bonding and metal center stabilization. At the same time, the amidoimine ligands are thought to be more labile, due to the relatively weak imine-metal bond. In this regard, metal complexes of such amidoimine ligands are excellent candidates for preparation of thin metal-containing films in various vapor
15 deposition processes.

[0041] Therefore, according to one aspect, a metal complex of Formula I is provided:



(I)

20 wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl, and aryl; M is a metal selected from Groups 7–10 of the periodic table or is copper; and L comprises at least one ligand.

[0042] In some embodiments of the metal complex of Formula I, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular
25 embodiments, M is manganese.


[0043] In some embodiments of the metal complex of Formula I, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl. In other embodiments, R_2 and R_2' are each methyl.

[0044] In some embodiments, two, three or four of R_1 , R_2 , R_2' , and R_3 are independently alkyl, such as, for example, C_1 – C_4 -alkyl. In a particular embodiment, two, three, or four of R_1 , R_2 , R_2' , and R_3 are methyl.

[0045] In some embodiments, at least one of R_1 and R_3 are branched alkyl, for example, isopropyl or *tert*-butyl. In other embodiments, R_1 and R_3 are each independently branched alkyl.

[0046] In the metal complex of Formula I, L comprises at least one ligand, which may be monodentate, bidentate, or polydentate. Thus, L may represent one, two, three, or more ligands, each of which may be the same or different at each occurrence, in addition to the amidoimine ligand explicitly shown in the metal complex of Formula I. The number of ligands present in a given metal complex, in addition to the amidoimine ligand, can and will vary depending on various factors, including for example, the identity of the particular ligands and the identity of the particular metal center. In some embodiments, L may be, for example, an amidoimine ligand (*e.g.*, a second amidoimine ligand), a diazabutadiene (DAD) ligand, an amidinate (AMD) ligand, an allyl ligand, or a substituted derivative of any of the foregoing. In particular embodiments, L is an η^3 -allyl ligand. In other embodiments, L is a ligand bound through one or more nitrogen atoms. In yet other embodiments, the metal center of the metal complex of Formula I is bound only to nitrogen atoms only.

[0047] According to another aspect, a metal complex comprising two amidoimine ligands is provided which may be represented by the metal complex of Formula IA:



(IA)

wherein R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 , and R_6' are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.


[0048] In some embodiments of the metal complex of Formula IA, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

[0049] In some embodiments of the metal complex of Formula IA, R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 , and R_6' are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_4 , R_5 , R_6 , and R_6' are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

[0050] In some embodiments of the metal complex of Formula IA, R_2 , R_2' , R_6 , and R_6' are each methyl.

[0051] In some embodiments, the metal complex of Formula IA is a homoleptic metal complex, such that $R_1 = R_5$, $R_2 = R_6$, $R_2' = R_6'$, and $R_3 = R_4$. Stated another way, each amidoimine ligand of the metal complex is the same.

[0052] According to another aspect, a metal complex comprising an amidoimine ligand and a diazabutadiene ligand is provided which may be represented by the metal complex of Formula IB:



(IB)

wherein R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.

[0053] In some embodiments of the metal complex of Formula IB, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.


[0054] In some embodiments of the metal complex of Formula IB, R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_7 , R_8 , R_9 , and R_{10} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

[0055] In some embodiments of the metal complex of Formula IB, R_2 and R_2' are each methyl.

[0056] In some embodiments of the metal complex of Formula IB, R_8 and R_9 are each hydrogen.

[0057] In some embodiments of the metal complex of Formula IB, R_7 and R_{10} are each alkyl, for example, C_1 – C_4 -alkyl.

[0058] According to another aspect, a metal complex comprising an amidoimine ligand and an amidinate ligand is provided which may be represented by the metal complex of Formula IC:



(IC)


wherein R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, alkyl, and aryl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.

[0059] In some embodiments of the metal complex of Formula IC, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

[0060] In some embodiments of the metal complex of Formula IC, R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, and C_6 – C_{10} -aryl. In particular embodiments, R_1 , R_2 , R_2' , R_3 , R_{11} , R_{12} , and R_{13} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

[0061] In some embodiments of the metal complex of Formula IC, R_2 and R_2' are each methyl.

[0062] According to another aspect, a metal complex comprising an amidoimine ligand and an η^3 -allyl ligand is provided which may be represented by the metal complex of Formula ID:



(ID)

wherein R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl, and aryl; R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and M is a metal selected from Groups 7–10 of the periodic table or is copper.

- 5 **[0063]** In some embodiments of the metal complex of Formula ID, M is selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese.

- 10 **[0064]** In some embodiments of the metal complex of Formula ID, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, C_6 – C_{10} -aryl; and R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of hydrogen, C_1 – C_4 -alkyl, C_6 – C_{10} -aryl, and tri(C_1 – C_4 -alkyl)silyl. In particular embodiments, R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are independently selected from the group consisting of
15 hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, phenyl, and trimethylsilyl.

- [0065]** In some embodiments of the metal complex of Formula ID, R_2 and R_2' are each methyl.

- 20 **[0066]** In some embodiments of the metal complex of Formula ID, R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' are each hydrogen, such that the η^3 -allyl ligand is unsubstituted. In other embodiments, the η^3 -allyl ligand is monosubstituted with an alkyl group, such as a C_1 – C_4 -alkyl group (*i.e.*, only one of R_{14} , R_{14}' , R_{15} , R_{16} , and R_{16}' is an alkyl group while the remaining groups are each hydrogen). In yet other embodiments, R_{14} and R_{16} are independently silyl and R_{14}' and R_{16}' are each hydrogen.


- 25 **[0067]** Any of the aforementioned metal complexes disclosed herein, including the metal complexes of Formulas I, IA, IB, IC, or ID, may be provided as solvates. For example, one or more solvent molecules may be associated with the metal complex, for instance, by coordination to the metal center as an additional ligand or ligands. As will be appreciated by those of skill in the art, solvates may be formed in the process of
30 synthesizing the metal complex, isolation of the metal complex, and/or purification of the

metal complex. In some embodiments, the solvate is an ether solvate, an amine solvate or a hydrocarbon solvate.

[0068] The metal complexes of Formulas I, IA, IB, IC, and ID (and solvated forms thereof) may be prepared by any number of methods, depending on the identity of the particular metal complex of interest. In general, the metal complexes may be prepared by reaction of the ligand of Formula II or conjugate acid thereof with an appropriate metal salt (*e.g.*, a Group 7–10 metal salt or copper salt), with optional further reaction or co-reaction with other ligands or ligand precursors. As will be appreciated by those of skill in the art, the ligand of Formula II may be prepared by the deprotonation of the corresponding conjugate acid of the ligand of Formula II with a suitable base such as, for example, *n*-butyllithium or sodium hydride. Suitable metal salts include, but are not limited to metal halides, metal pseudohalides, metal nitrates, metal sulfates, metal carbonates, metal acetates, metal alkane- or arenesulfonates (*e.g.*, metal triflates, metal tosylates), metal amides, metal silylamides (*e.g.*, bis(trialkylsilylamido)metals such as bis(trialkylsilylamido)manganese). In some embodiments, the metal salt is a Group 7–10 metal salt or copper salt. In particular embodiments, the metal salt is manganese salt, such as manganese(II) chloride, manganese(II) bromide, manganese(II) iodide, manganese(II) nitrate, manganese(II) acetate, manganese(II) sulfate, manganese(II) carbonate, manganese(II) perchlorate, manganese(II) trifluoromethanesulfonate, or bis(trimethylsilylamido)manganese.

[0069] As illustrated in Scheme 1, bis(trialkylsilylamido)metals are particularly useful in the preparation of metal complexes of Formulas I, IA, IB, IC, and ID; such metal salts are generally sufficiently basic as to allow for the direct use of the conjugate acid of the ligand of Formula II (stated differently, the need to pre-form the ligand of Formula II via deprotonation of the corresponding conjugate acid is obviated). Of course and as will be appreciated by those of skill in the art, less basic metal salts such as metal halides may be employed in conjunction with preformed ligand of Formula II (typically as a lithium or sodium salt).

Scheme 1

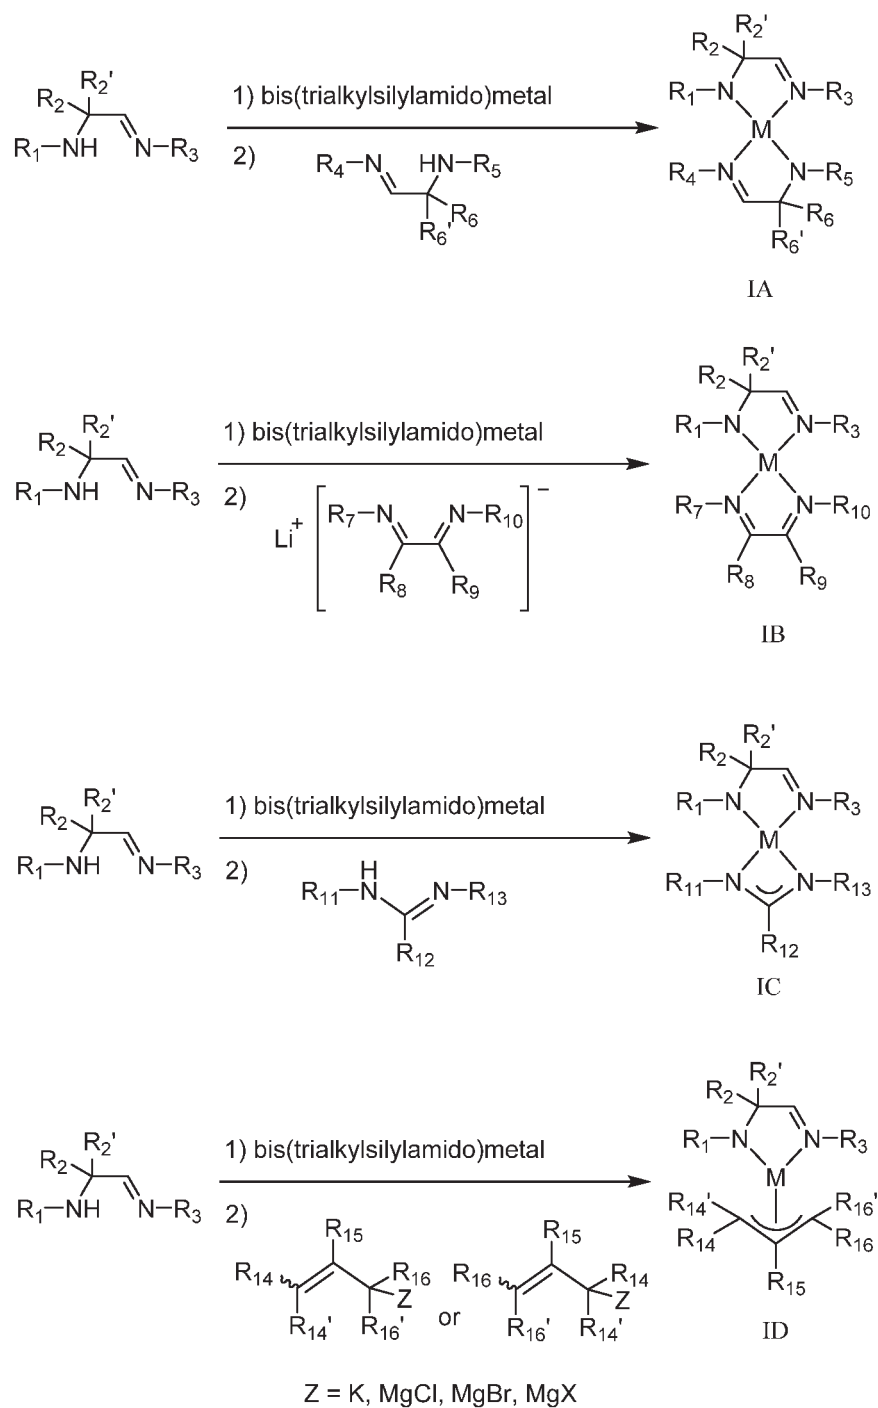

[0070] The metal complexes described herein are generally synthesized in the presence of one or more solvents. Examples of suitable solvents include, but are not

limited to, ethers (*e.g.*, diethyl ether, tetrahydrofuran, 1,2-dimethoxyethane, 1,4-dioxane, and the like) and aromatic hydrocarbons (*e.g.*, benzene, toluene, and the like).

[0071] The metal complexes described herein may be isolated from the reaction mixture from which they are formed and optionally purified using standard techniques known in the art. Such techniques include, but are not limited to, centrifugation, filtration, extraction, recrystallization, chromatography, sublimation, distillation, and the like. Depending on the manner of preparation of a particular metal complex, the identity of solvent(s) used in the complexation reaction, and the method of isolation and purification, it is possible that the metal complex may be isolated as a solvated form. For instance, the metal complexes may be isolated as solvates of any of the aforementioned solvents, or as solvates of any byproducts formed in the complexation reaction.

[0072] Ligands and ligand precursors (*e.g.*, amidoimine, aminoimine, diazabutadiene, amidine, amidinate, and allyl ligands or related ligand precursors such as those shown in Scheme 1) are commercially available or may be synthesized according to known procedures (*e.g.*, *Inorg. Chem.* **2009**, 48, 7639-7644), or simple modifications such known procedures which are well within the grasp of the person of ordinary skill.

[0073] Figure 1 illustrates various embodiments of metal complexes of Formula I, where M is a metal selected from Groups 7–10 of the periodic table or is copper. In some embodiments, M selected from the group consisting of manganese, cobalt, nickel, and copper. In particular embodiments, M is manganese. Figure 2 illustrates various embodiments of ligands, L, which may be bonded to any of the metal complexes of Formula I illustrated in Figure 1 (in any combination) such as to provide metal complexes of Formulas IA, IB, IC, and ID.

[0074] The metal complexes provided herein may be used to prepare metal-containing films such as, for example, elemental manganese and manganese nitride films, with smooth morphology. Thus, according to another aspect, a method for forming a metal-containing film by a vapor deposition process is provided, the method employing at least one of the metal complexes disclosed herein, such as those of Formulas I, IA, IB, IC, ID, or solvates thereof. The film-forming method may include, for example, (1) vaporizing the metal complex and (2) delivering and/or exposing the metal complex to a

substrate surface or passing the metal complex over a substrate surface (and/or decomposing the one metal complex on the substrate surface).

[0075] A variety of substrates can be used in the deposition methods disclosed herein. For example, metal complexes as disclosed herein may be delivered to, passed
5 over, or deposited on a variety of substrates or surfaces thereof such as, but not limited to, silicon, crystalline silicon, Si(100), Si(111), silicon oxide, glass, strained silicon, silicon on insulator (SOI), doped silicon or silicon oxide(s) (*e.g.*, carbon doped silicon oxides), silicon nitride, germanium, gallium arsenide, tantalum, tantalum nitride, aluminum, copper, ruthenium, titanium, titanium nitride, tungsten, tungsten nitride, and any number
10 of other substrates commonly encountered in nanoscale device fabrication processes (*e.g.*, semiconductor fabrication processes). As will be appreciated by those of skill in the art, substrates may be exposed to a pretreatment process to polish, etch, reduce, oxidize, hydroxylate, anneal and/or bake the substrate surface. In one or more embodiments, the substrate surface contains a hydrogen-terminated surface.

15 [0076] In certain embodiments, the metal complex may be dissolved in a suitable solvent such as a hydrocarbon or an amine solvent to facilitate the vapor deposition process. Appropriate hydrocarbon solvents include, but are not limited to, aliphatic hydrocarbons, such as hexane, heptane and nonane; aromatic hydrocarbons, such as toluene and xylene; and aliphatic and cyclic ethers, such as diglyme, triglyme, and
20 tetraglyme. Examples of appropriate amine solvents include, without limitation, octylamine and *N,N*-dimethyldodecylamine. For example, the metal complex may be dissolved in toluene to yield a solution with a concentration from about 0.05 M to about 1 M.

[0077] In another embodiment, the at least one metal complex may be delivered
25 “neat” (undiluted by a carrier gas) to a substrate surface.

[0078] In one embodiment, the vapor deposition process is chemical vapor deposition.

[0079] In another embodiment, the vapor deposition process is atomic layer deposition.

[0080] The ALD and CVD methods encompass various types of ALD and CVD processes such as, but not limited to, continuous or pulsed injection processes, liquid injection processes, photo-assisted processes, plasma-assisted, and plasma-enhanced processes. For purposes of clarity, the methods of the present technology specifically include direct liquid injection processes. For example, in direct liquid injection CVD (“DLI-CVD”), a solid or liquid metal complex may be dissolved in a suitable solvent and the solution formed therefrom injected into a vaporization chamber as a means to vaporize the metal complex. The vaporized metal complex is then transported/delivered to the substrate surface. In general, DLI-CVD may be particularly useful in those instances where a metal complex displays relatively low volatility or is otherwise difficult to vaporize.

[0081] In one embodiment, conventional or pulsed CVD is used to form a metal-containing film vaporizing and/or passing the at least one metal complex over a substrate surface. For conventional CVD processes see, for example Smith, Donald (1995). *Thin-Film Deposition: Principles and Practice*. McGraw-Hill.

[0082] In one embodiment, CVD growth conditions for the metal complexes disclosed herein include, but are not limited to:

- a. Substrate temperature: 50 – 600 °C
- b. Evaporator temperature (metal precursor temperature): 0 – 200 °C
- c. Reactor pressure: 0 – 100 Torr
- d. Argon or nitrogen carrier gas flow rate: 0 – 500 sccm
- e. Oxygen flow rate: 0 – 500 sccm
- f. Hydrogen flow rate: 0 – 500 sccm
- g. Run time: will vary according to desired film thickness

[0083] In another embodiment, photo-assisted CVD is used to form a metal-containing film by vaporizing and/or passing at least one metal complex disclosed herein over a substrate surface.

[0084] In a further embodiment, conventional (*i.e.*, pulsed injection) ALD is used to form a metal-containing film by vaporizing and/or passing at least one metal complex

disclosed herein over a substrate surface. For conventional ALD processes see, for example, George S. M., *et al. J. Phys. Chem.*, 1996, *100*, 13121–13131.

[0085] In another embodiment, liquid injection ALD is used to form a metal-containing film by vaporizing and/or passing at least one metal complex disclosed herein over a substrate surface, wherein at least one metal complex is delivered to the reaction chamber by direct liquid injection as opposed to vapor draw by a bubbler. For liquid injection ALD processes see, for example, Potter R. J., *et al., Chem. Vap. Deposition*, 2005, *11*(3), 159–169.

[0086] Examples of ALD growth conditions for metal complexes disclosed herein include, but are not limited to:

- a. Substrate temperature: 0 – 400 °C
- b. Evaporator temperature (metal precursor temperature): 0 – 200 °C
- c. Reactor pressure: 0 – 100 Torr
- d. Argon or nitrogen carrier gas flow rate: 0 – 500 sccm
- e. Reactive gas flow rate: 0–500 sccm
- f. Pulse sequence (metal complex/purge/reactive gas/purge): will vary according to chamber size
- g. Number of cycles: will vary according to desired film thickness

[0087] In another embodiment, photo-assisted ALD is used to form a metal-containing film by vaporizing and/or passing at least one metal complex disclosed herein over a substrate surface. For photo-assisted ALD processes see, for example, U.S. Patent No. 4,581,249.

[0088] In another embodiment, plasma-assisted ALD is used to form a metal-containing film by vaporizing and/or passing at least one metal complex disclosed herein over a substrate surface.

[0089] In another embodiment, a method of forming a metal-containing film on a substrate surface comprises: during an ALD process, exposing a substrate to a vapor phase metal complex according to one or more of the embodiments described herein, such that a layer is formed on the surface comprising the metal complex bound to the surface by the

metal center (*e.g.*, manganese); during an ALD process, exposing the substrate having bound metal complex with a co-reactant such that an exchange reaction occurs between the bound metal complex and co-reactant, thereby dissociating the bound metal complex and producing a first layer of elemental metal on the surface of the substrate; and
5 sequentially repeating the ALD process and the treatment.

[0090] The reaction time, temperature and pressure are selected to create a metal-surface interaction and achieve a layer on the surface of the substrate. The reaction conditions for the ALD reaction will be selected based on the properties of the metal complex. The deposition can be carried out at atmospheric pressure but is more
10 commonly carried out at a reduced pressure. The vapor pressure of the metal complex should be low enough to be practical in such applications. The substrate temperature should be high enough to keep the bonds between the metal atoms at the surface intact and to prevent thermal decomposition of gaseous reactants. However, the substrate temperature should also be high enough to keep the source materials (*i.e.*, the reactants) in
15 the gaseous phase and to provide sufficient activation energy for the surface reaction. The appropriate temperature depends on various parameters, including the particular metal complex used and the pressure. The properties of a specific metal complex for use in the ALD deposition methods disclosed herein can be evaluated using methods known in the art, allowing selection of appropriate temperature and pressure for the reaction. In
20 general, lower molecular weight and the presence of functional groups that increase the rotational entropy of the ligand sphere result in a melting point that yields liquids at typical delivery temperatures and increased vapor pressure.

[0091] An optimized metal complex for use in the deposition methods will have all of the requirements for sufficient vapor pressure, sufficient thermal stability at the selected
25 substrate temperature and sufficient reactivity to produce a reaction on the surface of the substrate without unwanted impurities in the thin film. Sufficient vapor pressure ensures that molecules of the source compound are present at the substrate surface in sufficient concentration to enable a complete self-saturating reaction. Sufficient thermal stability ensures that the source compound will not be subject to the thermal decomposition which
30 produces impurities in the thin film.

[0092] Thus, the metal complexes disclosed herein utilized in these methods may be liquid, solid, or gaseous. Typically, the metal complexes are liquids or solids at ambient temperatures with a vapor pressure sufficient to allow for consistent transport of the vapor to the process chamber.

5 [0093] In one embodiment, an elemental metal, a metal nitride, a metal oxide, or a metal silicide film can be formed by delivering for deposition at least one metal complex as disclosed herein, independently or in combination with a co-reactant. In this regard, the co-reactant may be deposited or delivered to or passed over a substrate surface, independently or in combination with the at least one metal complex. As will be readily
10 appreciated, the particular co-reactant used will determine the type of metal-containing film is obtained. Examples of such co-reactants include, but are not limited to hydrogen, hydrogen plasma, oxygen, air, water, an alcohol, H_2O_2 , N_2O , ammonia, a hydrazine, a borane, a silane, ozone, or a combination of any two or more thereof. Examples of suitable alcohols include, without limitation, methanol, ethanol, propanol, isopropanol,
15 *tert*-butanol, and the like. Examples of suitable boranes include, without limitation, hydridic (*i.e.*, reducing) boranes such as borane, diborane, triborane and the like. Examples of suitable silanes include, without limitation, hydridic silanes such as silane, disilane, trisilane, and the like. Examples of suitable hydrazines include, without limitation, hydrazine (N_2H_4), a hydrazine optionally substituted with one or more alkyl
20 groups (*i.e.*, an alkyl-substituted hydrazine) such as methylhydrazine, *tert*-butylhydrazine, *N,N*- or *N,N'*-dimethylhydrazine, a hydrazine optionally substituted with one or more aryl groups (*i.e.*, an aryl-substituted hydrazine) such as phenylhydrazine, and the like.

[0094] In one embodiment, the metal complexes disclosed herein are delivered to the substrate surface in pulses alternating with pulses of an oxygen-containing co-reactant
25 as to provide metal oxide films. Examples of such oxygen-containing co-reactants include, without limitation, H_2O , H_2O_2 , O_2 , ozone, air, *i*-PrOH, *t*-BuOH, or N_2O .

[0095] In other embodiments, a co-reactant comprises a reducing reagent such as hydrogen. In such embodiments, an elemental metal film is obtained. In particular
embodiments, the elemental metal film consists of, or consists essentially of, pure metal.
30 Such a pure metal film may contain more than about 80, 85, 90, 95, or 98% metal. In even more particular embodiments, the elemental metal film is a manganese film.

[0096] In other embodiments, a co-reactant is used to form a metal nitride film by delivering for deposition at least one metal complex as disclosed herein, independently or in combination, with a co-reactant such as, but not limited to, ammonia, a hydrazine, and/or other nitrogen-containing compounds (*e.g.*, an amine) to a reaction chamber. A plurality of such co-reactants may be used. In further embodiments, the metal nitride film is a manganese nitride film of the formula MnN_x , where the variable “x” is in the range of about 0.1, 0.2, or 0.25 to about 1, 2, 3, or 4, or in the range of about 0.2 to about 2, or in the range of about 0.25 to about 1.

[0097] In another embodiment, a mixed-metal film can be formed by a vapor deposition process which vaporizes at least one metal complex as disclosed herein in combination, but not necessarily at the same time, with a second metal complex comprising a metal other than that of the at least one metal complex disclosed herein.

[0098] In a particular embodiment, the methods of the present technology are utilized for applications such as dynamic random access memory (DRAM) and complementary metal oxide semi-conductor (CMOS) for memory and logic applications, on substrates such as silicon chips.

[0099] Any of the manganese complexes disclosed herein may be used to prepare thin films of manganese metal, manganese oxide, manganese nitride, and/or manganese silicide. Such films may find application as oxidation catalysts, anode materials (*e.g.*, SOFC or LIB anodes), conducting layers, sensors, diffusion barriers/coatings, super- and non-superconducting materials/coatings, tribological coatings, and/or, protective coatings. It is understood by one of ordinary skill in the art that the film properties (*e.g.*, conductivity) will depend on a number of factors, such as the metal(s) used for deposition, the presence or absence of co-reactants and/or co-complexes, the thickness of the film created, the parameters and substrate employed during growth and subsequent processing.

[00100] In particular embodiments, deposited elemental manganese or manganese nitride films can be used as an alternative diffusion barrier in the back-end-of-line copper interconnections to replace currently used tantalum nitride. The deposition approaches described herein can be integrated with the deposition of tantalum nitride to generate manganese-doped tantalum nitride or tantalum doped with manganese nitride. Manganese can react with dielectric underlayers to form manganese silicates as the barrier.

Without being bound to any particular theory of operation, it is believed that the manganese nitride is not only the diffusion barrier but also promotes the adhesion between copper and the dielectrics. Therefore, in some embodiments, the methods further comprise depositing copper over the manganese-containing film.


5 **[00101]** Reference throughout this specification to "one embodiment," "certain
embodiments," "one or more embodiments" or "an embodiment" means that a particular
feature, structure, material, or characteristic described in connection with the embodiment
is included in at least one embodiment of the present technology. Thus, the appearances
of the phrases such as "in one or more embodiments," "in certain embodiments," "in one
10 embodiment" or "in an embodiment" in various places throughout this specification are
not necessarily referring to the same embodiment of the present technology. Furthermore,
the particular features, structures, materials, or characteristics may be combined in any
suitable manner in one or more embodiments.

15 **[00102]** Although the present technology herein has been described with reference
to particular embodiments, it is to be understood that these embodiments are merely
illustrative of the principles and applications of the present technology. It will be apparent
to those skilled in the art that various modifications and variations can be made to the
method and apparatus of the present technology without departing from the spirit and
scope of the present technology. Thus, it is intended that the present technology include
20 modifications and variations that are within the scope of the appended claims and their
equivalents. The present technology, thus generally described, will be understood more
readily by reference to the following examples, which is provided by way of illustration
and is not intended to be limiting.

EXAMPLES

25 **[00103]** Unless otherwise noted, all synthetic manipulations are performed under an
inert atmosphere (*e.g.*, purified nitrogen or argon) using techniques for handling air-
sensitive materials commonly known in the art (*e.g.*, Schlenk techniques).

Example 1A: Preparation of complex 1 (a homoleptic complex of Formula IA)




1

[00104] To a solution of bis(trimethylsilylamido)manganese (10 g, 0.0266 mol) in toluene (200 mL) is added (*t*-Bu)NHCMe₂CH=N(*t*-Bu) (10.6 g, 0.053 mol) by transfer
 5 cannula. The resulting mixture is refluxed for 24 hours. The solvent and hexamethyldisilazane by-product are then removed under reduced pressure to provide complex 1 which may be further purified by distillation or sublimation under reduced pressure.

[00105] The ligand precursor (*t*-Bu)NHCMe₂CH=N(*t*-Bu) can be prepared by α -
 10 bromination of isobutyraldehyde (with for example, 1,4-dioxane-bromine complex) followed by reaction with excess *tert*-butylamine in THF. The crude ligand precursor is isolated and purified using standard techniques.

Example 1B: Preparation of complex 2 (a heteroleptic complex of Formula IA)




2

[00106] To a solution of bis(trimethylsilylamido)manganese (10 g, 0.0266 mol) in toluene (200 mL) is added (*t*-Bu)NHCMe₂CH=N(*t*-Bu) (5.3 g, 0.0266 mol) by transfer
 15 cannula. The resulting mixture is refluxed for 24 hours. The solvent and hexamethyldisilazane by-product are then removed under reduced pressure. The resulting intermediate is then dissolved in toluene and treated with (*i*-Pr)NHCMe₂CH=N(*t*-Bu) (4.9 g, 0.0266 mol), refluxing for a further 24 hours. The solvent and hexamethyldisilazane

by-product are then removed under reduced pressure to provide complex 2 which may be further purified by distillation or sublimation under reduced pressure.

[00107] The ligand precursor (*i*-Pr)NHCMe₂CH=N(*t*-Bu) can be prepared by α -bromination of isobutyraldehyde (with for example, 1,4-dioxane-bromine complex) followed by reaction with excess isopropylamine in THF. Subsequent treatment with excess *tert*-butylamine in THF provides the crude ligand precursor which is isolated and purified using standard techniques.

Example 2: Preparation of complex 3 (a complex of Formula IB)




10

3

[00108] To a solution of bis(trimethylsilylamido)manganese (10 g, 0.0266 mol) in toluene is added (*t*-Bu)NHCMe₂CH=N(*t*-Bu) ligand (5.3 g, 0.0266 mol) by transfer cannula. The resulting mixture is refluxed for 24 hours. The solvent and hexamethyldisilazane by-product are then removed under reduced pressure. Under argon, the intermediate is dissolved in THF (100 mL) and a solution of Li[(*t*-Bu)N=CHCH=N(*t*-Bu)] (4.7 g, 0.027 mol; prepared from (*t*-Bu)N=CHCH=N(*t*-Bu) and freshly cut Li metal in THF) in THF (100 mL) is added. The mixture is stirred at room temperature overnight. The solvent and lithium hexamethyldisilazide by-product are then removed under reduced pressure to provide complex 3 which may be further purified by distillation or sublimation under reduced pressure.

20


Example 3: Preparation of complex 4 (a complex of Formula IC)



4

[00109] To a solution of bis(trimethylsilylamido)manganese (10 g, 0.0266 mol) in toluene (200 mL) is added (*t*-Bu)NHCMe₂CH=N(*t*-Bu) ligand (5.3 g, 0.0266 mol) by transfer cannula. The resulting mixture is refluxed for 24 hours. The solvent and hexamethyldisilazane by-product are then removed under reduced pressure. The resulting intermediate is then dissolved in toluene and treated with (*i*-Pr)N=C(Me)NH(*i*-Pr) (3.8 g, 0.027 mol), refluxing for a further 24 hours. The solvent and hexamethyldisilazane by-product are then removed under reduced pressure to provide complex 4 which may be further purified by distillation or sublimation under reduced pressure.

10 Example 4: Preparation of complex 5 (a complex of Formula ID)



5

[00110] To a suspension of manganese chloride (1 equiv) in THF at -78°C is added 2 equiv of K[CH₂C(CH₃)CH₂] or [CH₂C(CH₃)CH₂]MgBr in THF or diethyl ether. The mixture is stirred for several hours, until the solid dissolves and a color change is observed. Then, 1 equiv of (*t*-Bu)NHCMe₂CH=N(*t*-Bu) ligand is added by syringe and the mixture allowed to warm to room temperature slowly. The solvent is then removed under reduced pressure and the residue extracted into hexane. The mixture is then filtered by cannula and then the solvent removed under reduced pressure to provide complex 5 which may be further purified by distillation or sublimation under reduced pressure.

Example 5: Deposition of elemental manganese metal films

[00111] First, a substrate surface may be placed in an atomic layer deposition chamber. The substrate surface is then contacted with a manganese precursor, for example one of manganese complexes 1-5. Excess, unreacted manganese precursor is then purged from the reaction chamber. Then, hydrogen gas is flowed into the chamber to the

substrate surface. The manganese precursor, which is bound to the substrate surface, undergoes reduction, leaving a manganese film which consists essentially of manganese metal. Excess manganese precursor is then purged from the chamber. The process can be repeated until a film of desired thickness is achieved.

5 Example 6: Deposition of manganese nitride films


[00112] First, a substrate surface may be placed in an atomic layer deposition chamber. The substrate surface is then contacted with a manganese precursor, for example one of the manganese complexes 1-5. Excess, unreacted manganese precursor is then purged from the reaction chamber. Then, ammonia gas is flowed into the chamber to the
10 substrate surface. The manganese precursor, which is bound to the substrate surface, reacts with the ammonia gas, leaving a film comprising manganese nitride. Excess manganese precursor is then purged from the chamber. The process can be repeated until a film of desired thickness is achieved.

[00113] All publications, patent applications, issued patents and other documents
15 referred to in this specification are herein incorporated by reference as if each individual publication, patent application, issued patent, or other document was specifically and individually indicated to be incorporated by reference in its entirety. Definitions that are contained in text incorporated by reference are excluded to the extent that they contradict definitions in this disclosure.

20 [00114] The words “comprise”, “comprises”, and “comprising” are to be interpreted inclusively rather than exclusively.

Claims

1. A metal complex of Formula I:



(I)


- 5 wherein
- R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of alkyl and aryl;
- M is selected from the group consisting of manganese, cobalt, nickel, and copper; and
- 10 L is at least one ligand selected from the group consisting of a diazabutadiene ligand, an amidinate ligand, and an allyl ligand.
2. The metal complex of claim 1, wherein R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of C₁–C₄-alkyl and C₆–C₁₀-aryl.
- 15 3. The metal complex of claims 1 or 2, wherein R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.
4. The metal complex of any one of the preceding claims, wherein R₂ and R_{2'} are each methyl.
- 20 5. The metal complex of any one of the preceding claims, wherein L comprises at least one monodentate or bidentate ligand.
6. The metal complex of any one of the preceding claims, wherein L comprises an η³-allyl ligand.

7. A metal complex of Formula IB:

5

10

15



(IB)


wherein

R₁, R₂, R₂' and R₃ are independently selected from the group consisting of alkyl
5 and aryl;

R₇, R₈, R₉, and R₁₀ are independently selected from the group consisting of
hydrogen, alkyl, and aryl; and

M is a metal selected from Groups 7–10 of the periodic table or is copper.

8. The metal complex of claim 7, wherein M is selected from the group consisting of
10 manganese, cobalt, nickel, and copper.
9. The metal complex of claim 7 or claim 8, wherein R₁, R₂, R₂' and R₃ are
independently selected from the group consisting of C₁–C₄-alkyl and C₆–C₁₀-aryl;
and R₇, R₈, R₉, and R₁₀ are independently selected from the group consisting of
hydrogen, C₁–C₄-alkyl, and C₆–C₁₀-aryl.
- 15 10. The metal complex of any one of claims 7-9, wherein R₁, R₂, R₂' and R₃ are
independently selected from the group consisting of methyl, ethyl, propyl,
isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and R₇, R₈, R₉, and R₁₀ are
independently selected from the group consisting of hydrogen, methyl, ethyl,
propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.
- 20 11. The metal complex of any one of claims 7-10, wherein R₂ and R₂' are each
methyl.
12. The metal complex of any one of claims 7-11, wherein R₈ and R₉ are each
hydrogen.
13. A metal complex of Formula IC:




(IC)

wherein

R₁, R₂, R₂', R₃, R₁₁, R₁₂, and R₁₃ are independently selected from the group consisting of hydrogen, alkyl, and aryl; and

M is a metal selected from Groups 7–10 of the periodic table or is copper.

14. The metal complex of claim 13, wherein M is selected from the group consisting of manganese, cobalt, nickel, and copper.
15. The metal complex of claim 13 or claim 14, wherein R₁, R₂, R₂', R₃, R₁₁, R₁₂, and R₁₃ are independently selected from the group consisting of hydrogen, C₁–C₄-alkyl and C₆–C₁₀-aryl.
16. The metal complex of any one of claims 13-15, wherein R₁, R₂, R₂', R₃, R₁₁, R₁₂, and R₁₃ are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.
17. The metal complex of any one of claims 13-16, wherein R₂ and R₂' are each methyl.
18. A metal complex of Formula ID:



(ID)

wherein

R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of alkyl and aryl;

5 R₁₄, R_{14'}, R₁₅, R₁₆, and R_{16'} are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and

M is a metal selected from Groups 7–10 of the periodic table or is copper.

19. The metal complex of claim 18, wherein M is selected from the group consisting of manganese, cobalt, nickel, and copper.

20. The metal complex of claim 18 or claim 19, wherein

10 R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of C₁–C₄-alkyl and C₆–C₁₀-aryl; and

R₁₄, R_{14'}, R₁₅, R₁₆, and R_{16'} are independently selected from the group consisting of hydrogen, C₁–C₄-alkyl, C₆–C₁₀-aryl, and tri(C₁–C₄-alkyl)silyl.

21. The metal complex of any one of claims 18-20, wherein

15 R₁, R₂, R_{2'}, and R₃ are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and

R₁₄, R_{14'}, R₁₅, R₁₆, and R_{16'} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, phenyl, and trimethylsilyl.


20 22. The metal complex of any one of claims 18-21, wherein R₂ and R_{2'} are each methyl.

23. A solvate of any one of the preceding claims.

24. The solvate of claim 23, wherein the solvate is an ether solvate, an amine solvate, or an aromatic hydrocarbon solvate.

25

25. A method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula I:



(I)

5

wherein

R₁ and R₃ are independently selected from the group consisting of hydrogen, alkyl and aryl;

R₂ and R_{2'} are independently selected from the group consisting of alkyl and aryl;

- 10 M is a metal selected from Groups 7–10 of the periodic table or is copper; and
L is at least one ligand selected from the group consisting of a diazabutadiene ligand, an amidinate ligand, and an allyl ligand.

26. The method of claim 25, wherein M is selected from the group consisting of manganese, cobalt, nickel, and copper.

- 15 27. The method of claim 25 or claim 26, wherein R₁ and R₃ are independently selected from the group consisting of hydrogen, C₁–C₄-alkyl and C₆–C₁₀-aryl; and
R₂ and R_{2'} are independently selected from the group consisting of C₁–C₄-alkyl and C₆–C₁₀-aryl.

- 20 28. The method of any one of claims 25-27, wherein R₁ and R₃ are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and R₂ and R_{2'} are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.

29. The method of any one of claims 25-28, wherein R₂ and R_{2'} are each methyl.

- 25 30. The method of any one of claims 25-29, wherein L comprises at least one monodentate or bidentate ligand.

31. The method of any one of claims 25-30, wherein L comprises an η^3 -allyl ligand.


5

10

15

20

32. A method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula IB:



(IB)

wherein


R₁, R₂, R₂', R₃, R₇, R₈, R₉, and R₁₀ are independently selected from the group

consisting of hydrogen, alkyl, and aryl; and

M is a metal selected from Groups 7–10 of the periodic table or is copper.

33. The method of claim 32, wherein M is selected from the group consisting of manganese, cobalt, nickel, and copper.
34. The method of claim 32 or claim 33, wherein R₁, R₂, R₂', R₃, R₇, R₈, R₉, and R₁₀ are independently selected from the group consisting of hydrogen, C₁–C₄-alkyl, and C₆–C₁₀-aryl.
35. The method of any one of claims 32-34, wherein R₁, R₂, R₂', R₃, R₇, R₈, R₉, and R₁₀ are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl.
36. The method of any one of claims 32-35, wherein R₂ and R₂' are each methyl.

37. The method of any one of claims 32-36, wherein R_8 and R_9 are each hydrogen.
38. A method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing the at least one metal complex corresponding in structure to any one of claims 13-17.
- 5 39. A method for forming a metal-containing film by a vapor deposition process, the method comprising vaporizing at least one metal complex corresponding in structure to Formula ID:



(ID)

- 10 wherein
- R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, alkyl and aryl;
- R_{14} , $R_{14'}$, R_{15} , R_{16} , and $R_{16'}$ are independently selected from the group consisting of hydrogen, alkyl, aryl, and silyl; and
- 15 M is a metal selected from Groups 7-10 of the periodic table or is copper.
40. The method of claim 39, wherein M is selected from the group consisting of manganese, cobalt, nickel, and copper.
41. The method of claim 39 or claim 40, wherein
- R_1 , R_2 , R_2' , and R_3 are independently selected from the group consisting of hydrogen, C_1 - C_4 -alkyl and C_6 - C_{10} -aryl; and
- 20 R_{14} , $R_{14'}$, R_{15} , R_{16} , and $R_{16'}$ are independently selected from the group consisting of hydrogen, C_1 - C_4 -alkyl, C_6 - C_{10} -aryl, and tri(C_1 - C_4 -alkyl)silyl.
42. The method of any one of claims 39-41, wherein

R₁, R₂, R_{2'} and R₃ are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, and phenyl; and

5 R₁₄, R_{14'}, R₁₅, R₁₆, and R_{16'} are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, isopropyl, butyl, *sec*-butyl, *tert*-butyl, phenyl, and trimethylsilyl.

43. The method any one of claims 39-42, wherein R₂ and R_{2'} are each methyl.
44. The method of any one of claims 25-43, wherein the vapor deposition process is chemical vapor deposition.
- 10 45. The method of claim 44, wherein the chemical vapor deposition is pulsed chemical vapor deposition or continuous flow chemical vapor deposition.
46. The method of claim 44, wherein the chemical vapor deposition is liquid injection chemical vapor deposition.
47. The method of any one of claims 25-43, wherein the vapor deposition process is
15 atomic layer deposition.
48. The method of claim 47, wherein the atomic layer deposition is liquid injection atomic layer deposition or plasma-enhanced atomic layer deposition.
49. The method of any one of claims 25-48, wherein the at least one metal complex is delivered to a substrate in pulses alternating with pulses of an oxygen source to
20 form a metal oxide film.
50. The method of claim 49, wherein the oxygen source is selected from the group consisting of H₂O, air, O₂, and ozone.
51. The method of any one of claims 25-50, further comprising vaporizing at least one co-reactant selected from the group consisting of hydrogen, hydrogen plasma,
25 oxygen, air, water, ammonia, a hydrazine, a borane, a silane, ozone and a combination of thereof.
52. The method of any one of claims 25-48, further comprising vaporizing a hydrazine as a co-reactant.

53. The method of claim 52, wherein the hydrazine is hydrazine (N_2H_4) or *N,N*-dimethylhydrazine.
54. The method of any one of claims 25-53, wherein the method is used for a DRAM or CMOS application.