(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/155372 A1

(51) International Patent Classification:
H04Q 7/36 (2006.01)

(21) International Application Number:
PCT/EP2008/057755

(22) International Filing Date: 19 June 2008 (19.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/929,288 20 June 2007 (20.06.2007) US

(71) Applicant *(for all designated States except US)*: **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FI-02610 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **SEBIRE, Benoist** [FR/JP]; 2-20-5 Kagurazaka Shinjuku, Tokyo, 162-0825 (JP).

(74) Common Representative: **NOKIA SIEMENS NETWORKS OY**; COO RTP IPR / Patent Admin., 80240 Munich (DE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: AVOIDING COLLISIONS BETWEEN SEMI-PERSISTENT ALLOCATION AND DYNAMIC ALLOCATION IN RADIO ACCESS NETWORKS

(57) Abstract: A method, comprising: receiving a request for retransmission from user equipment for a predetermined transmission time interval in a communication network; determining whether a collision risk exists between the retransmission and another transmission during the predetermined time interval; and ignoring the retransmission request when the determined collision risk exists.

FIG 2

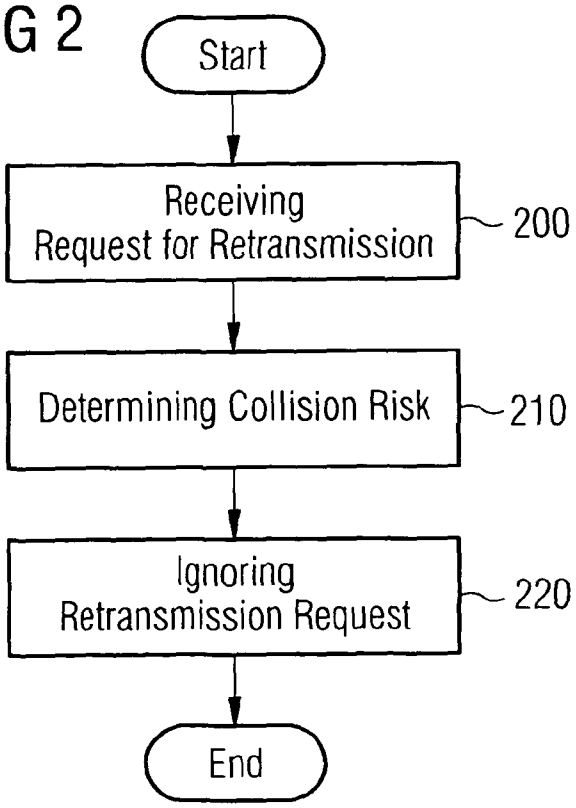

WO 2008/155372 A1

NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*