

**Liquid Uncrosslinked Michael Addition Oligomers Prepared In The
Presence Of A Catalyst Having Both An Epoxy Moiety
And A Quaternary Salt**

5 **FIELD OF THE INVENTION**

 This invention relates to uncrosslinked liquid oligomers containing polymerizable groups that can be crosslinked using ultraviolet (UV) light without adding costly photoinitiators. The uncrosslinked liquid Michael Addition oligomers are prepared in the presence of catalysts having both an epoxy moiety and a quaternary salt. The uncrosslinked liquid Michael Addition oligomers prepared using the desired catalyst have lower viscosities and lower resin colors, and on crosslinking, lower film color than the same uncrosslinked liquid Michael Addition oligomers prepared in the presence of catalysts commonly used for such purposes.


15

BACKGROUND OF THE INVENTION.

 The Michael Addition of beta-dicarbonyl donor compounds to multiacrylate acceptor compounds to make crosslinked polymers has been described in the literature. For example, Mozner and Rheinberger reported the Michael addition of acetoacetates to triacrylates and tetraacrylates (Macromolecular Rapid Communications 16, 135-138, 1995). The products formed were crosslinked (cured) gels. In one of the reactions, Mozner added one mole of trimethylol propane triacrylate (TMPTA) having 3 functional groups to one mole of polyethylene glycol (600 molecular weight) diacetoacetate (PEG-600-DAA) having two functional groups. (Each "acetoacetate functional group" reacts twice; thus each mole of

25

diacetoacetate has four reactive equivalents.)

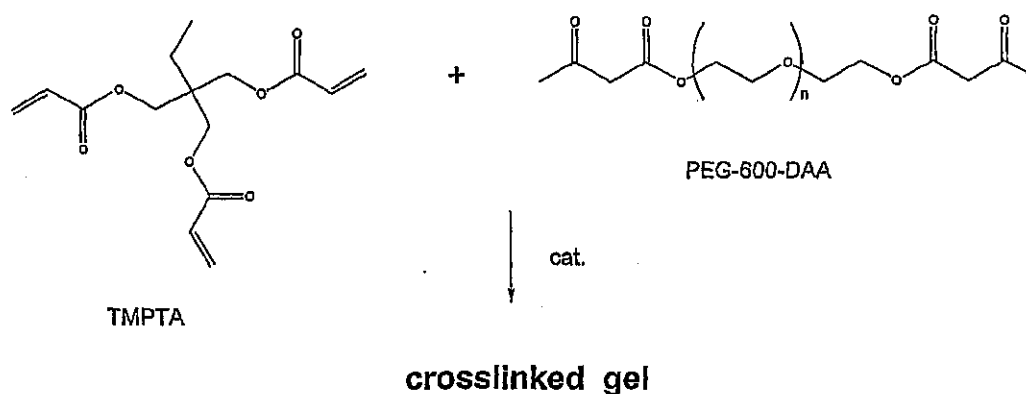

Mole Ratio of TMPTA : PEG 600 DAA = 1 : 1

Ratio of acrylate : acetoacetate functional groups = 3 : 2

Ratio of reactive equivalents = 3 : 4

U.S. Patent Nos. 5,945,489 and 6,025,410 issued to Ashland Inc.

disclose uncrosslinked liquid oligomeric compositions made by the Michael

- 5 Addition reaction of acetoacetate functional donor compounds with multifunctional acrylate acceptor compounds in the presence of strong base catalysts such as diazabicycloundecene, diazabicyclononane and guanidines. The contents of 5,945,489 and 6,025,410 are incorporated herein by reference. U.S. Patent No. 5,565,525 discloses resin compositions curable
- 10 through the Michael Addition reaction. The crosslinking reaction is catalyzed with a quaternary ammonium compound or other onium salt in the presence of an epoxide. The product of the Michael Addition reaction according to patent 5,565,525 is a cured, crosslinked composition and similar to compositions described in "Macromolecular Rapid Communications" in that
- 15 they form solids.

In contrast according to the invention it has been found that liquid, oligomeric acrylic compositions can be prepared via the Michael Addition reaction in the presence of a catalyst system comprising an epoxide moiety
5 and a quaternary salt.

SUMMARY OF THE INVENTION

This invention is the discovery that certain liquid uncrosslinked acrylic oligomers prepared via the Michael Addition reaction, using Michael donors
10 such as beta keto esters and Michael acceptors such as acrylates, in specified ratios and in the presence of a catalyst system having an epoxy moiety and a quaternary salt, results in uncrosslinked liquid Michael Addition acrylic oligomers having lower viscosity and lower color compared to Michael Addition oligomers prepared in the presence of strong base catalysts. The
15 oligomers of the present invention are photopolymerizable in the absence of photoinitiators. Polymerized (cured) films are lower in color than those produced from resins made with strong bases and color stability upon exposure to elevated temperatures and/or UV radiation (i.e., sunlight) is greatly enhanced.

20

DESCRIPTION OF THE DRAWING(S)


Figure 1. The area below the three curves represents ratios of acrylate to acetoacetate that when reacted, form unusable gelled materials outside the scope of the invention. Ratios of acrylate to acetoacetate on or above the
25 curves form the liquid oligomers of this invention.

DETAILED DESCRIPTION OF THE INVENTION


The present invention relates to Michael Addition uncrosslinked liquid polyacrylate oligomers prepared by reacting Michael donors with Michael
 5 acceptors. The reaction is carried out in the presence of a catalyst system suitable for promoting the reaction of a beta-dicarbonyl donor with a compound having multiple acrylate functionalities at low temperatures over short time frames with no required byproduct removal or work-up. The catalyst system used in the present invention comprises an epoxy moiety and
 10 a quaternary salt.

Among the common Michael acceptors used to make the oligomers of this invention are multiacrylates such as diacrylates, triacrylates, and tetraacrylates.


Examples of useful diacrylates are:




Diethylene Glycol Diacrylate, MW = 214, f = 2



Ethoxylated Bisphenol A Diacrylate, MW = 424, f = 2




1,6-Hexanediol Diacrylate, MW = 226, f = 2




Neopentyl Glycol Diacrylate, MW = 212, f = 2

5




Polyethylene Glycol Diacrylate, MW = 302, 508, f = 2

10




Propoxylated Neopentyl Glycol Diacrylate, MW = 328, f = 2

15




Tetraethylene Glycol Diacrylate, MW = 302, f = 2

20



Triethylene Glycol Diacrylate, MW = 258, f = 2

25



Tripropylene Glycol Diacrylate (TRPGDA), MW = 300, f = 2

Useful triacrylates are:




30


WO 2004/029118

PCT/US2003/030436

Trimethylolpropane Triacrylate (TMPTA), MW = 296, f = 3




5

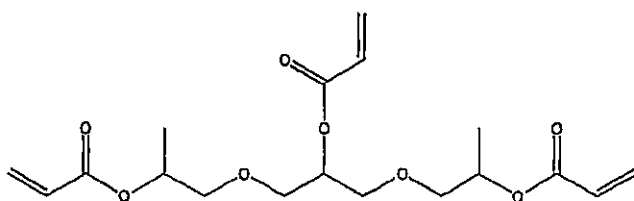Ethoxylated Trimethylolpropane Triacrylate, MW = ≥ 428 , f = 3


10

Propoxylated Glyceryl Triacrylate, MW = 428, f = 3

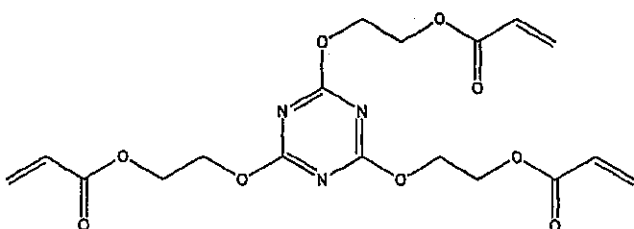


15

Tris (2-Hydroxy Ethyl) Isocyanurate Triacrylate, MW = 423, f = 3

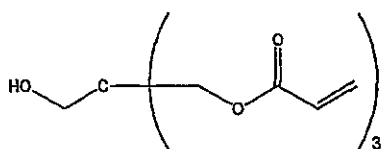

20

Pentaerythritol Triacrylate, MW = 298, f = 3



A useful tetraacrylate is

Pentaerythritol Tetraacrylate (PETA), MW = 352, f = 4

Additional useful acrylate acceptors are acrylated epoxies, such as

25 acrylated epoxy diacrylates, acrylated urethanes, such as aryl and aliphatic


urethane acrylates, and acrylated polyesters, such as polyester acrylates.

Also, monofunctional acrylates (e.g., simple C_1 - C_{18} acrylate ester, isobornyl acrylate, ethyl hexyl acrylate, lauryl acrylate, hydroxyethyl acrylate,


caprolactone acrylate, etc.) may be included to modify resin properties such

5 as adhesion to specific substrates, toughness, flexibility, film gloss, solvent resistance, impact resistance, surface tension and others.


Examples of Michael donors used to make the oligomers of this invention are acetoacetates having a functionality of two:




Methyl Acetoacetate, $f = 2$




Ethyl Acetoacetate, $f = 2$



t-Butyl Acetoacetate, $f = 2$

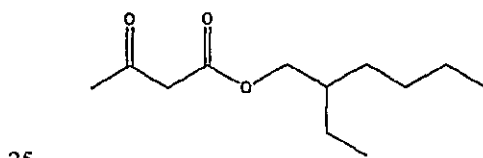


2-Ethylhexyl Acetoacetate, $f = 2$




WO 2004/029118


PCT/US2003/030436

Lauryl Acetoacetate, $f = 2$ 


5

Acetoacetanilide, $f = 2$ 


10

2-Acetoacetoxyethyl Methacrylate (AAEM), $f = 2$ 


15

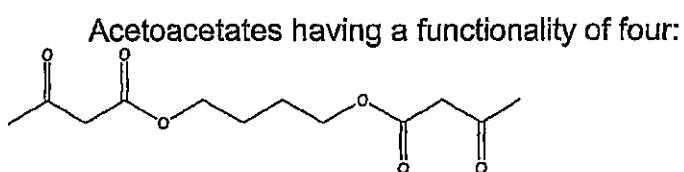Allyl Acetoacetate, $f = 2$ 

20

Butanediol Diacetoacetate, $f = 4$ 

25


1,6-Hexanediol Diacetoacetate, $f = 4$ 

30


Neopentyl Glycol Diacetoacetate, $f = 4$

WO 2004/029118

PCT/US2003/030436


Cyclohexanedimethanol Diacetoacetate, $f = 4$

5


Ethoxylated Bisphenol A Diacetoacetate, $f = 4$

10


Acetoacetates having a functionality of six:

Trimethylolpropane Triacetoacetate, $f = 6$

15

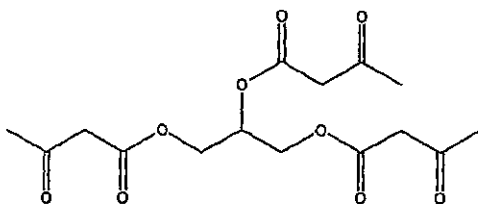
Glycerin triacetoacetate, $f = 6$

20

Polycaprolactone triacetoacetate, $f = 6$

25

An acetoacetate having a functionality of eight is:

Pentaerythritol Tetraacetoacetate, $f = 8$

Other useful Michael donors include esters of malonic acid, 2,4-pentanedione, methyl cyanoacetate, ethyl cyanoacetate, butyl cyanoacetate, octyl cyanoacetate and cyanoacetamide.

5 The Michael Addition reaction is typically carried out with an equivalent excess of Michael acceptor to Michael donor. Workable ratios to produce liquid oligomeric products are defined in Figure 1. It is critical that an appropriate equivalent ratio of acceptor to donor is used in order to ensure that a liquid oligomeric product is obtained. Examples of these ratios for
10 acrylate acceptors and Michael donors include the following.

Where the reactive equivalent functional ratios are:

15 a) diacrylate: Michael donor of

$\geq 1:1$ where the donor functionality = 2

$\geq 4.5:1$ where the donor functionality = 4

20 $\geq 4.5:1$ where the donor functionality = 6,

$\geq 3.5:1$ where the donor functionality = 8,

25 b) triacrylate: Michael donor of

$\geq 2.25:1$ where the donor functionality = 2

$\geq 6.4:1$ where the donor functionality = 4,

30 $\geq 7.8:1$ where the donor functionality = 6,

$\geq 7.4:1$ where the donor functionality = 8,

35

c) tetraacrylate: Michael donor of

$\geq 6.6:1$ where the donor functionality = 2

40

$\geq 12.3:1$ where the donor functionality = 4

$\geq 13.2:1$ where the donor functionality = 6

5 $\geq 12.7:1$ where the donor functionality = 8.

The catalyst system used in the present invention comprises an epoxy moiety and a quaternary salt. Examples of epoxy moiety-containing compositions useful in the invention include glycidyl methacrylate, 10 trimethylolpropane triglycidyl ether, diglycidyl ether of bisphenol A and the like. The quaternary salts include tetraalkyl ammonium halides such as tetrabutylammonium bromide, arylalkyl ammonium halides such as benzyltriethylammonium chloride and the like. The quaternary salts also include phosphonium halides such as tetraalkyl phosphonium bromides and 15 phosphonium acetates, such as ethyltriphenylphosphonium acetate acetic acid complex such as "A-1" catalyst from Morton International. The quaternary salts also include ammonium, phosphonium or sulfonium fluoroborate.

20 Preferred ranges for the epoxy and quaternary salt are 0.10 -10% and 0.10 -5% by weight, respectively, based on the total acrylate and Michael donor charge. Most preferred ranges would be 0.10 – 5% and 0.10 – 2% by weight, respectively. Resin design is application specific and a wide range of epoxy and quaternary salt moiety is possible on that basis as the catalyst 25 constituents can directly influence properties of cured films.

While not wishing to be bound by theory, it is believed that when the epoxy and quaternary salt are added as separate components the epoxy and

WO 2004/029118

PCT/US2003/030436

quaternary salt react to form the catalyst in-situ. In another embodiment, the epoxy moiety and quaternary salt may be present in one molecule. An example would be the reaction product of triethylamine and epichlorohydrin. In another embodiment the catalyst can be derived from a quaternary salt
5 with both epoxy and polymerizable ligand functionality. An example is acryloylethyl glycidyl dimethylammonium chloride. The polymerizable ligand allows for the binding of that composition with the cured product matrix by copolymerization with other acrylic functional groups.

10 The high selectivity of the Michael reaction permits the use of monomers such as styrene and methyl methacrylate as inert solvents to give low-viscosity systems that are easily incorporated into a variety of resins.

The liquid Michael Addition products of the present invention are
15 curable by ultraviolet light without the need of a photoinitiator and are useful as coatings, adhesives, sealants and encapsulants for a variety of substrates and applications. Photoinitiators such as benzophenone and/or 2,2-dimethoxy-2-phenyl acetophenone may be added to these resins to further enhance curing. The oligomers of the present invention may also be cured by
20 chemical or thermal means and electron beam radiation.

The following series of experiments provides examples of proportions of multifunctional-acrylate to β -dicarbonyl Michael donor, which separate the liquid oligomer products of this invention from the gel or solid products of the

WO 2004/029118

PCT/US2003/030436

prior art. In the following Examples all parts are by weight unless otherwise indicated.

Example 1

Trimethylolpropane triacrylate (TMPTA), 74.0 g, ethyl acetoacetate (EAA),
 5 14.8 g, glycidyl methacrylate (GMA) epoxy monomer, 1.8 g and
 tetrabutylammonium bromide, 0.45 g, were combined in a reactor with
 moderate agitation from a mechanical stirrer. The reactor contents were
 heated at approximately 1 °C/min to the prescribed run temperature of 80 °C
 and held for a three-hour period. After three hours, the resin was discharged
 10 from the reactor and allowed to cool. Twenty-four hours after discharge, resin
 viscosity was measured at 25 °C with a Brookfield Cap 2000 viscometer and
 determined to be 10,390 cps. Conversion of both reactive methylene protons
 on ethyl acetoacetate was determined to be 95.2 % by ¹³C NMR. Color was
 measured with a Gardner Delta 212 Color Comparator.

15

Viscosity (cps, 25 °C)	10,390
Acetoacetate conversion, %	95.2
Gardner Color	3

The viscous resin product was applied at a thickness of 2 mils to an aluminum
 panel and cured "tack-free" by exposure to a Fusion "H" bulb at a dosage of
 500 mJ/cm². The cured coating was smooth, glossy, very hard (pencil
 20 hardness 8H) and solvent resistant (>200 MEK double-rubs).

Example 2

For sake of comparison, a "traditional" oligomer synthesis is evaluated in
 25 example 2.

Trimethylol propane triacrylate (TMPTA) 1000.0 g, and 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU), 10.9 g, were combined in a reactor with vigorous agitation from a mechanical stirrer. Ethyl acetoacetate (EAA), 199.8 g, was added dropwise to the stirred acrylate/amine catalyst over approximately 20 minutes beginning at room temperature. The highly exothermic reaction resulted in a peak temperature of 84 °C during addition of EAA with no additional external heating. At the conclusion of EAA addition, the reactor temperature was set to 85 °C and held for a two-hour period. After two hours, the resin was discharged from the reactor and allowed to cool. Twenty-four hours after discharge, resin viscosity was measured at 25 °C with a Brookfield Cap 2000 viscometer. Extent of conversion of reactive methylene protons on ethyl acetoacetate was determined by ¹³C NMR.

Viscosity (cps, 25 °C)	48,000
Acetoacetate conversion, %	86.4
Gardner Color	6

As in example 1, the viscous resin product was applied at a thickness of 2 mils to an aluminum panel and cured "tack-free" by exposure to a Fusion "H" bulb at a dosage of 500 mJ/cm². The cured coating was smooth, glossy, very hard (pencil hardness 8H) and solvent resistant (>200 MEK double-rubs).

Example 3 [no epoxy]

Trimethylolpropane triacrylate (TMPTA), 74.0 g, ethyl acetoacetate (EAA), 14.8 g, and tetrabutylammonium bromide, 0.45 g, were combined in an open

reactor with moderate agitation from a mechanical stirrer. The reactor contents were heated at approximately 1 °C/min to the prescribed run temperature of 80 °C and held for a three-hour period. After three hours, the reactor contents were discharged from the reactor and allowed to cool.

- 5 Twenty-four hours after discharge, conversion of both reactive methylene protons on ethyl acetoacetate was determined to be 0 % by ¹³C NMR.

Viscosity (cps, 25 °C)	70
Acetoacetate conversion, %	0
Gardner Color	N/A

No attempt was made to cure the resulting unreacted monomer mixture.

10

Example 4 [no quat]

Trimethylolpropane triacrylate (TMPTA), 74.0 g, ethyl acetoacetate (EAA), 14.8 g, and glycidyl methacrylate, 1.8 g, were combined in an open reactor

- 15 with moderate agitation from a mechanical stirrer. The reactor contents were heated at approximately 1°C/min to the prescribed run temperature of 80 °C and held for a three-hour period. After three hours, the reactor contents were discharged from the reactor and allowed to cool. Twenty-four hours after discharge, conversion of both reactive methylene protons on ethyl
- 20 acetoacetate was determined to be 0 % by ¹³C NMR.

Viscosity (cps, 25 °C)	57
Acetoacetate conversion, %	0
Gardner Color	N/A

No attempt was made to cure the resulting unreacted monomer mixture.

25

Example 5

WO 2004/029118

PCT/US2003/030436

Trimethylolpropane triacrylate (TMPTA), 74.0 g, 2,4-pentanedione, 11.8 g, glycidyl methacrylate, 1.8 g, and tetrabutylammonium bromide, 0.44 g were combined in an open reactor with moderate agitation from a mechanical stirrer. The reactor contents were heated at approximately 1°C/min to the prescribed run temperature of 80 °C and held for a three-hour period. After three hours, the reactor contents were discharged from the reactor and allowed to cool. Twenty-four hours after discharge, conversion of both reactive methylene protons on 2,4-pentanedione was determined to be 93.6 % by ¹³C NMR.

10

Viscosity (cps, 25 °C)
2,4-Pentanedione
conversion, %
Gardner Color

52,400
93.6
5

As in examples 1 and 2, the mobile resin product was applied at a thickness of 2 mils to an aluminum panel and cured "tack-free" by exposure to a Fusion "H" bulb at a dosage of 500 mJ/cm². The cured coating was smooth, glossy, hard and solvent resistant (>200 MEK double-rubs).

15

Example 6

Trimethylolpropane triacrylate (TMPTA), 296.0 g, acetoacetanilide, 80.5 g, glycidyl methacrylate, 7.7 g, and tetrabutylammonium bromide, 1.9 g were combined in an open reactor with moderate agitation from a mechanical stirrer. The reactor contents were heated at approximately 1°C/min to the prescribed run temperature of 80 °C and held for a three-hour period. After three hours, the reactor contents were discharged from the reactor and allowed to cool. Twenty-four hours after discharge, conversion of both

25

WO 2004/029118

PCT/US2003/030436

reactive methylene protons on acetoacetanilide was determined to be 100 %
by ^{13}C NMR.

Viscosity (cps, 50 °C)	24,420
Acetoacetanilide conversion, %	100
Gardner Color	4

5 The data in Table 1 were derived from the following reaction paradigm:
Trimethylol propane triacrylate (TMPTA), 74.0g, ethyl acetoacetate (EAA),
14.8 g, epoxy and quaternary "salt" compounds as indicated in Table 1 were
10 combined in a reactor with moderate agitation from a mechanical stirrer. The
reactor contents were heated at approximately 1 °C/min to the prescribed run
temperature shown in Table 1 and held for the time indicated. After the
prescribed reaction time, the reactor contents were discharged from the
reactor and allowed to cool. Twenty-four hours after discharge, product
15 viscosity was measured at 25°C and 50°C with a Brookfield Cap 2000
viscometer. Conversion of ethyl acetoacetate was measured by ^{13}C NMR.
Color was measured by a Gardner Delta 212 Color Comparator.

Raw material key: (Raw materials were supplied by Aldrich Chemical
20 Company, Milwaukee, WI, except where indicated.)
GMA – glycidyl methacrylate, equivalent weight 142; supplied by The Dow
Chemical Company
D.E.R.* 332 – diglycidyl ether of bisphenol A, equivalent weight 174;
supplied by The Dow Chemical Company

WO 2004/029118

PCT/US2003/030436

TMPTGE – trimethylolpropane triglycidyl ether, equivalent weight 144;

supplied by Dyna Chem, Inc.

UVR 6128 – Bis-(3,4-epoxycyclohexyl) adipate, equivalent weight 183;

supplied by Union Carbide Corporation

5 TBAB – tetrabutylammonium bromide

TBPB – tetrabutylphosphonium bromide

BTEAC – benzyltriethylammonium chloride

TMSI – trimethylsulfonium iodide

TBAHS – tetrabutylammonium hydrogen sulfate

10 TBATFB – tetrabutylammonium tetrafluoroborate

ETPPA – ethyltriphenylphosphonium acetate acetic acid complex = "A-1";

supplied by Morton International

GTMAC – glycidyltrimethylammonium chloride

AETMAC – acryloylethyltrimethylammonium chloride

15

Table 1. Conversion of Ethyl Acetoacetate, Resin Viscosity and Color as a Function of Epoxy and Quaternary Moieties, Run Temperature and Run Time

5

	Epoxy Moiety & Wt. % of Total Reactor Charge	Quat Moiety & Wt. % of Total Reactor Charge	Run Temp. (°C)	Run Time (hr.)	% Full Conv. of acetoacetate (¹³ C NMR)	Dynamic Viscosity (cps, 50°C)	Resin Color (Gardner Scale)
80	GMA, 5%	TBAB, 0.5%	80	2.5	100		4
88	GMA, 2%	TBPB, 0.5%	70	4.0	73		1
88	GMA, 2%	TBPB, 0.5%	70	6.0	90		1
93	GMA, 2%	TBAB, 0.5%	70	4.0	77		1
97	GMA, 2%	TBAB, 0.5%	80	4.0	100		1
104	GMA, 2%	TBAB, 0.5%	80	3.0	100	3305	1
108	GMA, 2%	TBPB, 0.5%	80	3.0	94	1740	1
111	GMA, 2%	TMSI, 0.5%	80	3.0	0		
110	GMA, 2%	(none)	80	3.0	0		
115	GMA, 2%	TBAHS, 0.5%	80	3.0	0		
116	GMA, 2%	TBATFB, 0.5%	80	3.0	0		
117	GMA, 2%	ETPPA, 0.5%	80	3.0	100	10,140	4
118	GMA, 2%	BTEAC, 0.5%	80	3.0	100	2360	3
138	GMA, 2%	AETMAC, 0.5%	80	3.0	88.5	2148	
80	GMA, 1%	TBAB, 0.5%	60	24	100		4
82	GMA, 1%	TBAB, 0.5%	70	3.5	76		3
85	GMA, 1%	TBAB, 0.5%	70	6.0	90		1
114	(none)	TBAB, 0.5%	80	3.0	0		
148		GTMAC, 2.5%	80	3.0	74		
84	D.E.R.* 332, 1%	TBAB, 0.5%	75	4.0	78		4
87	TMPTGE, 1%	TBAB, 0.5%	70	5.0	99		3
134	UVR* 6128	TBAB, 0.5%	80	3.0	43		

*Trademark of the Dow Chemical Company

Having thus described the invention, we claim;

- 5 1. A liquid oligomeric composition, comprising an uncrosslinked Michael addition reaction product of;
- a) a diacrylate, triacrylate, and/or tetraacrylate Michael acceptor, and
- b) a Michael donor, having equivalent ratios of
- 10 i) diacrylate: Michael donor of
- $\geq 1:1$ where the donor functionality = 2
- $\geq 4.5:1$ where the donor functionality = 4
- 15 $\geq 4.5:1$ where the donor functionality = 6,
- $\geq 3.5:1$ where the donor functionality = 8,
- 20 ii) triacrylate: Michael donor of
- $\geq 2.25:1$ where the donor functionality = 2
- $\geq 6.4:1$ where the donor functionality = 4,
- 25 $\geq 7.8:1$ where the donor functionality = 6,
- $\geq 7.4:1$ where the donor functionality = 8,
- 30 iii) tetraacrylate: Michael donor of
- $\geq 6.6:1$ where the donor functionality = 2

$\geq 12.3:1$ where the donor functionality = 4

$\geq 13.2:1$ where the donor functionality = 6

5 $\geq 12.7:1$ where the donor functionality = 8,

where the reaction product of the di-, tri- and/or tetraacrylate acceptor and Michael donor is formed in the presence of a catalyst system comprising an epoxy moiety and a quaternary salt.

10

2. The composition of Claim 1, where the quaternary salt is an ammonium, phosphonium or sulfonium halide, acetate or fluoroborate.

3. The composition of Claim 1, where the epoxy moiety is an aryl or
15 aliphatic glycidyl ether, aryl or aliphatic glycidyl ester, common alkylene oxides, cycloaliphatic epoxy, aryl or aliphatic glycidyl sulfide or amine, and aryl or aliphatic thirane.

4. The composition of Claim 1 wherein the diacrylate is ethylene or
20 propylene glycol diacrylate, diethylene or dipropylene glycol diacrylate, triethylene or tripropylene glycol diacrylate, tetraethylene or tetrapropylene glycol diacrylate, polyethylene or polypropylene glycol diacrylate, ethoxylated bisphenol A diacrylate, bisphenol A diglycidyl ether diacrylate, resorcinol diglycidyl ether diacrylate, 1,3-propanediol diacrylate, 1,4-butanediol
25 diacrylate, 1,5-pentanediol diacrylate, 1,6-hexanediol diacrylate, neopentyl glycol diacrylate, cyclohexane dimethanol diacrylate, ethoxylated or propoxylated neopentyl glycol diacrylate, ethoxylated or propoxylated cyclohexanedimethanol diacrylate, acrylated epoxy diacrylate, aryl and aliphatic urethane diacrylate and polyester diacrylate or mixtures thereof.

30

5. The composition of claim 1 wherein the triacrylate is:

WO 2004/029118

PCT/US2003/030436

trimethylol propane triacrylate, glycerol triacrylate, ethoxylated or propoxylated trimethylolpropane triacrylate, tris (2-hydroxyethyl) isocyanurate triacrylate, ethoxylated or propoxylated glycerol triacrylate, pentaerythritol triacrylate, aryl and aliphatic urethane triacrylates, melamine triacrylates, epoxy novolac triacrylates or mixtures thereof.

6. The composition of claim 1 wherein the tetraacrylate is pentaerythritol tetraacrylate, ethoxylated or propoxylated pentaerythritol tetraacrylate, dipentaerythritol tetraacrylate, ethoxylated or propoxylated dipentaerythritol tetraacrylate, aryl and aliphatic urethane tetraacrylates, melamine tetraacrylates, epoxy novolac tetraacrylates or mixtures thereof.

7. The composition of claim 1, further comprising a monoacrylate.

8. The compositions of claim 1 where the monoacrylate is a simple $C_1 - C_{18}$ acrylate ester, isobornyl acrylate (IBOA), tetrahydrofurfuryl acrylate (THFFA), 2-(2-ethoxy ethoxy) ethyl acrylate (EOEOEA), phenoxyethyl acrylate (PEA), hydroxyalkyl acrylate, monoalkyl polyalkylene glycol acrylate, siloxane, silane or silicone acrylate, perfluoroalkyl acrylate and/or caprolactone acrylate.

9. The composition of claim 1, wherein the Michael donors having 2 reactive functional groups per molecule are methyl acetoacetate, ethyl acetoacetate, t-butyl acetoacetate, allyl acetoacetate, 2-ethylhexyl acetoacetate, lauryl acetoacetate, acetoacetanilide, 2-acetoacetoxyethyl methacrylate (AAEM), 2,4-pentanedione or mixtures thereof.

10. The composition of claim 1 wherein the Michael donors having 4 functional groups per molecule are 1,4 - butanediol diacetoacetate, 1,6 - hexanediol diacetoacetate, neopentyl glycol diacetoacetate, cyclohexane dimethanol diacetoacetate, ethoxylated bisphenol A diacetoacetate or mixtures thereof.

11. The composition of Claim 1 wherein the Michael donors having 6 functional groups per molecule are trimethylol propane triacetoacetate, glycerol triacetoacetate, polycaprolactone triacetoacetate, ethoxylated or propoxylated trimethylol propane triacetoacetate, ethoxylated or propoxylated glycerol triacetoacetate or mixtures thereof.
12. The composition of claim 1 wherein the Michael donor having 8 functional groups per molecule is pentaerythritol tetraacetoacetate, ethoxylated or propoxylated pentaerythritol tetraacetoacetate or mixtures thereof.
13. The composition of Claim 1, wherein the catalyst system comprises glycidyl methacrylate and tetrabutylammonium bromide.
14. The composition of claim 1 wherein said reaction between a Michael donor and an acrylate occurs in the presence of non-reactive monomers.
15. The composition of claim 14 wherein said monomer is styrene, t-butyl styrene, alpha methyl styrene, vinyl toluene, vinyl acetate, allyl acetate, allyl methacrylate, diallyl phthalate, C1 - C 18 methacrylate esters, dimethacrylates, trimethacrylates or mixtures thereof.
16. The composition of claim 1 wherein said Michael donor is an acetoacetate, a malonic ester, pentanedione, acetoacetanilide, o-acetoacetanilide, o-acetoacetatoluidide, acetoacetamide, N,N-dimethyl acetoacetamide, ethyl cyanoacetate, methyl cyanoacetate, butyl cyanoacetate or mixtures thereof.
17. The composition of Claim 1, wherein the epoxy moiety and the quaternary salt are present in one molecule.

18. A method of making a liquid oligomeric composition, comprising the steps of reacting a Michael donor having two, four, six, or eight reactive functional groups per molecule with a Michael acceptor selected from the group consisting of diacrylate, triacrylate, and tetra-acrylate, in the presence
5 of a catalyst system comprising an epoxy moiety and a quaternary salt, where the reactive equivalent functional ratios are:

i) diacrylate: Michael donor of

10 $\geq 1:1$ where the donor functionality = 2

$\geq 4.5:1$ where the donor functionality = 4

$\geq 4.5:1$ where the donor functionality = 6,

15

$\geq 3.5:1$ where the donor functionality = 8,

ii) triacrylate: Michael donor of

20 $\geq 2.25:1$ where the donor functionality = 2

$\geq 6.4:1$ where the donor functionality = 4,

$\geq 7.8:1$ where the donor functionality = 6,

25

iii) tetraacrylate: Michael donor of

$\geq 6.6:1$ where the donor functionality = 2

30 $\geq 12.3:1$ where the donor functionality = 4

$\geq 13.2:1$ where the donor functionality = 6

≥12.7:1 where the donor functionality = 8.

19. The method of Claim 18, where the quaternary salt is an ammonium, phosphonium or sulfonium halide.

5

20. The method of Claim 18, where the epoxy moiety is an aryl or aliphatic glycidyl ether, aryl or aliphatic glycidyl ester, alkylene oxide, cycloaliphatic epoxy, aryl or aliphatic glycidyl sulfide or amine, and aryl or aliphatic thirane.

10 21. A crosslinked resin, comprising the reaction product of the liquid oligomeric composition of claim 1.

22. The crosslinked resin of Claim 21, where the quaternary salt is an ammonium, phosphonium or sulfonium halide, acetate or fluoroborate.

15

23. The crosslinked resin of Claim 21, where the epoxy moiety is an aryl or aliphatic glycidyl ether, aryl or aliphatic glycidyl ester, alkylene oxide, cycloaliphatic epoxy, aryl or aliphatic glycidyl sulfide or amine, and aryl or aliphatic thirane.

20 24. A coated article, comprising: a substrate and the crosslinked resin of claim 21.

ABSTRACT

The uncrosslinked liquid oligomeric compositions of this invention are made by the Michael addition reaction of acetoacetate-functional donor
5 compounds with multifunctional acrylate acceptor compounds where the equivalent ratios of multifunctional acrylate to acetoacetate vary from $\geq 1:1$ to $\geq 13.2:1$ depending on the functionality of both multifunctional acrylate and acetoacetate in the presence of a catalyst comprising an epoxy moiety and a quaternary salt. Unusable gelled or cured oligomer products occur below the
10 claimed ranges. The liquid oligomers of this invention are further crosslinked to make coatings, laminates and adhesives.