

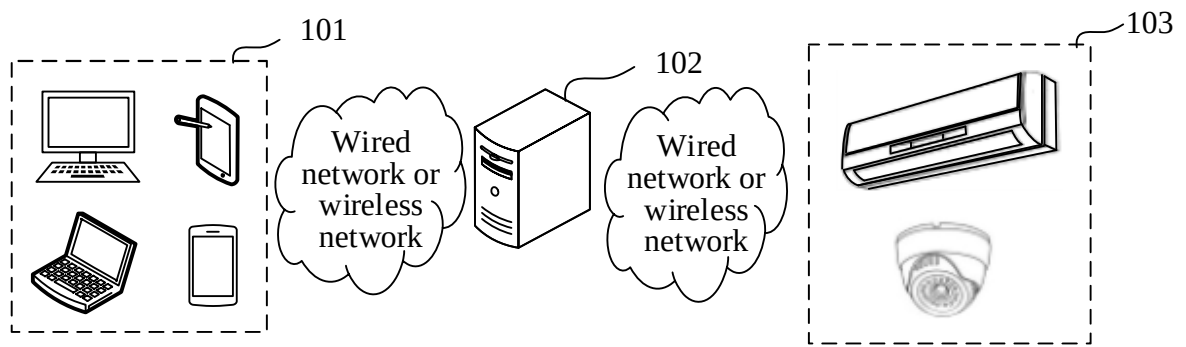


FIG. 1

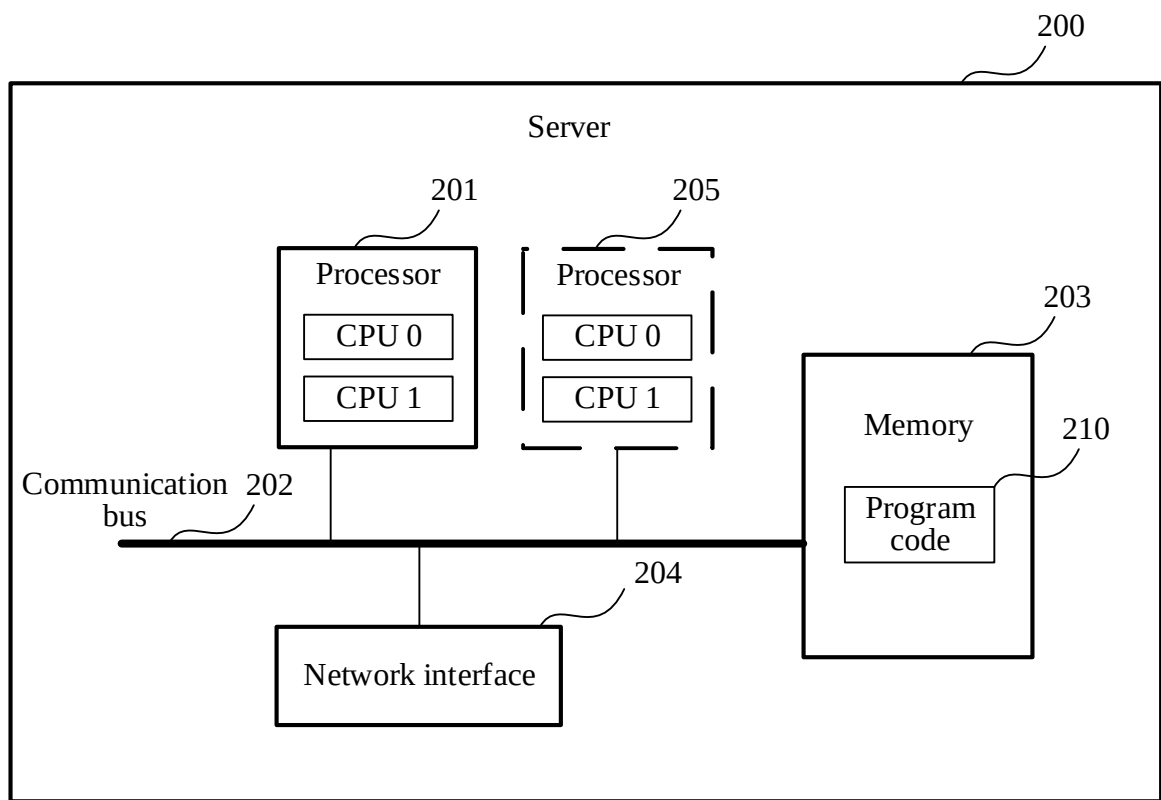


FIG. 2

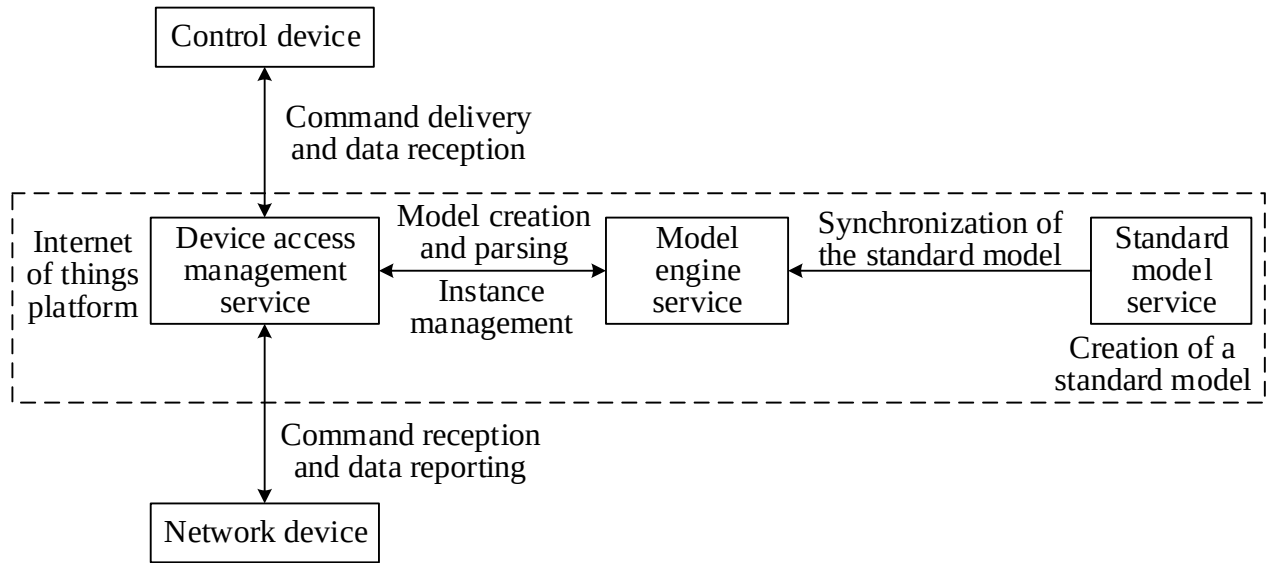


FIG. 3

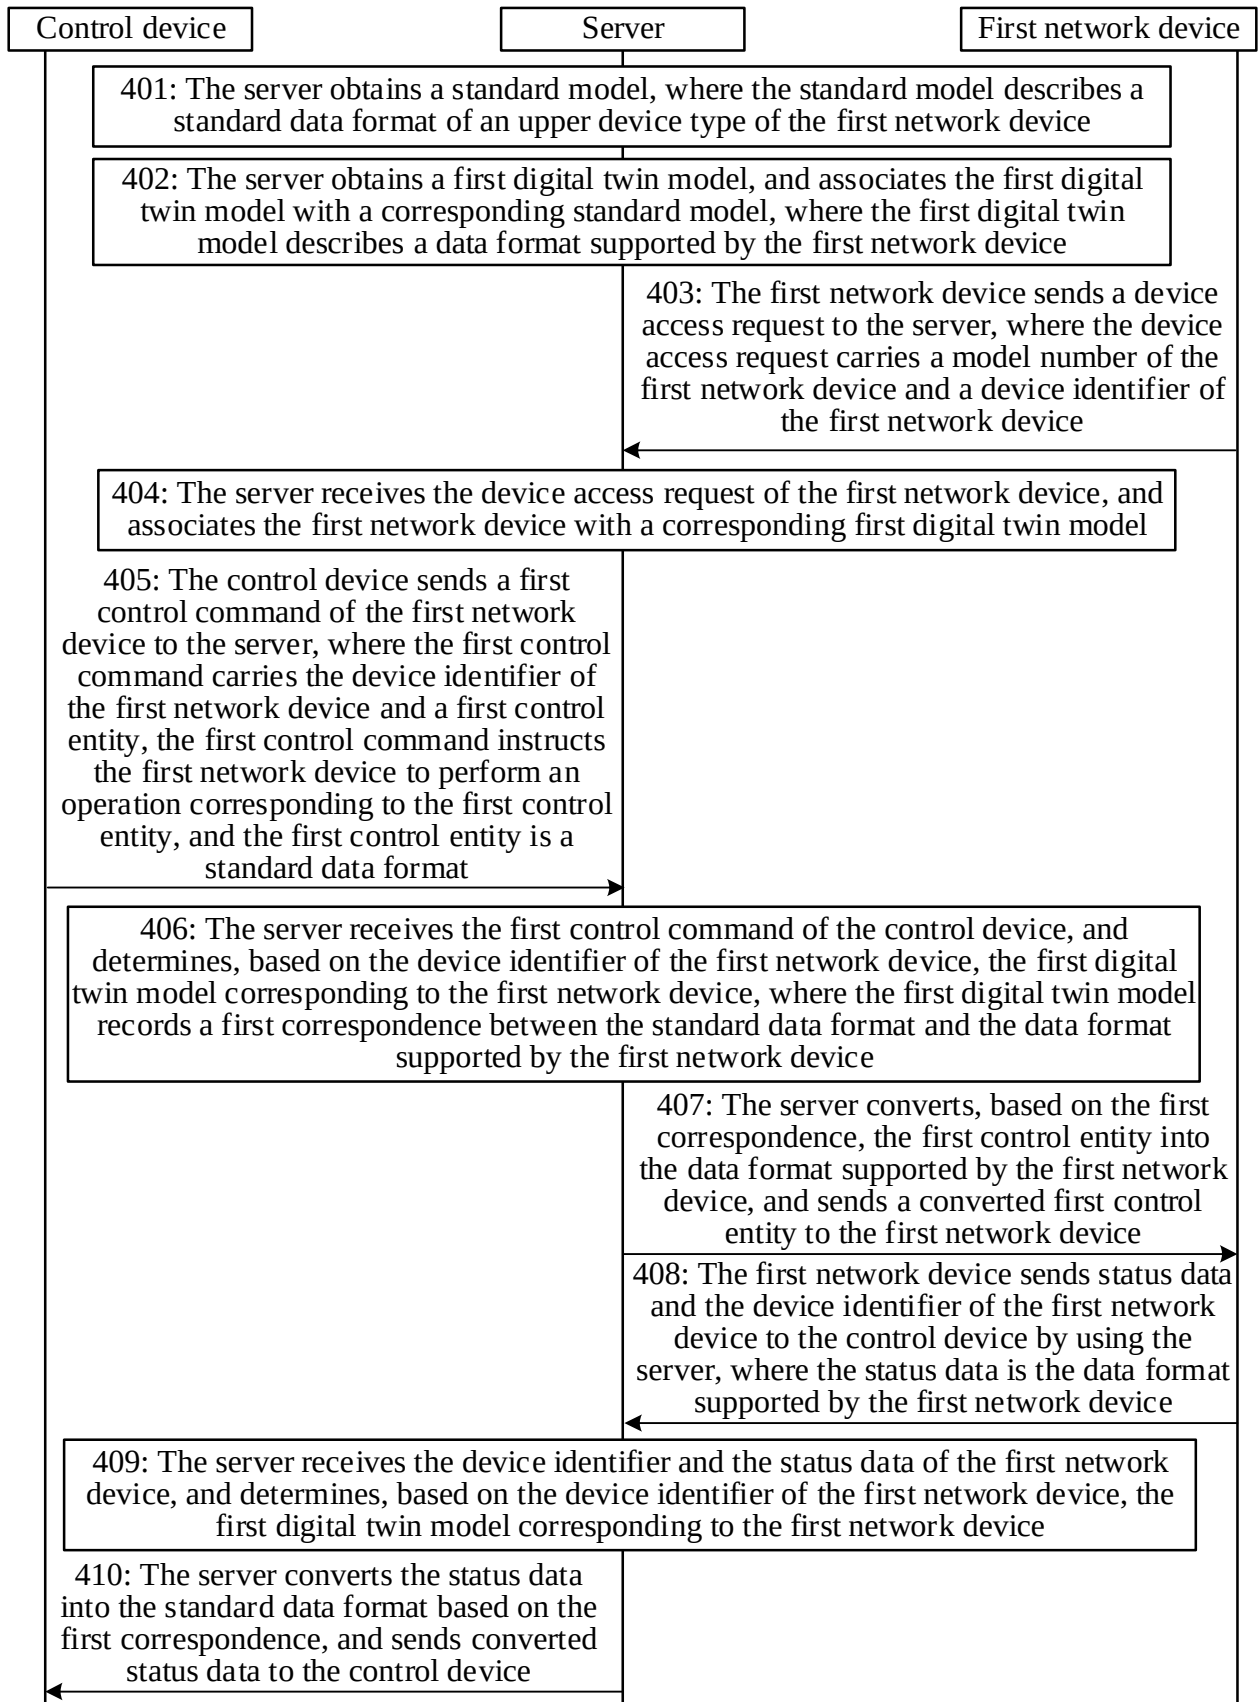


FIG. 4

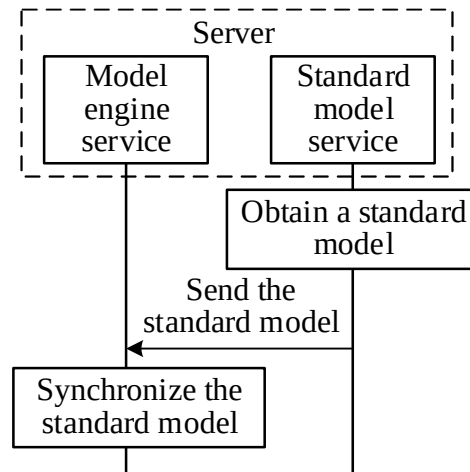


FIG. 5

*Identifier

dtm1:

Example: dtm1:Light;1

*Semantic version

dtm1:context:thing;1

▼

*Name

Input a model name, for example, a lamp

Description

Input descriptions related to a model

Industry

Select the industry

▼

Scenario

Select the scenario

▼

Icon

+

Select the icon

Property set

Command set

Event set

Component set

Relationship set

Data schema set

Inherit ?

Property adding

Adding manner: When a property is added, a corresponding command and event (which are not displayed on the page) are automatically generated

If a property of "status" is added, the system generates corresponding commands: "get status" and "set status", and event "set status" by default

Sequence number	Name	Identifier	Display name	Data mode	Writable
No content for the moment					

☐ I have read and agreed on the Statement Agreement of XXXX

OK

Save as a draft

Cancel

FIG. 6

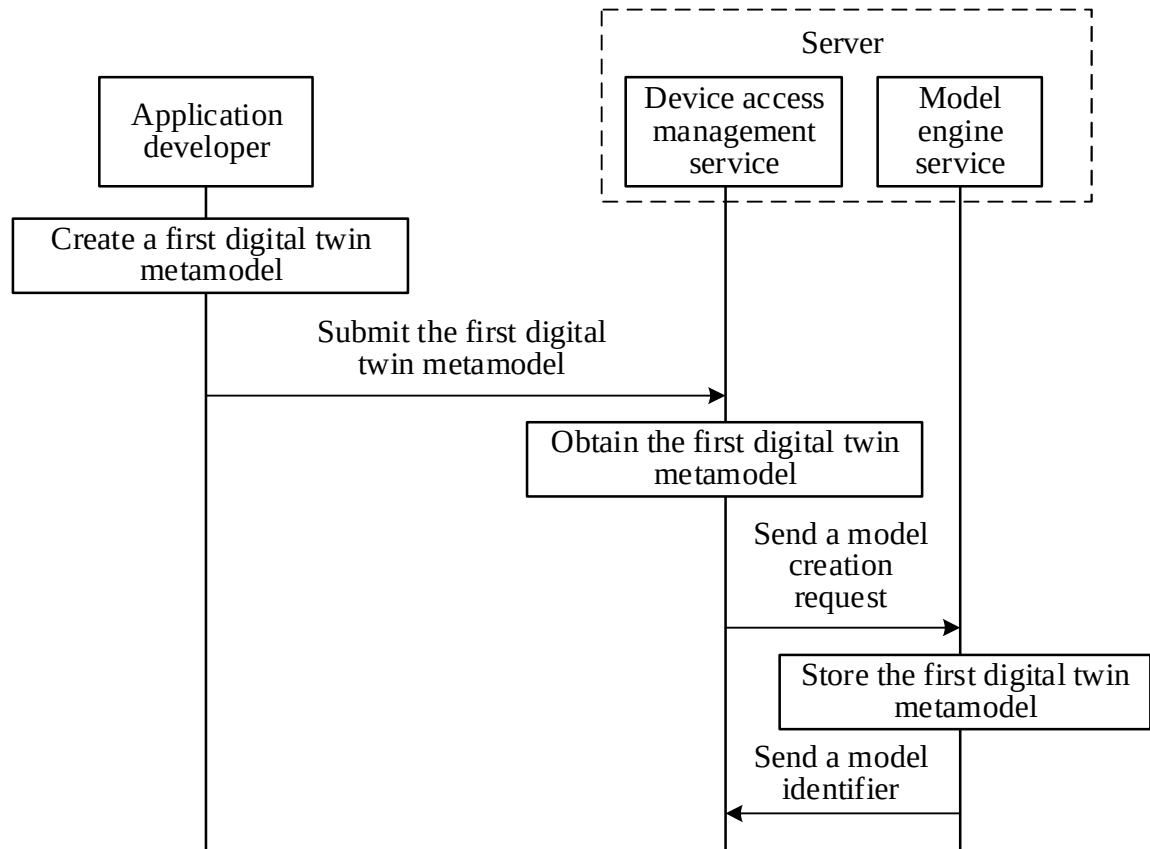


FIG. 7

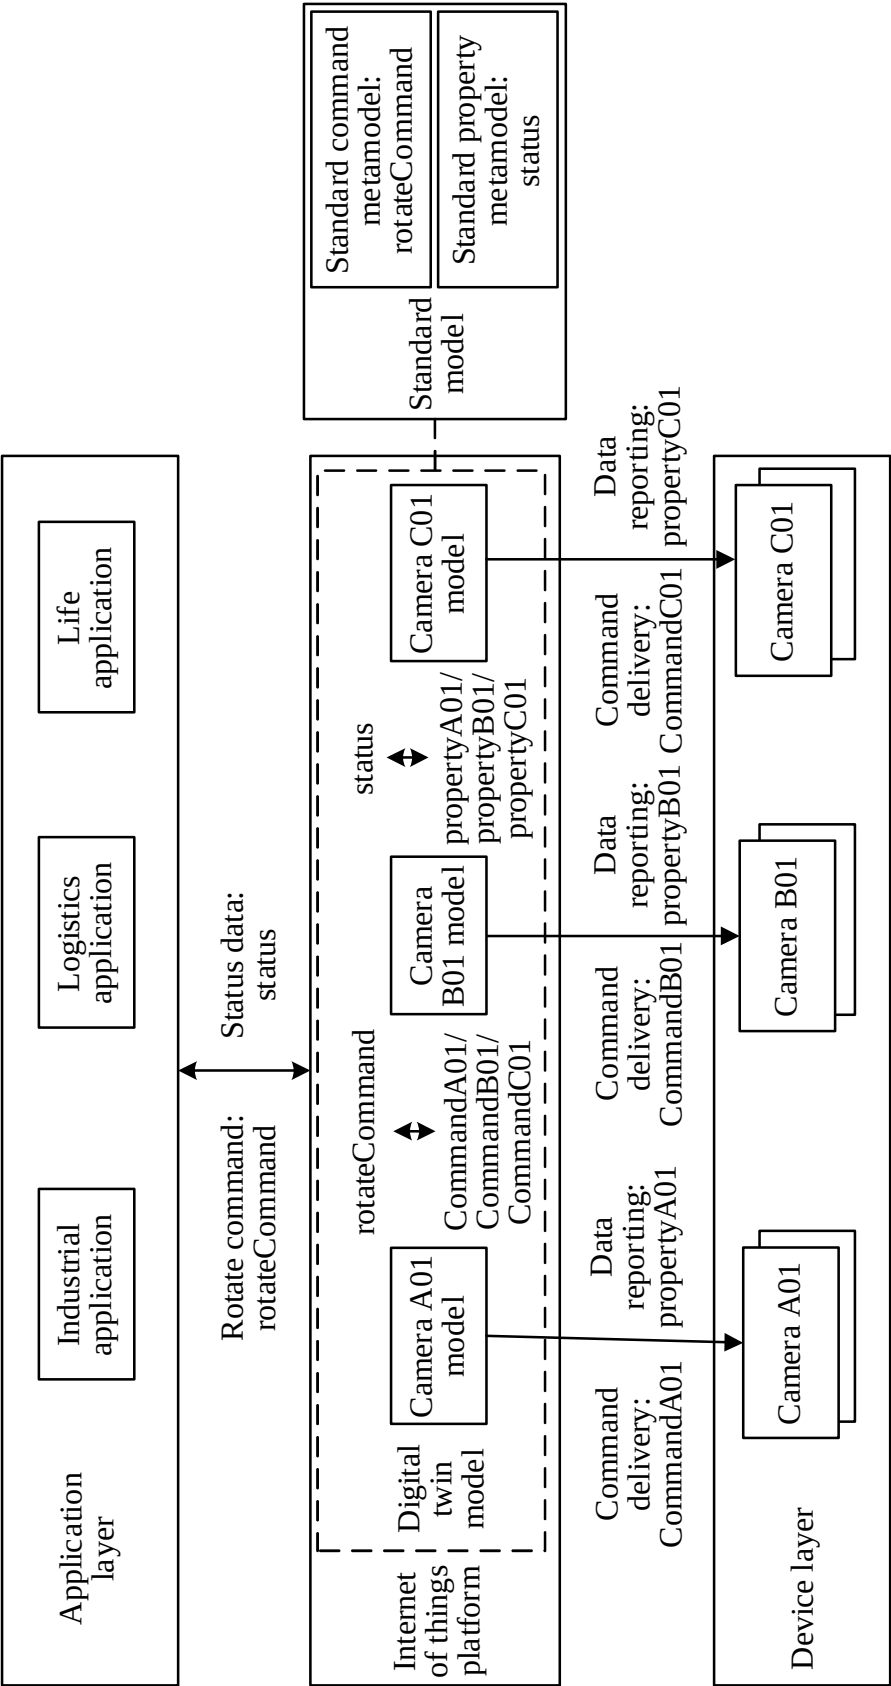


FIG. 8

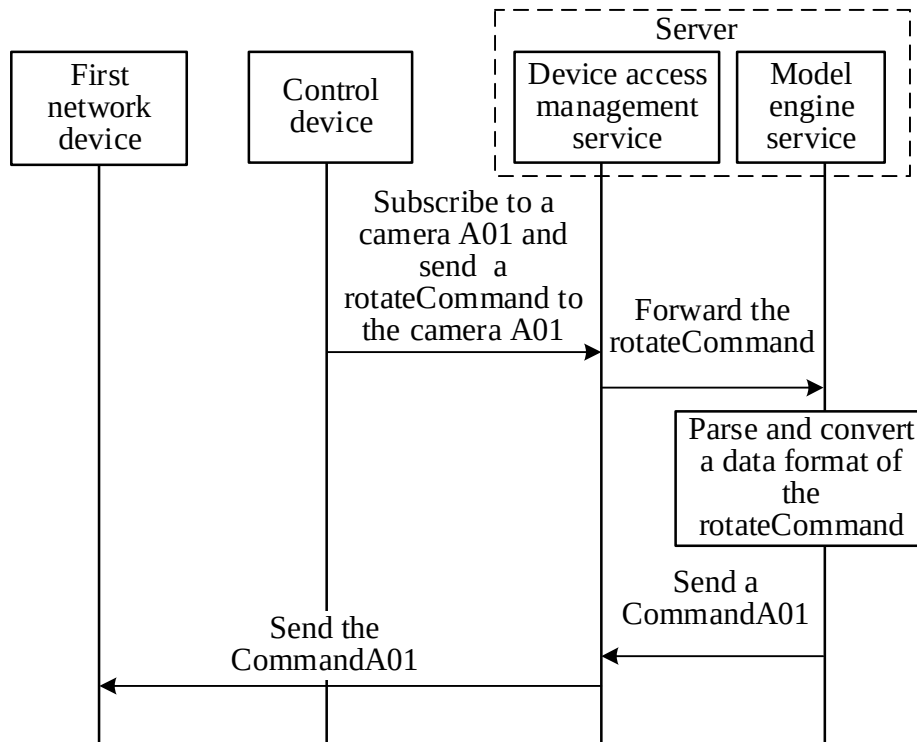


FIG. 9

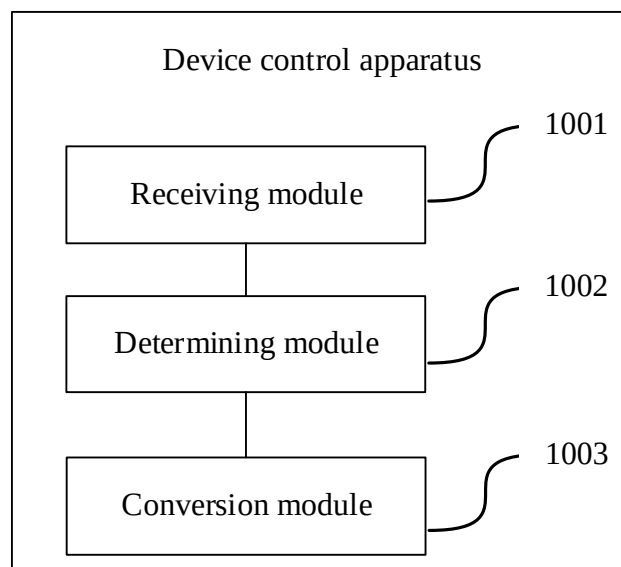


FIG. 10