

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088790 A1

- (51) International Patent Classification⁷: **H01Q 1/24**,
3/36, H04Q 7/36, H01Q 25/00, 3/40
- (21) International Application Number:
PCT/GB2004/001297
- (22) International Filing Date: 25 March 2004 (25.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0307558.7 2 April 2003 (02.04.2003) GB
- (71) Applicant (for all designated States except US): **QUINTEL TECHNOLOGY LIMITED** [GB/GB]; Registered Office, 18 Upper Grosvenor Street, London W1K 7PW (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HASKELL, Philip, Edward** [GB/GB]; QinetiQ Limited, Haslar Marine Technology Park, Haslar Road, Gosport, Hants PO12 2AG (GB).
- (74) Agent: **WILLIAMS, A., W., S.**; QinetiQ Ltd. IP Formalities, Cody Technology Park, A4 Building, Room G016, Ively Road, Farnborough, Hampshire GU14 0LX (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: PHASED ARRAY ANTENNA SYSTEM WITH VARIABLE ELECTRICAL TILT

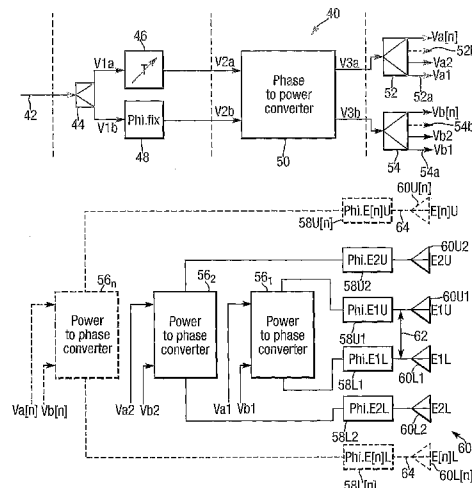

(57) Abstract: A phased array antenna system with variable electrical tilt comprises an array (60) of antenna elements (60L1) etc. incorporating a divider (44) dividing a radio frequency (RF) carrier signal into two signals between which a phase shifter (46) introduces a variable phase shift. A phase to power converter (50) converts the phase shifted signals into signals with powers dependent on the phase shift. Power splitters (52, 54) divide the converted signals into two sets of divided signals with total number equal to the number of antenna elements in the array. Power to phase converters (56), etc. combine pairs of divided signals from different power splitters (52, 54): this provides vector sum and difference components with appropriate phase for supply to respective pairs of antenna elements (60U1, 60L1) etc. located equidistant from an array centre. Adjustment of the phase shift provided by phase shifter (46) changes the angle of electrical tilt of the antenna array (60).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.