

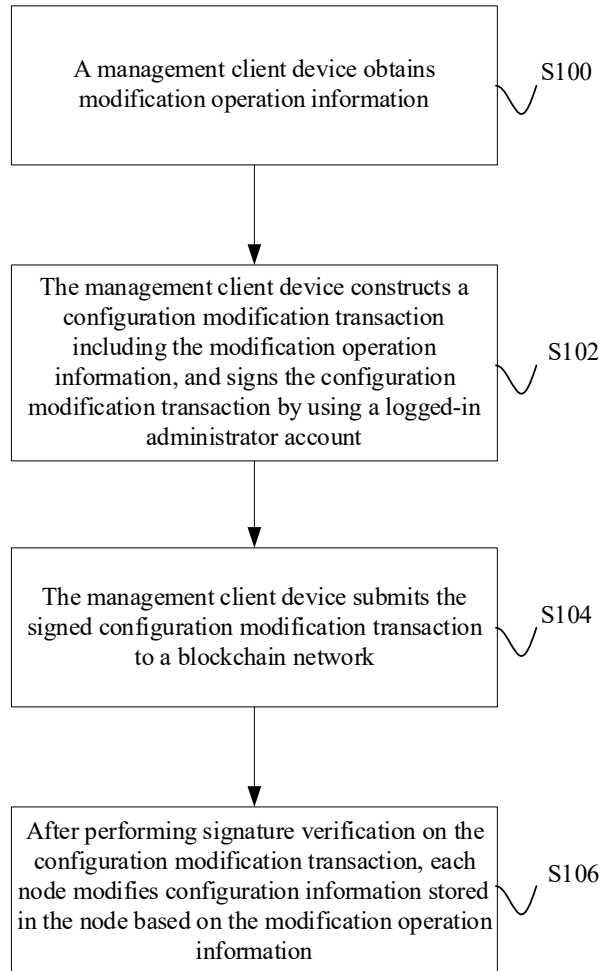


FIG. 1

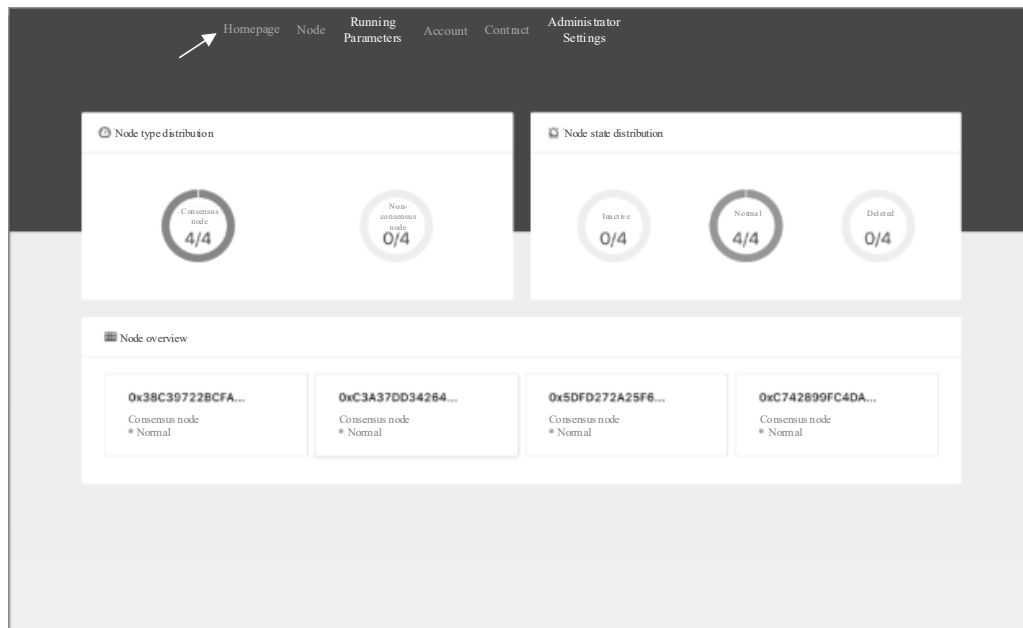


FIG. 2a

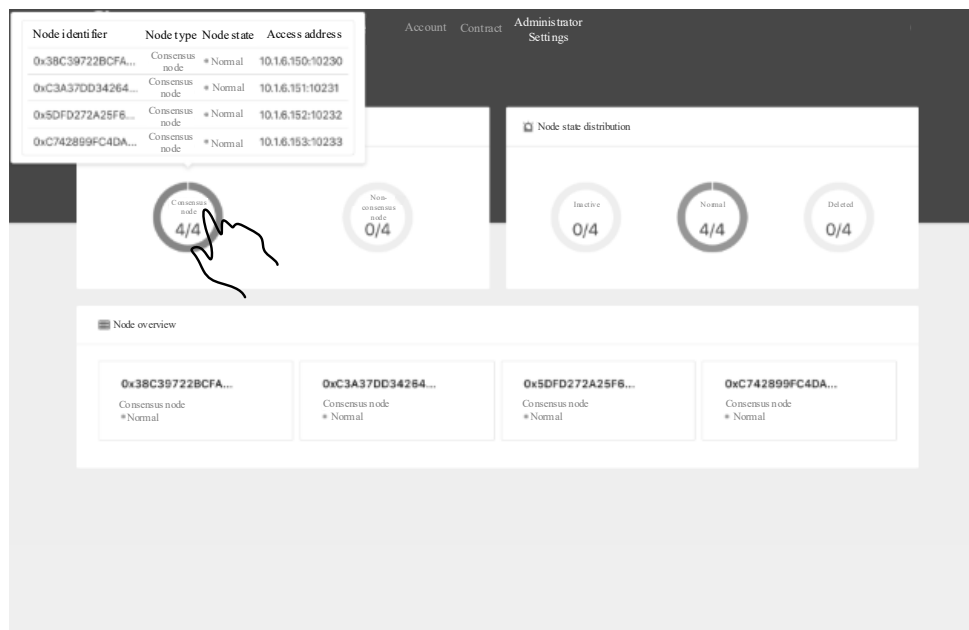


FIG. 2b

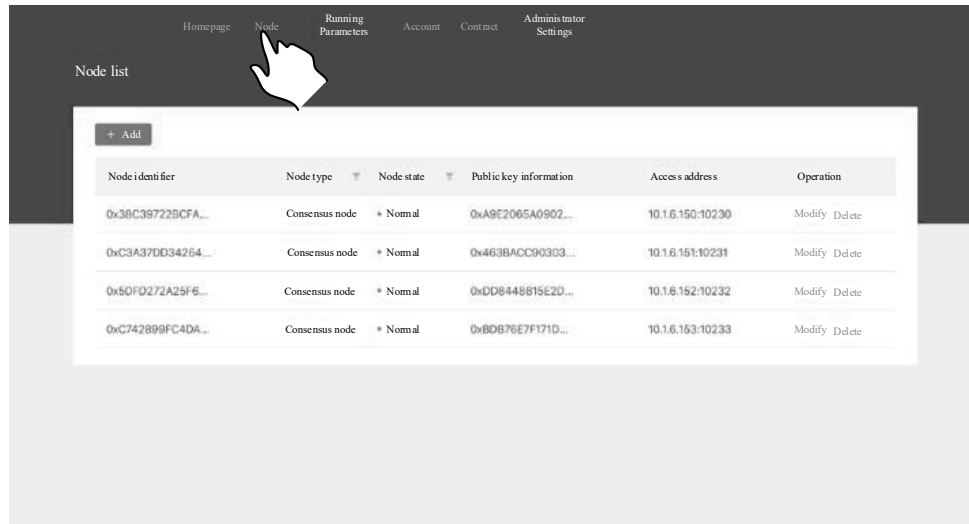


FIG. 2c

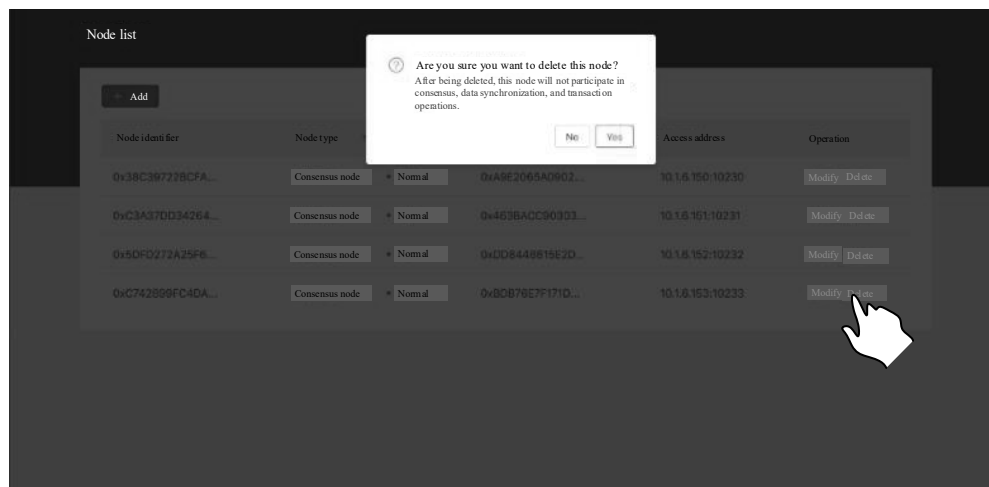


FIG. 2d

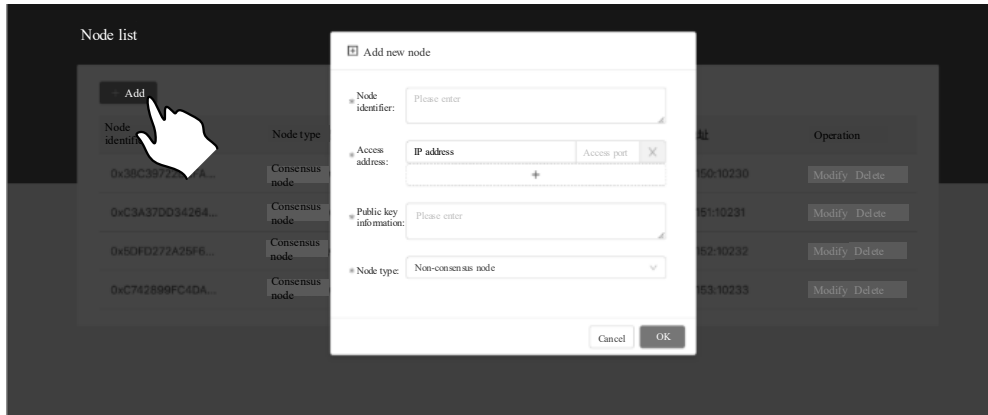


FIG. 2e

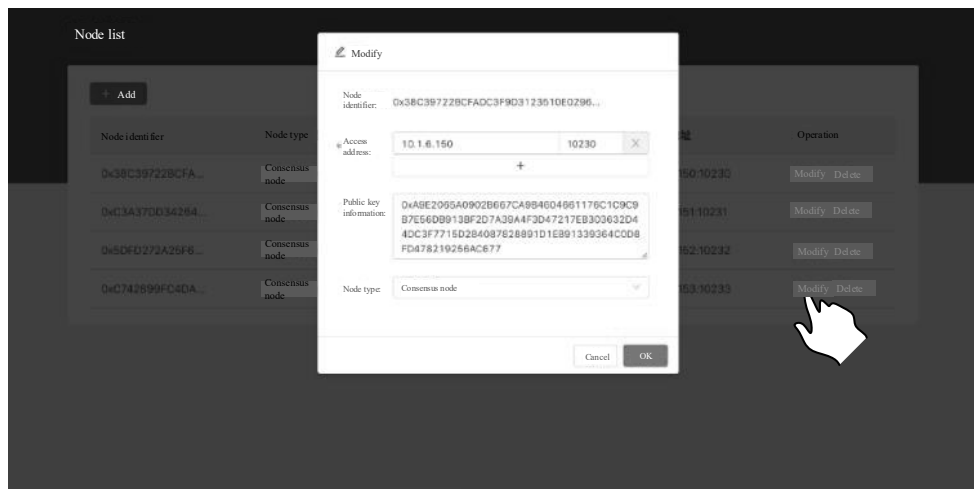


FIG. 2f

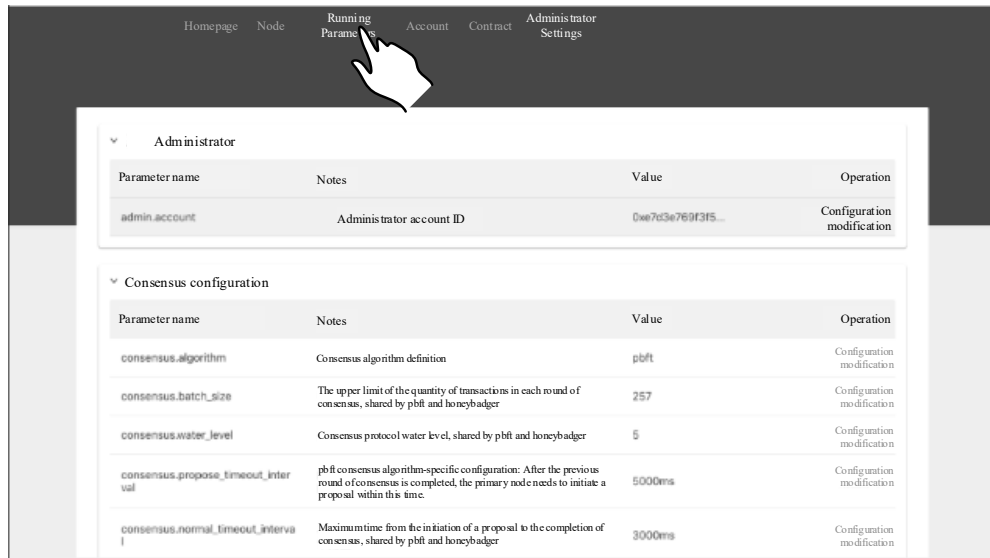


FIG. 2g

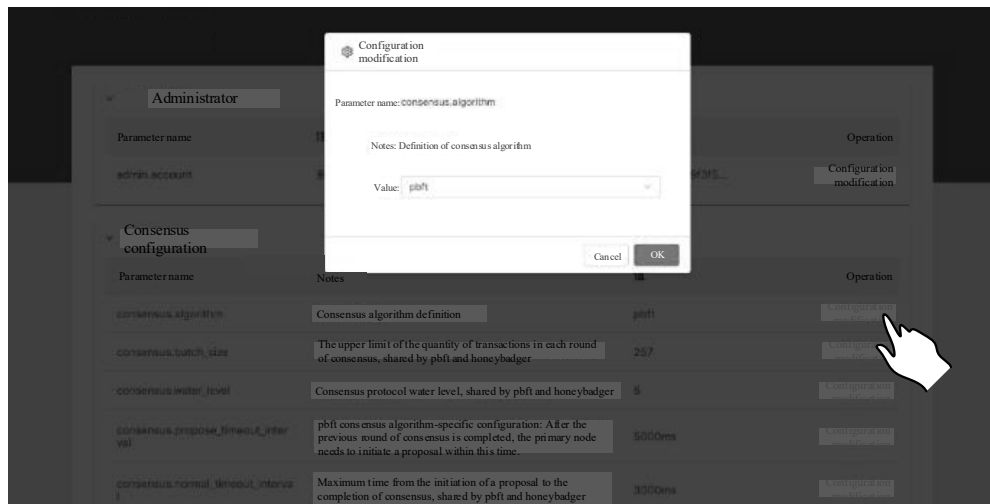


FIG. 2h

consensus.pbft.viewchange_timeout_max_interval	The pbft protocol attempts to switch the maximum timeout interval.	30001ms	Configuration modification
consensus.honeybadger.threads	honeybadger consensus algorithm-specific configuration: The quantity of threads for processing proposals, which is recommended not exceed the quantity of nodes and the quantity of CPU cores	4	Configuration modification

Chain configuration

Parameter name	Notes	Value	Operation
chain.gaslimit	The upper limit of gas executed in a single transaction of the system	10000000000	Configuration modification
chain.gasprice	The conversion ratio of gas to balance in the system, that is, how many balances can be converted from one gas; balance = gasprice * gas	0	Configuration modification
chain.recycleid	gas recovery account ID based on a hexadecimal identifier	0x4a501e12f785...	Configuration modification
chain.null_tx_block_period	Time interval between empty blocks in the system (Remarks: The interval must be smaller than the value set in consensus.propose_timeout_interval)	3000ms	Configuration modification
chain.consensus_period	When there is less than one batch of transactions in the system, wait for the time of initiating consensus.	时间 500ms	Configuration modification
chain.max_propose_bytes	Maximum byte limit of a consensus proposal	4000000 byte	Configuration modification
chain.concurrent_execution	Switch for opening and executing a transaction	false	Configuration modification

FIG. 2i

Nonce nonfiguration

Parameter name	Notes	Value	Operation
nonce.before	Forward moving range of the window in TimeNonce, in milliseconds	3600000ms	Configuration modification
nonce.after	Backward moving range of the window in TimeNonce, in milliseconds	1800000ms	Configuration modification

P2P network layer configuration

Parameter name	Notes	Value	Operation
p2p.protocol	Protocol type of the P2P network layer	ssl	Configuration modification
p2p.codec	P2P protocol layer codec mode	rlp	Configuration modification

Database configuration

Parameter name	Notes	Value	Operation
storage.type	Data storage engine type	rocksdb	Configuration modification

FIG. 2j

Parameter name	Notes	Value	Operation
tx.payload.limit	Maximum byte limit of transaction payload	1000000 bytes	Configuration modification

Account configuration

Parameter name	Notes	Value	Operation
account.recover_duration	The account is recovering, and the transaction of reset_pub_ 内 key cannot be sent within duration.	100	Configuration modification

Contract configuration

Parameter name	Notes	Value	Operation
contract.native.enable	Whether to allow the native contract	true	Configuration modification

Other configurations

Parameter name	Notes	Value	Operation
crypto.suite	Unknown type configuration	classic	Unknown configuration

FIG. 2k

HomepageNodeRunning ParametersAccountContractAdministrator Settings

Account list

Account	Balance	State	Quantity of transactions	Account registering transaction	Operation
cb84ac09120827b41e01de5494cd25b...	1000000	Normal	2	7689cbcb307da0...	Freeze
6f2656b6d6cf42ef2753beb2cb07ca...	Not available	Normal	3	bdcf9174635807...	Freeze
ffb839583d114cab8b1aa512df024c60...	Not available	Normal	143	6cf586962f5e72...	Freeze
be1f654ac99955963036230f7b8b379...	Not available	Normal	3	952c889e8b72d6...	Freeze
27faaf3615d63a1c2444eb98f1012ac2...	Not available	Normal	5	2894fec904bbf...	Freeze
e7d3e769f3f593dadcb8634cc5b00fc9...	100000000000000...	Normal	999	Not available	Freeze
4a501e12f78568e19b208e4f4c798d34...	Not available	Normal	6	Not available	Freeze
c60a9d48105950a0cca07a4c6320b9...	999999999999529...	Normal	2848	Not available	Freeze

< 1 > 10 entries per pageGo toPage

FIG. 2l

Contract list

Contract	Balance	State	Quantity of transactions	Create a contract transaction	Code hash	Operation
2ea01901f846b2ce09e66553d62b72f...	0	Normal	3	b67cf24008428b...	712cd6d1ae6802...	Freeze
90b8b74574a601ce3993db210d1dfb7...	0	Normal	3	03df8232e79c9f...	712cd6d1ae6802...	Freeze
f6b4d3392e2d23a6d5b89eb2f252428...	0	Normal	3	973bc62e48fea4...	712cd6d1ae6802...	Freeze
5d35a288e8934c763e73da4213c6c7c...	0	Normal	3	55ca09eb4bd105...	712cd6d1ae6802...	Freeze
6190006395663ead43e51a700dc1ab0...	0	Normal	15	131b0f2245f13...	88147ac796acfd...	Freeze
cfe09b69364a79663f24cce85410afb...	0	Normal	4	de6969cee4fcc5...	c38f00012748c4...	Freeze
43f253de2e8cf6631d583d9beba90d6...	0	Normal	15	54b08af420b4c8...	ca4ccbda7b45fb...	Freeze
565c1ee6e7b597beff4c47e87abd4d2e...	0	Normal	4	9b92a5db389ede...	c38f00012748c4...	Freeze
0f52138e11958a2976c22b022d5eef4...	0	Normal	15	654770d7f69f69...	177502bc4585b4...	Freeze
21ccdb5cf10875c0fd799ab7fa9a49a0...	0	Normal	4	276b70f811ec69...	c38f00012748c4...	Freeze

< 1 2 3 4 5 ... 53 > | 10 entries/page | Go to Page

FIG. 2m

Basic settings

Name:

Password:

Default group:

Key group settings

[+ Add key group](#)

Administrator2 (default group) [- Delete key group](#)

Account identifier:

Key list:

[1]	3081840201003010*****5ab52c4c4e4c145c11e86b43eb5b161e	Delete
[2]	3081840201003010*****d3fb78ec8d9cbf61c90f4d5df7a545e3	Delete
[3]	3081840201003010*****8888a393baaa17c1f7248736d54b006d	Delete
[4]	3081840201003010*****g1547205834b3d754f739ca0331592b4	Delete

[+ Add key](#)

FIG. 2n

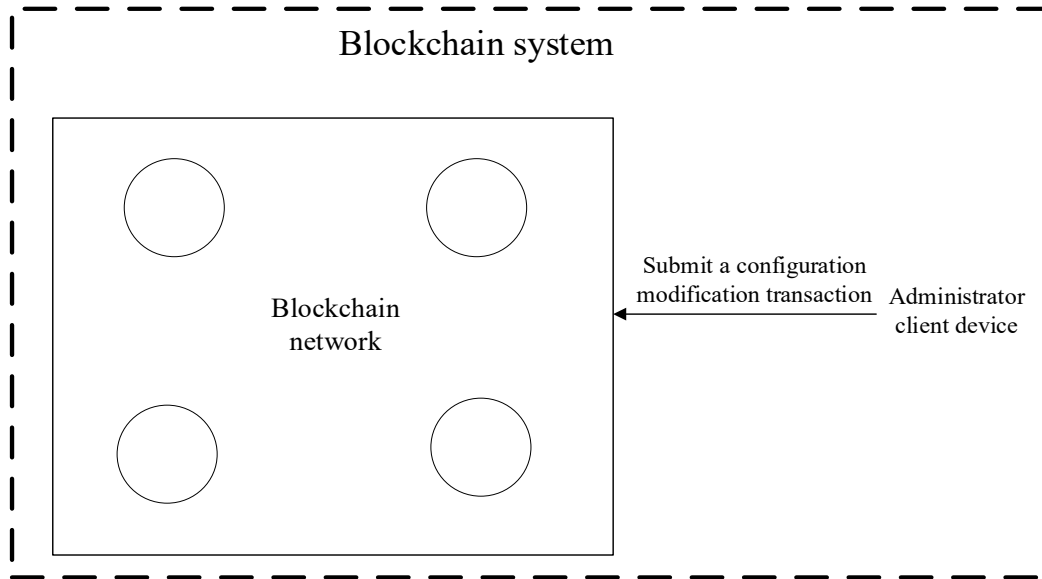


FIG. 3




FIG. 4




FIG. 5

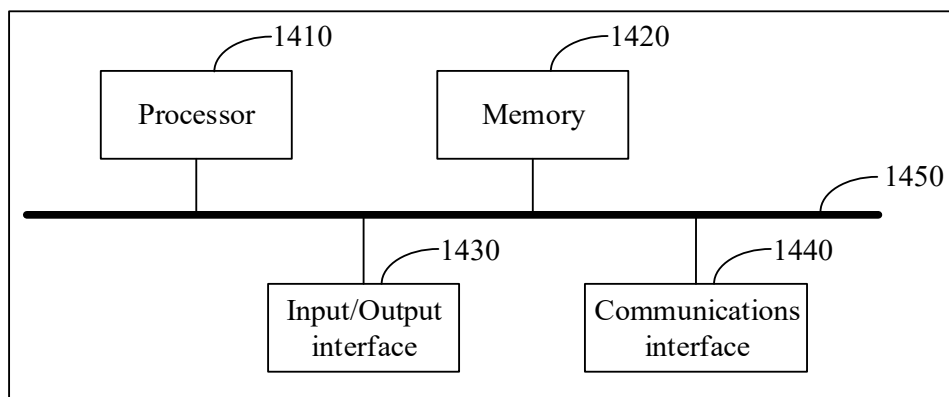


FIG. 6