


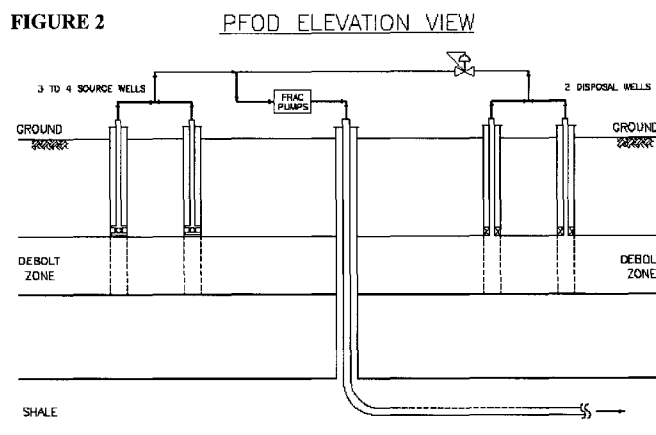

- (51) **International Patent Classification:**
E21B 43/26 (2006.01) *E21B 43/30* (2006.01)
- (21) **International Application Number:**
PCT/CA2011/001383
- (22) **International Filing Date:**
16 December 2011 (16.12.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/426,123 22 December 2010 (22.12.2010) US
61/434,167 19 January 2011 (19.01.2011) US
61/434,171 19 January 2011 (19.01.2011) US
- (71) **Applicant (for all designated States except US):** NEXEN INC. [CA/CA]; 2900, 801 - 7th Avenue S.W., Calgary, Alberta T2P 3P7 (CA).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** PETTIGREW, Dana [CA/CA]; 238 Canals Circle S.W., Airdrie, Alberta T4B 2Z6 (CA).
- (74) **Agent:** HEENAN BLAIKIE LLP; Bay Adelaide Centre, P.O. Box 2900, 333 Bay Street, Suite 2900, Toronto, Ontario M5H 2T4 (CA).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** HIGH PRESSURE HYDROCARBON FRACTURING ON DEMAND METHOD AND RELATED PROCESS

(57) **Abstract:** A method or process of Hydraulic Fracturing a geological, underground hydrocarbon deposit on demand comprising the steps of: using as a source of water an underground aquifer which contains water which is stable and clear in the aquifer but which may include undesirable chemical compounds as soluble components that are not in solution when subjected to reduced pressures at surface conditions such as hydrogen sulfide and other constituents, utilizing the water from the aquifer as a source of water to be used in a hydrocarbon fracturing process and to pump the water under pressure at a predetermined level for the aquifer water and above the bubble point pressure for the water contained in a particular aquifer to prevent undesirable constituents (chemical compounds) of said water from separating out of solution, maintaining said water pressure at a minimum required for each aquifer at all times during the fracturing process, drilling a source well into the aquifer, drilling a disposal well to the aquifer, providing a pump capable of maintaining the required pressure needed to prevent the constituents of the aquifer water from coming out of solution only by maintaining the minimum pressure, establishing a closed loop with a manifold, or a manifold and pumps, to keep the aquifer water circulating at all times until the fracturing operation begins when water will be supplied from that manifold, providing the fracturing operation with water from the manifold, or a manifold and pumps, so as to fracture a hydrocarbon reserve, wherein in using water from an aquifer in the fracturing process and by maintaining said water

[Continued on next page]

**Declarations under Rule 4.17:****Published:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
 - *of inventorship (Rule 4.17(iv))*
- *with international search report (Art. 21(3))*