

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

(43) International Publication Date  
02 December 2021 (02.12.2021)



(10) International Publication Number  
**WO 2021/239358 A1**

(51) International Patent Classification:  
*G05B 17/02* (2006.01)

(21) International Application Number:  
PCT/EP2021/060802

(22) International Filing Date:  
26 April 2021 (26.04.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20177360.3 29 May 2020 (29.05.2020) EP

(71) Applicant: **ABB SCHWEIZ AG** [CH/CH]; Brugger-  
strasse 66, 5400 Baden (CH).

(72) Inventors: **JANKA, Dennis**; Handschuhseimer Land-  
str. 53, 69121 Heidelberg (DE). **KLOEPPER, Ben-**

**jamin**; Adlerstrasse 12, 68199 Mannheim (DE). **CHIOUA, Moncef**; Bahnhofstr. 59, 69115 Heidelberg (DE). **RODRIGUEZ, Pablo**; Im Mahrgrund 126, 68549 Ilvesheim (DE). **LYMPEROPOULOS, Ioannis**; Webereistrasse 4, 8953 Dietikon (CH). **DIX, Marcel**; Neckarpromenade 15/517, 68167 Mannheim (DE).

(74) Agent: **MAIWALD PATENTANWALTS- UND RECHTSANWALTSGESELLSCHAFT MBH**; Elisenhof, Elisenstraße 3, 80335 München (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,

(54) Title: AN INDUSTRIAL PROCESS MODEL GENERATION SYSTEM

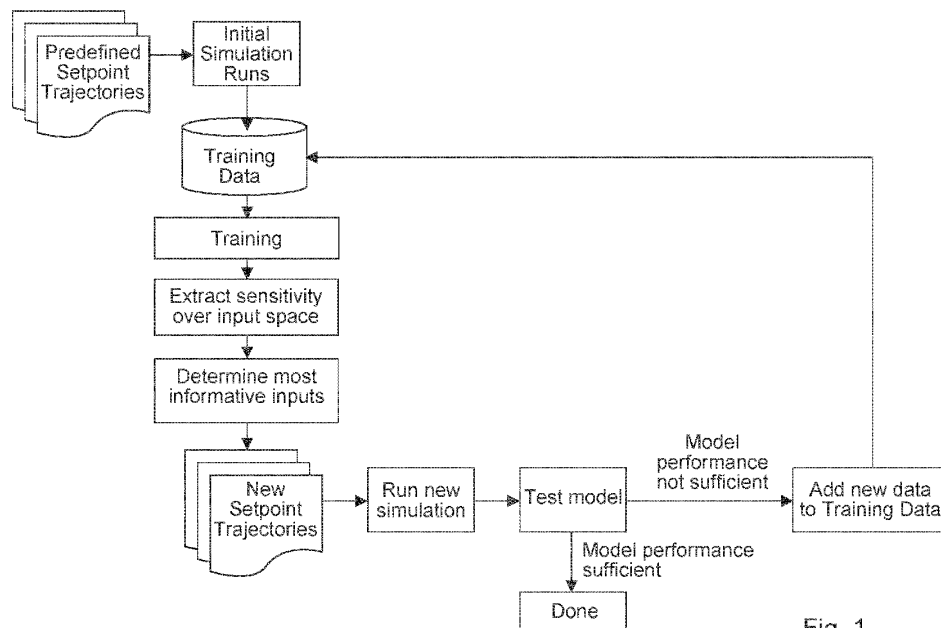


Fig. 1

(57) **Abstract:** The invention relates to an industrial process model generation system, comprising: an input unit; and a processing unit. The input unit is configured to receive a plurality of input value trajectories comprising operational input value trajectories and simulation input value trajectories relating to an industrial process. The processing unit is configured to implement a simulator of the industrial process. The processing unit is configured to generate a plurality of industrial process behavioural data, wherein industrial process behavioural data is generated for at least some of the plurality of input value trajectories, and wherein the generation of the industrial process behavioural data for the at least some of the plurality of input value trajectories comprises utilization of the simulator. The processing unit is configured to implement a machine learning algorithm that models the industrial process. The processing unit is configured to train the machine learning algorithm. The processing unit is configured to process a first behavioural data of the

[Continued on next page]

NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,  
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

**Published:**

— *with international search report (Art. 21(3))*

---

plurality of behavioural data with the machine learning algorithm to determine a first modelled result. The processing unit is configured to determine to train or not to train the machine learning algorithm using the first behavioural data, the determination comprising a comparison of the first modelled result with a performance condition. The processing unit is configured to process a second behavioural data of the plurality of behavioural data with the machine learning algorithm to determine a second modelled result. The processing unit is configured to determine to train or not to train the machine learning algorithm using the second behavioural data or to further train or not to further train the machine learning algorithm using the second behavioural data, the determination comprising a comparison of the second modelled result with the performance condition.