

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002



(43) International Publication Date
20 June 2002 (20.06.2002)


PCT

(10) International Publication Number
WO 02/49347 A1

- (51) International Patent Classification⁷: **H04N 5/44** (74) Agent: **HECKER, Gary, A.**; The Hecker Law Group, 1925 Century Park East, Ste. 2300, Los Angeles, CA 90067 (US).
- (21) International Application Number: PCT/US01/41929
- (22) International Filing Date: 29 August 2001 (29.08.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/738,281 14 December 2000 (14.12.2000) US
- (71) Applicant: **RGB SYSTEMS, INC.** [US/US]; 1230 South Lewis Street, Anaheim, CA 92806 (US).
- (72) Inventors: **TANG, Che, Wing**; 3221 Vineland Avenue, # 26, Baldwin Park, CA 91706 (US). **TROUNG, Dung, Duc**; 4833 North Cogswell Road, El Monte, CA 91731 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR INTERFACE-PROGRESSIVE VIDEO CONVERSION

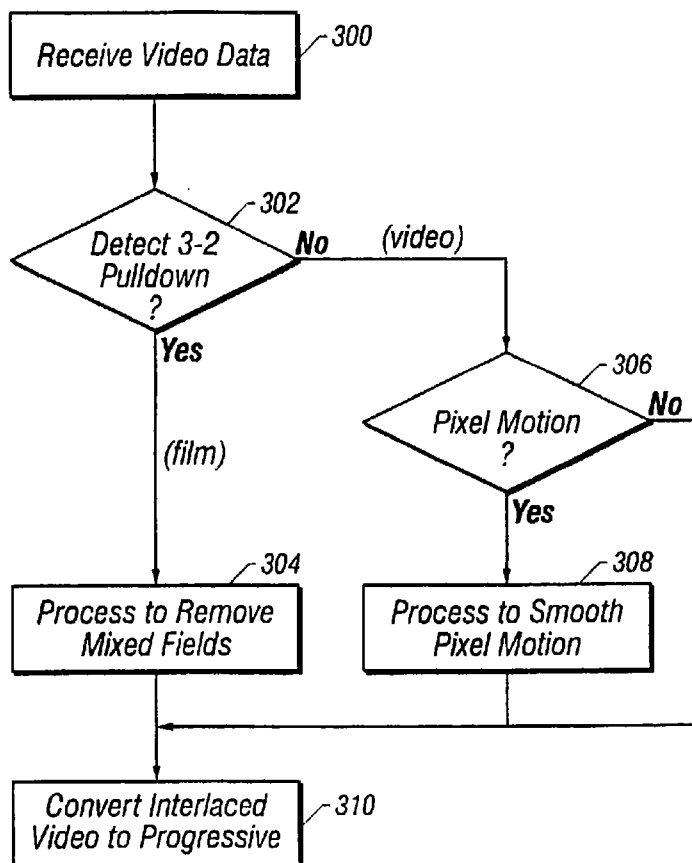

(57) Abstract: A method and apparatus for and correcting motion artifacts in interlaced video signal converted for progressive video display. To determine 3-2 pulldown or field motion, a video field is compared to the field prior to the previous field to generate field error. Field errors are generated for five consecutive fields and a local minimum error repeated every five fields indicate the origination of the video material from film source using the 3-2 pulldown process. Upon confirmation of 3-2 pulldown, the video material is modified to correct for the mixing of two film frames into one interlaced video frame by assuring that the two fields of the de-interlaced video frame contain data from the same film frame. Where the video material did not originate from a film source, but pixel motion is detected, the pixel motion is smoothed out by an averaging method. The odd and even fields of the resulting video data are subsequently combined to form a progressive video material.



162162

WO 02/49347 A1

A2

WO 02/49347 A1

||.....||



Published:

- - with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.