




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B28B 7/36	A1	(11) International Publication Number: WO 98/58783 (43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/TR97/00022 (22) International Filing Date: 3 November 1997 (03.11.97) (30) Priority Data: 97/530 23 June 1997 (23.06.97) TR (71)(72) Applicant and Inventor: BABACAN, Ayhan [TR/TR]; Meşeli Sok. 38/1, 4.Levent, 80620 Istanbul (TR). (74) Agent: DERİŞ, M., N., Aydın; İnebölü Sok. No.3 Derya Han, Kat:5 Kabataş-Setiüstü, 80040 Istanbul (TR).		(81) Designated States: AM, AT, AU, AZ, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, IL, JP, KG, KP, KR, KZ, LU, MD, MX, NO, NZ, PL, PT, RO, RU, SE, SG, SI, SK, TJ, TM, UA, US, UZ, VN, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. With amended claims and statement.

(54) Title: GLASS REINFORCED CEMENT (GRC) SHEETS/PLATES

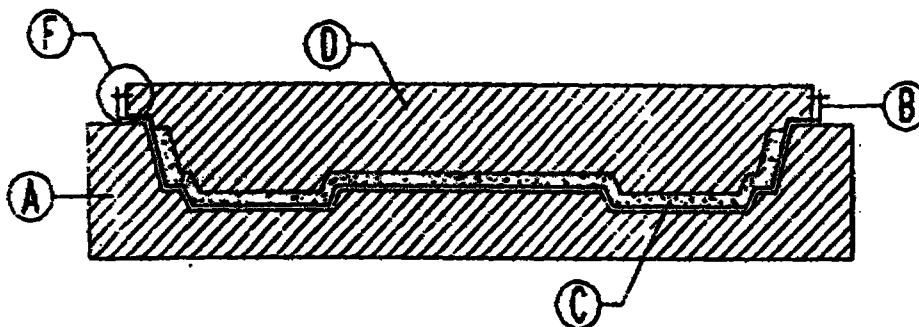

(57) Abstract

The object is placing inside a female mold which is prepared according to the form/shape of the required glass reinforced cement, an internal thin female mold tray also compressed in the same form; compressing this internal mold tray by spraying GRC mortar in it. After removing excess mortar water from 3 mm diameter holes, which were placed with short intervals on male mold of press, sending of the compressed material along with internal female mold tray to a steam vessel via conveyor belt and steam treating there.