

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau


(43) International Publication Date
02 December 2021 (02.12.2021)



(10) International Publication Number
WO 2021/242167 A1

- (51) **International Patent Classification:**
H04W 76/19 (2018.01) *H04W 36/08* (2009.01)
- (21) **International Application Number:**
PCT/SE2021/050494
- (22) **International Filing Date:**
26 May 2021 (26.05.2021)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
63/030,022 26 May 2020 (26.05.2020) US
- (71) **Applicant:** **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; 164 83 Stockholm (SE).
- (72) **Inventors:** **PARICHEHREHTEROUJENI, Ali**; Tegelskiftesgatan 39, SE-583 34 Linköping (SE). **RAMACHANDRA, Pradeepa**; Grindstugevägen 56, SE-589 29 LINKÖPING (SE).
- (74) **Agent:** **AYOUB, Nabil**; Ericsson AB, Patent Unit Kista RAN 2, 164 80 Stockholm (SE).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) **Title:** RECONNECTION CELL ID IN RLF REPORT

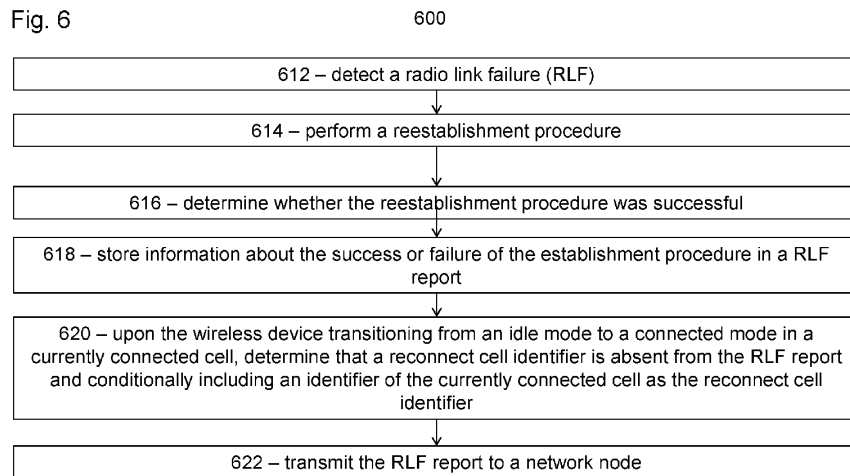

(57) **Abstract:** According to some embodiments, a method performed by a wireless device includes: detecting (612) a radio link failure (RLF); performing (614) a reestablishment procedure; determining (616) whether the reestablishment procedure was successful; and storing (618) information about the success or failure of the establishment procedure in a RLF report. Upon the wireless device transitioning from an idle mode to a connected mode in a currently connected cell, the method further comprises determining (620) that a reconnect cell identifier is absent from the RLF report and conditionally including an identifier of the currently connected cell as the reconnect cell identifier and transmitting (622) the RLF report to a network node.

[Continued on next page]

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*