

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/070090 A1

- (51) International Patent Classification⁷: A63F 13/08 (74) Agent: YAMAMOTO, Toshitake; 301, Ogikubo Sunny Garden, 28-9, Ogikubo 4-chome, Suginami-ku, Tokyo 167-0051 (JP).
- (21) International Application Number: PCT/JP01/01550
- (22) International Filing Date: 1 March 2001 (01.03.2001) (81) Designated States (*national*): AU, BR, CA, CN, IN, KR, MX, NZ, RU, SG.
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (71) Applicant: SONY COMPUTER ENTERTAINMENT INC. [JP/JP]; 1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP). Published:
— with international search report
- (72) Inventor: AKAZAWA, Toru; Sony Computer Entertainment Inc., 1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENTERTAINMENT DEVICE AND METHOD OF OPERATION THEREOF

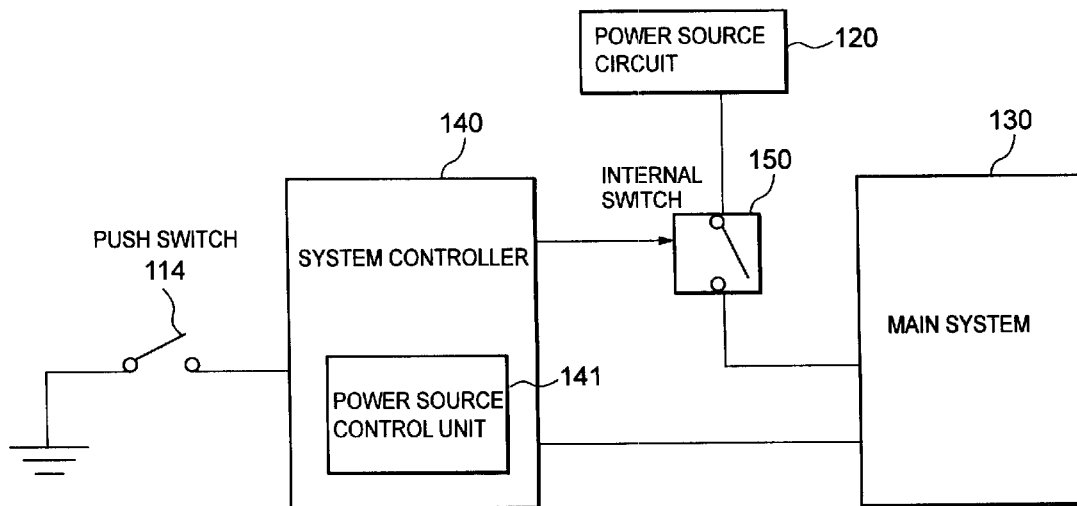

(57) Abstract: An entertainment device and its operation method in which multiple operations are achieved by the same operation unit. The entertainment device has a main system that receives a supply of power from a power circuit, a push switch that receives operation instructions from outside, a system controller that receives signals from the push switch and controls the state of main system. An internal switch of the device decides whether to turn the power of main system on or off. When the power source of main system is turned on, the system controller decides, based on the state of signals received from the push switch within a first standard time, whether to output to internal switch a signal giving power off instruction, or whether to output to the main system a signal giving a reset instruction.



WO 02/070090 A1