

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)


PCT

(10) International Publication Number
WO 2005/051829 A1

- (51) International Patent Classification⁷: **B66B 21/12** (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number:
PCT/FI2004/000661
- (22) International Filing Date:
9 November 2004 (09.11.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20031741 28 November 2003 (28.11.2003) FI
- (71) Applicant (for all designated States except US): **KONE CORPORATION** [FI/FI]; Kartanontie 1, FI-00330 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MUSTALAHTI, Jorma** [FI/FI]; Raivaajantie 13, FI-05620 Hyvinkää (FI). **AULANKO, Esko** [FI/FI]; Käenkatu 6 C 33, FI-04230 Kerava (FI).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (74) Agent: **KONE CORPORATION/Patent Department**; P.O. Box 677, FI-05801 Hyvinkää (FI).
- Published:
— with international search report

[Continued on next page]

(54) Title: CONVEYOR

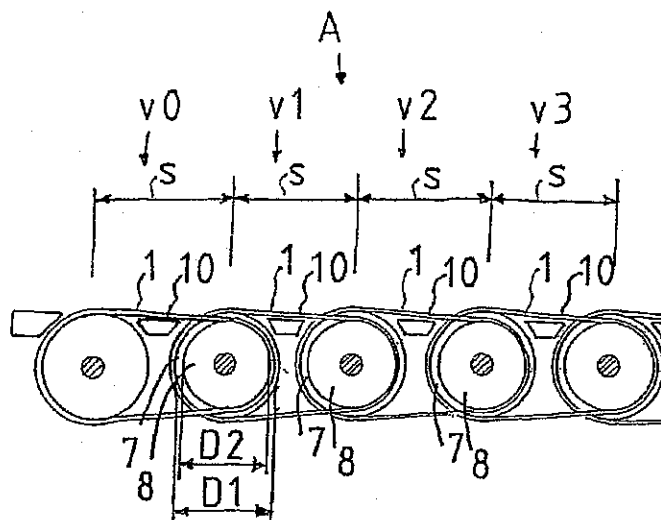

(57) Abstract: The invention relates to a method for transporting passengers on a travelator, and to a travelator. The travelator comprises a number of successive conveyors (1). An acceleration stage, in which the speed of transport of passengers is accelerated via stepwise increasing successive even speeds from a substantially slow initial speed to a heightened transport speed, is implemented in an acceleration section (2). A constant-speed stage, in which passengers are transported at a constant-speed, is implemented in a constant-speed section (3). A deceleration stage, in which the speed of transport of passengers is decelerated via stepwise decreasing successive even speeds to a substantially slow final speed, is implemented in a deceleration section. In the acceleration stage/section (2) and/or in the deceleration stage/section (4), the transport speed is changed in a stepwise manner such that the average acceleration experienced by the passengers is constant substantially during the entire acceleration/deceleration stage.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.