



(51) International Patent Classification:
G06T 17/20 (2006.01)

(21) International Application Number:
PCT/US2013/049149

(22) International Filing Date:
2 July 2013 (02.07.2013)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **LANDMARK GRAPHICS CORPORATION** [US/US]; 2107 City West Boulevard, Building 2, Houston, Texas 77042 (US).

(72) Inventors: **WARD, Steven Bryan**; 4309 Avenue F, Austin, Texas 78751 (US). **BREWER, Michael Loyd**; 5002 Sycamore Bluff Drive, Katy, Texas 77494 (US).

(74) Agents: **TIDWELL, Mark** et al.; Haynes and Boone, 2323 Victory Avenue, Suite 700, Dallas, Texas 75219 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*
— *with amended claims (Art. 19(1))*

(54) Title: LOFTING ALGORITHM FOR DISCRETE NETWORK MESHING

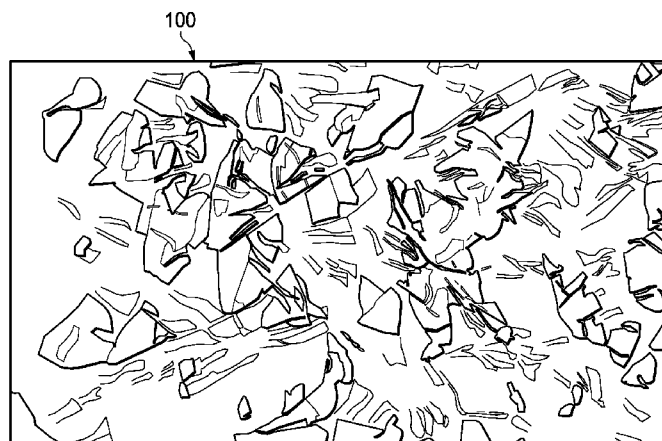


FIG. 1

(57) Abstract: The disclosed embodiments include a method, apparatus, and computer program product for generating hybrid computational meshes around complex and discrete fractures for the purpose of reservoir simulation. For example, one disclosed embodiment includes a method that comprises receiving a set of 3D fracture surfaces with geometry that has been discretized in a 2D manifold by a collection of polygons. The method defines a family of non-intersecting 2D slicing surfaces for slicing the set of 3D fracture surfaces. The method then uses the intersection of the 2D slicing surface with the 2D manifolds defining the fracture surfaces to create a set of 2D fractures on each slicing surface. Following a series of steps, the method generates three-dimensional shells connecting a set of stadia corresponding to each fracture on each 2D slicing surface to a corresponding set of stadia on a neighboring 2D slicing surface for creating a three-dimensional model.

