



(51) International Patent Classification:

G21G 1/00 (2006.01) A61M 36/00 (2006.01)
A61K 51/00 (2006.01)

(21) International Application Number:

PCT/CA2012/001000

(22) International Filing Date:

26 October 2012 (26.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/697,244 5 September 2012 (05.09.2012) US

(71) Applicants: JUBILANT DRAXIMAGE, INC. [CA/CA];
16751 Trans-Canada Highway, Kirkland, Québec H9H 4J4
(CA). OTTAWA HEART INSTITUTE RESEARCH
CORPORATION [CA/CA]; 40 Ruskin Street, Ottawa,
Ontario K1Y 4W7 (CA).

(72) Inventors: LEFORT, Étienne; 132 Niagara, Kirkland,
Québec H9J 3B6 (CA). TEOLI, Vincenzo; 10275 Tan-
guay, Montreal, Québec H3L 3G6 (CA). DEKEMP,
Robert A.; 92 Ross Avenue, Ottawa, Ontario K1Y 0N5
(CA). KLEIN, Ran; 247 Pleasant Park Road, Ottawa,
Ontario K1H 5M4 (CA).

(74) Agents: MELANSON, Lisa et al.; McCarthy Tetrault
LLP, Box 48, Suite 5300, Toronto Dominion Bank Tower,
Toronto, Ontario M5K 1E6 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RUBIDIUM ELUTION SYSTEM CONTROL

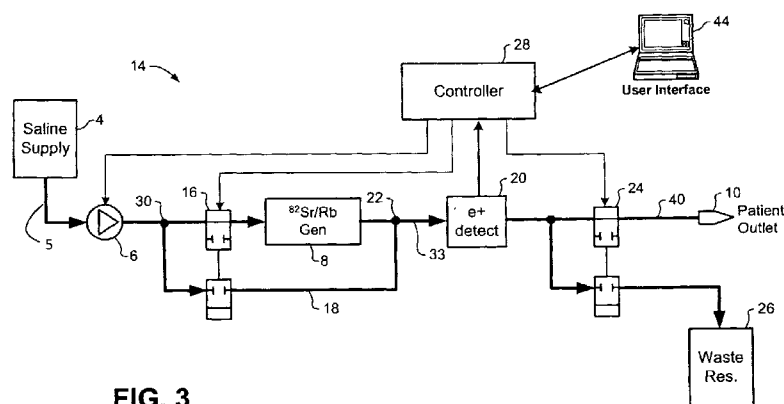


FIG. 3

(57) Abstract: Embodiments of the present invention provide for assessing the state of an ^{82}Rb elution system. In certain embodiments, a system begins an assessment that comprises an elution, and a metric may be measured. This metric may be a concentration of ^{82}Rb , ^{82}Sr , or ^{85}Sr in a fluid that is eluted from the generator, the volume of the fluid that is eluted from the generator, or the pressure of the fluid flowing through at least one portion of the system. If the assessment is completed, an output may be generated on a user interface that recommends a course of action, or no course of action, based on a result of the assessment. Should the assessment not complete successfully because it is interrupted, a $^{82}\text{Sr}/^{82}\text{Rb}$ generator of the system may be halted so as to prevent a user from performing an end-run around these quality control mechanisms of the ^{82}Rb elution system.

