



(51) International Patent Classification:

B65F 5/00 (2006.01) *F16L 55/26* (2006.01)
B08B 9/053 (2006.01)

(21) International Application Number:

PCT/FI2013/050615

(22) International Filing Date:

6 June 2013 (06.06.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20125624 7 June 2012 (07.06.2012) FI

(71) Applicant: **MARICAP OY** [FI/FI]; Pohjantähdentie 17,
FI-01450 Vantaa (FI).

(72) Inventor: **SUNDHOLM, Göran**; Ilmari Kiannon kuja 3,
FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa
(FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: METHOD FOR CONVEYING MATERIAL IN A PNEUMATIC MATERIALS HANDLING SYSTEM, AND A CONVEYING APPARATUS FOR MATERIAL, AND A MATERIAL CONVEYING SYSTEM

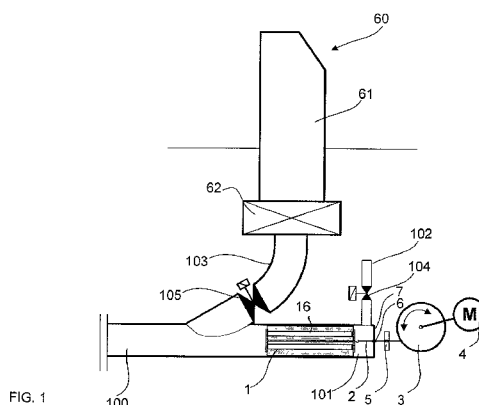

(57) Abstract: Method for conveying material that is in the piping of a pneumatic waste conveying system, in which method at least one conveying means (1) of material is fed into a conveying pipe, and a pressure difference is achieved in the pipe and under the influence of the pressure difference the conveying means is brought to move for conveying material in the conveying pipe section. In the method a conveying means (1) or a combination of a number of conveying means (1, 1') is moved in the conveying piping (100, 101) and that the conveying means (1) or combination of a number of conveying means (1, 1') is connected to a transmission means (2), with which the movement of the conveying means (1) or combination of a number of conveying means (1, 1') in the conveying piping is limited or guided and that a duct (16) is arranged in the conveying means (1) through it from a first side to a second side, through which duct transporting air is conducted in the conveying piping. The object of the invention is also a conveying apparatus and a pneumatic wastes conveying system.