

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number  
**WO 00/72266 A1**

- (51) International Patent Classification<sup>7</sup>: G06T 9/00, B41J 2/525 (74) Agent: SILVERBROOK RESEARCH PTY LTD; 393 Darling Street, Balmain, New South Wales 2041 (AU).
- (21) International Application Number: PCT/AU00/00513 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 24 May 2000 (24.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PQ 0560 25 May 1999 (25.05.1999) AU
- (71) Applicant (*for all designated States except US*): SILVERBROOK RESEARCH PTY LTD [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


**Published:**

— With international search report.

- (72) Inventor; and  
(75) Inventor/Applicant (*for US only*): WALMSLEY, Simon, Robert [AU/AU]; Unit 3, 9 Pembroke Street, Epping, New South Wales 2121 (AU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COLOR CONVERSION METHOD FOR COMPACT PRINTER SYSTEM

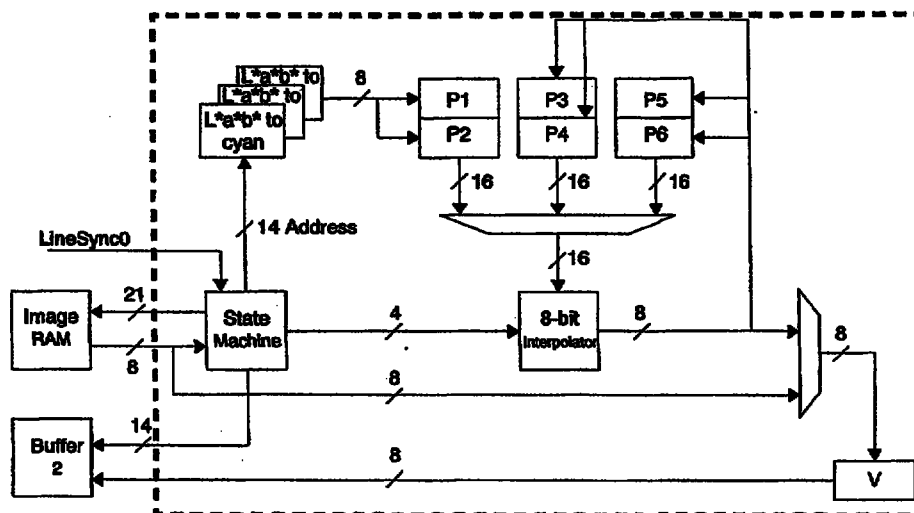

(57) Abstract: A color conversion method and apparatus for a compact printer system. An image processor converts a stored image from a first tri-color space to a second tri-color space. Resultant transformation values are read from lookup tables for each color component of the stored image pixels and a single cycle interpolator unit performs linear interpolation to generate a single color component in the second tri-color space in 14 cycles. In one example, the L\*a\*b\* color space is converted to CMY color space. In another example, the RGB form is converted to the L\*a\*b\* form and two extra L\* components for use in sharpening a converted image.