(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 December 2013 (19.12.2013)

WIPO | PCT

(10) International Publication Number
WO 2013/186617 A1

(51) International Patent Classification:
A61M 5/24 (2006.01) *A61M 5/20* (2006.01)

(21) International Application Number:
PCT/IB2013/001212

(22) International Filing Date:
11 June 2013 (11.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12004542.2 15 June 2012 (15.06.2012) EP

(71) Applicant: **ARES TRADING SA** [CH/CH]; Zone Industrielle de l'Ouriettaz, CH-1170 Aubonne (CH).

(72) Inventors: **WURMBAUER, Werner**; Stegendorf 31, A-9063 Maria Saal (AT). **SCHOPF, Josef**; Pölsweg 13, A-8753 Aichdorf/Fohnsdorf (AT). **SCHATZ, Bernhard**; Feschnigstrasse 78A, A-9020 Klagenfurt (AT).

(74) Agent: **MICHELI & CIE SA**; 122, rue de Genève, CP 61, CH-1226 Thônex (CH).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: INJECTION DEVICE

Fig.

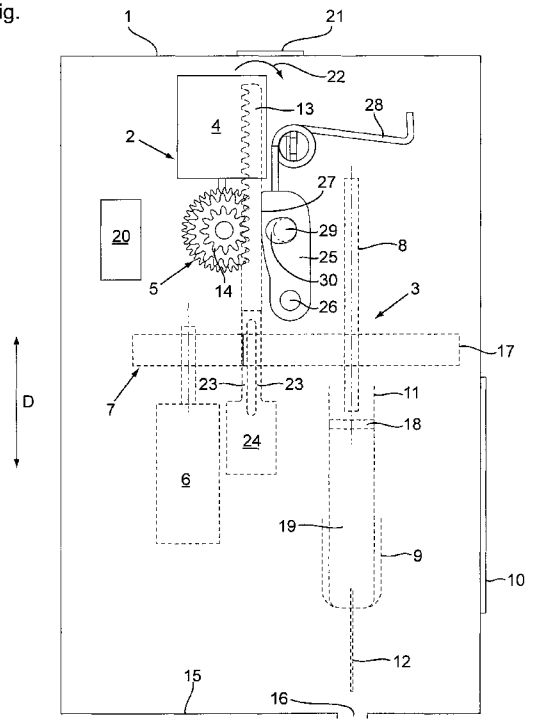

(57) Abstract: The injection device comprises: a static structure (2) comprising a first gear member (14), a dynamic structure (3) comprising a medicine container (11), means (6, 7, 8, 12) for pushing liquid medicine out of said medicine container (11) for its injection to a patient, and a second gear member (13) engaged with the first gear member (14), a drive member (4) for driving one (14) of the first and second gear members (13, 14) so as to cause the dynamic structure (3) to move relative to the static structure (2) along a predetermined direction (D) due to the engagement between the first and second gear members (13, 14), and clutch means (23, 25, 28) for maintaining engagement between the first and second gear members (13, 14) in normal condition of the injection device, and for allowing disengagement of the first and second gear members (13, 14) upon a shock received by the injection device along the predetermined direction (D).

WO 2013/186617 A1