

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
11 June 2020 (11.06.2020)



(10) International Publication Number
WO 2020/117226 A1

(51) International Patent Classification:

E21B 34/06 (2006.01) *E21B 34/00* (2006.01)
E21B 23/00 (2006.01)

(21) International Application Number:

PCT/US2018/064043

(22) International Filing Date:

05 December 2018 (05.12.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032 (US).

(72) Inventors: **INGLIS, Peter DW**; 25 Kilmaron Loan, Dundee, Tayside DD5 3TD (GB); **DAVIES, Katherine Ann**; 28 Slains Circle, Aberdeen, Aberdeenshire AB22 8TW (GB).

(74) Agent: **GARDNER, Jason D.** et al.; KILPATRICK TOWNSEND & STOCKTON LLP, 4208 Six Forks Road, Suite 1400, Raleigh, North Carolina 27609 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REMOTE OPENING TOOL

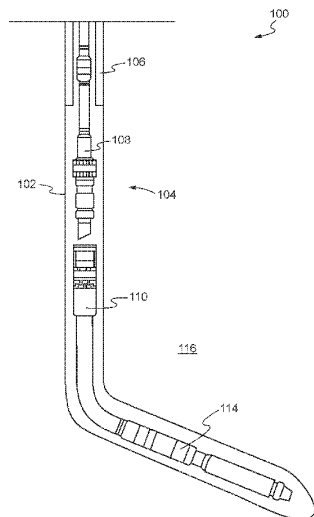


FIG. 1

(57) Abstract: An actuation assembly positionable within a wellbore may comprise a primary piston coupled to a first spring. The primary piston may be positionable in a first position in which it is coupled to a release latch for restraining the release latch from actuating a ball valve mechanism. The actuation assembly may also include a locking piston coupled to a second spring and a locking mechanism positioned between the primary piston and the locking piston. The locking mechanism may be moveable between a restrained position and an unrestrained position, wherein in the restrained position the locking mechanism prevents the primary piston from moving a predetermined amount in a first direction in response to an application of pressure from a surface of the wellbore that is greater than a predetermined amount of pressure.

WO 2020/117226 A1